




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G08G 1/27, G08B 25/10</b>		A1	(11) International Publication Number: <b>WO 96/16387</b>
			(43) International Publication Date: <b>30 May 1996 (30.05.96)</b>
(21) International Application Number: <b>PCT/DK95/00460</b>			(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).
(22) International Filing Date: <b>21 November 1995 (21.11.95)</b>			
(30) Priority Data: 1332/94 22 November 1994 (22.11.94) DK			
(71)(72) Applicants and Inventors: PEDERSEN, Heine, E. [DK/DK]; Sydskråningen 1, DK-2800 Lyngby (DK). HARDER, John [DK/DK]; Viborggade 8, st. th., DK-2100 Copenhagen Ø (DK). LOHMANN-JENSEN, Flemming [DK/DK]; Jensløvs Tværvej 13, 3.th., DK-2920 Charlottenlund (DK).			
(74) Agent: HOFMAN-BANG & BOUTARD A/S; Adelgade 15, DK-1304 Copenhagen K (DK).			

## (54) Title: A TRAFFIC SUPERVISION SYSTEM FOR VEHICLES

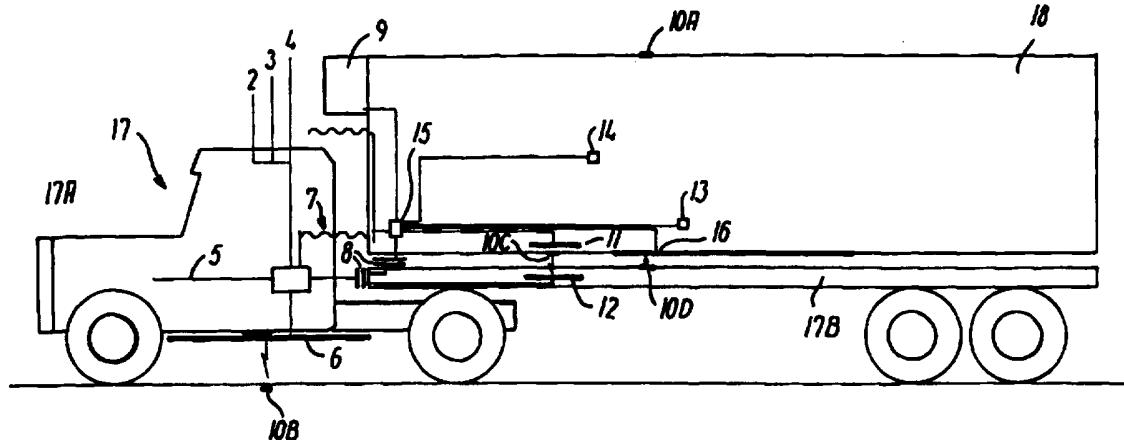

## (57) Abstract

To protect and watch transport units consisting of a towing unit and one or more transported or transporting units, the towing unit has a data processing system (1) capable of communicating with the outside world via communications and GPS satellites (45) and/or a GSM system (39) and with tags (10B) buried in a road. The transporting or transported unit or units additionally have a data processing system (15) capable of communicating with a data processing system (1) in the towing unit via a wireless interface (7) or interface (8). The data processing system in the transporting or transported unit or units is moreover interfaced with an aerial (16) capable of communicating with tags in a road or surfaces (10B) or tags (10A) located in the top of transporting or transported units. A system designed as described above provides the advantage that a cargo or a transport unit can always be positioned and watched.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## A traffic supervision system for vehicles

---

5 The invention concerns a traffic supervision system for vehicles of the type comprising a towing unit and one or more towed or transported units, said towing unit comprising:

10 A data processing unit having transmit and receive facilities adapted to read/write messages from stationarily positioned tags, or to read/write via a wireless transmission.

15 Such a traffic supervision system is known from DK patent application No. 1095/94. This system is extremely useful in connection with the supervision of vehicles, e.g. for identification of vehicles and determination of their positions.

20 In connection with two-part vehicles, e.g. a truck consisting of a motor vehicle and an attached trailer, it is not quite expedient that all the data facilities are present just in the towing unit, i.e. in the motor vehicle. This means that communications between towing and transporting or transported units are interrupted upon disengagement from the towing unit.

25 Where a trailer and a motor vehicle, even if the motor vehicle has data processing facilities, are left at a parking ground, the trailer is extremely vulnerable to being stolen or vandalised. In this connection it is clear that if the vehicle is a refrigerator vehicle with meat or other expensive goods, it is very great values that may be lost.

- 2 -

Accordingly, the object of the invention is to improve the existing system known from the above-mentioned DK patent application such that the same safe supervision and position determination of a transporting or transported unit, which is e.g. left at a parking ground, is achieved.

5 This object is achieved according to the invention in that the towed or transported unit or units have another data processing unit with transmit and receive facilities capable of exchanging information with the data processing unit in the towing unit via a wireless transmission or via 10 an interface.

15 It is hereby ensured that the towed or transported unit, no matter whether it is coupled to a towing unit or is left on a parking ground, is safely protected against theft and other vandalism, since the data processing facilities in the towed unit will instantaneously respond to abnormal events and notify the data processing unit in the 20 towing unit which can advise the police and the like.

25 It is expedient according to the invention, as stated in claim 2, that the data processing unit of the towed or transported unit or units can exchange information with local data processing units which are stationarily located outside the towing unit.

30 A system is hereby established wherein the towed or transported unit, when left alone at a terminal, is watched just as safely as if it was coupled to a towing unit.

35 Further, it is expedient, as stated in claim 3, that the towed or transported unit or units have a first aerial capable of reading the information from a tag which is positioned on the transported unit or units.

- 3 -

The transported unit and the transporting unit will hereby be linked up very closely with each other, in the sense that when the aerial tries to read the tag, it will be detected instantaneously if the tag is no longer present, 5 e.g. if it has been attempted to remove the transported unit. In that case, the data processing unit in the transported unit immediately states that it is not at the location where it ought to be, which can take place in that it immediately signals a local data processing unit which can 10 immediately pass on the signals to the police or the like.

When, as stated in claim 4, the transported unit or units have a tag capable of receiving or transmitting instructions or information from the data processing unit via 15 another aerial which is also located on the transported unit, the transported unit can advantageously provide information on its position. Information and instructions can also be read by a portable device. Similarly, the data processing facilities in the towing unit can write to and 20 read from the same tag via an aerial on the transporting unit. This opens up the possibility of protection against loss of data related to e.g. the course of the transport concerned.

25 It is also expedient that the transported unit or units have another tag located on the upper side of the towed unit or units.

30 This is particularly expedient if it is imagined that the transported units are formed by stackable containers. In that case, each individual container can easily be identified and be positioned, since the first container placed directly at a parking ground or terminal is positioned by 35 reading of tags buried in the surface dressing of the ground or the terminal, and when the next container is stacked, the next container can read the identity of the

- 4 -

lower container, whereby the position is determined unambiguously. If it is attempted to remove one of the containers, the container being removed cannot read the identification on the container below it, and the data processing facilities on the container which has been removed, 5 will therefore immediately give the alarm.

The same principle of positioning may be applied on ships equipped with data processing facilities and tags in 10 surfaces on decks.

As stated in claim 6, the data processing unit of the towing unit and the stationarily located data processing units may communicate with the satellite, GSM or GSP 15 system.

This provides a very certain position determination no matter where the towing unit is present, and opens up the possibility, via one of these systems, of inquiring for 20 the state and position of the transported unit or units or for remote activation of facilities in the individual transported unit.

Sensors, such as vibration sensors and temperature sensors, may also be connected to the data processing units 25 of the transported unit or units.

This improves the certainty that any undesired removal of a transported unit will be detected, since a vibration 30 sensor immediately signals the data processing facilities of the transporting unit and gives the alarm in the same manner as before.

Similarly, temperature sensors located in combination with data processing facilities in the transporting unit can 35 give the alarm in case of inexpedient temperature changes

- 5 -

and, via communication with the data processing facilities in the towing unit or at the terminal, inform the carrier or owner of the freight of the present condition in the transported unit.

5

In general, expedient embodiments of the invention are defined in the dependent claims.

10 The invention will be explained more fully below with reference to the drawing, which shows a preferred embodiment of the invention, and in which

15 fig. 1 shows a truck consisting of a motor vehicle and a trailer which transports a container with associated data processing facilities,

fig. 2 is a block diagram of the data processing facilities in the motor vehicle and a transported container, and

20 fig. 3 shows the invention applied in connection with e.g. a train and connected to a satellite, GPS and GSM system.

25 Fig. 1 shows a transport unit, here shown as a unit consisting of a motor vehicle and a trailer transporting a container. In other words a transport unit which is of a type having a towing unit and a towed or transporting unit loaded with a transported unit (container). Of course, any other transport unit may be contemplated, e.g. a train having a locomotive and several carriages or a ship. In  
30 the motor vehicle, 1 designates data processing facilities which communicate with a satellite, a GSM system and a GPS system, respectively, via aerials 2, 3, 4. Further, the bottom of the motor vehicle is provided with an aerial 6 capable of reading a tag 10B, which may be located on a road, a parking ground or even on a ship.

35

- 6 -

In this specification tag means a microchip having an aerial, transmit and receive facilities, a memory as well as a passive inductive source of energy (i.e. own power supply).

5

7 designates a radio link to a data processing unit 15 located in the transported unit. The data processing unit 15 essentially corresponds to the data processing 1, but with the difference that it does not have independent communications facilities to the satellite, GSM or GPS system. As moreover appears from fig. 1, the bottom of the transported unit is provided with an aerial 16 capable of communicating with a tag 10D which is located on the transported platform. Further, a transmit aerial 11 is provided 10 for the data processing unit 15, capable of transmitting information to and reading information from a tag 10C located on the transported unit. As will be seen, the transporting platform 17B is moreover provided with an aerial 12 having an interface 8 to the data processing system 1 in the towing unit 17A, enabling the towing unit to read 15 from and write to the mentioned tag. Finally, various sensors, such as a temperature sensor 14 or a vibration sensor 13, are associated with the data processing unit. The interface 8 may be used instead of the wireless link 7 for 20 communication between the motor vehicle and the transporting or the transported unit.

25

30

35

The data processing system 15 shown in fig. 1 may be located in all types of towed platforms with permanent structures, or in containers and swap/flex platforms. Via the aerial 16, the data processing system can read information from the tag 10D located on the transporting unit 17B, or from the tag 10B located in a road or in a surface dressing on a ship, terminal or parking ground. If a transporting unit is removed, or a transporting unit and a transported unit are separated, such removal will be re-

- 7 -

corded by the data processing system, and an alarm procedure will be implemented.

Via aerials 11 and 12 located in the transported and  
5 transporting unit, both the data processing system 1 and the data processing system 15 can read from and write to the tag 10C located in the transported unit. The tag 10C may contain information for identification of the transported unit as well as data and information related to the  
10 course of the transport concerned. Consequently, the tag 10C may be used as a backup function for the overall amount of information related to the transport concerned, no matter whether the information and data are collected or generated in the data processing system 1/15 in a tow-  
15 ing unit 17A, a transporting unit with a firm superstructure 17B or a transported unit 18. Information in the tag 10C may moreover be read using a portable device.

Where the transporting unit 17B or the transported unit 18  
20 is left at a terminal or parking ground disconnected from the data processing system 1 in the towing unit 17A, any attempt at removing the trailer will be recorded by the vibration sensor 13, which instantaneously notifies the data processing system 15 which can give the alarm to the  
25 nearest, stationarily located data processing unit via its transmit/receive facilities.

If it is imagined that the transporting unit 17B or the transported unit 18 is stackable, the first and lowermost  
30 unit in a stack can read the tag 10B, located in a surface on a ship, a terminal or a dressing on a traffic ground, via the aerial 16 in the bottom of the unit, and pass on read information and own data via transmit/receive facilities to stationarily located data processing systems  
35 42/44. The next unit in the stack can read the tag 10A, located in the top on the underlying unit, by means of a

- 8 -

corresponding aerial, and likewise pass on read information and own data via transmit/receive facilities to the stationarily located data processing unit, which is hereby is hereby enabled to position the individual transporting 5 or transported unit in the individual stack 43.

Fig. 2 is a block diagram view of the data processing unit in the towing and the towed or transported unit, respectively. As will be seen, the data processing facilities in 10 the towing unit comprise interface couplings to the satellite, GSM and GPS system and have a wireless link 22 for use when communicating with the data processing unit 15 in the towed or transported unit. Further, 24 designates a read and write unit of the RFID type (Radio Frequency 15 Identification Detection System) which, via the aerial 6 on the towing unit, can read information from or write information to a tag 10B located in a road or surface. The data processing system 15 in the transported unit has no direct connection to satellite, GPS and GSM systems, but 20 can communicate via a wireless interface 22 with the data processing system in the towing unit as well as with stationarily located data processing systems of the same type as the one used in the towing unit. Further, the data processing unit has connected to it detectors, such as vibration detectors 28 and temperature sensors 29, as well as a 25 power supply in the form of a battery 18. It will moreover be seen from the figure that more equipment may be coupled, as needed.

30 Fig. 3 schematically shows how the system operates in connection with a satellite, GPS and GSM system, the figure showing a train 34 which has a locomotive 35 and carriages 36. In connection with such a train, in which each carriage 36 has a data processing unit corresponding to the 35 data processing unit 15 mentioned before, it is expedient that communications between the locomotive 35 and the car-

riages 36 are wireless as shown at 37. Further, communication between the towing unit 35 and the towed or transported units 36 may take place via fixed connections 38. It is also shown that the locomotive 35 can communicate 5 via the GSM system 39 or additionally be connected to existing satellite-borne communications or positioning systems 45. Correspondingly, a road transport unit 40 is shown, in which communication between the towing and the towed or transported units likewise takes place via a 10 wireless connection 37 or via a fixed connection 38 between the data processing systems of the two units, and communication with the outside world may be performed via the GSM system 39 or the satellite-based communications and positioning systems 45. The figure moreover shows a 15 stationary data processing unit 42 that can be located at a terminal, parking ground or other location where communication with non-transported units 41/43 is to be established. In addition to communicating with the towing units, the stationary data processing system 42 can communicate 20 with the outside world both via GSM 39 and satellite-based communications systems 45. Communication between the stationary data processing system 42 and the units 41/43 not in transport are wireless 37, but may also take place via the fixed connection 38. Fig. 3 additionally 25 shows how a transporting unit 41 or a stacked transport unit 43 can communicate via the aerial 16 with the tag 10B located in a surface dressing, and thus contribute i.a. to position determination. Fig. 3 additionally shows schematically that stackable transport units 43 have tags 30 10A and aerials 16 in the top and the bottom, respectively, and can consequently read the underlying unit and thus contribute to the positioning of the individual stacked unit. Finally, fig. 3 scematically shows how the same 35 facilities in the transported units may be used, where a stationary data processing system is installed on a ship 46. In addition to the possibility of positioning the

- 10 -

individual transport unit 43, communication between the individual transport unit and the outside world may be established by satellite or radio via the ordinary communications and positioning facilities of the ship.

5

Although the invention has been described in connection with towing and towed, transporting and transported units on land, it is within the scope of the invention to use the technique and procedure described above in closely related connections. Thus, the same invention may conceivably be used to watch containers in air traffic.

15

20

25

30

35

- 11 -

P a t e n t   C l a i m s :

---

1. A traffic supervision system for transport systems  
5 (17) of the type comprising a towing unit and one or more  
transporting or transported units, said towing unit comprising:

10 a data processing unit (1) having transmit and receive  
facilities adapted to read/write messages from station-  
arily located tags (10B) or to transmit information via a  
wireless transmission (7), characterized in  
that the towed, transporting or transported unit or units  
have another data processing unit (15) having transmit and  
15 receive facilities capable of exchanging information with  
the data processing unit (1) in the towing unit via a  
wireless transmission (7) or via an interface (8).

20 2. A traffic supervision system according to claim 1,  
characterized in that the data processing  
unit (15) of the towed, transporting or transported unit  
or units can additionally exchange information with local  
data processing units (42) which are stationarily located  
outside the towing unit.

25 3. A traffic supervision system according to claim 2,  
characterized in that the transporting unit  
or units have a first aerial (16) capable of reading in-  
formation from a tag (10D) which is located on the trans-  
porting unit.

30 4. A traffic supervision system according to claims 1-3,  
characterized in that the transported unit or  
units have a tag (10C) from which and to which the data  
processing unit (15) in the transported unit (18) and the  
data processing system (1) in the towing unit (17A) can

- 12 -

receive and supply information related to the course of a transport concerned via an aerial (11) in the transported unit and an aerial (12) in the transporting unit (17B).

- 5        5. A traffic supervision system according to claims 1-4, characterized in that the transporting or transported unit or units have another tag (10A) which is located in the top of the unit.
- 10       6. A traffic supervision system according to any of claims 2-5, characterized in that the data processing unit (1) of the towing unit and the statinarily located data processing units (42) communicate with the satellite, GSM or GSP system.
- 15       7. A traffic supervision system according to any of the preceding claims, characterized in that sensors (13, 14), such as vibration sensors (13) and temperature sensors (14), are connected to the data processing units (15) of the transporting or transported unit or units.
- 20       8. A traffic supervision system according to any of the preceding claims, characterized in that the first aerial (16) of the transporting or transported unit or units is adapted to read information from tags (10B) which are located outside the transporting or transported unit, such as tags located in roads, surface dressings at terminals or parking grounds, a ship, or a tag (10A) located in the top of another transporting or transported unit.
- 25       9. A traffic supervision system according to any of the preceding claims, characterized in that the transporting or transported unit or units have their own power supply (18), such as an accumulator or a battery.



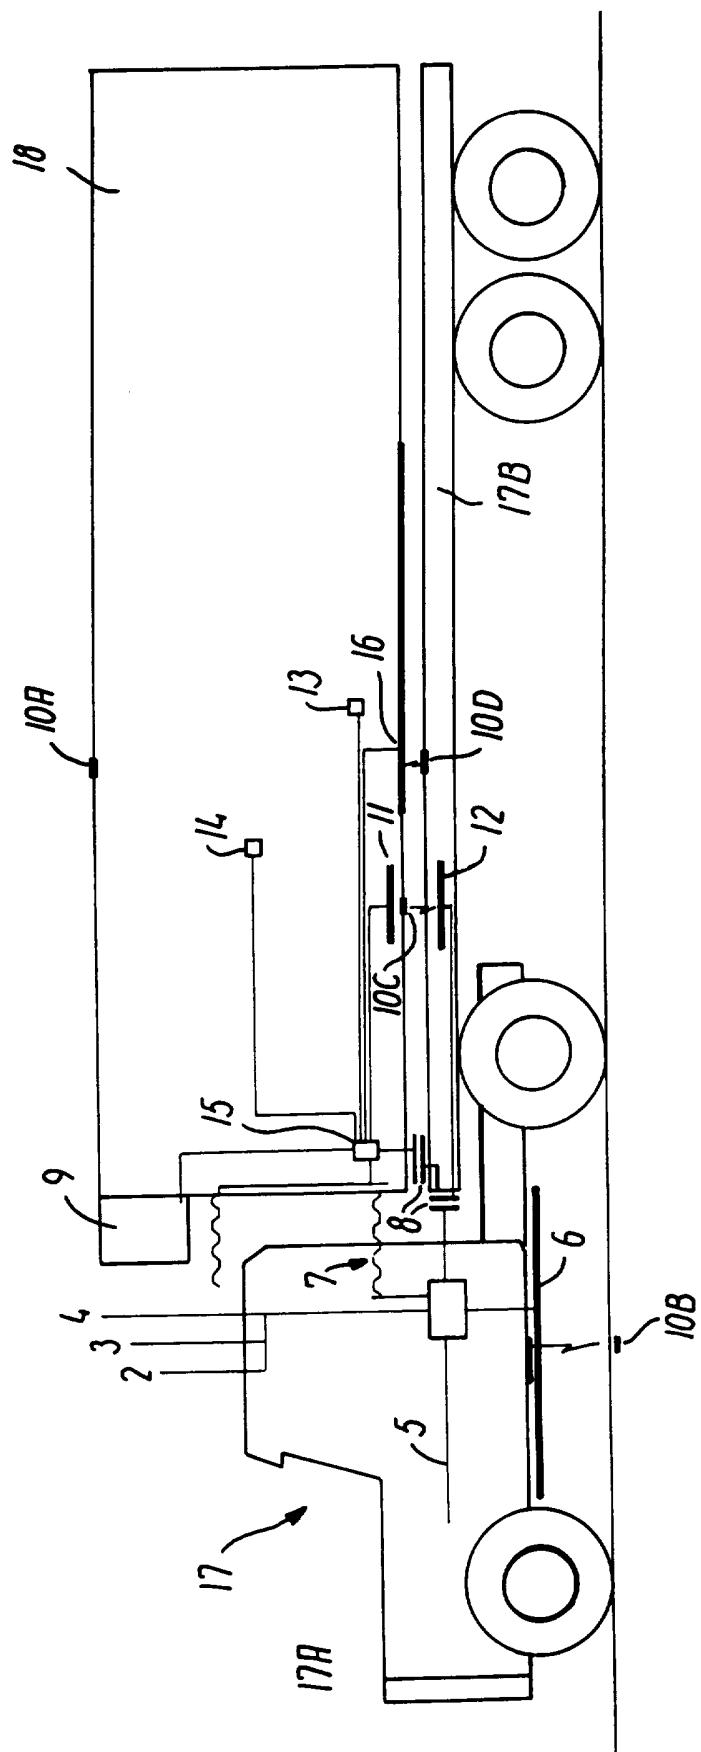


FIG. I

2/3

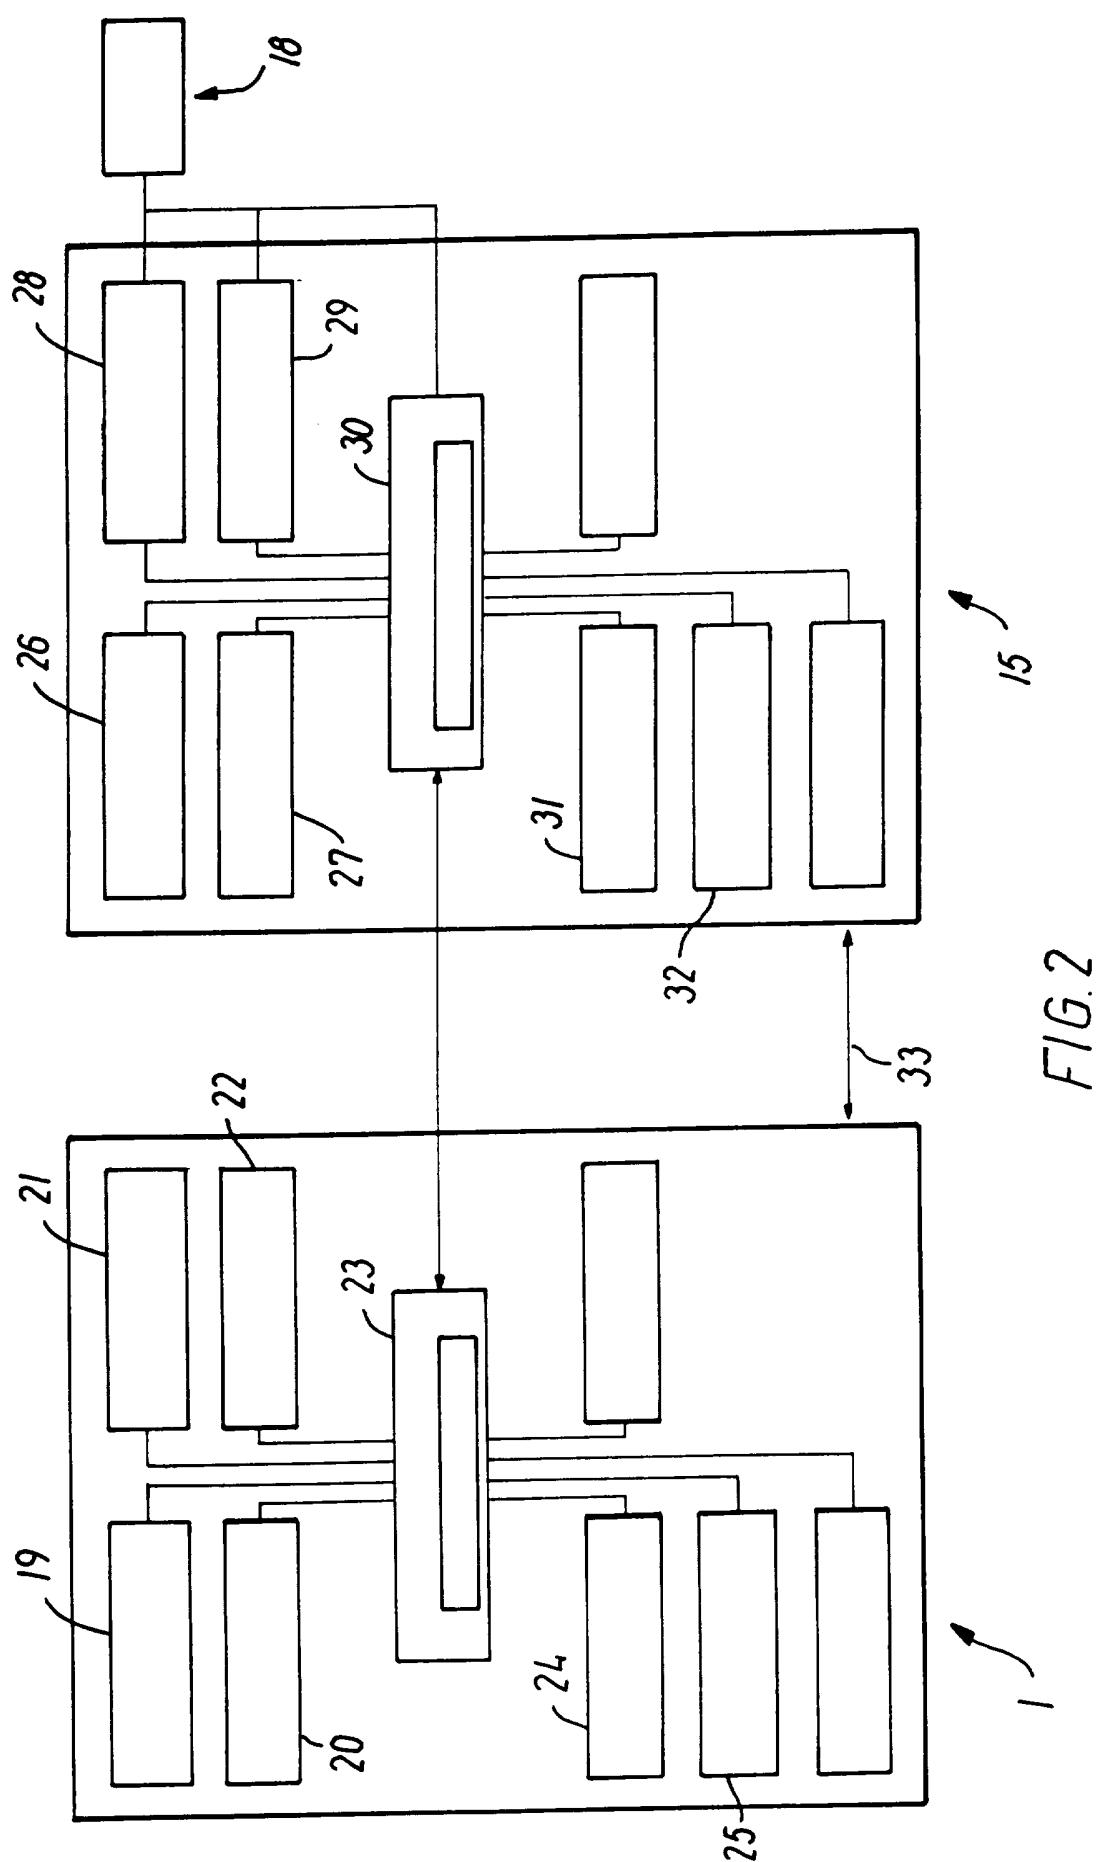

3 / 3

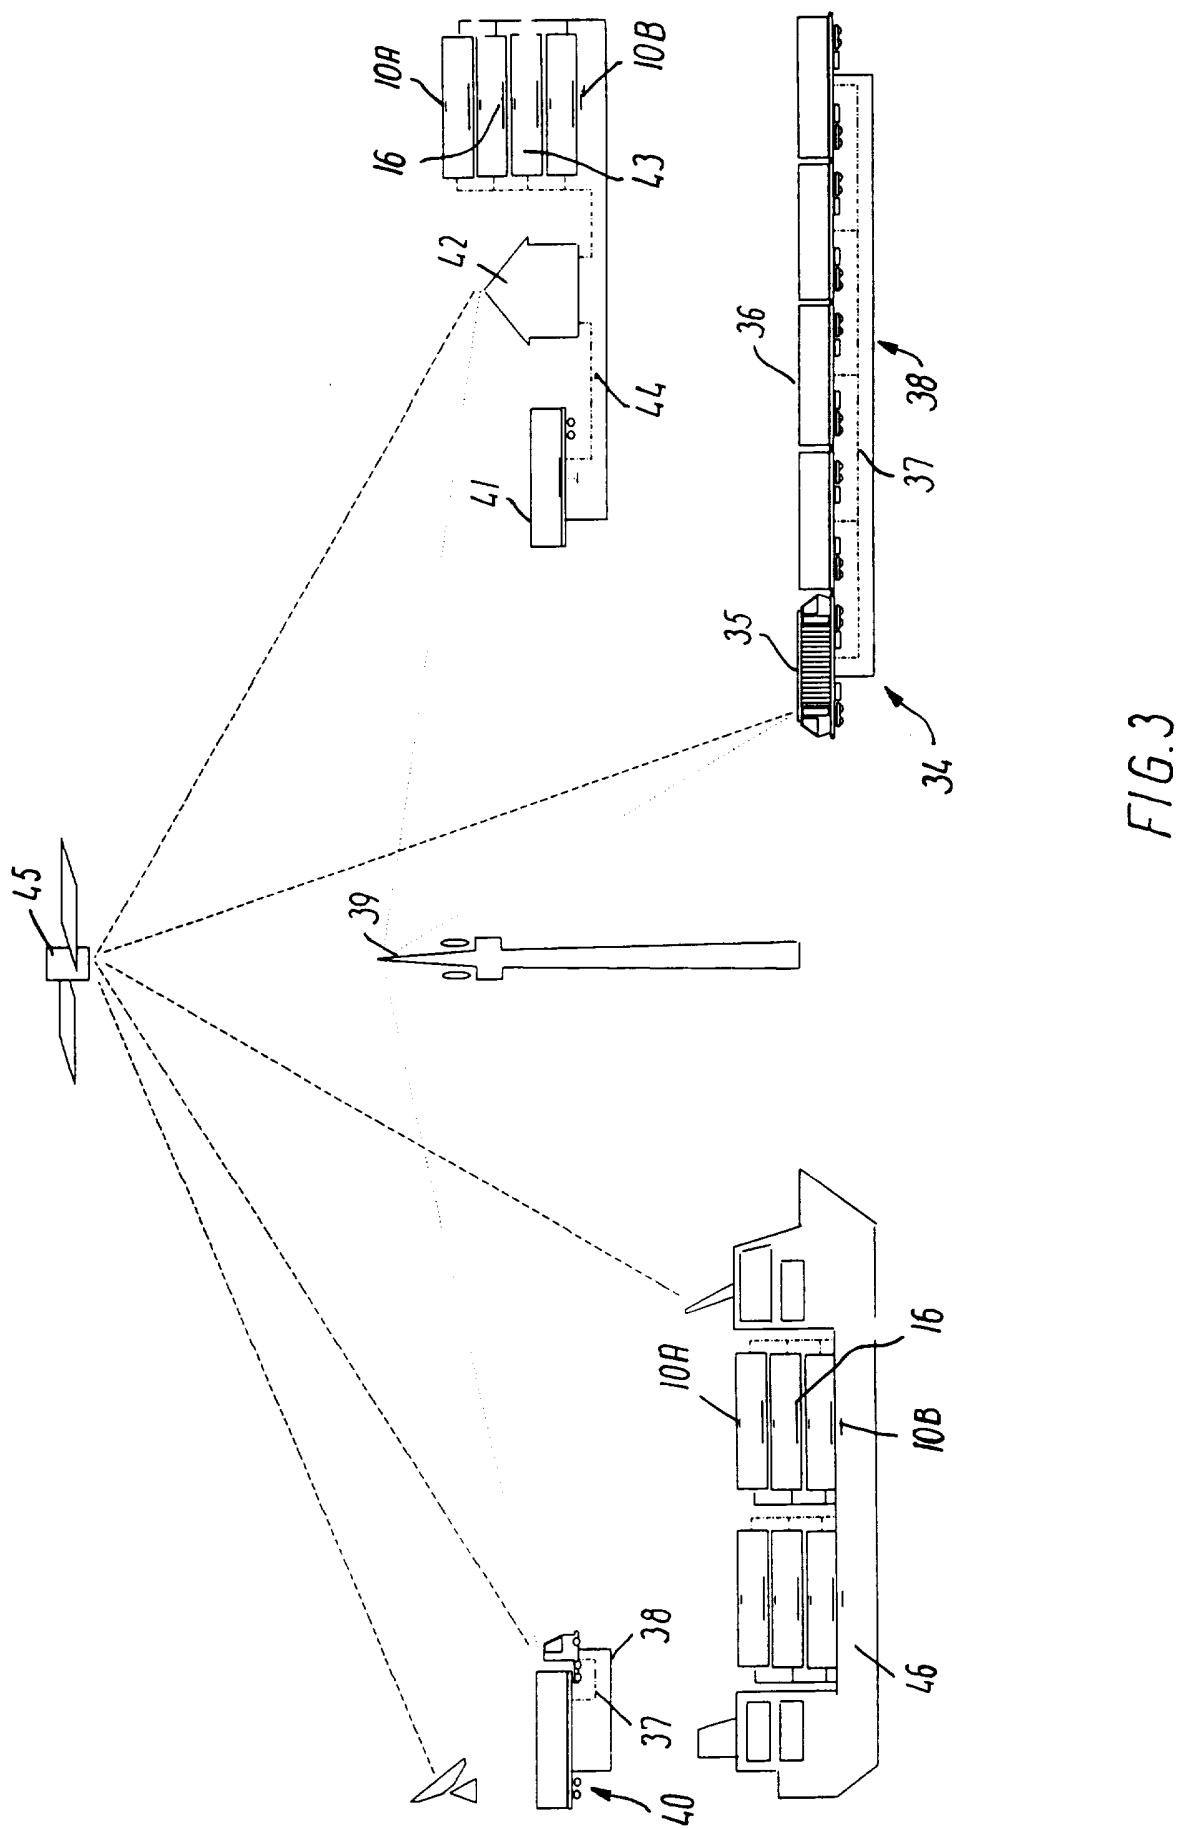

## **SUBSTITUTE SHEET (RULE 26)**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 95/00460

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G08G 1/27, G08B 25/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B60R, G08B, G08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5142278 A (MOALLEMI ET AL), 25 August 1992 (25.08.92), column 3, line 8 - column 6, line 42, figures 1-3, abstract  --	1,2,6,7
A	WO 9405536 A1 (CARRNOVO AB), 17 March 1994 (17.03.94), figure 1, abstract  --	1-9
A	US 5347274 A (HASSETT), 13 Sept 1994 (13.09.94), column 3, line 40 - column 4, line 28; column 5, line 60 - column 6, line 21  -- -----	1-9

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 February 1996

Date of mailing of the international search report

28. 02. 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. + 46 8 666 02 86

Authorized officer

Göran Magnusson  
Telephone No. + 46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

05/02/96

International application No.

PCT/DK 95/00460

Patent document cited in search report	Publication date		Patent family member(s)		Publication date
US-A- 5142278	25/08/92		AU-A- 5555990 WO-A- 9013183		16/11/90 01/11/90
WO-A1- 9405536	17/03/94		NONE		
US-A- 5347274	13/09/94		AU-A- 4857993 WO-A- 9407225 AU-A- 7901691 EP-A, A- 0530271 JP-T- 5508492 US-A- 5144553 US-A- 5406275 WO-A- 9118354 AU-A- 4539493 WO-A- 9400830 US-A- 5289183		12/04/94 31/03/94 10/12/91 10/03/93 25/11/93 01/09/92 11/04/95 28/11/91 24/01/94 06/01/94 22/02/94