



(51) International Patent Classification:
A61C 8/00 (2006.01)

(21) International Application Number:
PCT/IB2016/000762

(22) International Filing Date:
6 June 2016 (06.06.2016)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1041343 8 June 2015 (08.06.2015) NL
1041558 6 November 2015 (06.11.2015) NL

(71) Applicant: CADSKILLS BVBA [BE/BE]; Latemstraat
113, B-9830 Sint-Martens Latem (BE).

(72) Inventor: MOMMAERTS, Maurice, Yves; Latemstraat
113, B-9830 Sint-Martens Latem (BE).

(74) Agent: FERGUSON, Alexander; c/o Octrooibureau Fer-
guson B.V., P. O. Box 970, NL-3800 AZ Amersfoort (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: SUBPERIOSTEAL JAW IMPLANT

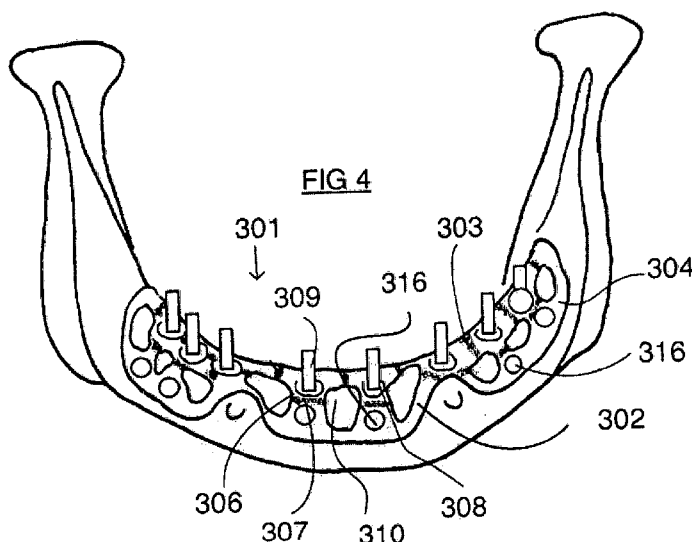

(57) Abstract: Jaw implant for oral, subperiosteal placement over the alveolar ridge of the maxilla or of the mandible, wherein the implant forms a body which in cross-section, in the condition in which it has been placed on the alveolar ridge transverse to the alveolar ridge, has been formed concave towards the alveolar ridge, such as J-shaped, L-shaped or U-shaped, wherein in or near a first portion forming the base of the body, in particular forming the base of the J, L or U, the body has been provided with one or more supporting areas for support members, such as pillars, for extending through the gingiva, said supporting areas being integrally formed with the body, said support members forming a support for an exo-prosthesis, such as a dental prosthesis or dentures, wherein the supporting areas have been connected to the rest of the body via relatively weakened areas of the body, in particular have been connected to the rest of the body via those relatively weakened areas of the body only.



Subperiosteal jaw implant

BACKGROUND OF THE INVENTION

The invention relates to a subperiosteal jaw implant and to a method for manufacturing such an implant.

5 The invention relates to an assembly of a jaw implant for oral subperiosteal placement of a dental prosthesis over the alveolar ridge of a patient's maxilla or mandible, and of column-shaped supports for supporting the dentures on the jaw implant. The invention further relates to placing such an assembly.

10 Subperiosteal implants are used in oral and maxillofacial surgery, including dentistry, when a patient is suffering from partial or complete edentulism or advanced bone atrophy and needs to wear a dental prosthesis. After the jaw bone has temporarily been stripped of the gingiva and mucosa, the implant is attached to the jaw bone that is still present by
15 means of screws. The implant forms an endo-prosthesis, to which, via transmucosal/transgingival supports, usually in the form of columns or pillars, the actual dental prosthesis or dentures, the exo-prosthesis, is attached.

 Subperiosteal jaw implants are used if bone grafting, an alveolar ridge augmentation or sinus lift is not an option or inconvenient.

20 In an old technique (Weinberg) a grid-shaped plate was bent in accordance with the shape of the jaw bone and cut to size and finished. Subsequently a supporting column for the endo-prosthesis was soldered onto the plate situated underneath the bone membrane, which plate was bent on both sides of the alveolar ridge like a saddle. The soft tissue was then placed
25 back again and sutured. The intention was that the plate would follow the contours of the supporting bone and the fit would contribute to the stability. However, this often turned out not to be the case.

Goldberg and Gerhkoff had a different approach, wherein an impression was made of the jaw, over the soft tissue and an estimate of the tissue thickness was made by means of X-rays and palpation, on the basis of which data a plaster model of the jawbone was made. Based on said model a
5 molded piece out of Vitallium (a chromium-cobalt-molybdenum alloy) was made, with support columns thereon, formed as one unity therewith. The tissue on the bone was incised and laid aside, after which the molded piece was placed on the exposed bone and attached thereto using vertical screws. The soft tissue was then sutured again. In this case as well, the stability often
10 turned out inadequate in the long term due to the inaccurate fit and peri-implantitis due to failing gingival-adhesion to the metal.

Berman, Lew, Marziani and others started from an impression of the exposed alveolar ridge for a better fit. Berman made a plaster model in the image of the impression. From the stone model he cast a grid-shaped
15 implant made of Vitallium that was attached using tantalum wires. Marzani made a plaster compression mold from the impression, in which mold a wire mesh or grid-shaped plate made of tantalum was pressed into the right shape. Support columns were soldered or screwed secure to the implant. The implant was then attached to the jaw bone using screws on the exterior
20 inclined areas of the alveolar ridge and on the symphysis.

Making an impression of the alveolar ridge after making an incision into the soft tissue and laying it aside, is very trying for a patient. Furthermore, the long period passing between making the impression and placing the implant during a second surgical session is also onerous.

25 A further drawback in existing techniques and subperiosteal implants is the problem that in case of failing gingival adhesion, gingivitis may arise around the pillars between the implant and the prosthesis, the gingivitis spreading along the pillar in a direction towards the implant and possibly resulting in peri-implantitis, bone decay, in the area surrounding and
30 underneath the implant. This may result in a bone crater and in case of spreading may cause a perforation towards the sinus, the nose, the canalis mandibularis. Further ingrowing epithelium may result in the entire frame getting detached from the bone.

35 SUMMARY OF THE INVENTION

It is an object of the invention to provide a subperiosteal jaw implant that causes a patient less inconvenience.

It is an object of the invention to provide a subperiosteal jaw implant with which the adverse effects it involves can be kept within limits.

According to one aspect, the invention provides a jaw implant for oral, subperiosteal placement over the alveolar ridge of the maxilla or of the mandible, wherein the implant forms a body which in cross-section, in the condition in which it has been placed on the alveolar ridge transverse to the alveolar ridge, has been formed concave towards the alveolar ridge, such as J-shaped, L-shaped or U-shaped, like in a kind of full or semi saddle shape, wherein in or near a first portion forming the base of the body, in particular forming the base of the J, L or U, the body has been provided with one or more supporting areas for support members, such as columns or pillars, for extending through the gingiva, in particular passing through it, said supporting areas being integrally formed with the body, said support members forming a support for an exo-prosthesis, such as a dental prosthesis or dentures, with or without replacing the alveolar ridge or part of the basic jaw, wherein the supporting areas have been connected to the rest of the body via relatively weakened areas of the body, in particular have been connected to the rest of the body via those relatively weakened areas of the body only. In that way one or more supporting areas, in particular those bearing one or more columns extending through the soft tissue, near a bone area infected with peri-implantitis can be detached relatively easily from the rest of the body of the implant, and thus also the attached support member, such as the pillar, for the exo-prosthesis, using rotary-driven instruments and/or manually driven instruments. The rest of the implant can remain in its place, thus relatively limiting the inconvenience to the patient. The exo-prosthesis can be placed back again, wherein, if so desired, an open space therein can be closed up, for instance using a screw.

In one embodiment each supporting area has been connected to the rest of the body via its own weakened areas, so that the area to be removed can be kept limited.

In one embodiment, at least at the location of the supporting areas, the body has an open structure, such as a framework or grid, with bars or strips between the holes of the open structure. Material can be saved on because of these holes and they may also form holes through which tissue can grow, as known per se from for instance US 4,379,694 and WO 02/39921. The weakened areas can then remain restricted to within the bars of the grid or framework, forming a part thereof. The holes between the bars or strips are not encompassed by the concept of 'weakened areas'. For

instance, a supporting area can be connected to the body by three or four bars with weakened areas.

The weakened areas can be configured in various ways. They may for instance have been formed by porous areas. Adhesion to the bone
5 can then also be enhanced if the porous areas form the lower surface of the weakened area. The pores may have a cross-section that is smaller than 1 mm, for instance in the order of a few tenths of one mm, such as 0.5 mm. The weakened areas may be continuous over the full thickness of the body.

The weakened areas may also have been formed by areas
10 having a relatively reduced wall thickness, such as a smaller thickness due to a slot in the exterior surface or an internal cavity, such as a tube shape. The weakened areas may for instance have been formed by hollow bar sections in the body.

The weakened areas may also have been formed by areas
15 having perforations in the material of the body, for instance a series of holes positioned circumferentially around a supporting area, the holes having a cross-section that is smaller than the thickness of the body at that location. In case of said grid and the like the bars or strips may have been provided with such perforations.

20 In an advantageous embodiment the implant has been manufactured by means of 3D printing, of a biocompatible material, preferably of titanium, tantalum or an alloy thereof. Said materials are highly suitable for subperiosteal implants but can be cut more easily than Vitallium. In the process of 3D printing the body can be manufactured such that the surfaces
25 contacting bone tissue have a roughness or porosity, contrary to cast bodies, which is conducive to the process of adhesion to bone.

Subperiosteal jaw implants are made as one unity in a U-shape in top view, having an arc length adapted to the support length to be provided to the dental prosthesis or dentures. In case it regards dentures that have to
30 extend over a large arc length, that means having to include teeth of both the group consisting of the right and left premolars and molars, in particular to include teeth of the group consisting of the right and left molars, the jaw implant that has a dimension corresponding with the number of pillars required for exo-prosthesis, will also have a large arc length.

35 Insertion of such a jaw implant may prove to be very difficult, or even impossible, if the patient's mouth opening is limited, for instance by nature, a birth defect, because of aging, or caused by trauma or as a result of maxillary joint pathology. A limited lip elasticity may also make insertion of the

jaw implant more difficult. If insertion can take place successfully indeed, fixation of the implant will also prove difficult, and possibly not take place as it should be, as a consequence of which the end result will be below expectations and possibly require further medical procedures or restorative surgery.

In a further development according to the invention, which is elucidated below in connection with an assembly of the type mentioned in the preamble, this is improved upon because the jaw implant has been divided into bodies or segments that have been configured for respective placement in different areas of the alveolar ridge, spaced apart from each other in arc direction of the alveolar ridge.

At least one body or segment can be intended for supporting dentures, which comprise at least a few of the group consisting of the right premolars and right molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the left of the median line and/or

comprise at least a few of the group consisting of the left premolars and left molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the right of the median line.

At least one of the bodies or segments can be configured for placement on the alveolar ridge at the location of the right molars and/or left molars, and, in particular, be configured for placement at one side of the median line.

At least one of the bodies or segments can be configured for placement on the alveolar ridge at the location of incisors and/or a canine, and in particular, be configured for placement at one side of the median line.

The bodies or segments can be configured for placement on the alveolar ridge with intermediate distances from one to the other, so that intermediates spaces are situated in between them.

In a further development the body has been provided or the bodies have been provided with attachment holes for screws for attaching the implant to the jawbone. The attachment holes may have been provided on a second portion of the J-shaped, L-shaped or U-shaped body forming an upright leg thereof, in particular when the second portion has been formed for attachment to the buccal side of the jawbone in question. The screws can then find a reliable hold in the jawbone.

In one embodiment the body or segment has been provided with extensions, provided with one or more of the attachment holes. For an implant for the mandible, the body may have been provided with such an extension for attachment to the corpus mandibulae and/or with such an extension for attachment to the ramus ascendens mandibulae, in particular for attachment to the frontal edge (trigonum retromolare) of the ramus ascendens mandibulae, or lateral from the ascending branch of the mandible, dorsally extending, resulting in a high degree of stability. For an implant for the maxilla, the body can be provided with such an extension for attachment adjacent to the apertura piriformis and/or for attachment to the zygomatic pillar and/or the zygoma.

The optimal location and shape of the extensions can be determined by means of a scan of the jaw in question and the connecting bone areas.

In one embodiment the supporting areas at the convex side of the body have been provided with elevations which, at their end facing away from the body, have been provided with a means for attaching an exo-prosthesis thereto, either with or without the interposition of an intermediate pillar. The elevations, either with or without intermediate pillar, form support members for supporting the exo-prosthesis on the supporting areas of the body of the implant. The elevations preferably have been integrally formed with the body, so that discontinuities are kept within limits, and it is possible for them to be executed in said 3D print in accordance with the wanted design.

In one embodiment the elevations protrude from the body up to a distance that is sufficient for their circumferential surface to extend above the gingiva after having been placed. The circumferentially situated surfaces of the connection to a further part, such as an exo-prosthesis, placed on the elevation, will then remain above the gingiva thus reducing the risk of peri-mucositis and gingivitis. The elevations can be pillar-shaped and in one embodiment at their outer ends be provided with a means for direct attachment of an exo-prosthesis thereon. This can for instance be done by means of attachment means, such as screws, extending through the attachment holes in the exo-prosthesis and engaging in the outer end of the pillar-shaped elevations for attachment. An assembly according to the invention, in addition to the implant described, also comprises an exo-prosthesis and the means for attaching the exo-prosthesis to the implant, in particular pillar-shaped elevations.

At their outer ends the elevations can be provided with a means for attaching an intermediate pillar thereon, which intermediate pillar can extend to above the gingiva and at its opposite end has been provided with a means for attaching an exo-prosthesis thereon, either in the center line of the pillar or not. The connection intermediate pillar - exo-prosthesis can be as described in the previous paragraph.

According to a further aspect, the invention provides a method for manufacturing a subperiosteal implant according to any one of the preceding claims, wherein a 3D scan, in particular a CT scan or more in particular a CBCT scan is made of a jaw for which the implant is intended, on the basis of which scan a design of the implant is made, the design is entered as a CAD file into the operating system of a 3D printer which is fed with a bio-compatible printing material suitable for subperiosteal implants, after which the designed implant is printed by the 3D printer using the printing material, in accordance with the design in the CAD file. In that way a properly fitting implant can be manufactured in manner that will not inconvenience the patient.

In one embodiment of this method for manufacturing an implant as described above, wherein the supporting areas at the convex side of the body have been provided with elevations which at their end facing away from the body have been provided with a means for attaching an exo-prosthesis thereon, either with or without the interposition of an intermediate pillar, the elevations are provided in a number that is an excess of the required number. In that way the stability of the prosthesis is not put at risk when an elevation including optional intermediate pillar needs to be removed due to full-blown peri-implantitis.

According to a further aspect, the invention provides a method for intervening in cases of imminent onset of or full-blown peri-implantitis in the area of a support column forming the connection between a subperiosteal implant and an exo-prosthesis, wherein a relatively weakened area forming the connection between the support column in question and the concave body of the implant placed against the jawbone, is broken and the support column is removed. In one embodiment the exo-prosthesis is placed back again after removal of the elevation.

It is an object of the invention to provide an assembly of the type mentioned in the preamble that can also easily be placed in the above-mentioned difficult circumstances (in terms of introduction into the mouth, and such).

It is an object of the invention to provide an assembly of the type mentioned in the preamble that can also be reliably placed in the above-mentioned difficult circumstances.

5 It is an object of the invention to provide an assembly of the type mentioned in the preamble that can also be placed with overview in the above-mentioned difficult circumstances.

According to a further aspect the invention provides an assembly of

- 10 - a jaw implant for oral subperiosteal placement over the alveolar ridge of a patient's maxilla or mandible,
- dentures and
- supports for supporting the dentures on the jaw implant, spaced apart therefrom, which supports in particular form columns or pillars, wherein the dentures comprise at least a few of the group consisting of the
- 15 right premolars and right molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the left of the median line
- and/or comprise at least a few of the group consisting of the left premolars and left molars and at least a few of the group consisting of the incisors, the
- 20 canine, the premolars and the molars situated to the right of the median line, wherein the jaw implant has been divided into segments that have been configured for respective placement in different areas of the alveolar ridge, spaced apart from one another in arc direction of the alveolar ridge, and
- wherein the dentures comprise a bridge part that is bending-rigid under the intended loads that occur and has an arc length that suffices to connect the
- 25 segments to each other via the supports.

In that case the segments or bodies will have a size taking the limited mouth opening and/or limited lip elasticity into account and allowing to consecutively introduce them via the limited, existing mouth opening into the

30 oral cavity. At that location they can be consecutively positioned, with overview, on the jawbone underneath the gingiva and other weak parts. Subsequently they can be connected to each other via the pillars and the bridge part continuing over the segments and forming a support for the dentures. The bridge part here forms a means for at least temporarily

35 stabilizing the segments of the jaw implant, at least until the segments are/have been fixated to the jawbone using osteosynthesis screws. Placing those bone screws can also be executed reliably and with overview.

The invention enables nonetheless and reliably arranging a jaw implant, albeit in segments, for dentures spanning a considerable arc length, in an oral cavity of limited access. The dentures may have such an arc length as to comprise right molars and/or left molars, in particular second molars and
5 more in particular third molars.

At least a few of the segments can each form a curved plate-shaped body which in cross-section, in the condition in which it has been placed on the alveolar ridge transverse to the alveolar ridge, has been formed concave towards the alveolar ridge, such as J-shaped, L-shaped or U-shaped, like a kind of full or semi saddle shape, wherein in or near a first
10 portion forming the base of the body, in particular forming the base of the J, L or U, the body has been provided with one or more supporting areas for the (column-shaped) supports, which supporting areas have been integrally formed with the body. The body in question can be provided with holes for
15 bone screws and with holes through which bone tissue can grow.

The stability of the segments or bodies can be enhanced if the bridge part and at least one of the segments or bodies have been configured for mutual connection by means of two or more of said supports. In a further embodiment thereof the bridge part and each of the segments have been
20 configured for mutual connection by means of two or more of said supports.

Depending on the wanted procedure at least one of the segments can be configured for placement on the alveolar ridge at the location of the incisors and/or canine(s) and the dentures comprise related incisors and/or canine(s).
25

In one embodiment the segments have been configured for placement on the alveolar ridge at intermediate distances from each other. In that way more room is provided when placing a next segment on the alveolar ridge.

If the distance between maxillary alveolar ridge and mandibular
30 alveolar ridge is sufficient the dentures can be configured as two-part supra structure, wherein the dentures comprise a continuous bridge part and a continuous dental part to be attached to the bridge part, which dental part comprises teeth of the group consisting of the premolars and molars and optionally teeth of the group consisting of incisors/canine(s). The bridge part
35 then forms a retentive part of a second structure, which as visible dental part can then easily be placed inside and removed from the mouth, and then for instance be cleaned.

If the bite height is low it may be advantageous to configure the exo-prosthesis substantially as a one-part supra structure, wherein the dentures comprise a continuous bridge part and a dental part forming one unity therewith, which dental part comprises teeth of the group consisting of the premolars and molars and optionally teeth of the group consisting of
5 the incisors/canine(s).

For enhancing the stability, the connection between the bridge part and the column-shaped supports is angularly rigid under the intended conditions of use, and likewise the connection between each implant segment
10 and the column-shaped supports in question is angularly rigid under the intended conditions of use.

At least one of the segments can be configured for placement on the alveolar ridge at the location of the right molars and/or left molars, and, in particular, be configured for placement at one side of the median line.

15 At least one of the segments can be configured for placement on the alveolar ridge at the location of incisors and/or canine(s), and in particular, be configured for placement at one side of the median line.

In one embodiment the jaw implant has been configured for placement on the alveolar ridge of the mandible. At least one of the segments
20 can then be provided with an extension having holes for attachment to the corpus mandibulae and/or with an extension having holes for attachment to the ramus ascendens mandibulae, over the trigonum retromolare in the direction of the processus coronoideus, or lateral from the ascending branch of the mandible, dorsally extending.

25 In another embodiment the jaw implant has been configured for placement on the alveolar ridge of the maxilla. At least one segment can then be provided with an extension having holes for attachment adjacent to the apertura piriformis and/or with an extension having holes for attachment to the cheekbone (zygoma) or the zygomatic pillar (also bone area to the dorsal side of the fossa canina that is suitable for attachment).
30

These extensions augment the dimensions of the implant, which is not problematic because of the division into segments, which leaves sufficient room for placement. Screw fixation in the bone via the openings of the implant can take place via intra-oral or extra-oral (through the skin)
35 access.

According to a further aspect, the invention provides a method for placing dentures in a patient's mouth, which dentures comprise at least a few of the group consisting of the right premolars and right molars and at least

a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the left of the median line
and/or

comprise at least a few of the group consisting of the left premolars and left
5 molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the right of the median line, wherein the dentures comprise a bridge part formed as one unity and a dental part,
wherein an implant constituting of segments is made, with at least a segment
10 for the right area of teeth of the group consisting of premolars and molars and/or at least a segment for the left area of teeth of the group consisting of premolars and molars, the segments are provided with supports, in particular column-shaped or pillar-shaped supports, for supporting the dentures, and the segments are successively placed on the prospective areas on the
15 sufficiently exposed alveolar ridge, at least the bridge part is attached to the supports in order to form a connecting bridge between the placed segments, the segments are attached to permanent jaw material, in particular by means of bone screws, the gingiva is placed back again, over the segments, and is sutured.

20 Because the segments have not yet been fixated to the jawbone when placing either the bridge part of the dentures, or the complete dentures, the precise attachment of the bridge part et cetera to the supports is facilitated and enhanced. The segments then still have some freedom to adapt themselves to the orientation imposed by the bridge part to the
25 supports, such as columns.

In a first embodiment, dentures are placed comprising a bridge part formed as one unity and a dental part to be attached thereto, wherein first the bridge part is attached to the supports of all segments and subsequently the dental part is attached to the bridge part.

30 In a second embodiment, dentures are placed comprising a bridge part and a dental part that forms one unity therewith, so that placing the bridge part also includes placing the dental part.

In a further development also a segment for an area of incisors and/or canine(s) is being placed.

35 In a further development the segments are placed at intermediate distances from each other.

In one embodiment the (precision) attachment between bridge part and supports is realized by a screw fixation in or to columns or pillars

present on the subperiosteal implant segment in question. In another embodiment other precision attachments are used, such as tongue-in-groove, Dalbo, Locators, rail mechanisms and connections known in for instance timber construction.

5 In another embodiment said precision attachments are realized in 3D-print/CNC connections between the subperiosteal segments at crest height.

 According to a further aspect, the invention provides a subperiosteal implant to be placed on the alveolar ridge of a mandible or
10 maxilla, wherein the implant has been divided into segments in alveolar ridge direction, in particular apparently suitable and intended for an assembly according to the invention.

 According to a further aspect, the invention provides a jaw
15 implant for oral, subperiosteal placement over the alveolar ridge of the maxilla or of the mandible, wherein the implant forms a body which in cross-section, in the condition in which it has been placed on the alveolar ridge transverse to the alveolar ridge, has been formed concave towards the alveolar ridge, such as J-shaped, L-shaped or U-shaped, wherein the body has been provided with one or more supporting areas for support members, such as pillars, for
20 extending through the gingiva, in particular passing through it, said supporting areas being integrally formed with the body, said support members forming a support for an exo-prosthesis, such as a dental prosthesis or dentures, wherein the body extends over a part of the alveolar ridge only and has been provided with lips or extensions, which have been provided with one or more
25 attachment holes for attachment to the bone.

 If the body has been configured for placement on the mandible, it can be provided with such an extension for attachment to the corpus mandibulae and/or with such an extension for attachment to the ramus ascendens mandibulae, in particular for attachment to the frontal edge
30 (trigonum retromolare) of the ramus ascendens mandibulae, over the trigonum retromolare in the direction of the processus coronoideus, or lateral from the ascending branch of the mandible, dorsally extending.

 If the body has been configured for placement on the maxilla, it can be provided with such an extension for attachment adjacent to the
35 apertura piriformis and/or be provided with such an extension for attachment to the zygomatic pillar and/or the zygoma.

The body can be configured for placement at one side of the median line only. The body can be configured as discussed above in the assembly according to the invention.

The aspects and measures described in this description and the claims of the application and/or shown in the drawings of this application may where possible also be used individually. Said individual aspects may be the subject of divisional patent applications relating thereto. This particularly applies to the measures and aspects that are described per se in the sub claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be elucidated on the basis of a number of exemplary embodiments shown in the attached drawings, in which:

Figure 1 shows a bottom view of a jaw implant according to the invention placed on a maxilla;

Figure 1A shows a vertical cross-section of the implant of figure 1, according to plane 1A;

Figure 2 shows a side view of a jaw implant according to the invention placed on a mandible;

Figure 2A shows a vertical cross-section of the implant of figure 2, according to plane 2A;

Figure 3 shows a side view of an implant according to the invention placed on a maxilla;

Figure 4 shows an oblique top/front view of an implant according to the invention placed on a mandible;

Figures 5A and 5B show examples of a pillar structure in an assembly of a jaw implant according to the invention and a prosthesis;

Figure 6A shows a bottom view of a jaw implant according to the invention placed on a maxilla;

Figure 6B shows vertical cross-section of the implant of figure 1, according to plane 6B;

Figure 6C shows a side view of an assembly according to the invention with a segment of the jaw implant according to figure 6A;

Figure 7A shows an oblique top/front view of an assembly according to the invention placed on a mandible;

Figure 7B shows a vertical cross-section of a segment of the implant of the assembly of figure 7A, according to plane 7B;

Figure 7C shows a top view of a bridge part of two-part dentures for an assembly according to the invention that slightly differs from figure 7A for a mandible, like in figure 7D; and

Figure 7D shows a side view of an assembly according to the invention for a mandible.

DETAILED DESCRIPTION OF THE DRAWINGS

The subperiosteal jaw implant 1 of figure 1 has been placed against the alveolar ridge of the maxilla. For reasons of an illustrative nature, the implant 1 is shown folded out slightly flat. The implant 1 is formed by a body 2 formed as one unity of titanium or tantalum, or an alloy thereof.

As can be seen in the cross-section of figure 1A, the body 2 has a gentle U-shape having a portion 3 abutting the crest of the alveolar ridge and portions 4a, 4b that are formed as one unity therewith and abut the palatal (palate) sides and the buccal (cheek) and labial (lip) sides, respectively, of the alveolar ridge. The implant 1 can for instance have an arc length suitable for dentures having teeth of the group consisting of the right premolars and molars and teeth of the group consisting of the left premolars and molars. The body 2 is frame-shaped or grid-shaped, having main bars or main strips 5, 5a, 5b, that are circumferential, and auxiliary bars or auxiliary strips 6. The bars 5a and 5b are intended to abut the labial and the palatal sides, respectively, of the alveolar ridge. Spacious holes 10 through which tissue can grow have been left open between the bars 5, 5a, 5b and bars 6. Supporting areas 8, in this case having integrally formed column-shaped elevations 9 for connection to an exo-prosthesis that is not shown, are surrounded by holes 10 and are connected to the rest of the body by the bars 6 only. Weakenings 7 (as discussed above) have been formed in the material of the body, approximately halfway the bars 6. Each column 9 therefore has its own supporting area 8, which has been provided with a weakening 7 in each connection 6 to the rest of the body 2.

The body 2 has furthermore been provided with integrally formed attachment lips 11 and 12, which have been provided with attachment holes 13 for osteosynthesis screws 14. The lips 11 are intended/configured for attachment to zygomatic pillars, the lips 12 are intended/configured for attachment to the bone adjacent to the apertura piriformis.

In figure 2 a subperiosteal jaw implant 101 has been placed against the left alveolar ridge of the mandible. The implant 101 is formed by a body 102 formed as one unity of titanium or tantalum, or an alloy thereof.

As can be seen in the cross-section of figure 2A, the body 102 is U-shaped having a portion 103 abutting the crest of the alveolar ridge and two pending portions 104a,b formed as one unity therewith, which portions about the buccal and lingual sides, respectively, of the left alveolar ridge. The body 102 is grid-shaped, having main bars or main strips 105 that are circumferential, and auxiliary bars or auxiliary strips 106. Holes 110 through which tissue can grow, have been left open between the bars 105 and the bars 106. Supporting areas 108 having integrally formed supports 109 for columns or pillars that have not been shown, for an exo-prosthesis are surrounded by holes 110 and are connected to the rest of the body by the bars 106 only. The bars 106 have been formed with weakenings 107 in the material of the body.

The body 102 has furthermore been provided with integrally formed attachment lip 115, which has been provided with attachment holes 113 for osteosynthesis screws 114. The lips 115 are intended/configured for attachment to the frontal edge (trigonum retromolare) of the ramus ascendens mandibulae. Portion 105a has been provided with attachment holes 116, also for osteosynthesis screws 114.

Figure 3 shows another embodiment of a subperiosteal jaw implant 201 for a maxilla. Parts that are similar to the implant 1 of figure 1 have the same reference numbers increased by 200. Lip 211 is for attachment to the zygomatic pillar and lip 212 is for attachment to the bone adjacent to the apertura piriformis.

Figure 4 shows another embodiment of a subperiosteal jaw implant 301 for a mandible. Parts that are similar to the implant 101 of figure 2 have the same reference numbers increased by 200. The implant 301 has been formed like a continuous body 302 to be placed on both sides of the jaw and the portion situated in between. Attachment holes 316 have been provided for osteosynthesis screws for attachment.

Figure 5A schematically shows an example of attaching an exo-prosthesis to an example of an implant according to the invention. The column-shaped elevation 9 forms a support member for an exo-prosthesis and is step-shaped having a foot 9a and a column 9b, which has such a length as to extend above the crest of the gingiva. In the upper end the

column 9b has been provided with a bearing surface which has a screw hole in there for screw 20 in order to secure prosthesis 30.

In figure 5B the elevation 9 is narrower and shorter, and extends to below the crest t of the gingiva. For supporting dentures at the correct height, an intermediate pillar 25 has been placed on the elevation 9. In its lower side the intermediate pillar 25 has been provided with an accommodation space 25a in order for it to fit on the elevation 9 therewith and to be secured thereto by means of a screw. In the upper side the intermediate pillar has been provided with a screw hole 25b for screw 20 in order to secure prosthesis 30. Here, the prosthesis is attached indirectly to the elevation 9 on a support member that is composed of elevation 9 and intermediate pillar 25.

The embodiment of figure 5A has the advantage of a transition in the exterior surface situated below the crest of the gingiva being absent, thus reducing the risk of contamination.

The implant is placed in the patient by exposing the alveolar ridge by making a few incisions in the gingiva. The implant is placed on the alveolar ridge and attached to permanent jaw material using osteosynthesis screws. The gingiva is placed back again over the implant and sutured. The columns extend to above the gingiva.

Finally, the exo-prosthesis is placed on the columns.

After a while the implant will get osseointegrated with the bone membrane and with the gingiva. If the weakened areas 7, 107, 207, 307 have been formed by an incision at the bone side or have a porous surface at that location, this will be conducive to osseointegration. The forces resulting from chewing motions can be absorbed by the jaw via the various screw attachments. The motions of the implant relative to the gingiva and bone membrane will then remain within limits.

If a column extending through the gingiva has a mechanical problem or when there is question of peri-mucositis at said column, it is possible, after having detached the exo-prosthesis and cutting the gingiva around the column in question open in flaps, to detach the column 9 including its supporting area 8 from the body 2 of the subperiosteal implant 1, 101, 201, 301 through a machining action at the location of the weakened areas 7, 107, 207, 307. In case the body has been made of titanium or tantalum, or an alloy thereof, the machining action can be executed more easily than would be the case with the chromium-cobalt-molybdenum type alloys.

It is noted that the columns 9 can alternatively be executed as separate elements, and are then securely attached to the supporting areas 8, et cetera, inseparable therefrom.

Manufacturing using 3D printing enables shaping the
5 weakenings in any wanted way, such as by porous areas, for instance with pores having a maximum cross-section of 0.5 mm, hollow areas, incisions, or perforations having a diameter that is smaller than the thickness of the body at that location.

Figure 6A shows a jaw implant 1 according to the invention,
10 divided into segments, placed against the alveolar ridge of the maxilla. For reasons of an illustrative nature, the implant segments or bodies 2a,b are shown folded out slightly flat, just like in figure 1. The implant segments or bodies 2a,b have been formed as one unity per se, made of titanium or tantalum, or an alloy thereof.

15 As can be seen in the cross-section of figure 6B, the bodies 2a,b are slightly U-shaped having a portion 3 abutting the crest of the alveolar ridge and portions 4a, 4b that are formed as one unity therewith and abut the palatal (palate) sides and the buccal (cheek) and labial (lip) sides, respectively, of the alveolar ridge. The bodies 2a,b are frame-shaped or grid-
20 shaped, having main bars or main strips 5, 5a, 5b that are circumferential, and auxiliary bars 6. The bars 5a and 5b are intended to abut the respective palatal sides of the alveolar ridge. Holes 10 through which tissue can grow have been left open between the bars 5, 5a, 5b and bars 6. Supporting areas
25 8, in this case having integrally formed column-shaped elevations 9 that are connected thereto in an angularly rigid manner, for an exo-prosthesis that is not shown yet (see figure 6C), are surrounded by holes 10 and are connected to the rest of the body by the bars 6 only. Each column 9 therefore has its own supporting area 8.

Like in the preceding examples, weakenings 7 have been
30 formed in the material of the body approximately halfway the bars 6, in accordance with what has been discussed above. Each column 9 therefore has its own supporting area 8, which has been provided with a weakening 7 in each connection 6 to the rest of the body 2.

The bodies 2a,b have furthermore been provided with integrally
35 formed attachment lips 11 and 12, which have been provided with holes 13 for osteosynthesis screws 14. The lips 11 are intended for attachment to the zygomatic pillars and the zygoma, the lips 12 for attachment adjacent to the

apertura piriformis. In figure 6C the lips have been executed slightly different from those in figure 6A.

Prior to placing the segments 2a,b the alveolar ridge has been exposed by making a few incisions in the gingiva. Despite the presence of the rather long extensions 11 and 12, the segments 2a,b have in a controlled manner been successively introduced into the patient's mouth, and placed at the correct location on the maxillary alveolar ridge. See figure 6C for segment 2a. If so desired, the segments 2a,b can be kept in their place for the time being using a few temporary screws. These screws only need to be put in a number of places and can be shorter than the osteosynthesis screws that will ultimately be placed.

Then the dentures 20 can be placed. In figure 6C the dentures are substantially one-part, having a base part 20a made of metal forming a bending-rigid bridge part continuing in dental arc direction/alveolar ridge direction, and a dental part 20b in polymer or PMMA modelled thereon having molars 21, premolars 22, canines 23 and incisors 24. The dentures comprise teeth of the group consisting of the premolars and molars and extend on both sides of the median plane M. The bridge part 20a has been provided with holes 27 for snugly fitting accommodation of the outer ends of columns 9, and the dental part 20b has been provided with holes 25 for entry of screws 26 the screw thread of which engages with the screw thread in the columns 9. The head of the screw 26 fits into the hole 25, wherein in the bottom of the hole 25 is an opening to the hole 27 for fitting passage of the screw shank. The screws 26 create an angularly rigid connection of bridge part 20a to segments 2a,b. The holes 25 are filled later on by a suitable filler.

The bridge part 20a then connects both segments 2a,b rigidly, wherein the stability of the segments is enhanced, which is advantageous for fixating the segments after that.

Subsequently the segments 2a,b are permanently fixated at intermediate distance from one another, to the labial/buccal side of the maxillary alveolar ridge using osteosynthesis screws 14, and are also attached to the zygomatic pillar and adjacent to the apertura piriformis using the osteosynthesis screws 14. The gingiva is placed back again, around the columns 9 and over the implant, and sutured. The columns 9 extend to above the gingiva.

In figure 7A a subperiosteal jaw implant 101 has been placed against the mandible. The implant 101 is constituted of three segments or

bodies 102a-c each formed as one unity made of titanium or tantalum, or of an alloy thereof.

As can be seen in the cross-section of figure 7B for segment or body 102c, each segment or body 102a-c is U-shaped having a portion 103 abutting the crest of the alveolar ridge and two pending portions 104a,b that are formed as one unity therewith, and abut the labial and lingual sides, respectively, of the alveolar ridge or, for bodies 102a,b, abut the buccal and lingual sides of the left and right alveolar ridge. The bodies 102a-c are grid-shaped, having holes 110 through which tissue can grow and screw holes 113 for osteosynthesis screws 114 and with supporting areas 108 having integrally formed columns 109 for an exo-prosthesis in the form of dentures 120.

The segments or bodies 102a,b have furthermore been provided with integrally formed attachment lips or extensions 115a,b that have been provided with holes 113 for osteosynthesis screws 114. The lips 115a,b are intended for attachment to the lateral side of the ramus ascendens mandibulae, dorsally extending.

Despite the rather long extensions 115a,b, the segments or bodies 102a,b have in a controlled manner been successively introduced into the patient's mouth and placed at the correct location on the alveolar ridge. If so desired, the segments 102a,b could be kept in their place for the time being using a few temporary screws. After this has successively been done for both, the segment 102c is placed, optionally also by means of a temporary screw, in order to realize the situation of figure 2A, in which the segments are situated at intermediate distances from each other.

In this example the dentures 120 to be placed are one-part like in figure 7C, that means that the bridge part 120a and dental part 120b form one unity with each other and therefore are placed as a unit. The dentures 120 comprise teeth of the group consisting of the premolars and molars and extend on both sides of the median plane M. The dental part 120b with the teeth (premolars/molars and incisors/canine(s)) is made of polymer or PMMA. Downwardly oriented holes or accommodation spaces 127 are present in the metal bridge part 120a for snugly fitting accommodation of the columns 109. While placing the dentures on the columns 109, the holes 127 are able, if necessary, to orient the columns 109 and thus the segments that are rigidly connected to the columns. Holes or accommodation spaces 125 have been arranged in the upper side of the dentures 120, in which holes or accommodations spaces screws 126 are inserted and via a hole in the bottom

of said holes can be screwed into the columns 109 in order to fixate the bridge part 120a and thus the dentures 120 and the segments to each other.

The screws 126 now also realize an angularly rigid connection of bridge part 120a to the segments 102a, 102b and 102c. The holes 125 are
5 filled later on by a suitable filler.

The bridge part 120a then rigidly connects the three segments or bodies 102a,b,c, thus enhancing the stability of the segments placed on the alveolar ridge, at least until they have been fixated to the lateral side of the ramus ascendens mandibulae and to the alveolar ridge using osteosynthesis
10 screws 114 in all holes 113. The gingiva can subsequently be placed back again and sutured.

In figures 7C and 7D the embodiment is slightly different. The segment 102c extends onwards along the alveolar ridge to the left side. Furthermore, the dentures 120' are two-part, in this case having a separate
15 bridge part 120a' and a separate dental part 120b, to be placed successively. As can also be seen in top view in figure 7C, the bridge part 120a' at the side of the dental part 120b' has been provided with two types of holes, namely holes or accommodation spaces 125' for screws 126' with which the bridge part 120a' can be screwed onto the columns 109', and holes 134 for screws
20 133 with which the dental part 120b' can be screwed onto the bridge part 120a'.

The way of placement largely corresponds with placing the assembly of figure 7A, however, not until after the bridge part 120a itself has been fixated to the columns 109' and the segments have been fixated to the
25 alveolar ridge using osteosynthesis screws 114, will the dental part 120b' be detachably attached to the bridge part 120a' using the screws 133 that can be inserted into the holes/accommodation spaces 132 in the dental part 120b' for screw engagement into the holes 134.

After a while the implant segments will get osseointegrated with
30 the bone membrane and with the gingiva. Until that time the bridge part ensures stabilization of the segments.

In one embodiment each segment has been provided to be ideally positioned by means of the precision attachment between the subperiosteal segments and the supra structure, which spatially define the
35 segments in their ideal configuration relative to each other and relative to the jawbone.

Manufacturing the implants according to the invention, either in the segmented embodiment or not, can take place as follows. The patient is

in need of an exo-prosthesis, yet due to an atrophied jawbone they have insufficient material to attach and anchor endosseous implants. Bone reconstruction using the patient's own bone or donor bone or using synthetic bone is not an option and neither is bone grafting. In such cases a
5 subperiosteal implant may be the solution.

A three-dimensional image is made of the jaw or the jaw part in question of the patient's, which reveals the specific contours and condition of the jawbone. This is done using a 3D scanner, in particular a CT scanner, more in particular a CBCT scanner.

10 The 3D image is stored and made available to a designer of subperiosteal implants. The designer designs an optimal design of the subperiosteal implant for the patient using a CAD program. The designer then also decides on the locations of attachment by means of screws and the design of the weakenings and/or the division into segments. The scan also
15 provides information about the locations where the bone is sufficiently thick to serve as location of attachment. Based on the scan, the designer is able to decide on the use of, the location and the shape of extensions/lips.

The design can be stored in a design file suitable for operating a 3D printer. The 3D printer is configured for printing medical implants made
20 of biocompatible materials such as titanium or tantalum or alloys thereof.

The operating system of the 3D printer reads the design file and has the 3D printer print the body or the bodies in accordance with the design. The body obtained then forms the subperiosteal implant or the bodies obtained together form the subperiosteal implant constituting of segments. If
25 required the body or the bodies/segments can be further finalized (such as finishing the threading), for instance in a CNC process.

The above description is included to illustrate the operation of preferred embodiments of the invention and not to limit the scope of the invention. Starting from the above explanation many variations that fall within
30 the spirit and scope of the present invention will be evident to an expert.

Claims

1. Jaw implant for oral, subperiosteal placement over the alveolar ridge of the maxilla or of the mandible, wherein the implant forms a body which in cross-section, in the condition in which it has been placed on the alveolar ridge transverse to the alveolar ridge, has been formed concave
5 towards the alveolar ridge, such as J-shaped, L-shaped or U-shaped, wherein in or near a first portion forming the base of the body, in particular forming the base of the J, L or U, the body has been provided with one or more supporting areas for support members, such as pillars, for extending through the gingiva, in particular passing through it, said supporting areas being
10 integrally formed with the body, said support members forming a support for an exo-prosthesis, such as a dental prosthesis or dentures, characterized in that the supporting areas have been connected to the rest of the body via relatively weakened areas of the body, in particular have been connected to the rest of the body via those relatively weakened areas of the body only.
- 15 2. Implant according to claim 1, wherein each supporting area has been connected to the rest of the body via its own weakened areas.
3. Implant according to claim 2, wherein, at least at the location of the supporting areas, the body has an open structure such as a framework or grid.
- 20 4. Implant according to claim 3, wherein the weakened areas have been restricted to within the bars or strips of the grid or framework.
5. Implant according to any one of the preceding claims, wherein the relatively weakened areas have been formed by porous areas, wherein the pores may have a cross-section that is smaller than 1 mm, for instance in
25 the order of a few tenths of one mm, such as 0.5 mm.
6. Implant according to any one of the claims 1-4, wherein the weakened areas are formed by hollow bar sections or hollow strip sections.

7. Implant according to any one of the claims 1-4, wherein the relatively weakened areas are formed by areas having a relatively reduced wall thickness.
8. Implant according to any one of the claims 1-4, wherein the relatively weakened areas are formed by areas having perforations in the material of the body, wherein the perforations have a cross-section that is smaller than the thickness of the body at that location.
9. Implant according to any one of the preceding claims, manufactured by means of 3D printing, preferably made of titanium, tantalum or an alloy thereof.
10. Implant according to any one of the preceding claims or according to the preamble of claim 1, wherein the jaw implant has been divided into segments or bodies that have been configured for respective placement in different areas of the alveolar ridge, spaced apart from each other in arc direction of the alveolar ridge.
11. Implant according to claim 10, wherein the jaw implant is intended for supporting dentures comprising at least a few of the group consisting of the right premolars and right molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the left of the median line and/or comprising at least a few of the group consisting of the left premolars and left molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the right of the median line.
12. Implant according to claim 11, wherein at least one of the segments has been configured for placement on the alveolar ridge at the location of the right molars and/or left molars, and, in particular, has been configured for placement at one side of the median line.
13. Implant according to claim 10 or 11, wherein at least one of the segments has been configured for placement on the alveolar ridge at the location of the incisors and/or canine(s) and, in particular, has been configured for placement at one side of the median line.
14. Implant according to any one of the claims 10-13, wherein the segments have been configured for placement on the alveolar ridge with intermediate distances from one to the other.
15. Implant according to any one of the preceding claims, wherein either the body has been provided or the segments/bodies have been

provided with attachment holes for screws for attaching the implant to the jawbone.

16. Implant according to claim 15, wherein the holes have been provided on a second portion of the body in question abutting a side of the alveolar ridge, wherein, preferably, the second portion has been formed for attachment to the buccal side of the jawbone in question.

17. Implant according to claim 15 or 16, wherein the body in question has been provided with extensions, provided with one or more of the attachment holes.

18. Implant according to any one of the preceding claims, wherein the body, or at least one of the bodies/segments according to any one of the claims 10-14, has been configured for placement on the mandible.

19. Implant according to claim 18, wherein the body, or at least one of the segments/bodies according to any one of the claims 10-14, has been provided with such an extension for attachment to the corpus mandibulae and/or with such an extension for attachment to the ramus ascendens mandibulae, in particular for attachment to the frontal edge (trigonum retromolare) of the ramus ascendens mandibulae, over the trigonum retromolare in the direction of the processus coronoideus, or lateral from the ascending branch of the mandible, dorsally extending.

20. Implant according to any one of the claims 1-17, wherein the body, or at least one of the segments/bodies according to any one of the claims 10-14, has been configured for placement on the maxilla.

21. Implant according to claim 20, wherein the body, or at least one of the segments/bodies according to any one of the claims 10-14, has been provided with such an extension for attachment adjacent to the apertura piriformis and/or has been provided with such an extension for attachment to the zygomatic pillar and/or the zygoma.

22. Implant according to any one of the preceding claims, wherein the supporting areas at the convex side of the body in question have been provided with elevations which, at their end facing away from the body, have been provided with a means for attaching an exo-prosthesis thereto, either with or without the interposition of an intermediate pillar.

23. Implant according to claim 22, wherein the elevations have been integrally formed with the body in question.

24. Implant according to claim 22 or 23, wherein the elevations protrude from the body in question up to a distance that is sufficient for their circumferential surface to extend above the gingiva after having been placed.

25. Implant according to claim 22, 23 or 24, wherein the elevations are pillar-shaped and at their outer ends have been provided with a means for direct attachment of an exo-prosthesis thereon.

26. Implant according to claim 24, wherein at their outer ends the elevations have been provided with a means for attaching an intermediate pillar thereto, which intermediate pillar at its opposite end has been provided with a means for attaching an exo-prosthesis thereon.

27. Assembly of

- a jaw implant for oral subperiosteal placement over the alveolar ridge of a patient's maxilla or mandible, in particular an implant according to any one of the preceding claims,

- dentures; and

- supports for supporting the dentures on the jaw implant, spaced apart therefrom, which supports in particular form columns or pillars,

wherein the dentures comprise at least a few of the group consisting of the right premolars and right molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the left of the median line

and/or

comprise at least a few of the group consisting of the left premolars and left molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the right of the median line,

wherein the jaw implant has been divided into segments or bodies that have been configured for respective placement in different areas of the alveolar ridge, spaced apart from one another in arc direction of the alveolar ridge, and wherein the dentures comprise a bridge part that is bending-rigid under the intended loads that occur and has an arc length that suffices to connect the segments to each other via the supports.

28. Assembly according to claim 27, wherein the dentures comprise right molars and/or left molars.

29. Assembly according to claim 27 or 28, wherein the bridge part and at least one of the segments have been configured for mutual connection by means of two or more of said supports.

30. Assembly according to claim 29, wherein the bridge part and each of the segments have been configured for mutual connection by means of two or more of said supports.

31. Assembly according to any one of the preceding claims, wherein the dentures comprise a continuous bridge part and a continuous

dental part to be attached to the bridge part, which dental part comprises teeth of the group consisting of the premolars and molars and optionally teeth of the group consisting of incisors/canine(s).

32. Assembly according to any one of the claims 27-31, wherein
5 the dentures comprise a continuous bridge part and a dental part forming one unity therewith, which dental part comprises teeth of the group consisting of the premolars and molars and optionally teeth of the group consisting of incisors/canine(s).

33. Assembly according to any one of the claims 27-32, wherein
10 the connection between the bridge part and the column-shaped supports is angularly rigid under the intended conditions of use.

34. Assembly according to any one of the claims 27-33, wherein the connection between each implant segment and the column-shaped supports in question is angularly rigid under the intended conditions of use.

15 35. Assembly according to any one of the claims 27-34, wherein at least one of the segments has been configured for placement on the alveolar ridge at the location of the right molars and/or left molars, and, in particular, has been configured for placement at one side of the median line.

36. Assembly according to any one of the claims 27-35, wherein at
20 least one of the segments has been configured for placement on the alveolar ridge at the location of the incisors and/or canine(s) and, in particular, has been configured for placement at one side of the median line.

37. Assembly according to any one of the claims 27-36, wherein
25 the jaw implant has been configured for placement on the alveolar ridge of the mandible.

38. Assembly according to claim 37, wherein at least one of the segments/bodies has been provided with an extension, provided with one or more of the attachment holes, which extension has been configured for attachment to the corpus mandibulae and/or has been configured for
30 attachment to the ramus ascendens mandibulae, in particular for attachment to the frontal edge (trigonum retromolare) of the ramus ascendens mandibulae, over the trigonum retromolare in the direction of the processus coronoideus, or lateral from the ascending branch of the mandible, dorsally extending.

35 39. Assembly according to any one of the claims 27-36, wherein the jaw implant has been configured for placement on the maxilla.

40. Assembly according to claim 39, wherein at least one of the segments/bodies has been provided with an extension, provided with one or

more of the attachment holes, which extension has been configured for attachment adjacent to the apertura piriformis or has been configured for attachment to the zygomatic pillar and/or the zygoma.

41. Method for manufacturing a subperiosteal jaw implant
5 according to any one of the preceding claims, wherein a scan is made of a jaw for which the implant is intended, on the basis of which scan a design of the implant is made, the design is entered as a CAD file into the operating system of a 3D printer which is fed with a bio-compatible printing material suitable for subperiosteal implants, after which the designed implant is printed
10 by the 3D printer using the printing material, in accordance with the design in the CAD file.

42. Method according to claim 41, using an implant according to any one of the claims 22-26, wherein the elevations are provided in a number that is an excess of the required number.

15 43. Method for intervening in cases of imminent onset of or full-blown peri-implantitis in the area of a support column forming the connection between a subperiosteal jaw implant and an exo-prosthesis, wherein a relatively weakened area forming the connection between the support column in question and a concave body of the implant placed against the jawbone is
20 broken and the support column is removed.

44. Method according to claim 43, wherein the exo-prosthesis is placed back again after removal of the elevation.

45. Method for placing dentures in a patient's mouth, which dentures comprise at least a few of the group consisting of the right premolars and right molars and at least a few of the group consisting of the incisors, the
25 canine, the premolars and the molars situated to the left of the median line and/or

comprise at least a few of the group consisting of the left premolars and left molars and at least a few of the group consisting of the incisors, the canine, the premolars and the molars situated to the right of the median line,
30 wherein the dentures comprise a bridge part formed as one unity and a dental part,

wherein an implant constituting of segments is made, with at least a segment for the right area of teeth of the group consisting of premolars and molars and/or at least a segment for the left area of teeth of the group consisting of
35 premolars and molars, the segments are provided with supports, in particular column-shaped or pillar-shaped supports, for supporting the dentures, and the segments are successively placed on the prospective areas on the

sufficiently exposed alveolar ridge, at least the bridge part is attached to the supports in order to form a connecting bridge between the placed segments, the segments are attached to permanent jaw material, in particular by means of bone screws, the gingiva is placed back again, over the segments, and is
5 sutured.

46. Method according to claim 45, wherein dentures are placed comprising a bridge part formed as one unity and a dental part to be attached thereto, wherein first the bridge part is attached to the column-shaped supports of all segments and subsequently the dental part is attached to the
10 bridge part.

47. Method according to claim 46, wherein dentures are placed comprising a bridge part and a dental part that is a unity therewith, so that placing the bridge part also includes placing the dental part.

48. Method according to claim 45, 46 or 47, wherein also a
15 segment for an area of incisors and/or canine(s) is being placed.

49. Method according to any one of the claims 45-48, wherein the segments are placed at intermediate distances from each other.




50. Method according to any one of the claims 45-49, wherein the dentures also comprise a right third molar and/or a left third molar.



20 51. Subperiosteal implant to be placed on the alveolar ridge of a mandible or maxilla, wherein the implant has been divided into segments in alveolar ridge direction.



52. Subperiosteal implant according to claim 51, apparently suitable and intended for an assembly according to any one of the claims 27-40.



25 53. Implant provided with one or more of the characterizing measures described in the attached description and/or shown in the attached drawings.


54. Method provided with one or more of the characterizing measures described in the attached description and/or shown in the attached
30 drawings.

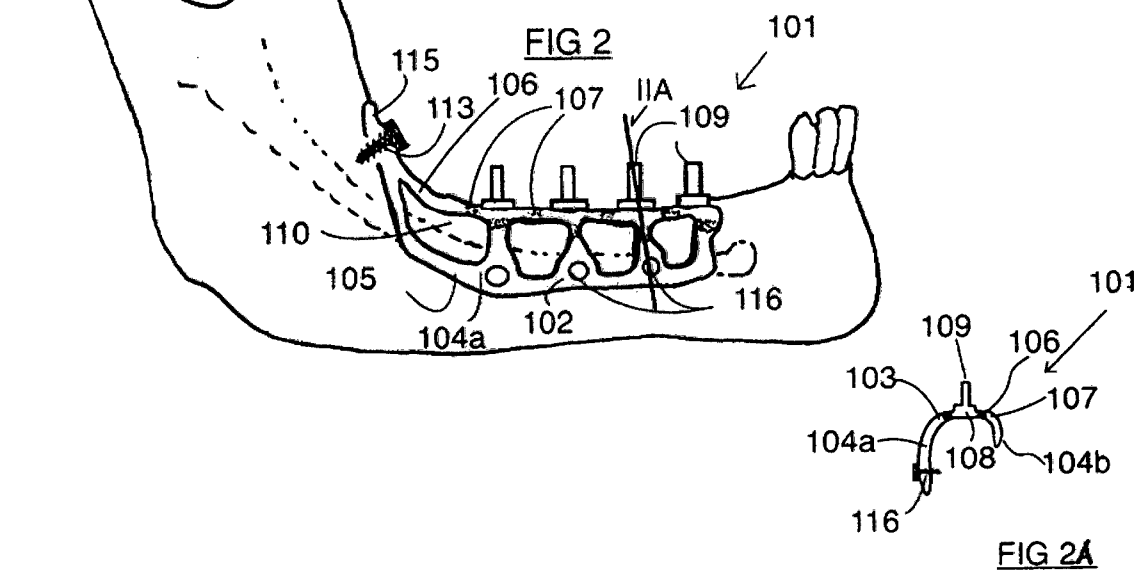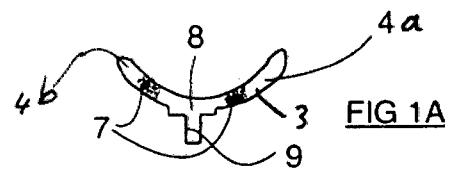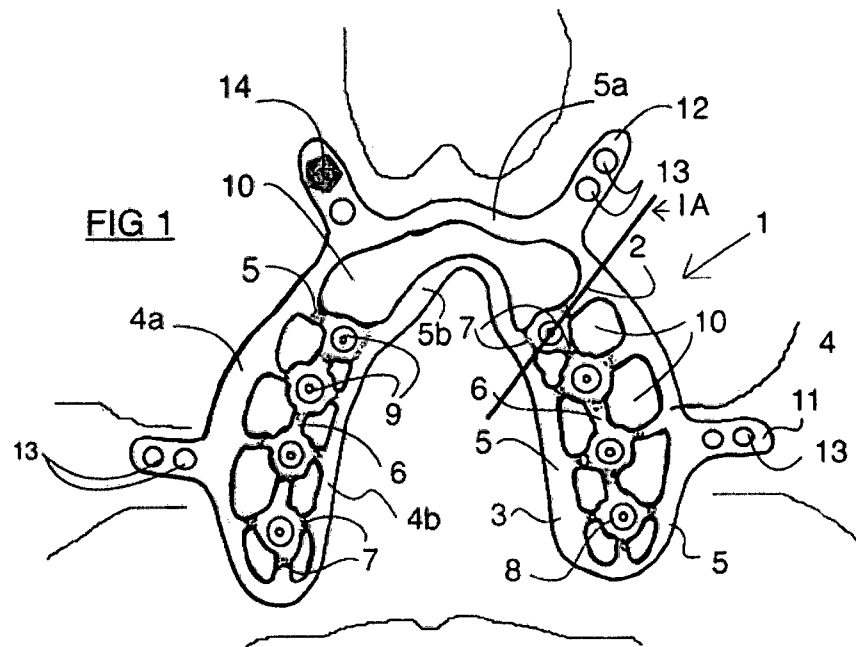

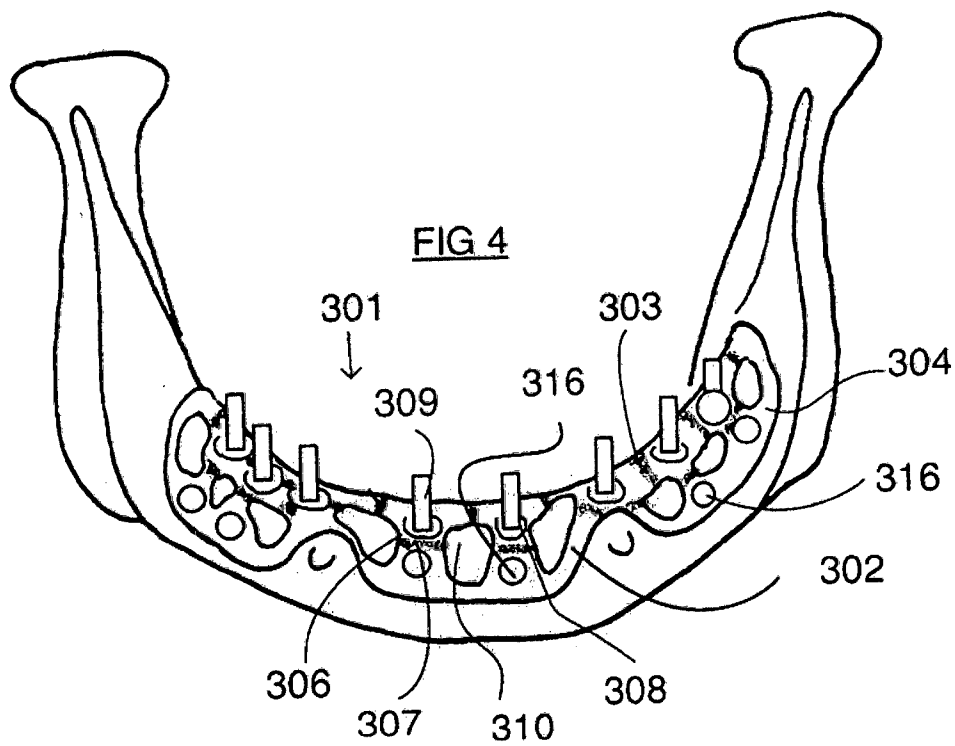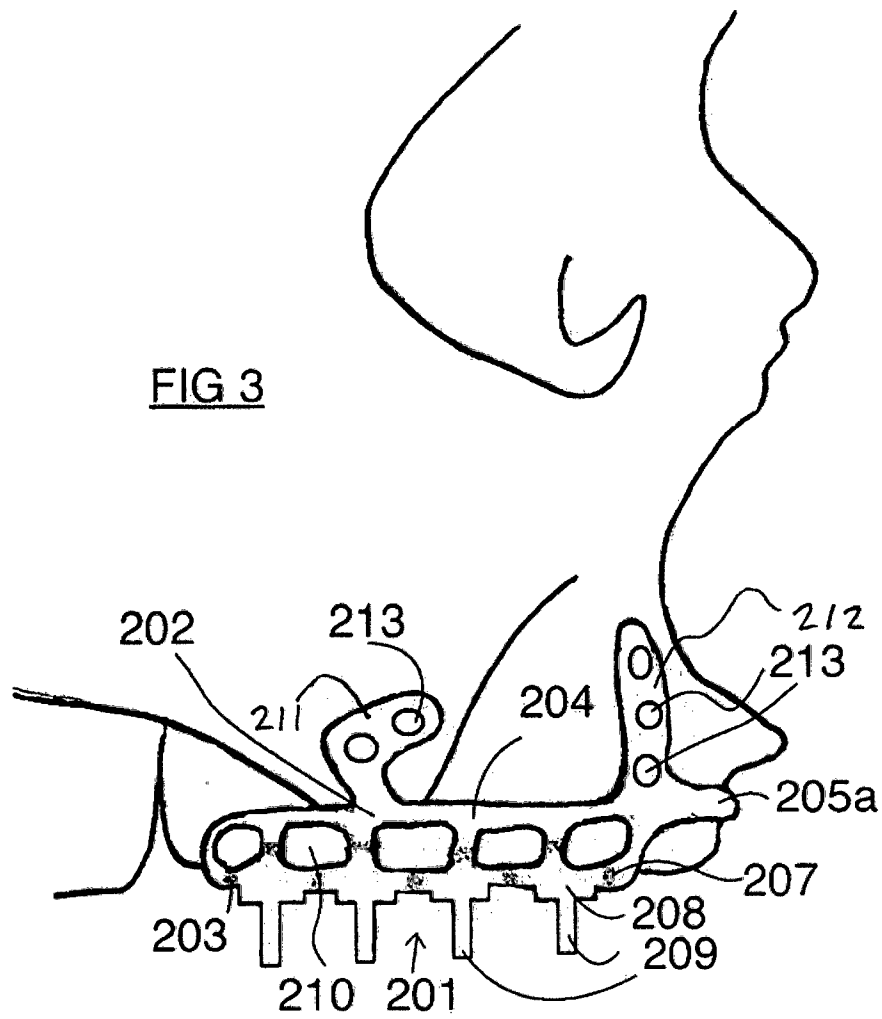

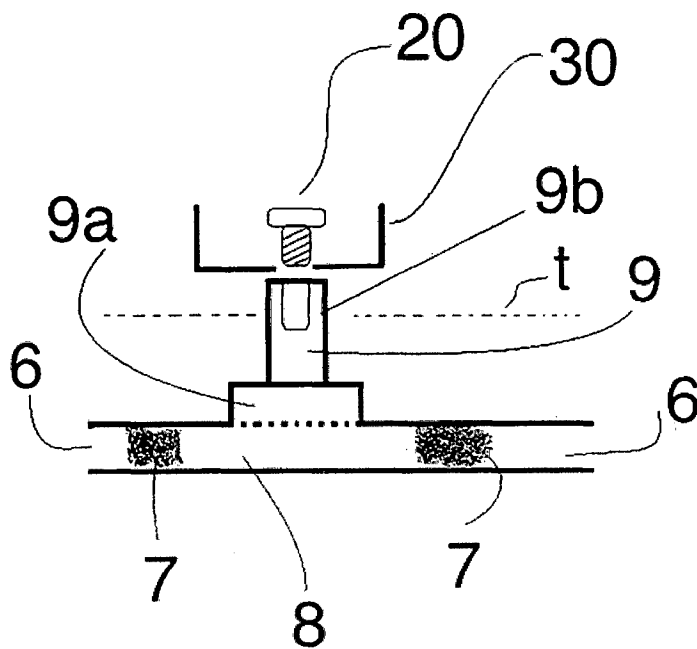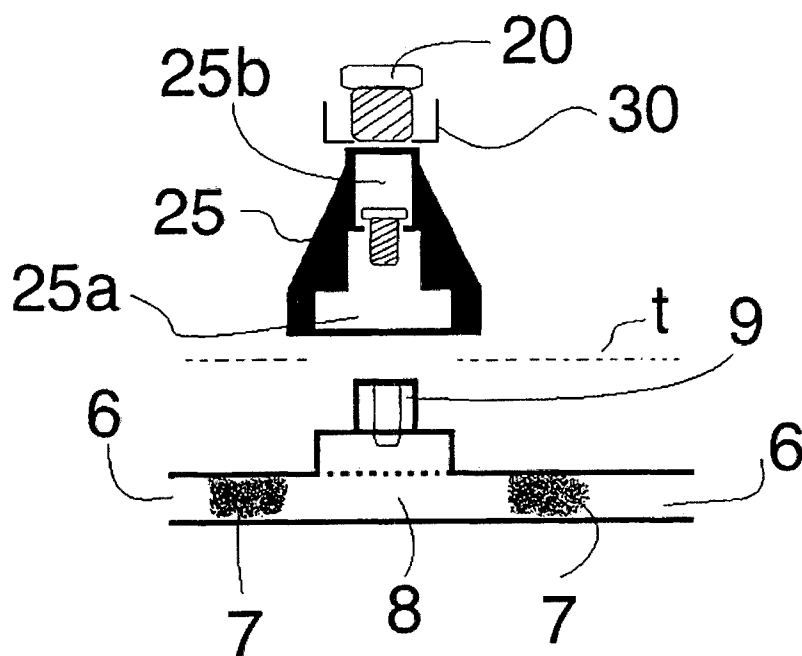FIG 5AFIG 5B

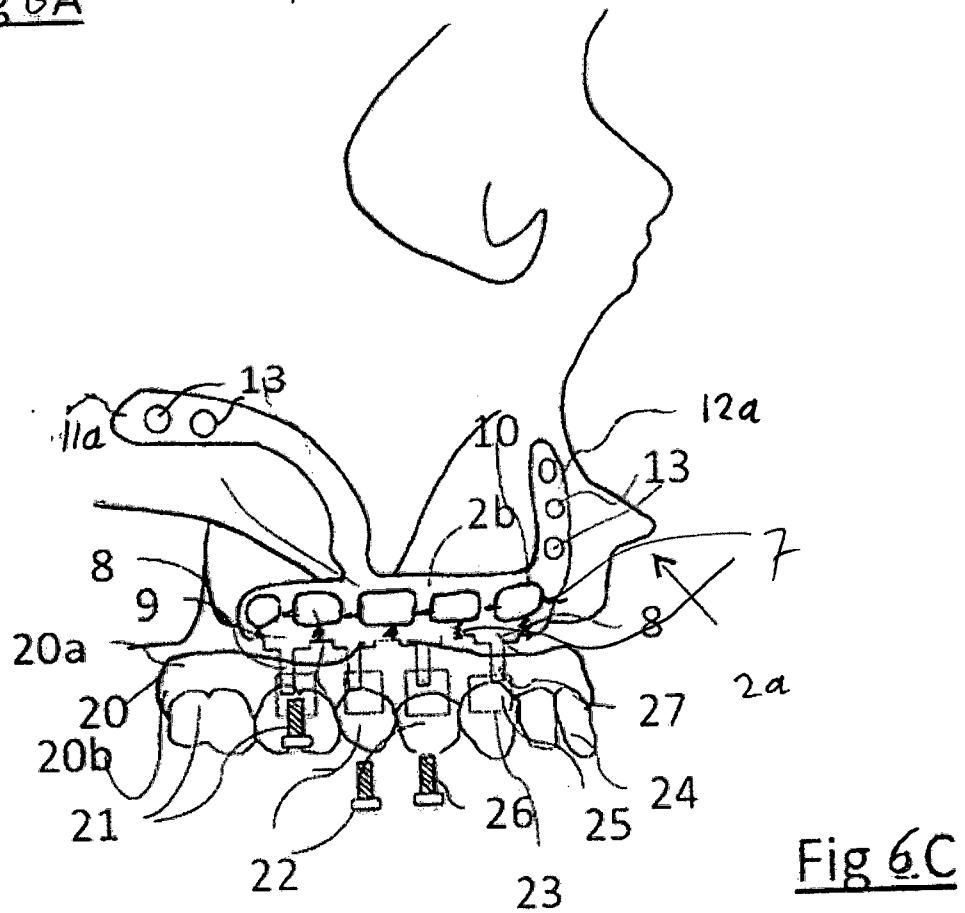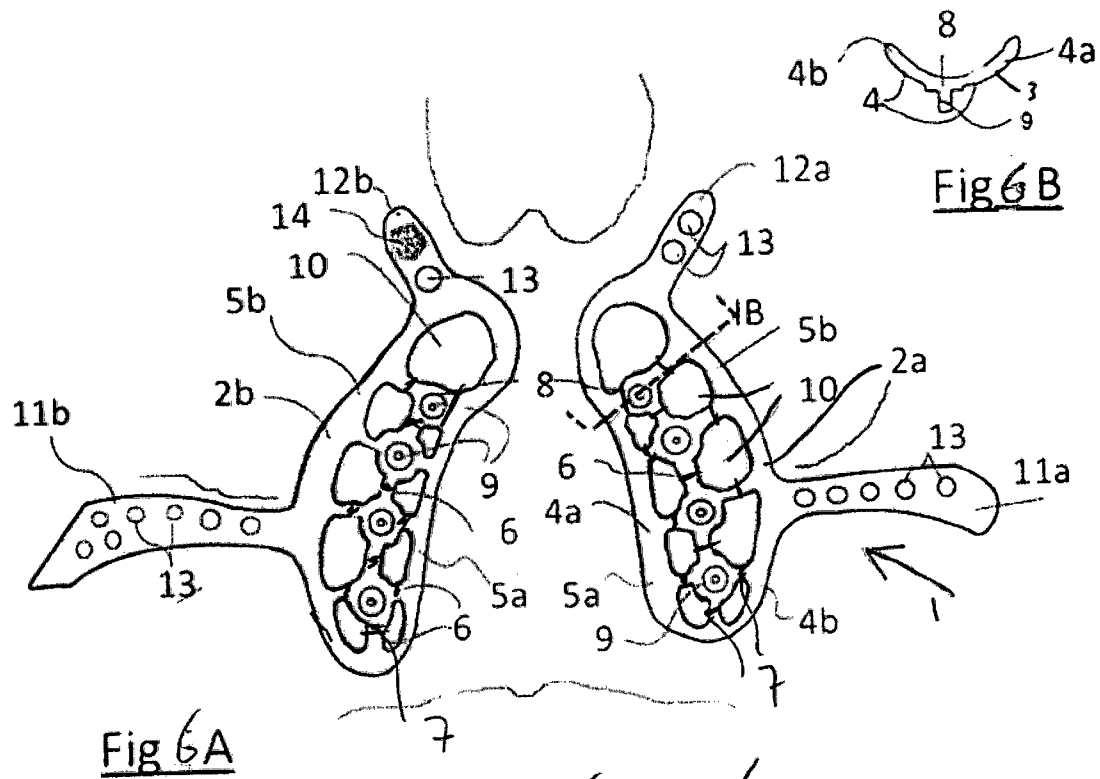

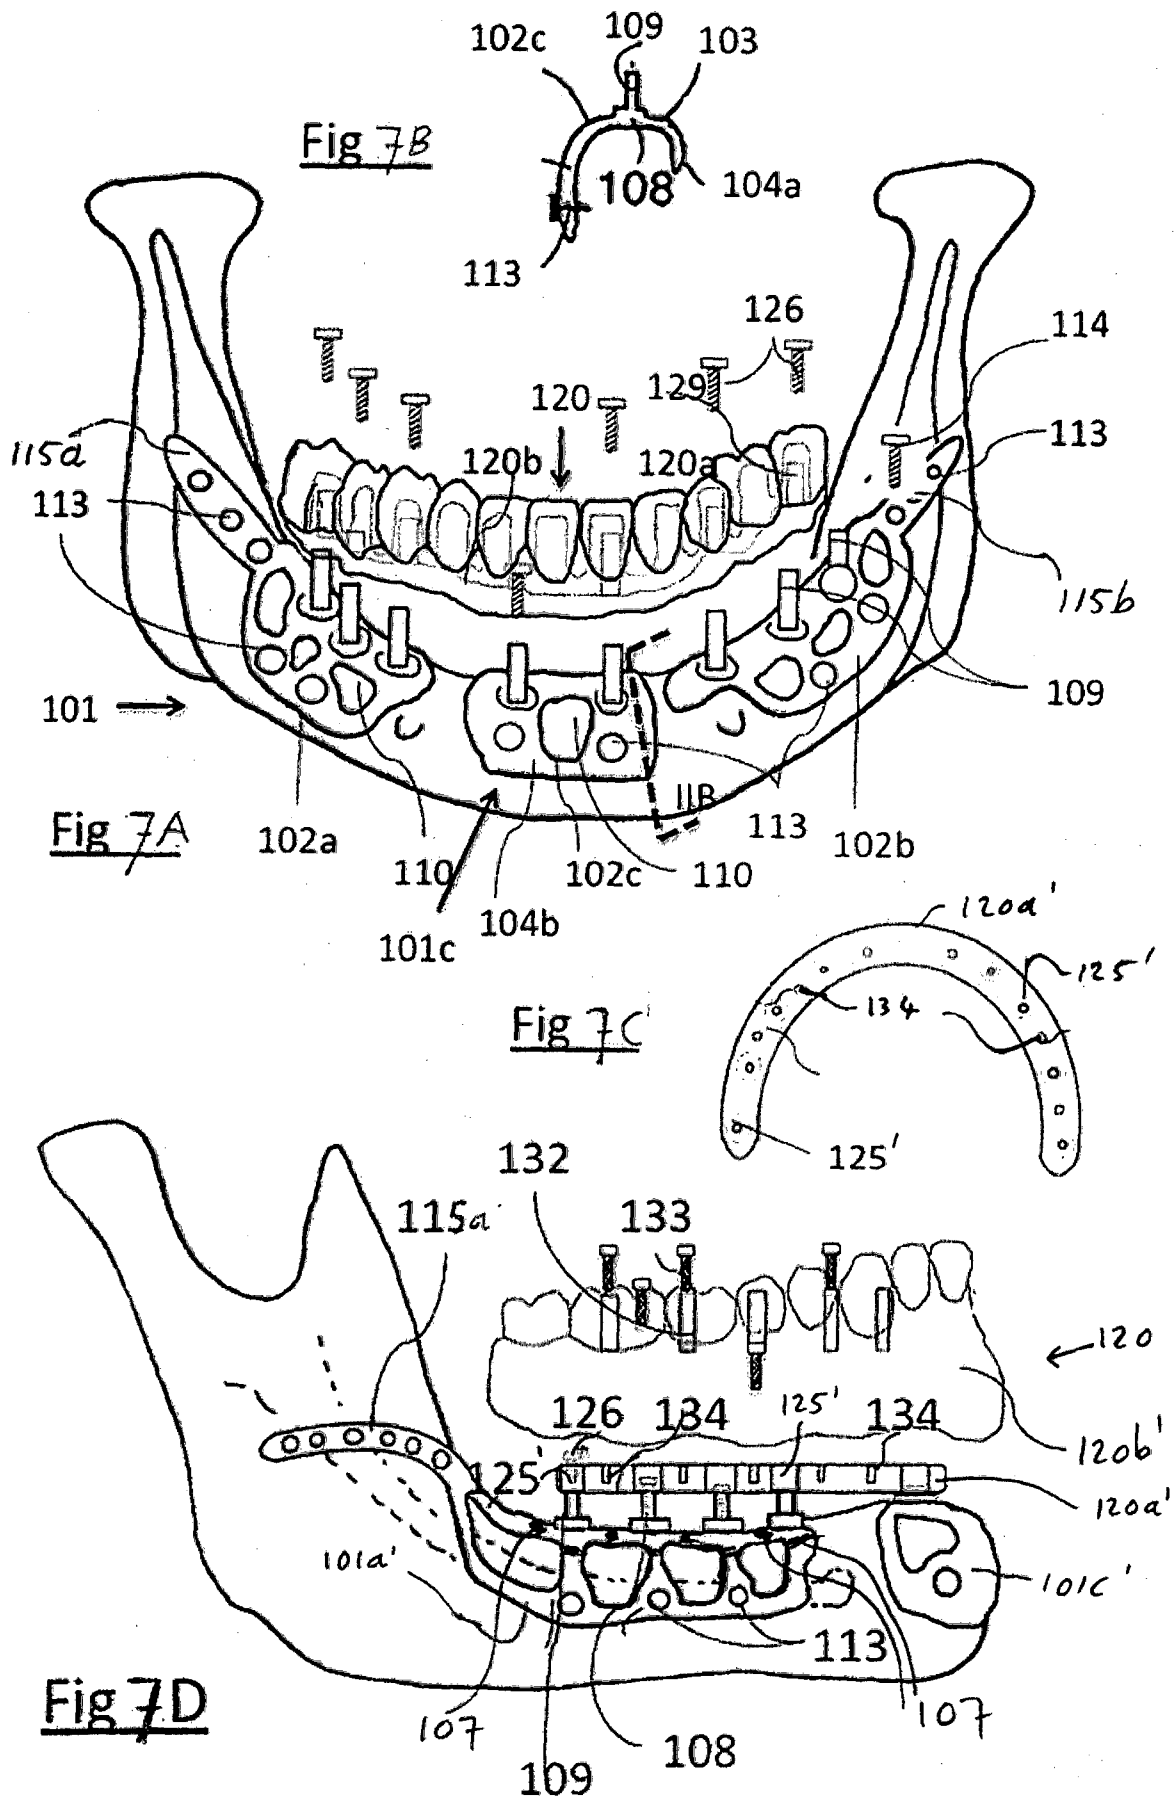

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2016/000762

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61C8/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 379 694 A (RIESS GUIDO [DE]) 12 April 1983 (1983-04-12) column 3, lines 19-47; claim 1; figures 1, 2, 5, 6 column 4, lines 3-21, 49-53 abstract -----	1-5, 10-31, 33-37, 39,51,52
X	US 6 030 218 A (ROBINSON DANE Q [US]) 29 February 2000 (2000-02-29) abstract; figures -----	1-5, 18-20, 22-26
X	GB 770 696 A (HERAEUS GMBH W C) 20 March 1957 (1957-03-20) figures ----- -/-	1-4, 18-20, 22,24-26



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 August 2016

Date of mailing of the international search report

12/09/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Fouquet, Michèle

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2016/000762

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/39921 A1 (CORTESE GIANCARLO [IT]) 23 May 2002 (2002-05-23) page 3, lines 18-26; figures page 4, lines 9-19 page 9, lines 5-13 -----	1-4, 15-20, 22-26,41
X	DE 20 2015 001579 U1 (KOPP SIGMAR [DE]) 18 May 2015 (2015-05-18) paragraphs [0005], [0008]; claim 1 -----	1-4, 18-20, 22-26
A	US 2011/269100 A1 (FURRER ANDRE [CH] ET AL) 3 November 2011 (2011-11-03) figures -----	1-40,51, 52
X,P	US 2016/022385 A1 (ZHAO KUN [US]) 28 January 2016 (2016-01-28) paragraphs [0010], [0016]; figures -----	1-4,9, 15-20, 22-26, 41,42
X	US 4 741 698 A (ANDREWS DOUGLAS V [US]) 3 May 1988 (1988-05-03) figures -----	1-5, 10-20, 22-40, 51,52
X	RU 2 317 794 C1 (GOU VPO SMOLENSKAJA GMA MIN ZD [RU]) 27 February 2008 (2008-02-27) claim 1; figures -----	1-5,20, 22-26

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2016/000762

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 43-50
because they relate to subject matter not required to be searched by this Authority, namely:
see FURTHER INFORMATION sheet PCT/ISA/210
2. ☒ Claims Nos.: 53, 54
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.1

Claims Nos.: 43-50

The methods according to independent claims 43 and 45 and their respective dependent claims 44 and 46-50 are not regarded as patentable inventions (Rule 39(iv) and Art. 17(2)(a)(i) PCT) as they relate to surgical and therapeutical methods, especially in view of the description, p.7, line 27- 38 which clearly states that the method is performed in the mouth of the patient when the implant is already installed in the bone (claim 43) of the implant is reinstalled (claim 45, which is also a surgical method).

Continuation of Box II.2

Claims Nos.: 53, 54

Claims 53 and 54 are not searched, because they are so unclear (Art. 6PCT) as their subject-matter has not been defined by technical structural features (claim 53) or method steps (54) but instead by reference to the drawings and description only.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guidelines C-IV, 7.2), should the problems which led to the Article 17(2) declaration be overcome.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2016/000762

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4379694	A	12-04-1983	AR 218704 A1 30-06-1980
		BR 7808248 A	20-05-1980
		CA 1117328 A	02-02-1982
		DE 2824118 A1	06-12-1979
		DK 500978 A	02-12-1979
		NO 783793 A	04-12-1979
		US 4379694 A	12-04-1983
		ZA 7806453 B	31-10-1979
US 6030218	A	29-02-2000	NONE
GB 770696	A	20-03-1957	NONE
WO 0239921	A1	23-05-2002	AU 1084302 A 27-05-2002
		EP 1333770 A1	13-08-2003
		IT T020001056 A1	14-05-2002
		WO 0239921 A1	23-05-2002
DE 202015001579	U1	18-05-2015	NONE
US 2011269100	A1	03-11-2011	CA 2795724 A1 03-11-2011
		CN 102858254 A	02-01-2013
		CN 105147374 A	16-12-2015
		EP 2563242 A1	06-03-2013
		EP 2952145 A1	09-12-2015
		ES 2548162 T3	14-10-2015
		JP 5951598 B2	13-07-2016
		JP 2013524995 A	20-06-2013
		KR 20130069575 A	26-06-2013
		US 2011269100 A1	03-11-2011
		US 2015265378 A1	24-09-2015
		WO 2011136898 A1	03-11-2011
US 2016022385	A1	28-01-2016	NONE
US 4741698	A	03-05-1988	NONE
RU 2317794	C1	27-02-2008	NONE