



- (51) International Patent Classification:
B25B 27/08 (2006.01)
- (21) International Application Number:
PCT/US2015/065004
- (22) International Filing Date:
10 December 2015 (10.12.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/570,033 15 December 2014 (15.12.2014) US
- (71) Applicant: BENDIX SPICER FOUNDATION BRAKE
LLC [US/US]; 901 Cleveland Street, Elyria, OH 44035
(US).
- (72) Inventors: JONES, Jeffrey, L.; 901 Cleveland Street,
Elyria, OH 44035 (US). ENNIS, Daniel; 901 Cleveland
Street, Elyria, OH 44035 (US).
- (74) Agents: GREENLY, Cheryl, L. et al.; Bendix Spicer
Foundation Brake LLC, 901 Cleveland Street, Elyria, OH
44035 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

(54) Title: APPARATUS AND METHOD FOR IMPACT FORMING A COTTER PIN

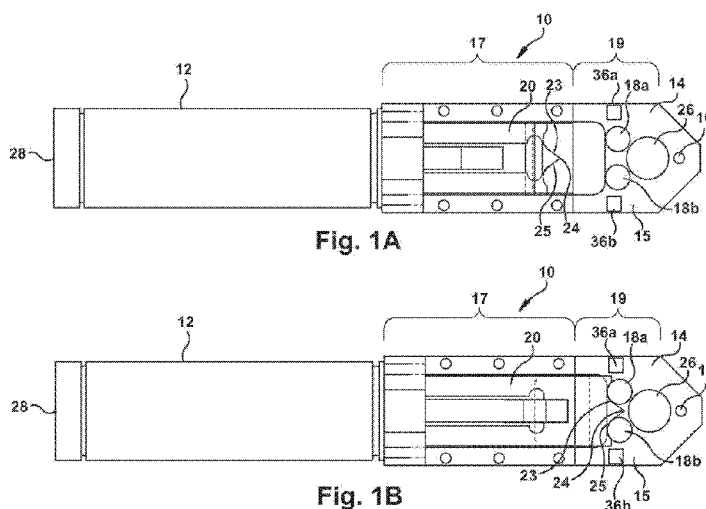

(57) Abstract: Various embodiments of an apparatus and method for impact forming a coter pin (30) in a brake assembly (70) are disclosed. In one example, an impact forming tool (10) comprises a handle (12) for receiving an operating force, a stationary portion (14) and a hammer portion (20). The stationary portion (14) is connected to the handle (12) at a proximate end. An orientation pin (16) is positioned on a distal end and two anvil pins (18A) are positioned on the stationary portion (14) between the proximate end and the orientation pin (16). The hammer portion (20) communicates with the operating force and moves linearly across the face (15) of the stationary portion (14) from a first position to a second position. The hammer portion (20) has a symmetrical arcuate end, wherein a vertex (24) of the symmetrical arcuate end is between the two anvil pins (18A) when the hammer is in the second position.

APPARATUS AND METHOD FOR IMPACT FORMING A COTTER PIN

Background

[0001] The present invention relates to embodiments of an apparatus and method for forming a cotter pin. Cotter pins are generally metallic fasteners with two tines that are bent during installation. The cotter pin holds two different components together while allowing the two components to move or rotate with respect to each other. In one example, a first of the two components is inserted through a second component and the cotter pin is inserted into an aperture in the first component. The two tines are bent such that the cotter pin cannot be removed from the first component. An example of a commercial vehicle application for cotter pins includes inserting a cotter pin through a clevis pin and bending the cotter pin tines to connect a yoke to a slack adjuster via the clevis pin.

[0002] Several methods exist for bending the tines of a cotter pin. One common method is a manual method where the operator uses pliers to first grab one of the tines of the cotter pin and bend the pin outward away from the other tine. Then the operator grabs the second tine of the cotter pin and bends the second tine in the opposite direction. Manual bending of the tines requires a twisting motion of the operator's wrist, which may cause ergonomic issues over long periods of repetitive motion. There is no automatic check in the process to confirm that the operator actually bent both tines. The bend may not have been complete enough to hold the cotter pin in the first component and the cotter pin may fall out of the first component.

[0003] Another method to bend cotter pins is the use of automatic tools. Automatic tools are typically rotational tools that grab one longer tine of the cotter pin and bend the longer tine first. Then the tool rotates again to grab the second shorter tine of the cotter pin to bend it in an opposite direction. These machines are generally large and are designed for

applications where the cotter pin is easily accessible. The automatic machines require special types of cotter pins having one tine longer than the other.

Summary

[0004] Various embodiments of an apparatus for impact forming a cotter pin are disclosed. In accordance with one example, the apparatus is a tool comprising a handle configured to receive an operating force, a stationary portion and a hammer portion. The stationary portion has a face and is connected to the handle at a proximate end portion. An orientation pin is positioned on a distal end portion of the face of the stationary portion and two anvil pins are positioned on the face of the stationary portion between the proximate end portion and the orientation pin. The hammer portion communicates with the source of operating force and is configured to move linearly across the face of the stationary portion from a first position to a second position. The hammer portion has a symmetrical arcuate end, wherein a vertex of the symmetrical arcuate end is between the two anvil pins when the hammer is in the second position.

[0005] In accordance with another aspect, a method for impact forming a cotter pin comprises inserting a cotter pin having a head and two tines into a securing pin aperture, wherein the tines of the cotter pin extend through the securing pin aperture. The method includes aligning an impact forming tool with the head of the cotter pin at an orientation pin on the impact forming tool wherein the orientation pin positions the cotter pin and aligning the impact forming tool wherein a securing pin fits through an alignment aperture in the impact forming tool. The method includes actuating the impact forming tool to move a hammer portion of the impact forming tool linearly along a face of a stationary portion of the impact forming tool where the hammer portion simultaneously separates the two tines of the cotter pin.

[0006] In accordance with another aspect, a system for securing an assembly with a cotter pin comprises a cotter pin with a head and two tines and an impact forming tool. The impact forming tool comprises a handle configured to receive an operating force; a stationary portion with a face and connected to the handle at the proximate end. The impact forming tool includes an orientation pin positioned on a distal end of the stationary portion for receiving the head of the cotter pin and two anvil pins positioned on the stationary portion between the proximate end and the orientation pin. A hammer portion communicates with the operating force and is configured to move linearly across the face of the stationary portion from a first position to a second position. The hammer portion has a symmetrical arcuate end, wherein a vertex of the symmetrical arcuate end is positioned to separate the two tines of the cotter pin between the two anvil pins when the hammer is in the second position.

Brief Description of the Drawings

[0007] In the accompanying drawings which are incorporated in and constitute a part of the specification, embodiments of the invention are illustrated, which, together with a general description of the invention given above, and the detailed description given below, serve to exemplify the embodiments of this invention.

[0008] **FIGURE 1A** illustrates a schematic representation of an impact forming tool in a first, or unactuated, position, according to an embodiment of the present invention.

[0009] **FIGURE 1B** illustrates a schematic representation of an impact forming tool in a second, or actuated, position, according to an embodiment of the present invention.

[0010] **FIGURE 2** illustrates a perspective view of the impact forming tool as in Figure 1A, according to an embodiment of the present invention.

[0011] **FIGURE 3** illustrates a hammer portion of the impact forming tool.

[0012] **FIGURE 4A** illustrates a cotter pin.

[0013] **FIGURE 4B** illustrates the cotter pin of Figure 4A after impact forming.

[0014] **FIGURE 5** illustrates a cotter pin in a slack adjuster assembly.

[0015] **FIGURE 6** illustrates the impact forming tool being used in a slack adjuster assembly according to an embodiment of the present invention.

[0016] **FIGURE 7** illustrates a method of impact forming a cotter pin according to an embodiment of the present invention.

Detailed Description

[0017] With reference to **FIGURES 1A and 1B**, an impact forming tool **10** for impact forming a cotter pin is illustrated. **FIGURE 1A** illustrates the impact forming tool **10** in a first position and **FIGURE 1B** illustrates the impact forming tool **10** in a second position.

[0018] The impact forming tool **10** comprises a handle **12**. The handle **12** is configured to be held by an operator's hand during operation of the impact forming tool **10**. The handle **12** is configured for receiving an operating force (not shown) at the operating force input **28**. The operating force may be actuated at the handle **12** or remotely from the impact forming tool **10**. The source of the operating force may be pneumatic, hydraulic, electrical or manual. The source of the operating force is to be capable of delivering between 120 pounds and 300 pounds of force.

[0019] The impact forming tool **10** comprises a stationary portion **14**. The stationary portion **14** has a face **15**. The stationary portion **14** is connected to the handle **12** at a proximate end portion **17**. The stationary portion **14** includes an orientation pin **16** positioned on the face **15** at a distal end portion **19**. The stationary portion **14** also includes two anvil pins **18a, 18b** positioned on the face **15** of the stationary portion **14** between the proximate end portion **17** and the orientation pin **16**. The stationary portion **14** also comprises an alignment aperture **26** positioned between the orientation pin **16** and the two anvil pins **18a, 18b**.

[0020] The impact forming tool **10** comprises a hammer portion **20**. The hammer portion **20** is in communication with the source of operating force at the handle **12**. The hammer portion **20** has a symmetrical arcuate end having a first arcuate portion **23** and a second arcuate portion **25**. The first arcuate portion **23** and second arcuate portion **25** meet to form an angle at a vertex **24**.

[0021] The hammer portion **20** is configured to move linearly across the face **15** of the stationary portion **14** from a first position shown in Figure 1A to a second position shown in Figure 1B. In the first, or open, position, the impact forming tool **10** is capable of receiving an unbent cotter pin (not shown). In the second, or closed, position, the vertex **24** of the hammer portion **20** is positioned between the two anvil pins **18a**, **18b**, thereby impacting the unbent cotter pin and forming the cotter pin tines.

[0022] The impact forming tool **10** may also comprise at least one sensor **36a**, **36b** on the stationary portion **14**. The at least one sensor **36a**, **36b** may be an optical device or a switching device for determining the presence and angle of bending of a cotter pin, as will be described.

[0023] In **FIGURE 2**, a side view of the impact forming tool **10** in the first position is illustrated. The dimension D1 of the stationary portion **14** is about 0.5 inches. In another example, the dimension D1 is between about 0.25 inches and 0.75 inches.

[0024] **FIGURE 3** illustrates a view of the hammer portion **20** only. The first arcuate portion **23** and the second arcuate portion **25** meet at vertex **24** and form angle alpha α . In one example, angle alpha α is between thirty (30) degrees and sixty (60) degrees. In another example, angle alpha α is about 45 degrees.

[0025] Accordingly, a tool for impact forming a cotter pin comprises a handle configured to receive an operating force. The tool includes a stationary portion having a face and connected to the handle at a proximate end portion. The stationary portion has an orientation pin positioned on a distal end of the face and two anvil pins between the

proximate end portion and the orientation pin. The tool includes a hammer portion communicating with the source of operating force. The hammer portion is configured to move linearly across the face of the stationary portion from a first position to a second position. The hammer portion has a symmetrical arcuate end, wherein a vertex of the symmetrical arcuate end is between the two anvil pins when the hammer is in the second position.

[0026] In **FIGURE 4A**, a cotter pin **30** as would be received for manufacturing purposes is shown. The cotter pin **30** is a single piece that includes a head **32** and two tines **34a**, **34b**. The cotter pin **30** may be a metallic material, such as steel or aluminum. The tines **34a**, **34b** have a length L . Length L is the same for tines **34a**, **34b**. The tines **34a**, **34b** may be beveled at the ends.

[0027] In **FIGURE 4B**, the cotter pin **30** is shown after being bent by the impact forming tool **10** of the present invention. Tine **34a** forms an angle β with respect to an axis A through the center of the cotter pin **30**. In one example, the angle β is about ninety (90) degrees. When the tine **34a** is at a bend angle β of about ninety degrees significant force is required to un-bend the cotter pin tine **34a**. Tine **34b** would be similarly bent to an angle β simultaneously during the impact forming process.

[0028] **FIGURE 5** shows a slack adjuster **62** for use in a brake assembly. It is desired to hold a yoke **64** to the slack adjuster **62** while allowing linear and rotational movement of the yoke **64**. A securing pin **66**, such as clevis pin, is inserted in apertures in both the slack adjuster **62** and the yoke **64**. The cotter pin **30** is then inserted through an aperture in the securing pin **66**. The cotter pin **30** is then ready for bending by the impact forming tool **10**.

[0029] A brake assembly **70** using slack adjuster **62** is shown in **FIGURE 6**. In this example, the slack adjuster **62** is mounted to a bracket **68** prior to the yoke **64** being attached. The securing pin **66** is inserted in the apertures in the yoke **64** and the slack adjuster **62**. The

cotter pin 30 (not visible) is inserted in the aperture in the securing pin 66 such that the tines 34a, 34b are oriented upwards.

[0030] In this example, a distance D2 between the bracket 68 and the slack adjuster 62 is less than about one (1) inch. Since there is a limited space in which the impact forming tool 10 can be inserted between the bracket 68 and the slack adjuster 62, the thickness D1 of the stationary portion 14 of about 0.5 inches supports fitting the impact forming tool 10 into the desired space.

[0031] Additionally, the operator aligns the orientation pin 16 with the head 32 of the cotter pin 30. The operator also aligns the aperture 26 with the securing pin 66. In this manner, the impact forming tool 10 orients the cotter pin 30 in a consistent longitudinal and angular position prior to impact. In addition, the cotter pin 30 cannot rotate while being impact formed.

[0032] A flowchart for implementing a method 40 of impact forming a cotter pin in a brake assembly is shown in FIGURE 7. In step 44, a new cotter pin 30 is inserted in the aperture in the securing pin 66. In step 46, the orientation pin 16 of the tool 10 is aligned with the head 32 of the cotter pin 30. The alignment aperture 26 of the tool 10 is aligned with the securing pin 66 so that the securing pin 66 extends through the alignment aperture 26.

[0033] In step 48, the impact forming tool 10 is actuated so that the hammer portion 20 moves linearly across the face 15 of the stationary portion 14 from a first position to a second position for impact forming the cotter pin 30. The symmetrical arcuate ends 23, 25 of the hammer portion 20 separate the tines 34a, 34b. The tines 34a, 34b of the cotter pin 30 are bent simultaneously between the anvil pins 18a, 18b and the symmetrical arcuate end of the hammer portion 20. The angle α of about 45 degrees formed by the arcuate portion 23 and arcuate portion 25 of the hammer portion 20 is selected to bend the tines 34a, 34b each to an angle β of about ninety (90) degrees. A different angle α may be selected to bend the

tines **34a**, **34b** to a different angle β . The impact forming tool **10** does not require the tines **34a**, **34b** to be of a different length or shape.

[0034] In step **50**, the sensors **36a**, **36b** determine the presence and the bend angle of the tines **34a**, **35b**. In step **54**, the determination of an acceptable angle is completed. The determination may be done by a controller (not shown) separate from the impact forming tool **10**. The predetermined range of acceptable bend angles is from about 80 degrees to about 110 degrees. In one example, the acceptable bend angle is 90 degrees. If the bend angle β is acceptable in step **54**, the operator is informed so he can remove the impact forming tool **10** from the brake assembly **70** in step **56**. The impact forming operation is then complete.

[0035] If the bend angle is not acceptable in step **54**, the operator is informed and he removes the cotter pin **30** in step **58** and restarts the method **40** again at step **44**.

[0036] This apparatus and method for impact forming a cotter pin results in an easily usable handheld tool which provides more uniform bending of cotter pin tines for applications requiring cotter pin bending in a confined space.

[0037] Therefore a system for securing an assembly with a cotter pin comprises a cotter pin with a head and two tines and an impact forming tool. The impact forming tool comprises a handle configured to receive an operating force; a stationary portion with a face, a proximate end and a distal end, the stationary portion connected to the handle at the proximate end; an orientation pin positioned on a distal end of the stationary portion for receiving the head of the cotter pin; two anvil pins positioned on the stationary portion between the proximate end and the orientation pin; and a hammer portion communicating with the source of operating pressure. The hammer portion is configured to move linearly across the face of the stationary portion from a first position to a second position; the hammer portion having a symmetrical arcuate end, wherein a vertex of the symmetrical arcuate end is positioned to separate the two tines of the cotter pin between the two anvil pins when the hammer is in the second position.

[0038] While the present invention has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicants to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the invention, in its broader aspects, is not limited to the specific details, the representative apparatus, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the applicant's general inventive concept.

We claim:

1. A tool for impact forming a cotter pin comprising:
 - a handle configured to receive an operating force;
 - a stationary portion having a face, the stationary portion connected to the handle at a proximate end portion;
 - an orientation pin positioned on a distal end portion of the face of the stationary portion;
 - two anvil pins positioned on the face of the stationary portion between the proximate end portion and the orientation pin; and
 - a hammer portion communicating with the operating force; the hammer portion configured to move linearly across the face of the stationary portion from a first position to a second position in response to the operating force; the hammer portion having a symmetrical arcuate end, wherein a vertex of the symmetrical arcuate end is between the two anvil pins when the hammer is in the second position.
2. The tool as in claim 1, wherein the tool is a handheld tool.
3. The tool as in claim 1, wherein the operating force is one of a pneumatic force, a hydraulic force, an electrical force and a manual force.
4. The tool as in claim 1, wherein the orientation pin is configured for holding a head of an associated cotter pin and the vertex of the symmetrical arcuate end is configured for separating tines of the associated cotter pin when the hammer portion is in the second position.
5. The tool as in claim 4, wherein the stationary portion further comprises an alignment aperture for receiving an associated securing pin, the associated securing pin configured to receive the associated cotter pin, the alignment aperture positioned between the orientation pin and the two anvil pins.
6. The tool as in claim 5, wherein the stationary portion is sized for insertion between the securing pin and an associated mounting bracket.
7. The tool as in claim 1, wherein the symmetrical arcuate end comprises a first arcuate portion and a second arcuate portion forming an angle of about 45 degrees at the vertex.

8. The tool as in claim 4, further comprising a means for sensing the angle of separation of the tines of the associated cotter pin when the hammer is in the second position.
9. The tool as in claim 1, wherein the thickness of the stationary portion is less than about 0.5 inches.
10. A method for impact forming a cotter pin comprising:
 - inserting a cotter pin having a head and two tines into a securing pin aperture, wherein the tines of the cotter pin extend through the securing pin aperture;
 - aligning an impact forming tool with the head of the cotter pin at an orientation pin on the impact forming tool wherein the orientation pin positions the cotter pin;
 - aligning the impact forming tool wherein the securing pin fits through an alignment aperture in the impact forming tool;
 - actuating the impact forming tool for moving a hammer portion of the impact forming tool linearly along a face of a stationary portion of the impact forming tool; and
 - simultaneously separating the two tines of the cotter pin.
11. The method as in claim 10, wherein simultaneously separating the two tines of the cotter pin comprises bending the two tines to a predetermined angle.
12. The method as in claim 11, wherein the predetermined angle is between about eighty degrees and about one hundred ten degrees.
13. The method as in claim 11, further comprising sensing the bend angle of the tines of the cotter pin after actuating the impact forming tool to determine if the two tines of the cotter pin are bent to the predetermined angle.
14. The method as in claim 10, wherein the two tines of the cotter pin are the same length.
15. The method as in claim 10, wherein actuating the impact forming tool comprises one of a hydraulic actuating force, a pneumatic actuating force, an electrical actuating force and a manual actuating force.
16. A system for securing an assembly with a cotter pin comprising:
 - a cotter pin with a head and two tines;
 - an impact forming tool comprising;

a handle configured to receive an operating force;
a stationary portion with a face and connected to the handle at a proximate end;
an orientation pin positioned on a distal end of the stationary portion for receiving the heat of the cotter pin;
two anvil pins positioned on the stationary portion between the proximate end and the orientation pin; and
a hammer portion communicating with the operating force; the hammer portion configured to move linearly across the face of the stationary portion from a first position to a second position; the hammer portion having a symmetrical arcuate end, wherein a vertex of the symmetrical arcuate end is positioned to separate the two tines of the cotter pin between the two anvil pins when the hammer portion is in the second position.

17. The system as in claim 16, further comprising a sensing device for sensing the presence and bend angle of the tines of the cotter pin.

18. The system as in claim 16, wherein the source of operation force is one of a pneumatic force, a hydraulic force, an electrical force and manual force.

19. The system as in claim 16, wherein the two tines of the cotter pin are the same length.

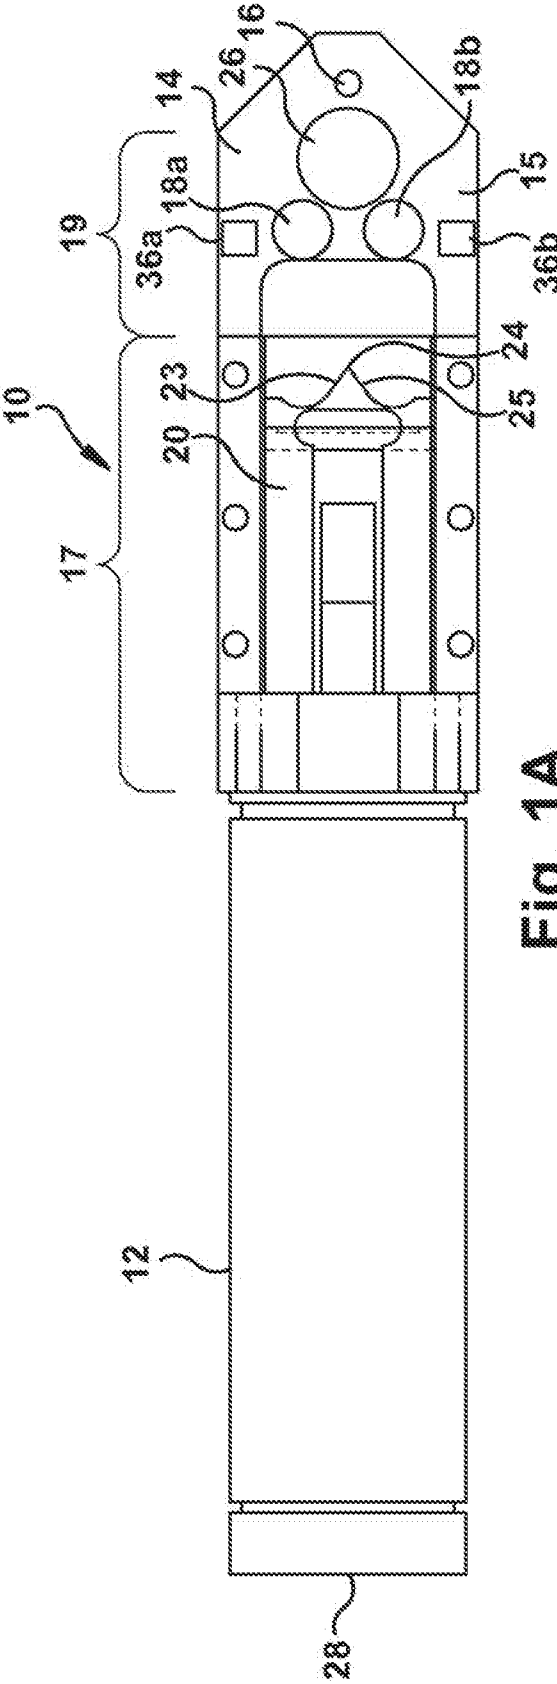


Fig. 1A

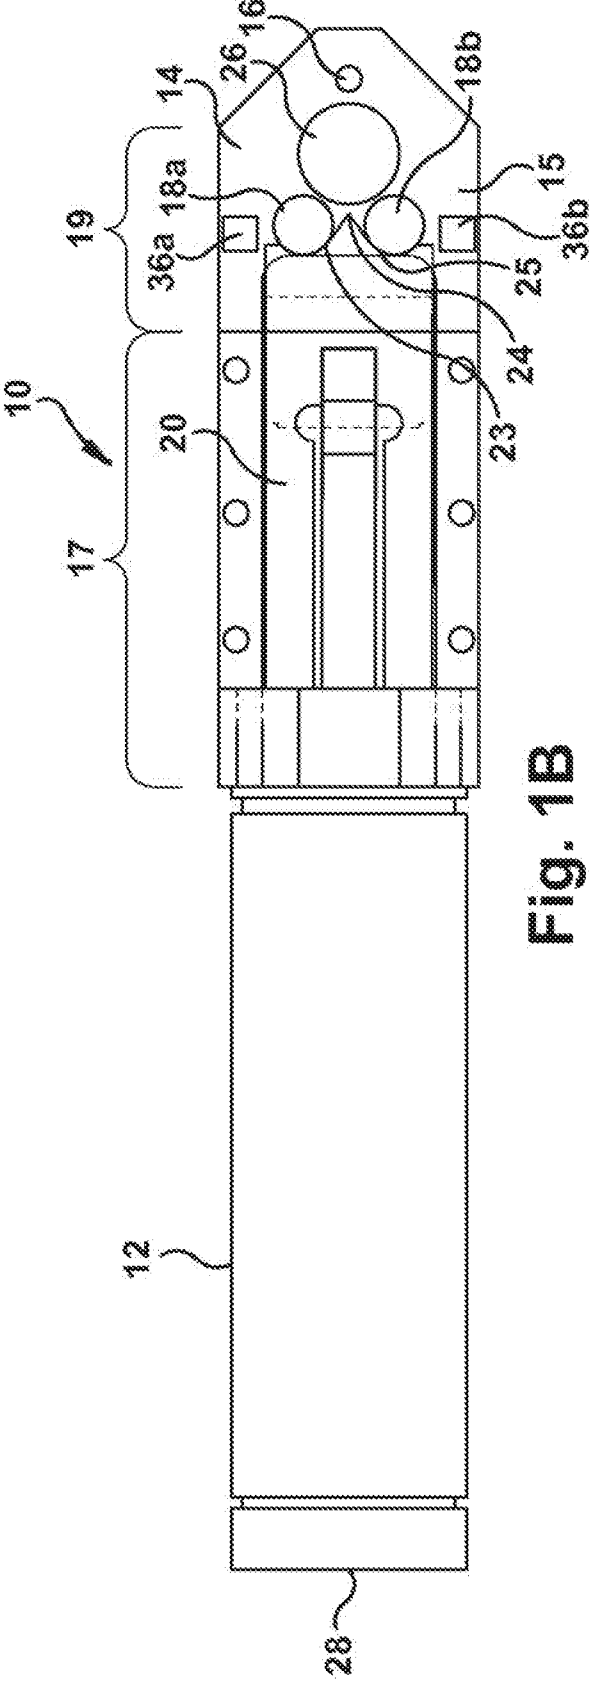


Fig. 1B

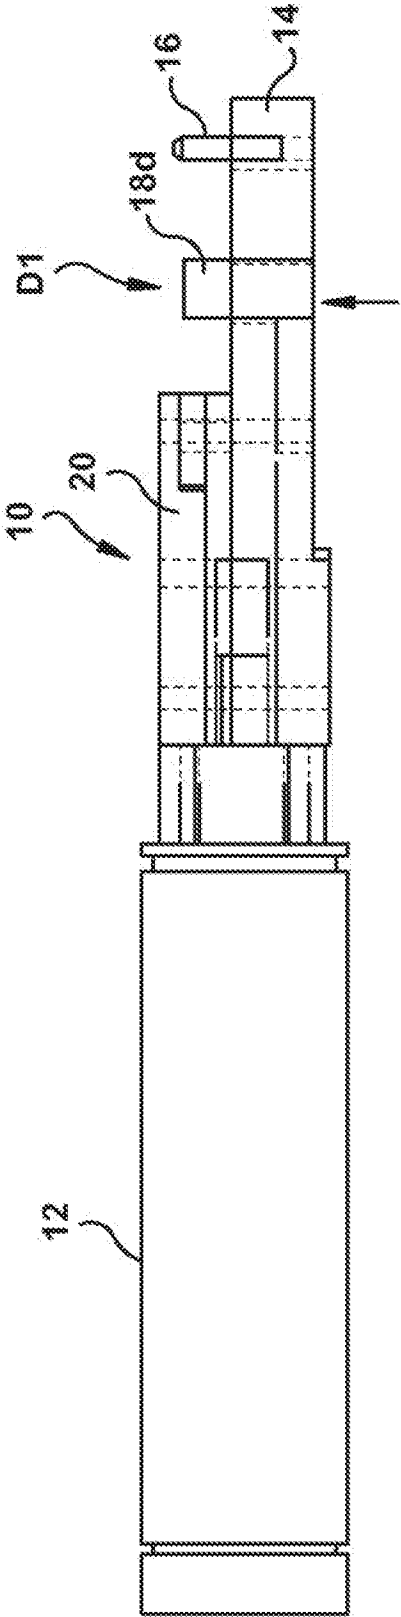


Fig. 2

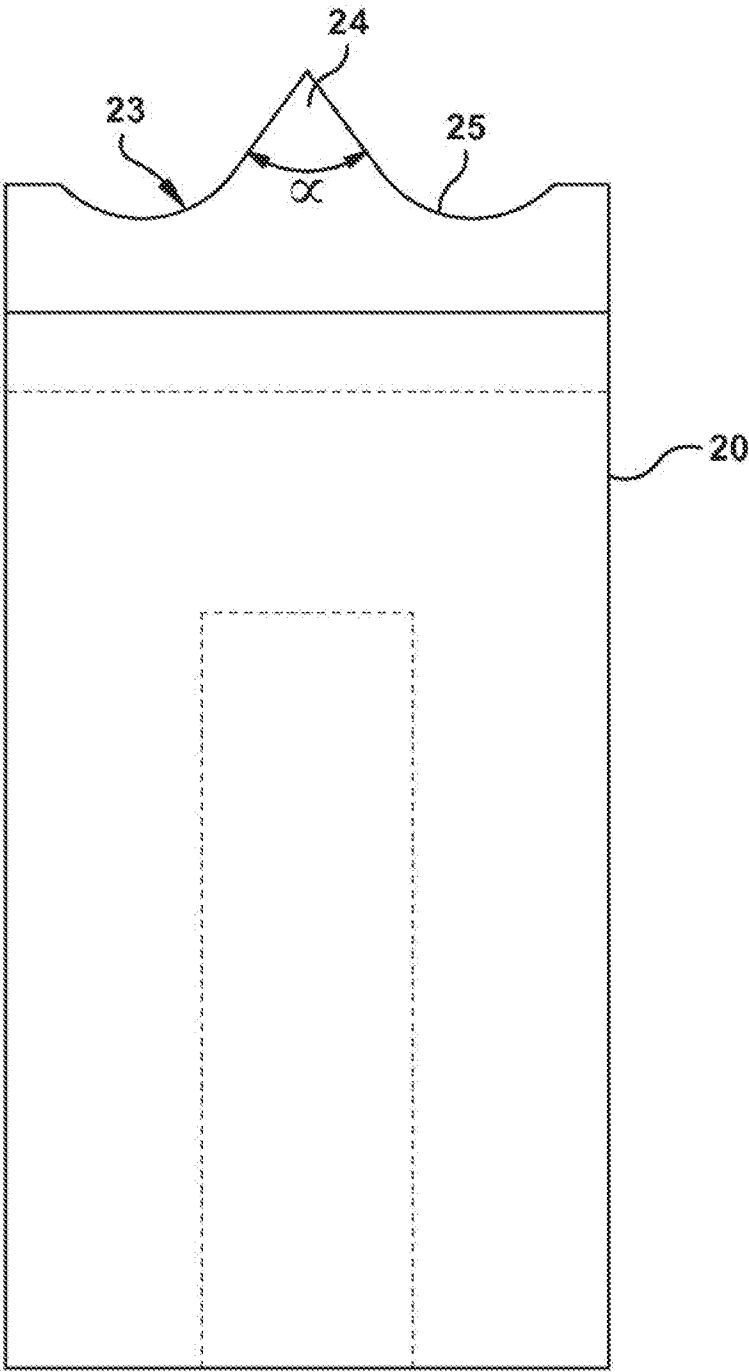
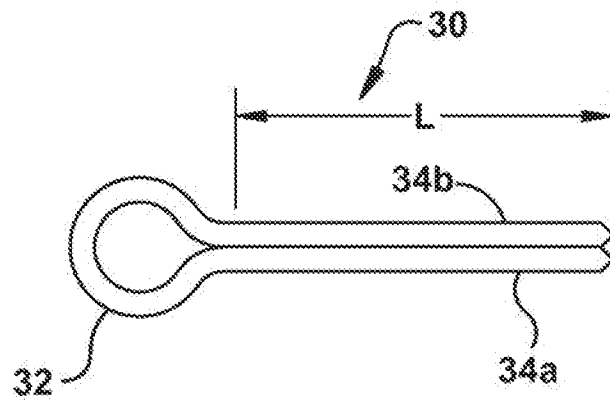
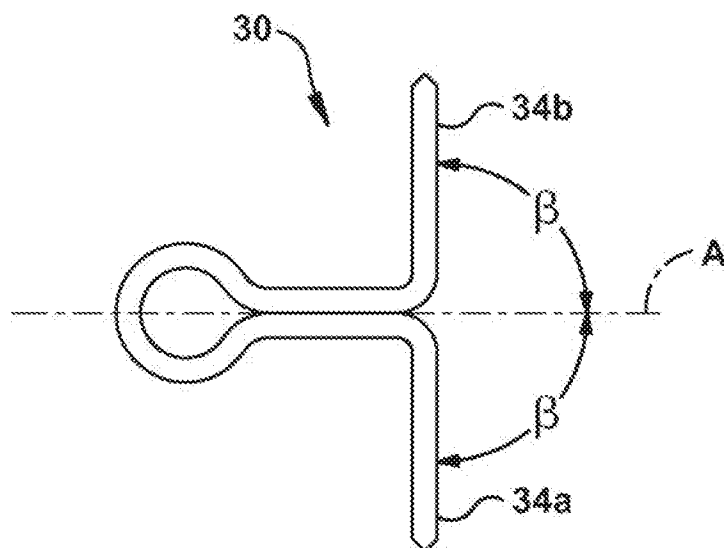


Fig. 3

**Fig. 4A****Fig. 4B**

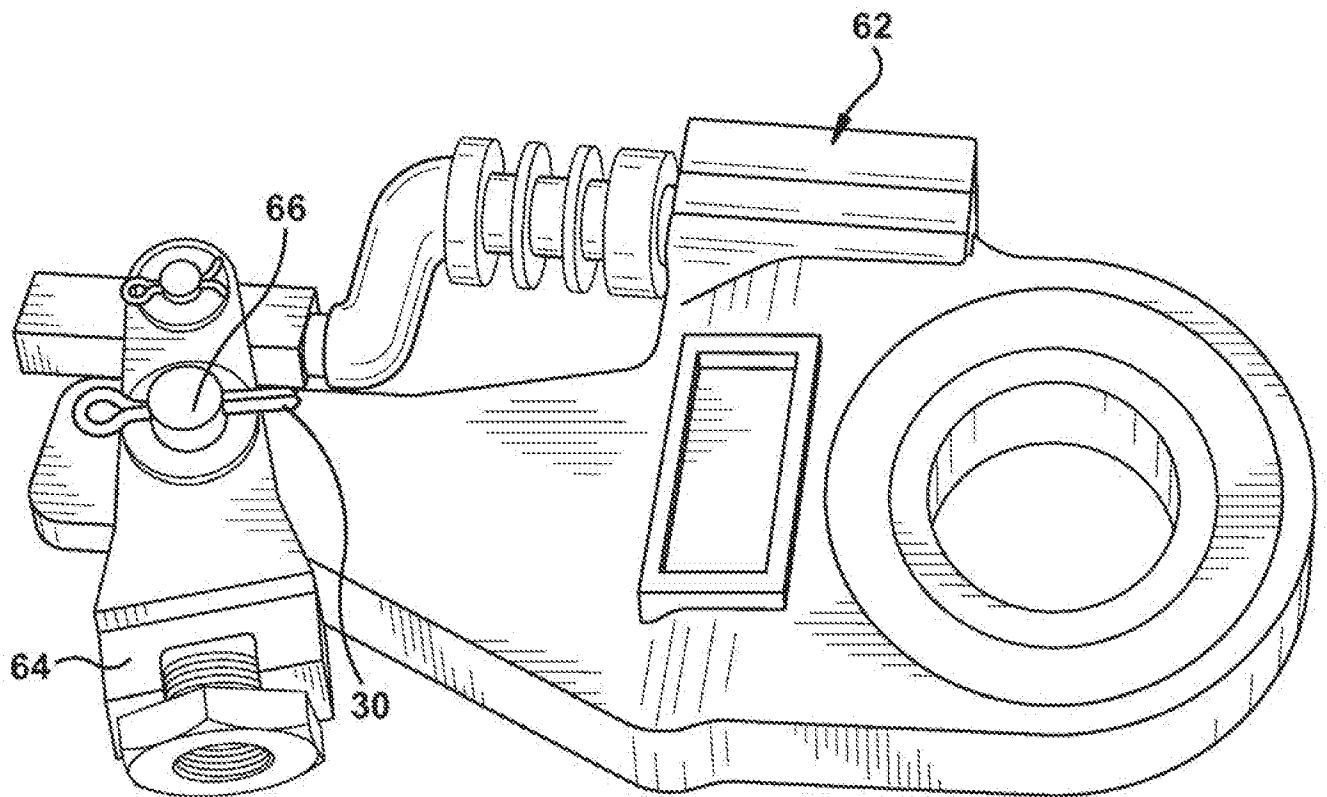


Fig. 5

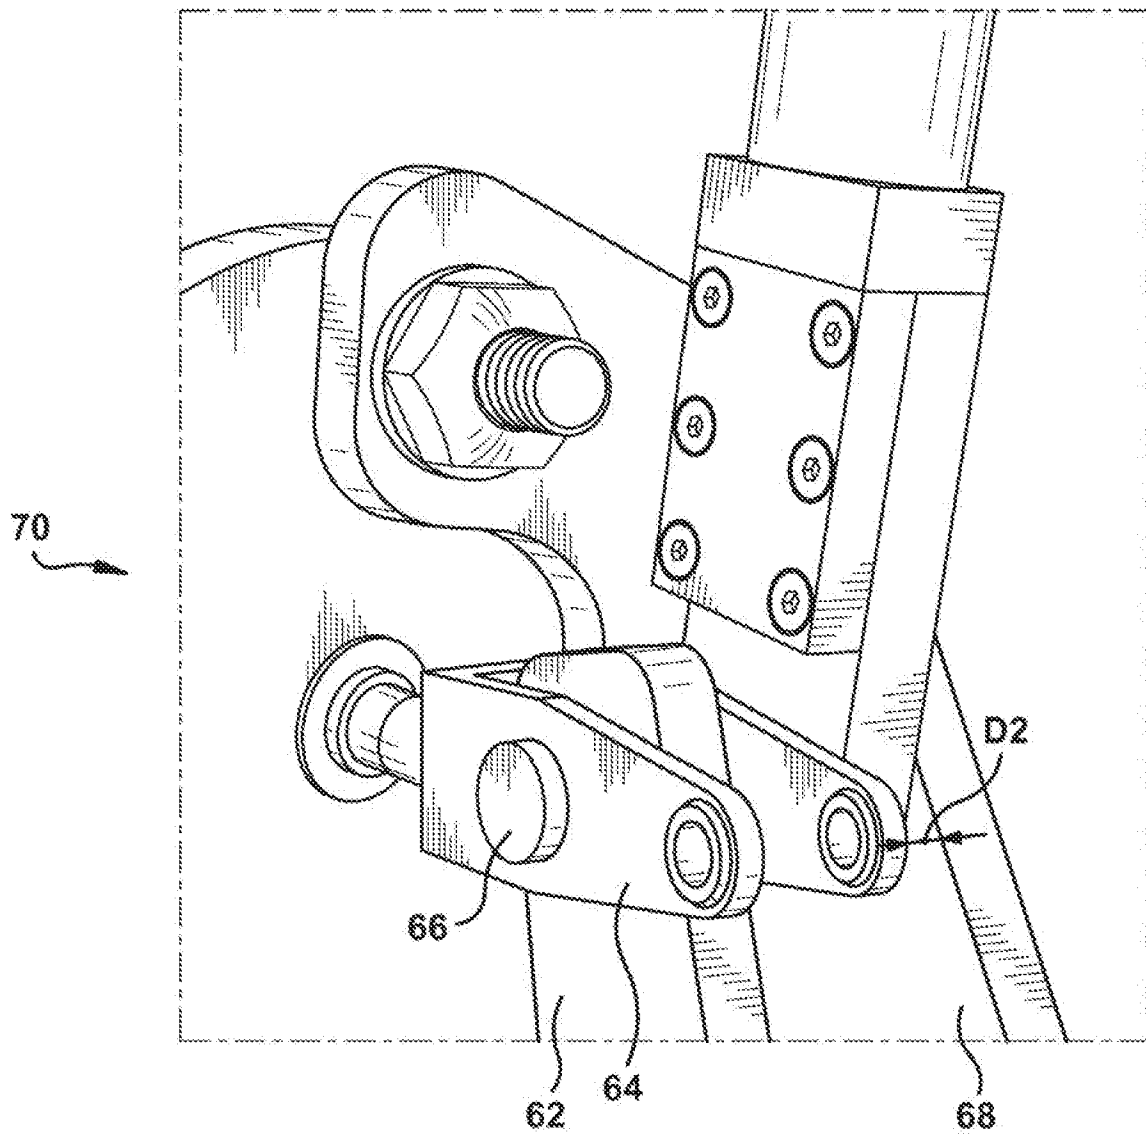


Fig. 6

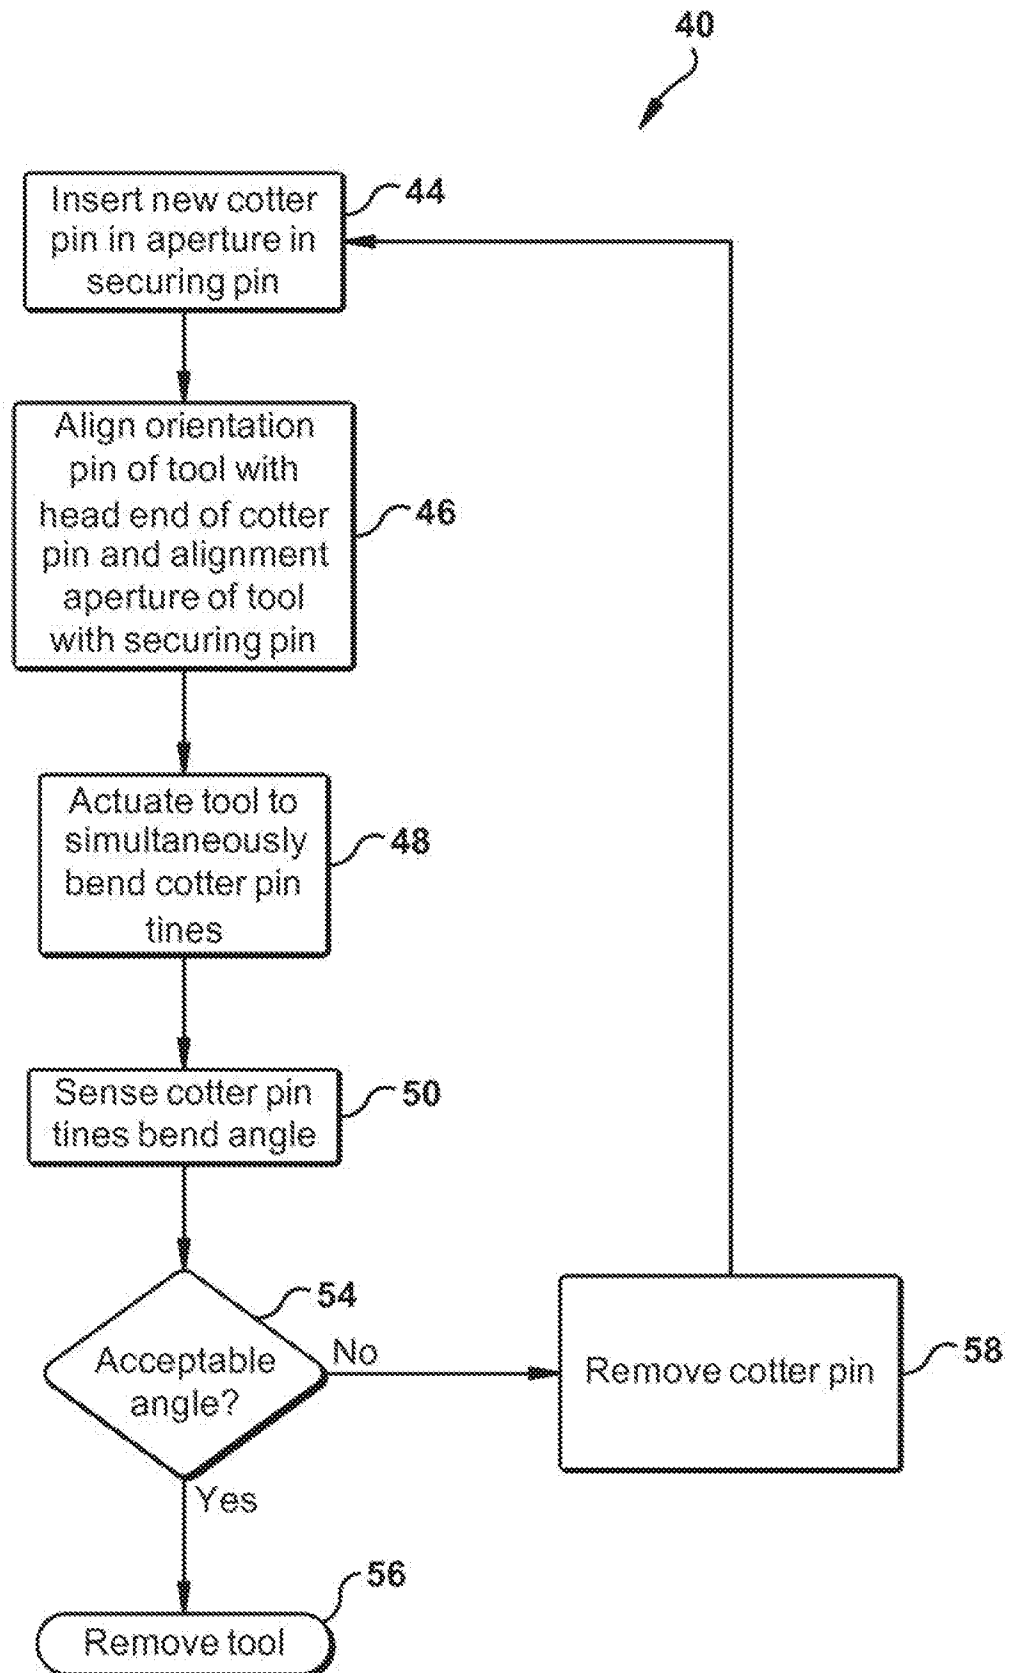


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2015/065004

A. CLASSIFICATION OF SUBJECT MATTER
INV. B25B27/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2 802 383 A (BABYAK GEORGE H) 13 August 1957 (1957-08-13) fig. 2; col. 2, l. 33 - col. 4, l. 11	10-15 1-9, 16-19
X A	----- US 2 330 013 A (MATHEW SCHULTZ JOSEPH) 21 September 1943 (1943-09-21) fig. 3	10-12, 14,15 1-9, 16-19
X A	----- US 2 821 100 A (DECKER ROBERT W) 28 January 1958 (1958-01-28) fig. 1-4; col. 2, ll. 24-43	10,11, 13,15
A	----- US 1 516 877 A (JOHN ANEKEE) 25 November 1924 (1924-11-25) the whole document	1-19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 March 2016

Date of mailing of the international search report

23/03/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hartnack, Kai

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/065004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2802383	A	13-08-1957	NONE	
US 2330013	A	21-09-1943	NONE	
US 2821100	A	28-01-1958	NONE	
US 1516877	A	25-11-1924	NONE	