




(86) Date de dépôt PCT/PCT Filing Date: 2005/04/12
(87) Date publication PCT/PCT Publication Date: 2005/10/27
(45) Date de délivrance/Issue Date: 2014/03/25
(85) Entrée phase nationale/National Entry: 2006/10/11
(86) N° demande PCT/PCT Application No.: US 2005/012310
(87) N° publication PCT/PCT Publication No.: 2005/099627
(30) Priorité/Priority: 2004/04/12 (US60/561,342)


(51) Cl.Int./Int.Cl. *A61F 2/07* (2013.01),
A61F 2/848 (2013.01)
(72) Inventeurs/Inventors:
OSBORNE, THOMAS A., US;
EELLS, SCOTT E., US
(73) Propriétaire/Owner:
COOK MEDICAL TECHNOLOGIES LLC, US
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : DISPOSITIF DE REPARATION D'UNE ENDOPROTHESE
(54) Title: STENT GRAFT REPAIR DEVICE

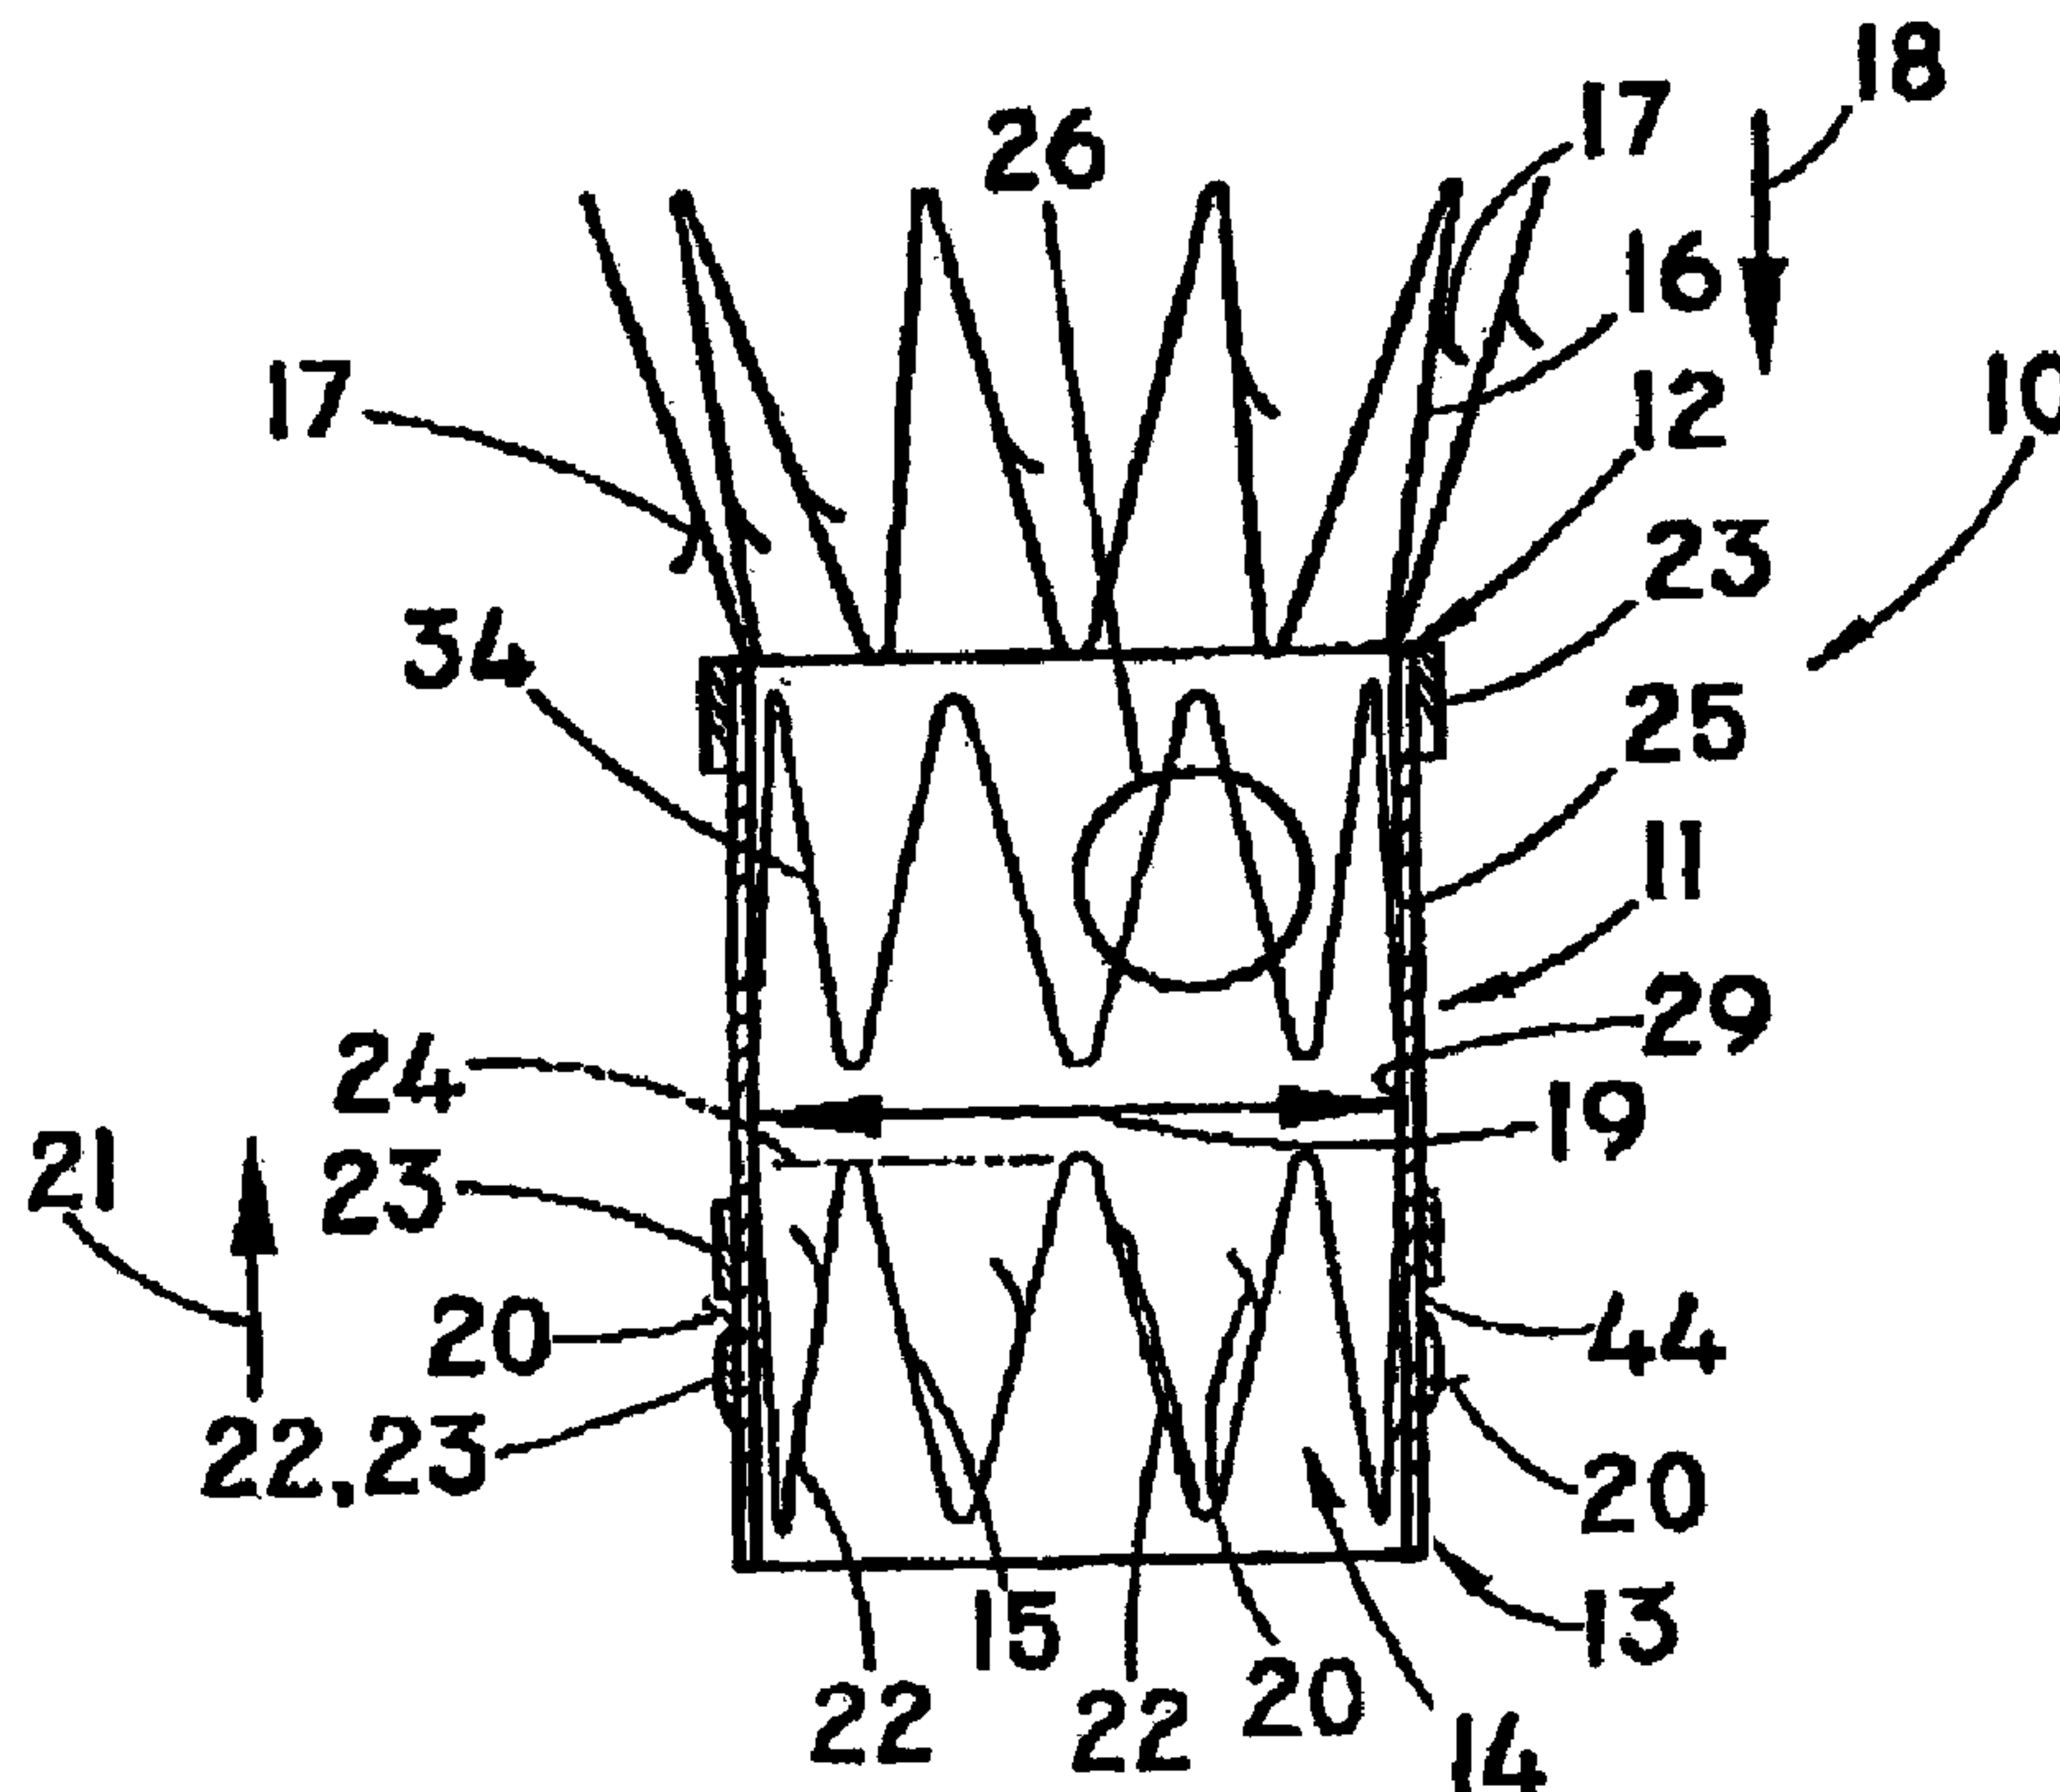

(57) Abrégé/Abstract:

A repair device for affixing a migrating stent graft to the interior surface of a vessel wall. The repair device includes tubular graft with a bare or uncovered stent affixed to the proximal end. The bare stent includes a plurality of distally pointed barbs for securing the repair device to a vessel wall. A second stent is positioned in the passage of the tubular graft to expand the graft against the interior surface of the migrating stent graft. Proximally pointing barbs are affixed to the struts of the second stent and extend through the graft material for securing the repair device to the migrating stent graft. Biological glue and other sealing material can be applied to the tubular graft and/or stents for sealing the repair device against the vessel wall and/or the interior of the migrating stent graft.

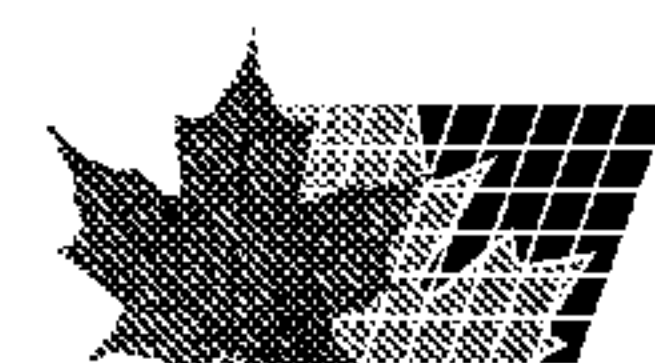

Abstract

A repair device for affixing a migrating stent graft to the interior surface of a vessel wall. The repair device includes tubular graft with a bare or uncovered stent affixed to the proximal end. The bare stent includes a plurality of distally pointed barbs for securing the repair device to a vessel wall. A second stent is positioned in the passage of the tubular graft to expand the graft against the interior surface of the migrating stent graft. Proximally pointing barbs are affixed to the struts of the second stent and extend through the graft material for securing the repair device to the migrating stent graft. Biological glue and other sealing material can be applied to the tubular graft and/or stents for sealing the repair device against the vessel wall and/or the interior of the migrating stent graft.

WO 2005/099627

PCT/US2005/012310

- 1 -

STENT GRAFT REPAIR DEVICE

Description

Technical Field

This invention relates to medical devices and, in particular, to stent grafts. More specifically the invention is directed to a repair device for correcting leakage at the proximal (inflow) end of a stent graft due to migration or changes in the aneurysm that result in blood pressure being restored to the aneurysm sack, which could cause it to rupture.

Background of the Invention

In many cases of abdominal aortic aneurysm (AAA), the diseased or weakened portion of the artery is near or up to the origins of the renal arteries. In these cases, it is difficult to get firm anchoring of the proximal end of an AAA stent graft. If the top stent of the stent graft cannot anchor to several millimeters of healthy tissue, there is a likelihood that there will be leakage around the top of the stent graft and/or migration of the stent graft out of the anchor area or "neck", resulting in even more leakage and the failure of the stent graft to protect the aneurysm from arterial blood pressure.

In these cases, the common method for repair has been to add a short stent graft extension to the top of the main stent graft to extend the length of the top portion of the main stent graft back into the neck of the aneurysm, just below the renal arteries. The problem with this approach is that since the neck of the artery is short, these extension devices do not create a good reliable seal in the neck and are still subject to migration. Also, since there are so many different brands and sizes of stent grafts, it is difficult to provide a standard set of extension stent grafts that can be kept on hand, ready to use when the migration occurs. As soon as the leakage to the aneurysm resumes, the danger of rupture is immediate. There is little or no time to fabricate, sterilize and ship a custom manufactured product. In addition, if the extension stent graft is placed more proximal, up into the aorta, the extension stent graft will occlude one or both of the renal arteries, causing a failure of one or both kidneys. Since most of the stent graft patients are

- 2 -

not good open surgery candidates, complete surgical replacement of the diseased abdominal aorta, the only other method of repair for a migrating stent graft, is not a good option.

Summary of the Invention

5 The foregoing problems are solved and a technical advance is achieved in an illustrative embodiment of a stent graft repair device of the present invention. The repair device includes a covered stent graft, which is somewhat similar to prior art extension devices, and, in addition, the proximal or top stent of the repair device advantageously includes a bare or non-covered stent with anchoring barbs that can
10 be placed across, for example, the origins of the renal arteries without occluding them. This provides the advantage of being able to deploy the barbed, bare stent in an area of healthy artery wall where a good, secure anchor can be made without blocking or occluding the arteries. The barbed, top or bare stent advantageously prevents the possibility of further migration. The repair device of the present
15 invention makes it possible to add the barbed top stent to implanted stent graft bodies of other manufacturers who do not use a barbed, bare top stent for anchoring. The repair device of this invention can also be used with stent grafts with barbed, bare top stents, like the ZENITH® AAA stent graft, available from Cook Incorporated, Bloomington, Indiana, if it is needed to control a leak, or it is desired
20 to extend the proximal end of the stent graft to a point closer to the origin of the renal arteries.

 The stent graft repair device of this invention can be advantageously designed dimensionally so that only a total of about 12 different repair devices can practically accommodate all needs. This makes it practical for a hospital to stock
25 all sizes so that the appropriate stent graft repair device is available at all times. This is especially important since a leaking stent graft poses an immediate threat to the patient and must be fixed as soon as possible. The repair device of this invention advantageously can be manufactured in two lengths (one or two stents in the passage of the graft and one top bare stent) and about 6 diameters for each
30 length (from 15 to 35 mm diameter).

- 3 -

The stent graft repair device of this invention can also include barbs on the distal portion to improve the tensile strength of the connection between the repair device and the migrating stent graft body. The barbs on the distal end of the stent graft repair device protrude through the graft material from the internal stent and engage the graft material of the stent graft body. The barbs on the distal end can also be designed so that in a folded or compressed condition, as when the stent is in a delivery sheath, ready for delivery, the points or tips point inwardly, away from the wall of the delivery sheath so as to not scrape or puncture the inside wall of the delivery sheath. This advantageously eliminates the need to deliver the repair device in a hard, non-flexible capsule, which makes endoluminal delivery much more difficult. The barbs of this repair device can be placed at alternate levels around the distal end stent so they will not occupy the same space in the collapsed condition. This arrangement allows for a smaller, more flexible delivery system.

The repair device of this invention can also incorporate a biological glue or adhesive on the exterior graft surface around the distal stent to enhance the stability of the connection between the repair device and the migrating stent graft body. The stent graft repair device of this invention can also include a sealing material around the distal stent to enhance sealing between the inside of the migrating stent graft and an external surface of the repair device. This sealing material can be a thin strip of DACRON® felt or it can be a frayed edge or cuff at the edge of the distal stents. These seal enhancing features can also be used around the top portion of the graft material, between the bare stent and the first interior stent to improve sealing between the repair device and the neck of the aneurysm.

The stent graft repair device of this invention can also contain openings or fenestrations to allow blood flow to the renal arteries or other branch arteries. This feature is especially important in cases where the aneurysm has no neck or is extended all the way to the renal arteries. With holes or cut out areas in the device to accommodate branch arteries, the top of the covered section could be placed even more proximal in the aorta.

- 3a -

In accordance with one aspect of the present invention there is provided a stent graft repair device comprising: a tubular graft having a proximal end, a distal end, and a passage extending longitudinally therethrough, a second expandable stent disposed on an interior surface and
5 in the passage of the tubular graft, and a first expandable stent attached to a first of the distal and the proximal ends of the tubular graft and extending longitudinally therefrom and from the passage, the first expandable stent having a first plurality of barbs attached thereto and extending longitudinally therealong and pointing in a first direction toward the other of the distal and
10 the proximal ends of the tubular graft, characterised in that the tubular graft includes a wall with an aperture at or adjacent the end of the wall at the first end of the graft.

- 4 -

Brief Description of the Drawings

FIG. 1 depicts a typical AAA stent graft in place and functioning in the abdominal aorta. The aneurysm is excluded and protected from blood pressure, and the renal arteries are still receiving blood. The proximal end of the stent is at the
5 origins of the renal arteries and is sealed around a short neck between the aneurysm and renals.

FIG. 2 depicts the stent graft of FIG. 1 after migrating only a few millimeters distally. Blood is once again flowing into the aneurysm, returning to the danger of aneurysm rupture.

10 FIG. 3 depicts a repair device useful in explaining the present invention, in place at the top (proximal end) of the stent graft, re-connecting the stent graft to the neck of the aneurysm. The top, bare stent is placed above and across the renals for secure fixation, but blood is still allowed to flow to the renals.

15 FIG. 4 depicts a stent graft repair device useful in explaining the present invention in the expanded condition. This view depicts a two interior stent repair device with distal barbs. The stents in this embodiment are secured to the inside of the graft material, thus providing a smooth exterior for contact with the inside of the migrating stent graft to be extended.

20 FIG. 5A depicts an enlarged detail of the distal barb as used in this invention.

FIG. 5B depicts an enlarged detail of the barb of FIG. 5A with the barb shaped so that when it is compressed inside the sheath, the point of the barb does not engage the wall of the delivery sheath.

25 FIG. 6 depicts a stent graft repair device useful in explaining the present invention with a cut out or scallop to allow for blood flow into the renal or other branch arteries.

FIG. 7 depicts an enlarged cross-sectional longitudinal view of a stent graft repair device of this invention which corresponds to the stent graft repair device of FIG. 4 and with an optional opening or a fenestration through the graft wall.

30 Detailed Description

The stent graft repair device of this invention can be delivered by a simple commercially available sheath and dilator system (COOK® Incorporated,

- 5 -

Bloomington, IN) wherein the dilator portion has a recess or indentation to accommodate the compressed device. Delivery can be by percutaneous methods over a guide wire from either above (trans jugular) or from below via the femoral arteries. The low profile, flexible nature of this delivery system, which is made possible in large part by barb 20 as shown in FIGS. 5A and 5B, is ideal for passage through a previously placed stent graft. The lack of ledges or joints as would be the case with a hard capsule, minimizes the chance that the delivery system will catch or tangle with the stents or graft material of the previously placed stent graft. This device could also be delivered in a delivery system similar to the H&LB One Shot delivery system as used for the ZENITH® AAA stent graft as commercially available from Cook Incorporated, Bloomington, Indiana. This delivery system makes it possible to release the more distal sections of the device before releasing the proximal, anchoring section. This is possible by the use of a capsule at the proximal end of the sheath that encapsulates the anchoring stent separately from the delivery sheath. The distal sections can be released, the device position refined, then the capsule removed from the top stent, anchoring the device in place. As used herein, proximal means closest to the heart, whereas distal means farthest from the heart.

FIG. 1 depicts an abdominal aortic aneurysm (AAA) stent graft 30 implanted in abdominal aorta 31 with proximal end 36 of the stent graft positioned just below the origins of renal arteries 33 and in short neck 35 between the renals and aneurysm 32. Distal ends 37 of the bifurcated stent graft are implanted in contralateral and ipsilateral iliac arteries 38 and 39, respectively. Blood flows in the aorta as indicated by arrows 40 down the descending aorta into renal arteries 33 and into proximal end 36 of stent graft 30. Blood flows through stent graft 30 by entering main body portion 43 and into contralateral and ipsilateral iliac branches 41 and 42. Blood exits distal ends 37 of branches 41 and 42 and into contralateral iliac 38 and ipsilateral iliac 39, respectively. As a result, blood is excluded from flowing into aortic aneurysm 32, thereby advantageously preventing the rupture or dissection of the aneurysm. Bifurcated stent graft 30 is typically a well-known bifurcated modular stent graft having a long and a short iliac leg. In a well-known

- 6 -

manner, an extension stent graft is positioned into the short leg via the contralateral iliac artery to complete assembly and placement of the bifurcated modular stent graft in the aorta and iliac arteries. When so positioned, blood is excluded from the aneurysm. One bifurcated commercially available modular stent graft is the ZENITH® stent graft available from Cook Incorporated, Bloomington, Indiana. When properly positioned, the stent graft excludes blood flow from the aneurysm without any leakage around the exterior of the stent graft. Should such leaks occur, these are commonly referred to as endoleaks.

FIG. 2 depicts stent graft 30 of FIG. 1 after the proximal end 36 has migrated distally from short aortic neck 35 and the origins of renal arteries 33. As a result, blood flow as indicated by arrows 40 can now once again flow into aneurysm 32 thereby exerting pressure on the aneurysm with the possibility of rupture or dissection. Such a condition is not a desired medical condition, and intervention is required to once again exclude blood flowing into aneurysm 32.

FIG. 3 depicts stent graft 30 of FIG. 2 with illustrative repair device 10 positioned in the proximal end of main body 43 of the stent graft. The distal end 13 of the repair device is positioned in the passage of stent graft 30 and conforms to the tubular shape thereof. Repair device 10 includes tubular graft 11 which is positioned just below the origins of renal arteries 33. A bare or uncovered, expandable stent 16 is attached to the proximal end of tubular graft 11 and extends across the ostium of the renal arteries. Included on the struts of bare or uncovered expandable stent 16 is a plurality of barbs 17 pointed in a first downward or distal direction 18 to engage the wall of the aorta. When bare, top expandable stent 16 expands against the wall of the aorta, barbs 17 engage and pierce the aortic wall. As a result, bare or uncovered stent 16 is fixably positioned in the aorta across the ostium of the renals and provides secure attachment of the repair device and the migrated stent graft. Blood, as indicated by arrows 40, continues flow into the renals as well as repair device 10 and stent graft 30.

The repair device also includes a second or interior expandable stent 15 disposed in the passage and on the interior surface of the tubular graft wall of the repair device. This second interior expandable stent pushes the tubular graft

against short aortic neck 35 and further provides for the exclusion of blood flow around the repair device as well as the migrated stent graft. Accordingly, blood flows only out the distal end of the branch portions or legs of the stent graft and into the contralateral and ipsilateral iliac arteries 38 and 39, respectively. Blood is
5 once again advantageously excluded from aneurysm sack 32, thereby removing the pressure in the aneurysm sack and allowing it to not expand. Consequently, the excluded aneurysm sack can shrink around exterior surface 44 of the stent graft.

FIG. 4 depicts an illustrative example of stent graft repair device 10 in an expanded condition. FIG. 7 depicts an enlarged
10 longitudinally cross-sectioned view of the stent graft repair device 10 of FIG. 4 with an opening or fenestration 26 in the tubular graft wall 25. As depicted in FIGS. 4 and 7, stent graft repair device 10 comprises tubular graft 11 having a proximal end 12, a distal end 13 and passage 14 extending longitudinally therethrough. The tubular graft is woven or knitted from a biocompatible material such as a DACRON®
15 material forming a wall 25 with interior surface 29 and exterior surface 44. The graft material can also be any other biocompatible material such as polymers, copolymers, or biological materials. These biological materials can include an extracellular collagen matrix (ECM) material including but not limited to small intestine submucosa (SIS), commercially available from Cook Biotech, West
20 Lafayette, Indiana. These biological ECM materials are fully described in detail in the patents of Purdue Research Foundation and Cook Biotech, which are hereinafter identified. In this particular application of the repair device, tubular graft 11 has a diameter extending across passage 14 and ranges in size from, for example, 15 to 35 mm. The diameter of the tubular graft can be more or less, depending on the size
25 of the vessel in which the repair device is to be implanted. Second interior expandable stent 15 is positioned in passage 14 and on interior surface 29 of tubular graft 11 at distal end 13 thereof. The stent graft repair device can have any number of stents depending on how tall or long the stents are. Typically, two or three stents are utilized, but more stents ranging from four to eight could be utilized if the stents
30 are short. One or more sutures are typically utilized to attach this interior expandable stent to the interior surface or

- 8 -

wall of the tubular graft. A plurality of barbs 20 is affixed to this expandable stent and point in a direction 21 toward the proximal end 12 of the tubular graft and repair device. These barbs are utilized to engage the interior surface of the migrating stent graft and secure attachment thereto. Expandable stent 15 is preferably a Gianturco Z stent formed from, for example, stainless steel or other metallic alloys including nickel titanium alloys commercially known as nitinol. These stents can also be formed from any other biological or polymeric material that exhibits resilient properties to expand when released from a compressed condition and press the tubular graft of the repair device against the interior surface of the migrating stent graft, as well as the interior surface of the aortic vessel wall.

Stent graft repair device 10 also includes a bare or uncovered expandable stent 16 attached to the other end of the tubular graft, preferably proximal end 12, and extends longitudinally from passage 14 of the tubular graft. This bare, expandable stent is also of the Gianturco Z stent type and is attached to the proximal end of the tubular graft, using, for example, well-known and commercially available suture material. A plurality of barbs 17 are affixed to the struts of this bare, expandable stent and point in first direction 18 toward the distal end of the tubular graft. The ends or points of barb 17 point toward the distal end of the graft so as to fully engage and pierce the aortic wall when positioned there against. The flow of blood typically flows in first direction 18 and causes barbs 17 to fully engage and insert themselves into the vessel wall. Barbs 20 of the second expandable stent 15 point in a second or proximal direction 21 opposite to that of first direction 18. As previously described, these barbs engage the interior surface of the migrating stent graft to fixedly attach the repair device to the migrating stent graft.

Depending on the desired length of the tubular graft, which can range from 20 to 60 mm, an additional or second interior expandable stent 34 is disposed on interior surface 29 and in passage 14 of the tubular graft about proximal end 12 thereof. This second interior expandable stent is used in longer length repair devices to expand the tubular graft 11 against hopefully healthy tissue of the aortic wall, typically just below the origins of the renal arteries. However, should healthy

- 9 -

tissue not be available to provide a good seal against the vessel wall, the repair device can be moved to a more proximal position above the renal arteries. In such case, tubular graft 11 includes one, preferably two openings or fenestrations 26, in the tubular graft. These openings or fenestrations are positioned directly in front of the origin of the renal arteries so as to permit blood flow into the renal arteries. Preferably two openings or fenestrations would be provided in the tubular graft so as to accommodate both openings of the renal arteries. Should the repair device not be required to fully cover the renal orifices, a cutout or scallop 27 can be formed at, for example, the proximal end 12 of the tubular graft. These cutouts or scallops are positioned about the circumference of the tubular graft to line up with the origins of the renal arteries and allow blood flow to continue into the renal arteries. These cutouts or scallops are depicted in FIG. 6.

FIG. 5A depicts an enlarged view of barb 20 on a strut of stent 15 extending in a radially outward direction to engage, for example, the interior wall of the migrated stent graft. FIG 5B depicts an enlarged view of barb 20 attached to a strut of stent 15 wherein the barb is pointed radially inward when the stent is positioned in a compressed condition.

Returning to FIGS. 4 and 7, a biological glue 22 can be applied to the surface of the interior expandable stent 15 to enhance the stability between the connection between the repair device and the migrating stent body. The biological glue is commercially available and can also be applied to the exterior surface of the tubular graft to further enhance connection between the repair device and the migrating stent body. A sealing material 23 can also be positioned around the distal expandable stent and on the exterior surface of the tubular graft to enhance the interconnection between the repair device and the stent graft. This sealing material can include a polymer or DACRON® felt. The sealing material can also be a frayed edge or cuff at the edge of the proximal stent. The sealing material 23 can be disposed on the outer surface of the tubular graft and at an edge 24 of the expandable stent. Furthermore, the sealing material can be disposed on the tubular

- 10 -

graft between the bare, uncovered stent and the proximal interior stent 34 so as to provide a better seal against the arterial vessel wall.

The following patents are included for a more detailed description of any and all forms of an ECM or SIS material. These references include U.S. Patent Nos. 4,902,508, Tissue Graft

Composition; 4,956,178, Tissue Graft Composition; 5,275,826, Fluidized Intestinal Submucosa and its Use as an Injectable Tissue Graft; 5,281,422, Graft For Promoting Autogenous Tissue Growth; 5,352,463, Tissue Graft for Surgical Reconstruction of a Collagenous Meniscus And Method Therefor; 5,372,821, Graft for Promoting Autogenous Tissue Growth; 5,445,833, Tendon or Ligament Graft for Promoting Autogenous Tissue Growth; 5,516,533, Fluidized Intestinal Submucosa and its Use as an Injectable Tissue Graft; 5,573,784, Graft for Promoting Autogenous Tissue Growth; 5,641,518, Method of Repairing Bone Tissue; 5,645,860, Tissue Graft and Method for Urinary Urothelium Reconstruction Replacement; 5,695,998, Submucosa as a Growth Substrate for Islet Cells; 5,711,969, Large Area Submucosal Tissue Graft Constructs; 5,753,267, Method for Enhancing Functional Properties of Submucosal Tissue Graft Constructs; 5,755,791, Perforated Submucosal Tissue Graft Constructs; 5,762,966, Tissue Graft and Method for Urinary Urothelium Reconstruction Replacement; 5,866,414, Submucosa Gel as a Growth Substrate for Cells; 5,885,619, Large Area Submucosal Tissue Graft Constructs and Method for Making the Same; 5,955,110, Multilayered Submucosal Graft Constructs and Method for Making Same; 5,968,096, Method of Repairing Perforated submucosal Tissue Graft Constructs; 5,997,575, Perforated Submucosal Tissue Graft Constructs; 6,087,157, Device and Method of Analyzing Tumor Cell Invasion of an Extracellular Matrix; 6,096,347, Myocardial Graft Constructs; 6,126,686, Artificial Vascular Valves; 6,187,039, Tubular Submucosal Graft Constructs; 6,241,981, Composition and Method for Repairing Neurological Tissue; 6,264,992, Submucosa as a Growth Substrate for Cells; 6,331,319, Galactosidase Modified Submucosal Tissue; 6,375,989, Submucosa Extracts; 6,206,931, Graft Prosthesis Materials; 6,358,284, Tubular Grafts from Purified Submucosa; 5,554,389, Urinary Bladder Submucosa Derived Tissue Graft; 6,099,567, Stomach Submucosa

- 11 -

Derived Tissue Graft. The following additional US and World Intellectual Property Organization publications are as follows: US 6,666,892, Multi-formed Collagenous Biomaterial Medical Device 2003-12-23; US 20030051735A1, Vessel Closure Member, Delivery Apparatus, and
5 Method of Inserting the Member 2003-03-20; WO 03092546A2, Sling for Supporting Tissue 2003-11-13; WO 03092471A2, Cell-Seeded Extracellular Matrix Grafts 2003-11-13; WO 03088844A1, Apparatus and Method for Producing a Reinforced Surgical Staple Line 2003-10-30; WO 03035125A3, Medical Graft Device with Meshed Structure 2003-05-01; WO 03035125A2,
10 Medical Graft Device with Meshed Structure 2003-05-01; WO 03009764A1, Vessel Closure Member and Delivery Apparatus 2003-02-06; WO 03002168A1, Porous Sponge Matrix Medical Devices and Methods 2003-01-09; WO 03002165A1 Graft Prosthesis Devices Containing Renal Capsule Collagen 2003-01-09; WO 0156500A, Implantable
15 Vascular Device 2001-08-09; WO 0154625A1, Stent Valves and Uses of Same 2001-08-02; WO 0110355A1, Tubular Graft Construct 2001-02-15; WO 0032253A1, Radiopaque Implantable Collagenous Biomaterial Device 2000-06-08; WO 0032250A1, A Multi-formed Collagenous Biomaterial Medical Device 2000-06-08 and WO 0032112A1, Embolization
20 Device 2000-06-08. It is also contemplated that the bioremodelable substance can be cross-linked as described in the aforementioned references to control the amount of remodeling of tissue coming in proximity to a bioremodelable substance.

Submucosa or other ECM tissue used in the invention
25 is preferably highly purified, for example, as described in U.S. Patent No. 6,206,931 to Cook et al. Thus, preferred ECM material will exhibit an endotoxin level of less than about 12 endotoxin units (EU) per gram, more preferably less than about 5 EU per gram, and most preferably less than about 1 EU per gram. As additional preferences, the

- 12 -

submucosa or other ECM material may have a bioburden of less than about 1 colony forming units (CFU) per gram, more preferably less than about 0.5 CFU per gram. Fungus levels are desirably similarly low, for example less than about 1 CFU per gram, more preferably less than about 0.5 CFU per gram. Nucleic acid levels are preferably less than about 5 µg/mg, more preferably less than about 2 µg/mg, and virus levels are preferably less than about 50 plaque forming units (PFU) per gram, more preferably less than about 5 PFU per gram. These and additional properties of submucosa or other ECM tissue taught in U.S. Patent No. 6,206,931 may be characteristic of the submucosa tissue used in the present invention.

Repair device 10 can be delivered to a treatment site using a variety of endovascular techniques. In treating aortic aneurysms, a catheter-based introducer can be used to insert the stent graft repair device into the body through a femoral artery and then into the aorta. The introducer may be similar to those described in WO 03/53761 and in US2002/0198587.

U.S. Patent No. 5,387,235 entitled "Expandable Transluminal Graft Prosthesis For Repair Of Aneurysm" discloses apparatus and methods of retaining grafts onto deployment devices. These features and other features disclosed in U.S. Patent No. 5,387,235 could be used with the present invention.

U.S. Patent No. 5,720,776 entitled "Barb and Expandable Transluminal Graft Prosthesis For Repair of Aneurysm" discloses improved barbs with various forms of mechanical attachment to a stent. These features and other features disclosed in U.S. Patent No. 5,720,776 could be used with the present invention.

U.S. Patent No. 6,206,931 entitled "Graft Prosthesis Materials" discloses graft prosthesis materials and a method for implanting, transplanting, replacing and repairing a part of a patient and particularly the manufacture and use of a purified, collagen based matrix structure removed from a submucosa tissue source. These features and other features disclosed in U.S. Patent No. 6,206,931 could be used

- 13 -

with the present invention.

PCT Patent Publication No. WO 98/53761 entitled
“A Prosthesis And A Method And Means Of Deploying A Prosthesis” discloses
an introducer for a prosthesis which retains the prosthesis so that each end
5 can be moved independently. These features and other features disclosed in
PCT Patent Publication No. WO 98/53761 could be used with the present
invention.

PCT Patent Publication No. WO 99/29262 entitled
“Endoluminal Aortic Stents” discloses a fenestrated prosthesis for
10 placement where there are intersecting arteries. This feature
and other features disclosed in PCT Patent Publication No. WO 99/29262
could be used with the present invention.

PCT Patent Publication No. WO 03/034948 entitled
“Prosthesis For Curved Lumens” discloses prostheses with
15 arrangements for bending the prosthesis for placement into curved lumens.
This feature and other features disclosed in PCT Patent Publication
No. WO 03/034948 could be used with the present invention.

U.S. Publication No. US2003-0233140 entitled “Trigger Wires”
discloses release wire systems for the release of stent grafts retained
20 on introducer devices. This feature and other features disclosed in
U.S. Publication No. US2003-0233140, could be used with the present
invention and the disclosure of U.S. Publication No. US2003-0233140.

- 14 -

U.S. Publication No. US2004-0098079, entitled "Thoracic Deployment Device" discloses introducer devices adapted for deployment of stent grafts particularly in the thoracic arch. This feature and other features disclosed in U.S. Publication No. US2004-0098079, could be used with the
5 present invention.

U.S. Publication No. US2004-0106978, entitled "Thoracic Aortic Aneurysm Stent Graft" discloses stent grafts that are useful in treating aortic aneurysms particularly in the thoracic arch. This feature and other features disclosed in U.S. Publication No. US2004-0106978 could be used with the
10 present invention.

U.S. Publication No. US2004-0054396, and PCT Patent Publication Number WO 2004/002365 entitled "Stent-Graft Fastening" disclose arrangements for fastening stents onto grafts particularly for exposed stents. This feature and other features disclosed in WO 2004/002365 could be used
15 with the present invention.

U.S. Publication No. US2004-0073289, and PCT Patent Publication No. WO 2004/017868 entitled "Asymmetric Stent Graft Attachment" disclose retention arrangements for retaining onto and releasing prostheses from introducer devices. This feature and other features disclosed in
20 WO 2004/017868 could be used with the present invention.

U.S. Patent Publication No. US2003-0120332, and WO03/053287 entitled "Stent Graft With Improved Adhesion" disclose arrangements on stent grafts for enhancing the adhesion of such stent grafts into walls of vessels in which they are deployed. This feature and other features disclosed in U.S.
25 Patent Publication No. US2003-0120332, and WO03/053287 could be used with the present invention.

- 15 -

U.S. Publication No. US2004-0082990, and WO 2004/017867
entitled "Composite Prostheses" discloses prostheses or stent grafts suitable
for endoluminal deployment. These prostheses and other features disclosed
in U.S. Publication No. US2004-0082990, and WO 2004/017867, could be
5 used with the present invention.

To help identify elements of the embodiments of the present
invention, the following list of element numbers and descriptors is provided as
a convenience for the reader.

List of Elements

10	10	Repair device
	11	Tubular graft of 10
	12	Proximal end of 10
	13	Distal end of 10
	14	Passageway of 10
15	15	Interior expandable stent of 10
	16	Bare, expandable stent of 10
	17	Plurality of barbs on 16
	18	Distal direction of 17
	19	Diameter of 11
20	20	Barbs (plurality)
	21	Direction (proximal) of 20
	22	Biological glue

WO 2005/099627

PCT/US2005/012310

- 16 -

	23	Sealing material
	24	Edge of 15
	25	Wall of 10
	26	Fenestrations in 11
5	27	Cutout or scallop
	28	End of 25
	29	Interior surface of 25
	30	Stent graft
	31	Abdominal aorta
10	32	Aneurysm of 31
	33	Renal arteries
	34	Second expandable stent
	35	Short neck of 31
	36	Proximal end of 30
15	37	Distal ends of 30
	38	Contralateral iliac arteries
	39	ipsilateral iliac arteries
	40	Blood flow arrows
	41	Contralateral iliac branch of 30
20	42	Ipsilateral iliac branch of 30
	43	Main body portion of 30
	44	Exterior surface of 30

Claims

1. A stent graft repair device, for repairing a pre-existing stent graft in a body vessel, comprising:

a tubular graft configured with a length for repair of the pre-existing stent graft of biocompatible graft material having a proximal end, a distal end and a passage extending longitudinally therethrough and being further configured such that when deployed in a patient the proximal end is located towards the patient's heart and the distal end is located away from the patient's heart;

a first expandable stent at the proximal end of the tubular graft and extending beyond the graft material at the proximal end;

the first expandable stent having a first plurality of barbs attached thereto and extending longitudinally therealong and pointing in a direction toward the distal end of the tubular graft; and

a second expandable stent disposed on an interior surface of the tubular graft and within the passage of the tubular graft, the second expandable stent having a second plurality of barbs attached thereto and extending longitudinally therealong and pointing in a direction toward the proximal end of the tubular graft, wherein the second plurality of barbs protrude through the tubular graft and are configured to engage graft material at a proximal end of the pre-existing stent graft.

2. The stent graft repair device of claim 1, wherein the tubular graft has a diameter extending across the passage and ranging in size from 15 to 35 millimetres.

3. The stent graft repair device of claim 1, wherein the second plurality of barbs points radially inwardly when the repair device is in a compressed condition.

-18-

4. The stent graft repair device of claim 1, further comprising a biological glue on a surface of the second expandable stent.
5. The stent graft repair device of claim 1, further comprising a sealing material around the second expandable stent.
6. The stent graft repair device of claim 5, wherein the sealing material comprises at least one of a polymer felt, a frayed edge, and a cuff.
7. The stent graft repair device of claim 5, wherein the sealing material is disposed at an edge of the second expandable stent.
8. The stent graft repair device of claim 1, further comprising a sealing material disposed on the tubular graft and between the first and the second expandable stents.
9. The stent graft repair device of claim 1, further comprising a third expandable stent disposed on the interior surface and in the passage of the tubular graft.
10. The stent graft repair device of claim 1, wherein the second plurality of barbs are staggered longitudinally around the second expandable stent.
11. The stent graft repair device of claim 1, wherein the tubular graft includes a wall and at least one opening or fenestration extending through the wall.
12. The stent graft repair device of claim 1, wherein the tubular graft includes a wall and at least one cut out or scallop at an end of the wall.
13. A stent graft repair device for repairing a pre-existing stent graft previously placed in a body vessel, comprising:

-19-

a tubular graft configured with a length for repair of the pre-existing stent graft and having a proximal end, a distal end, and a passage extending longitudinally therethrough and being further configured such that when deployed in a patient the proximal end is located towards the patient's heart and the distal end is located away from the patient's heart;

a first expandable stent at a first one of the distal and the proximal ends of the tubular graft and extending beyond the tubular graft at at least the proximal end thereof, the first expandable stent having a first plurality of barbs attached thereto and extending longitudinally therealong and pointing in a first direction toward the other end of the at least one of the distal and the proximal ends of the tubular graft; and

a second expandable stent disposed on an interior surface and within the passage of the tubular graft, and having a second plurality of barbs attached thereto and extending longitudinally therealong and pointing in a direction toward the first one of the distal and proximal ends of the tubular graft,

wherein the tubular graft includes a wall with an aperture at or adjacent the first one of the distal and the proximal ends of the tubular graft, and

wherein the second plurality of barbs protrude through the tubular graft and are configured to engage an internal surface of the pre-existing graft at an end of the pre-existing stent graft.

14. The stent graft repair device of claim 13, wherein the tubular graft has a diameter extending across the passage and ranging in size from 15 to 35 millimetres.

15. The stent graft repair device of claim 13, wherein the second plurality of barbs points towards said passage when the repair device is in a compressed condition.

16. A stent graft repair device for repairing a pre-existing stent graft previously placed in a body vessel, comprising:

-20-

a tubular graft configured with a length for repair of the pre-existing stent graft and having a proximal end, a distal end, and a passage extending longitudinally therethrough and being further configured such that when deployed in a patient the proximal end is located towards the patient's heart and the distal end is located away from the patient's heart;

a first expandable stent at a first one of the distal and the proximal ends of the tubular graft and extending beyond the tubular graft at at least the proximal end thereof, the first expandable stent having a first plurality of barbs attached thereto and extending longitudinally therealong and pointing in a first direction toward the other end of the at least one of the distal and the proximal ends of the tubular graft; and

a second expandable stent disposed on an interior surface and within the passage of the tubular graft, and having a second plurality of barbs attached thereto and extending longitudinally therealong and pointing in a direction toward the first one of the distal and proximal ends of the tubular graft, and

wherein the tubular graft includes a wall with a cut out or a scallop at the end of the wall, and

wherein the second plurality of barbs protrude through the tubular graft and are configured to engage graft material at the proximal end of the pre-existing stent graft.

17. The stent graft repair device of claim 16, wherein the tubular graft has a diameter extending across the passage and ranging in size from 15 to 35 millimetres.

18. Use of the stent graft repair device of any one of claims 1 to 17 for repairing the pre-existing stent graft.

1/5

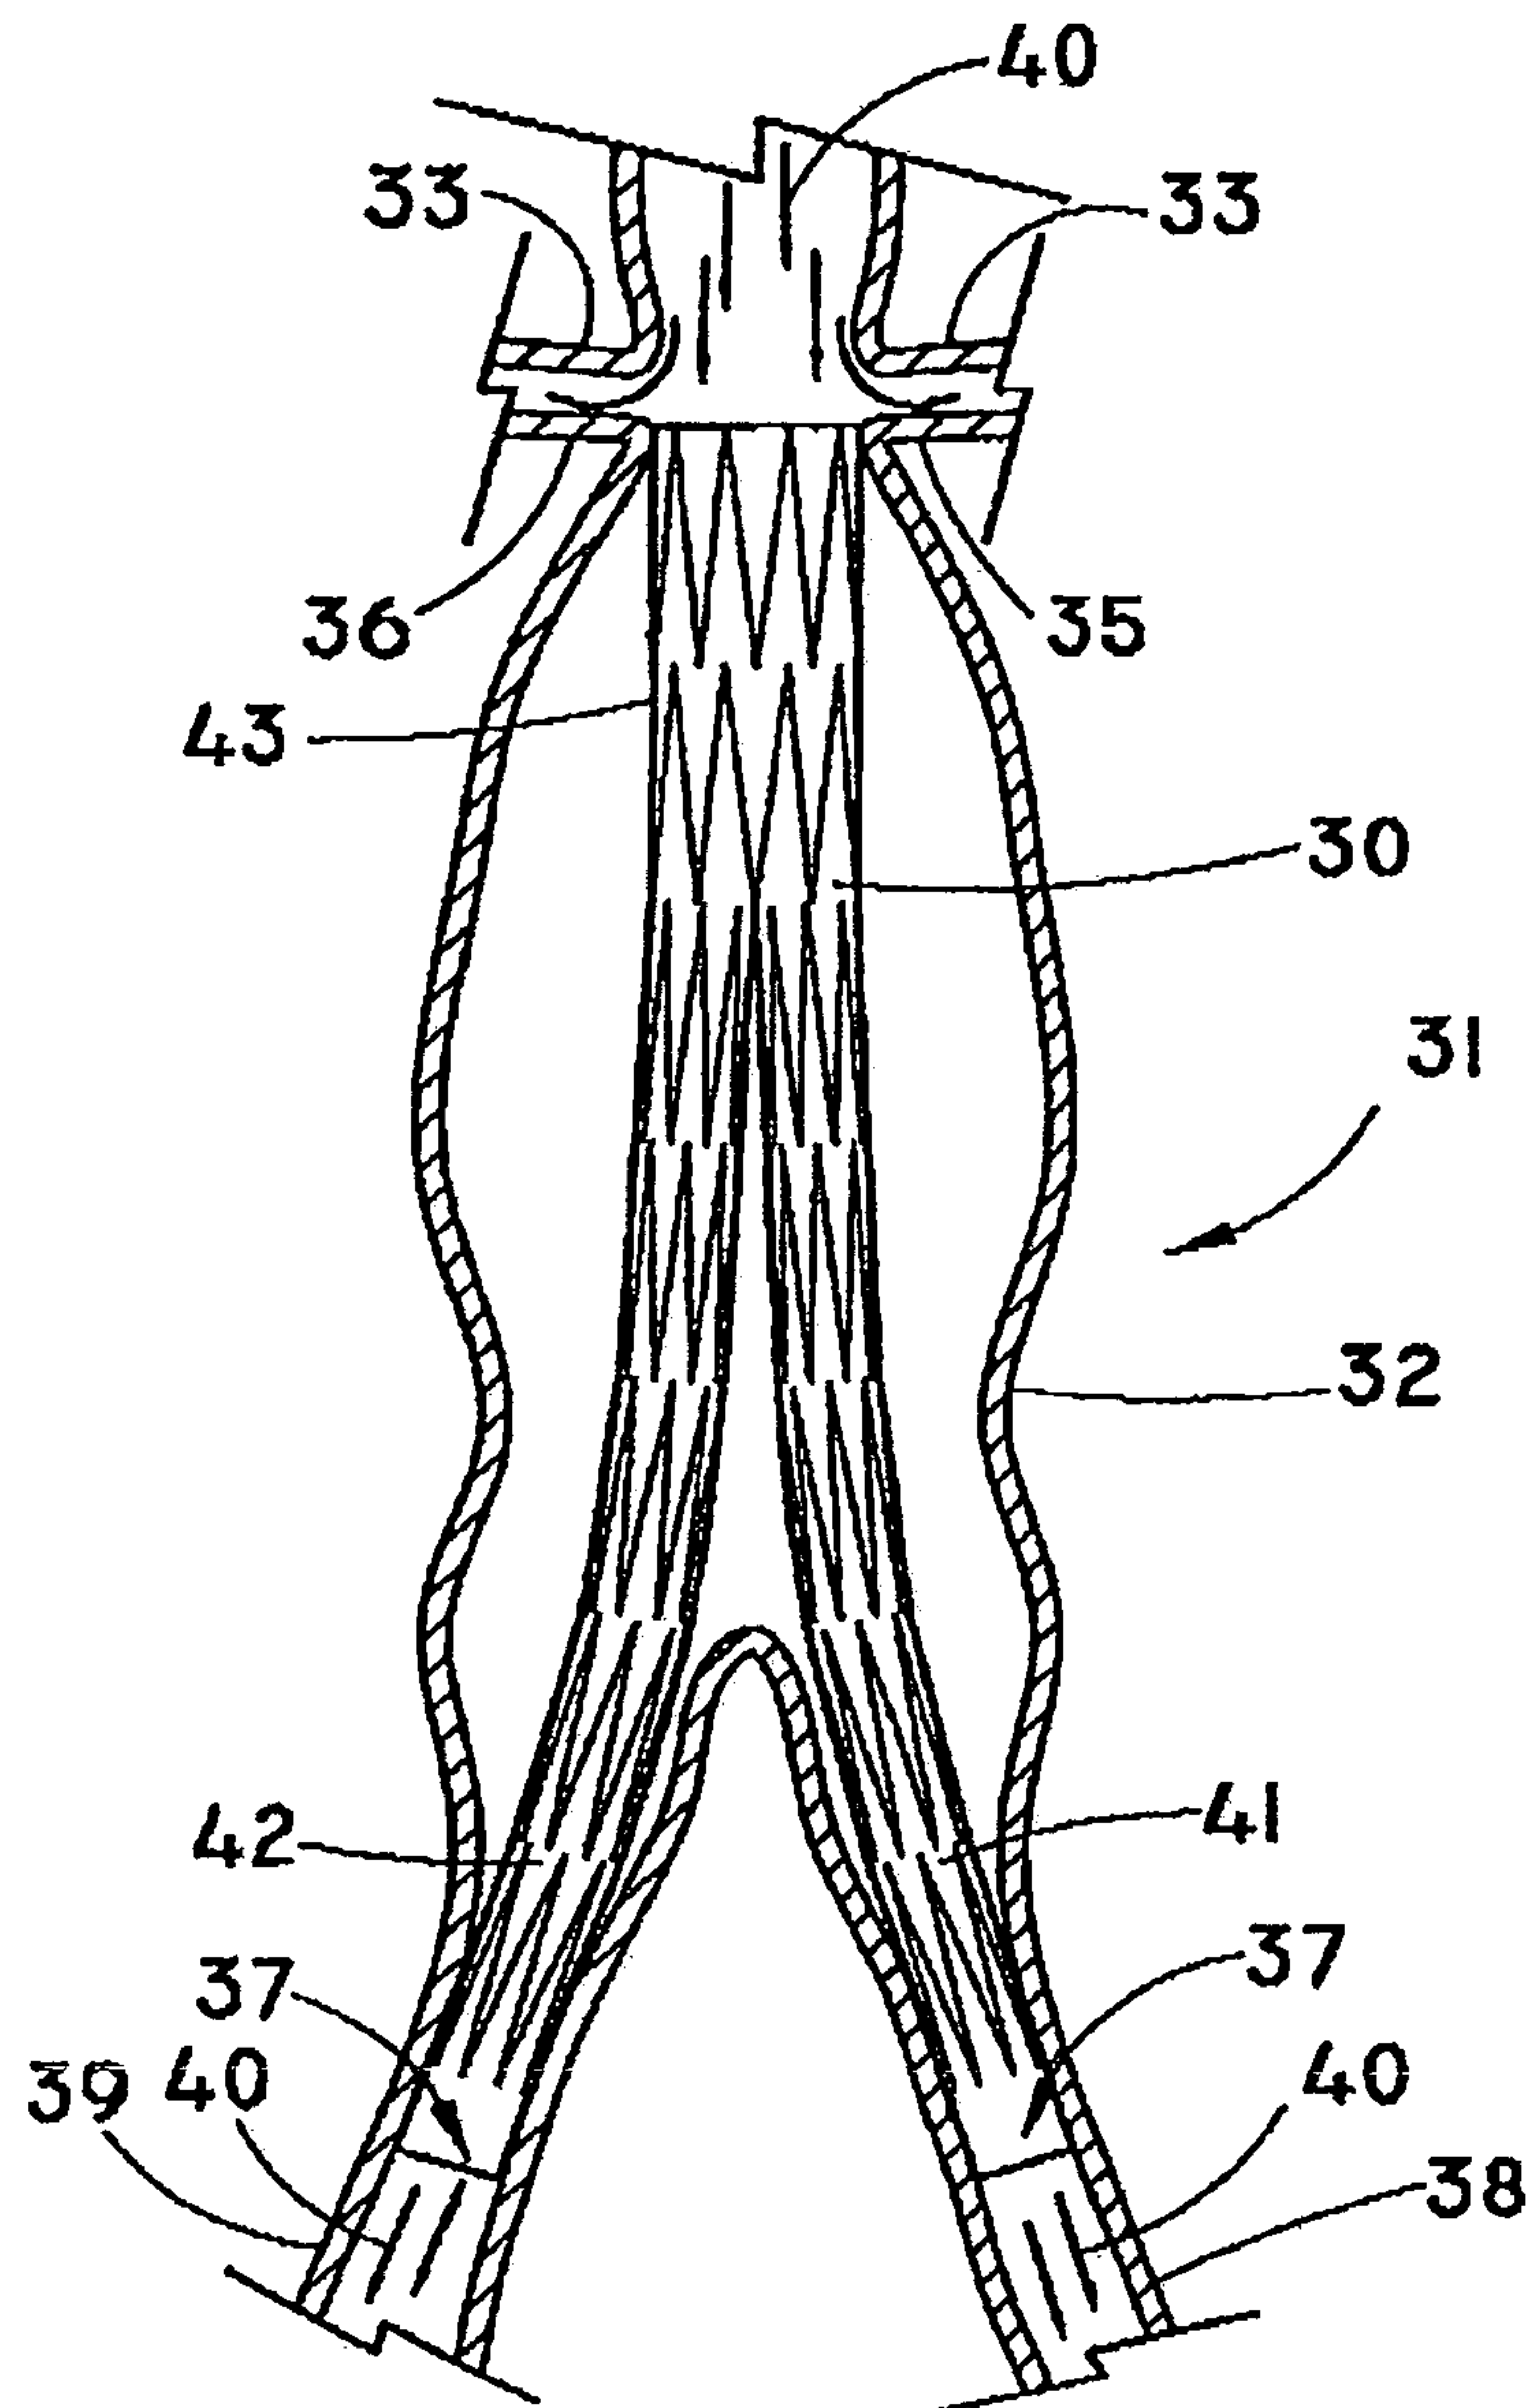


FIG. 1
(PRIOR ART)

2/5

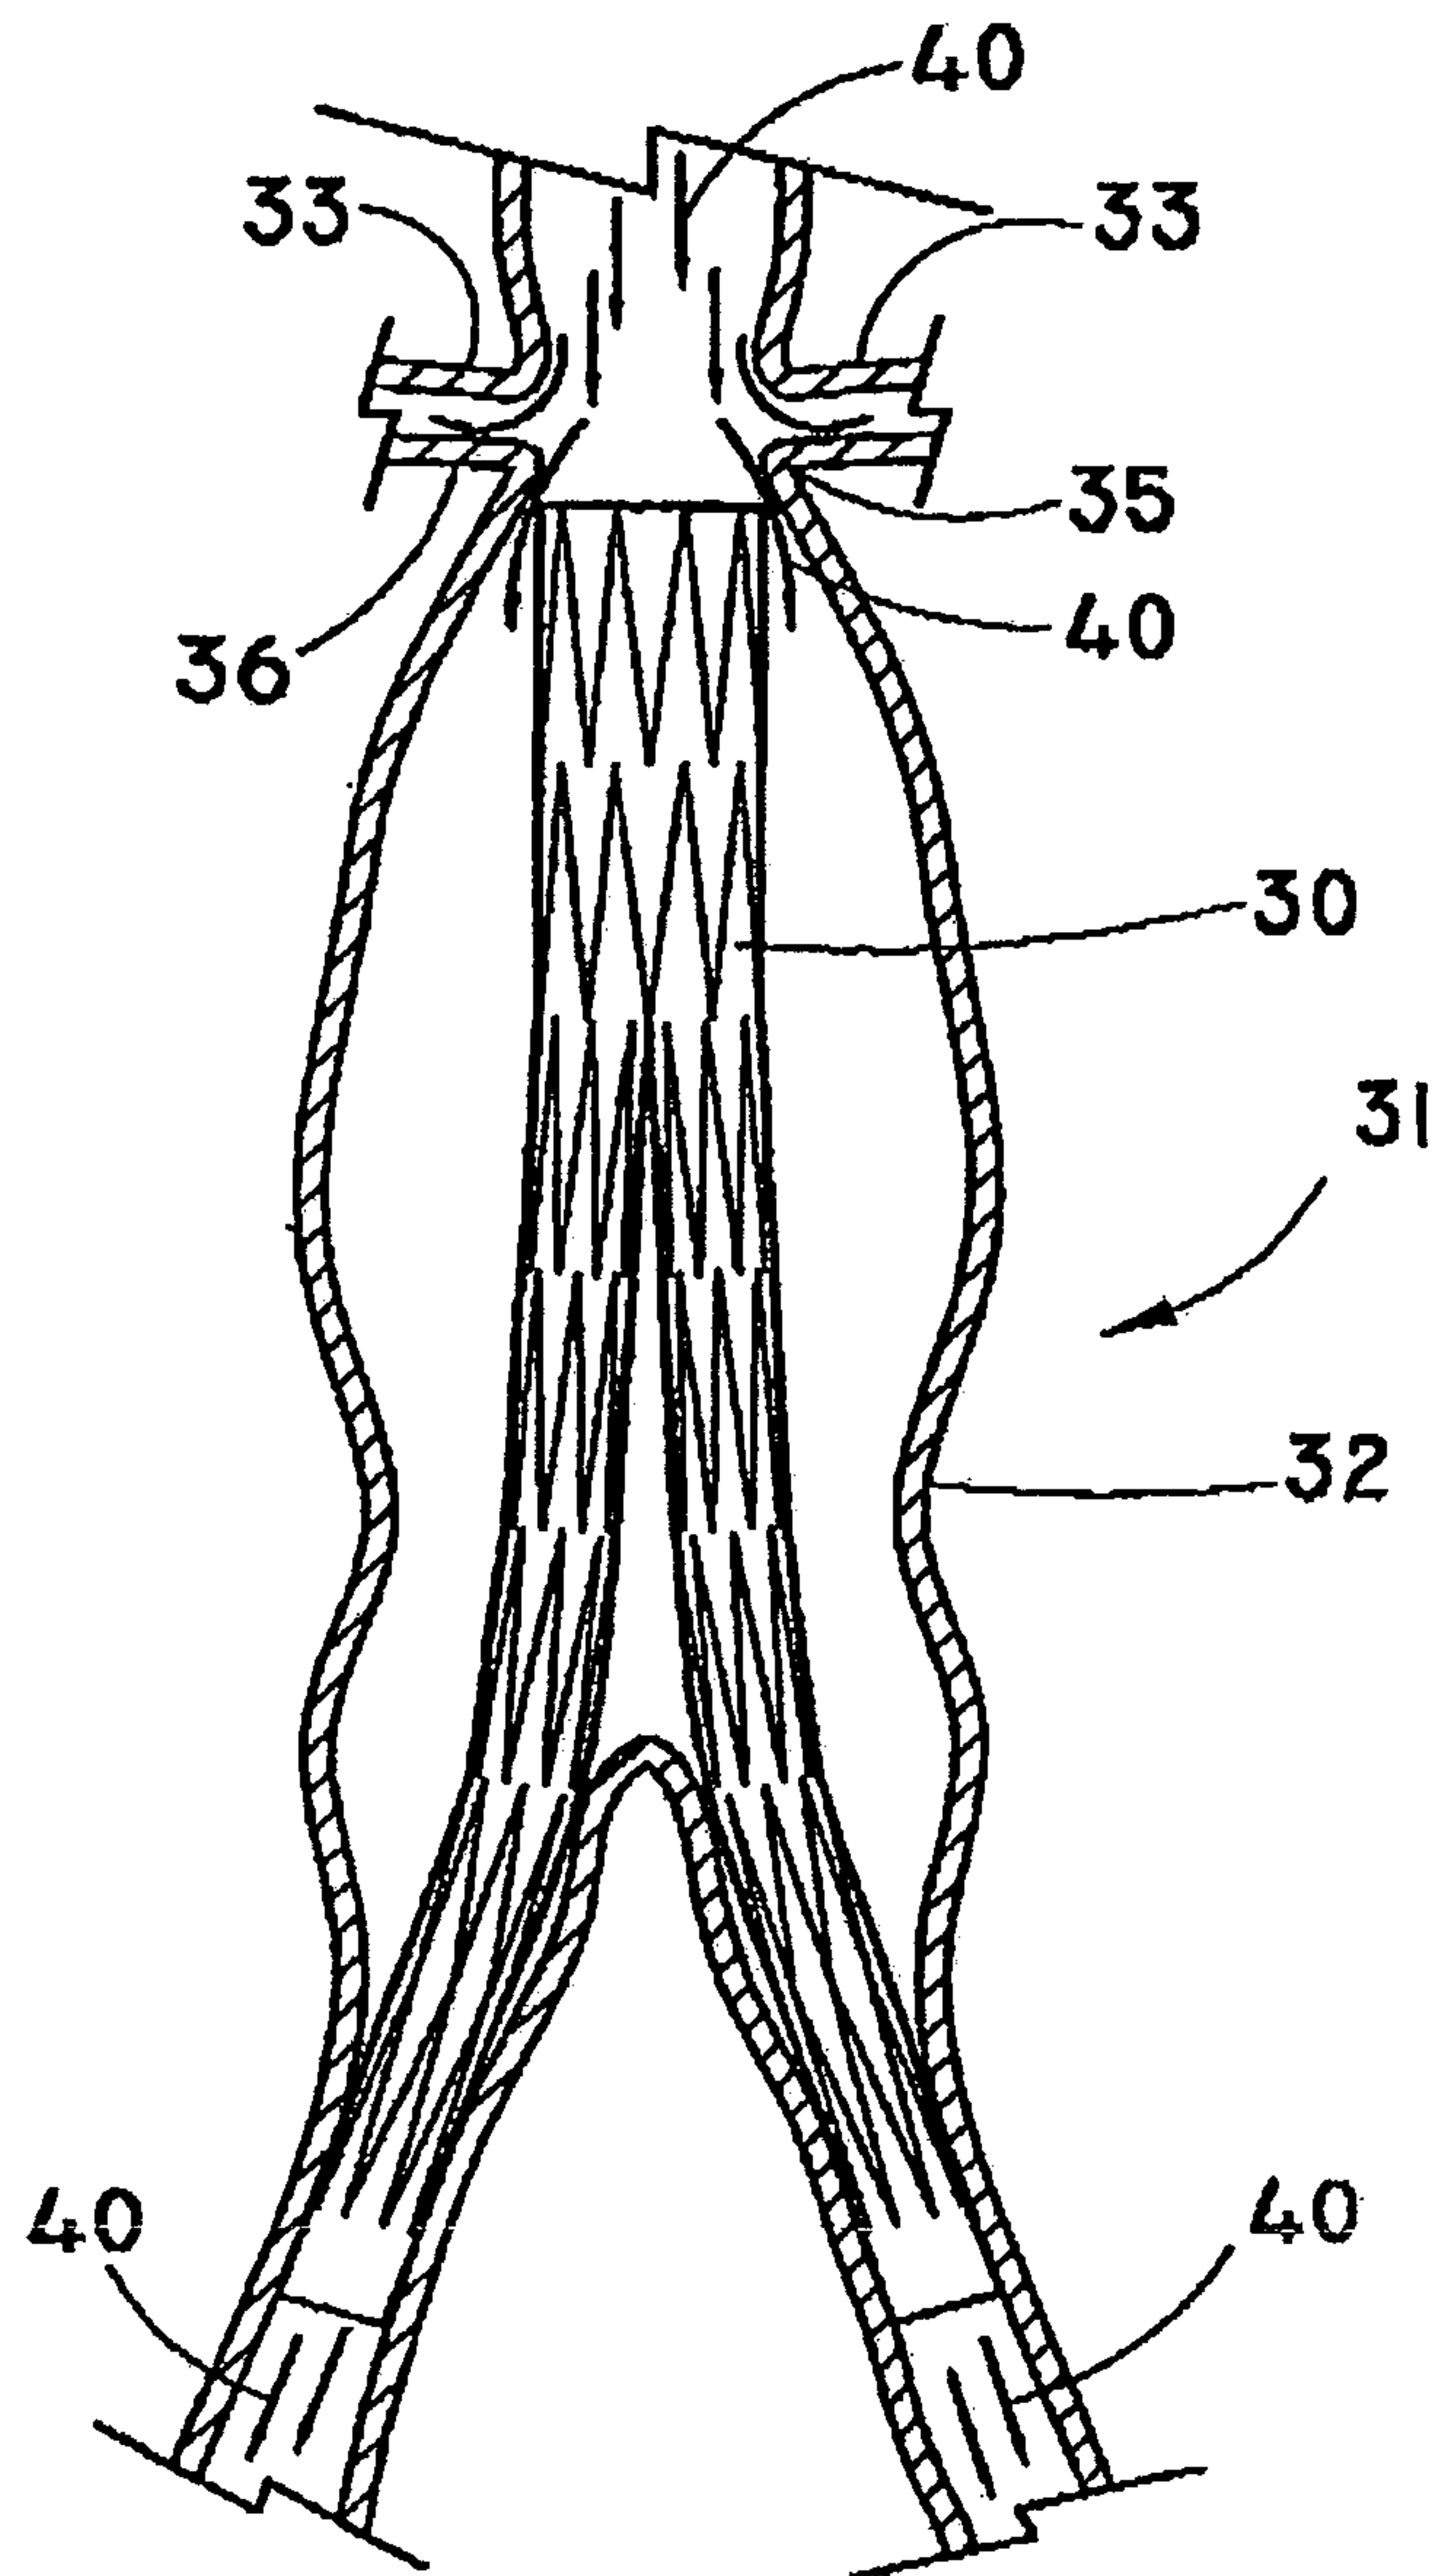


FIG. 2
(PRIOR ART)

3/5

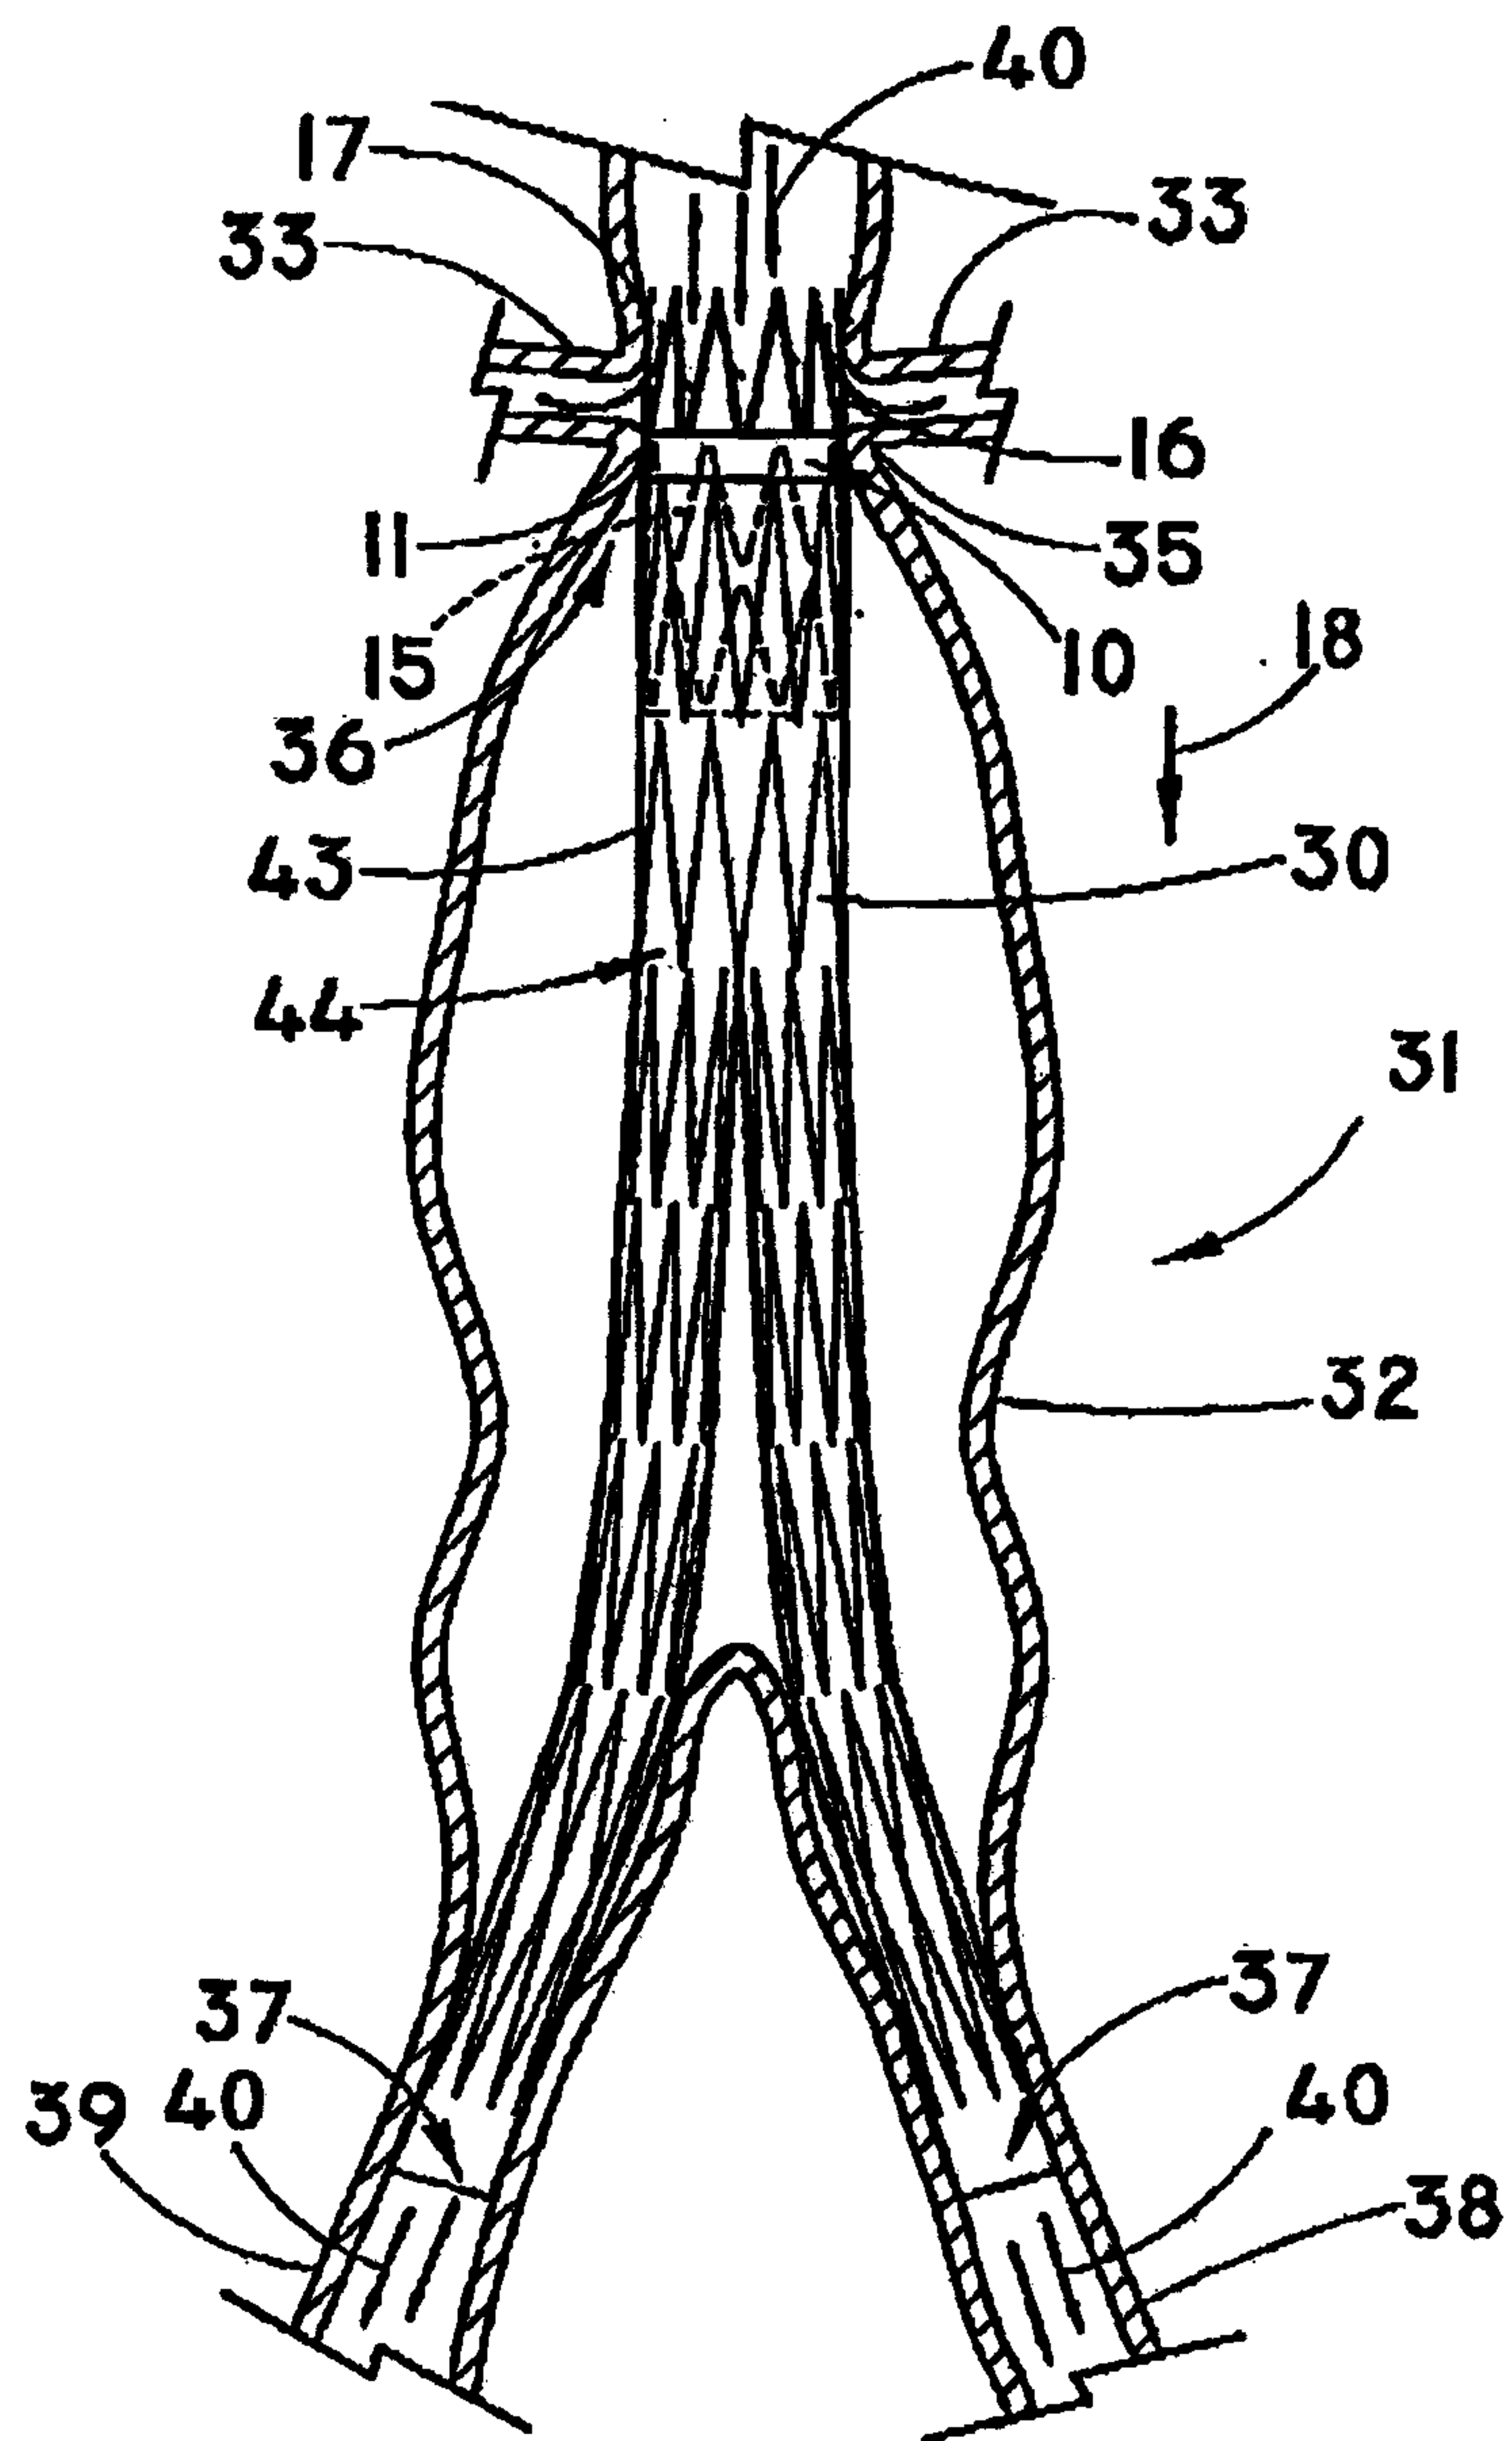


FIG. 3

4/5

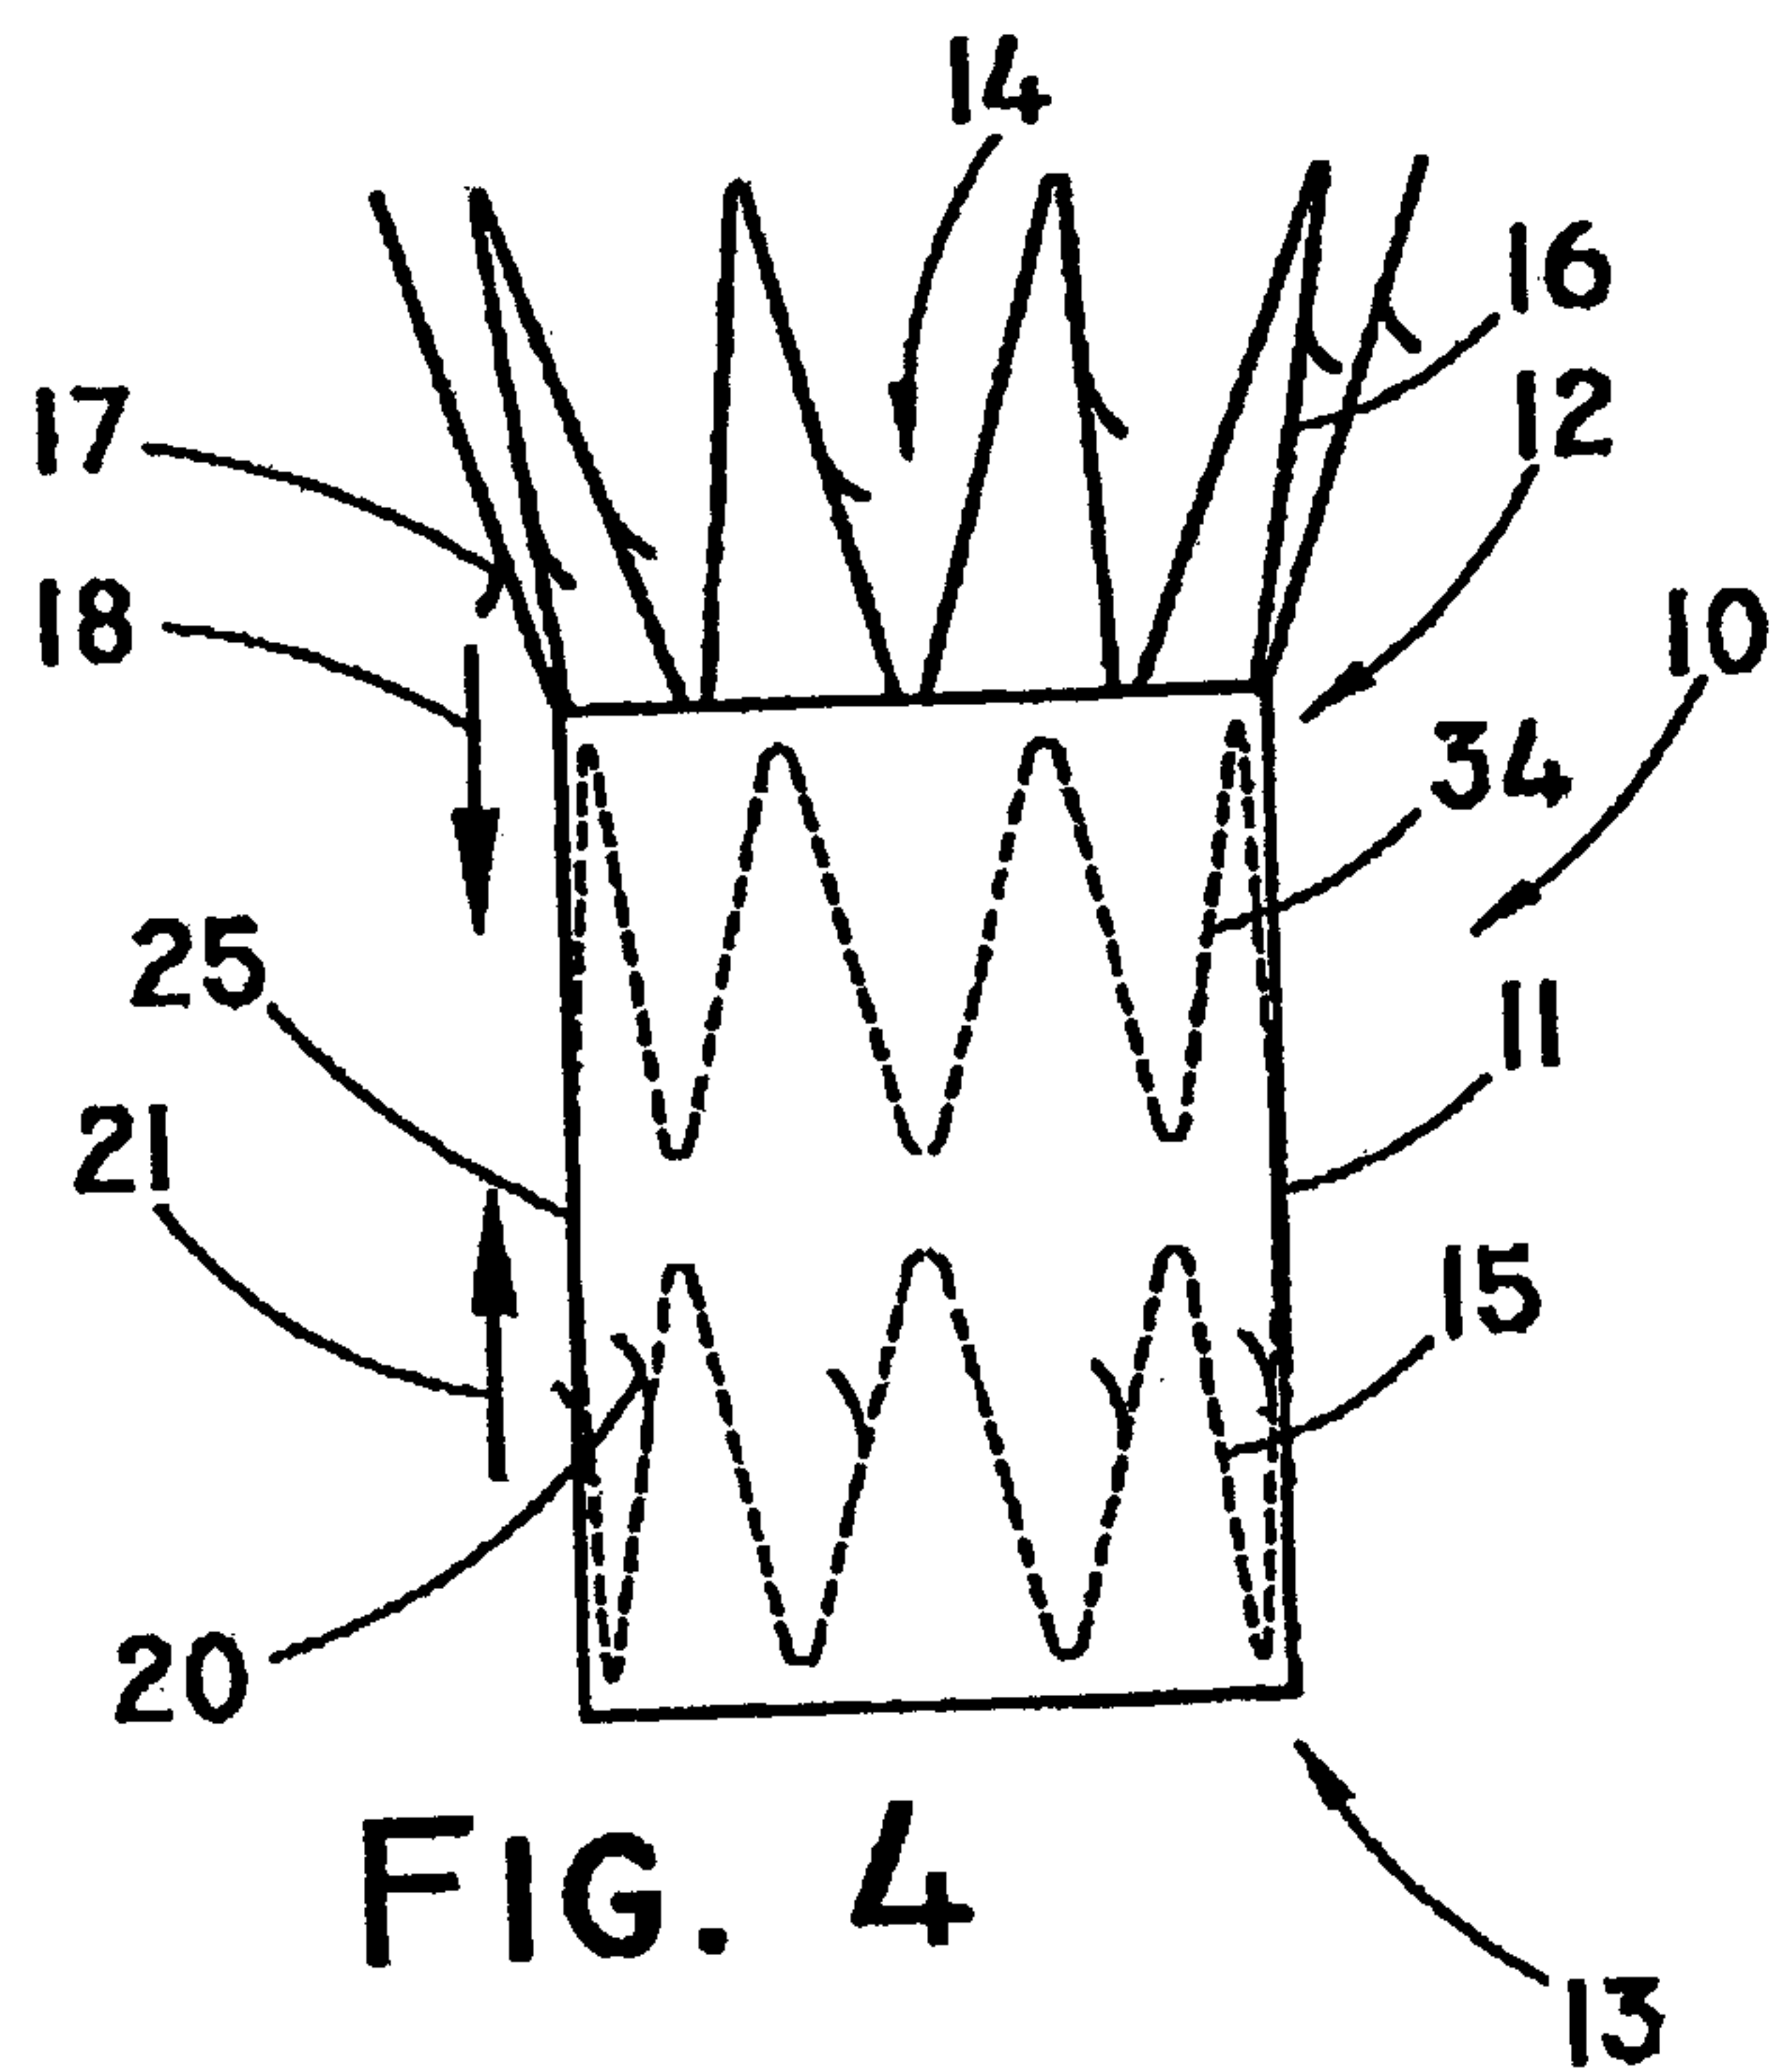


FIG. 4

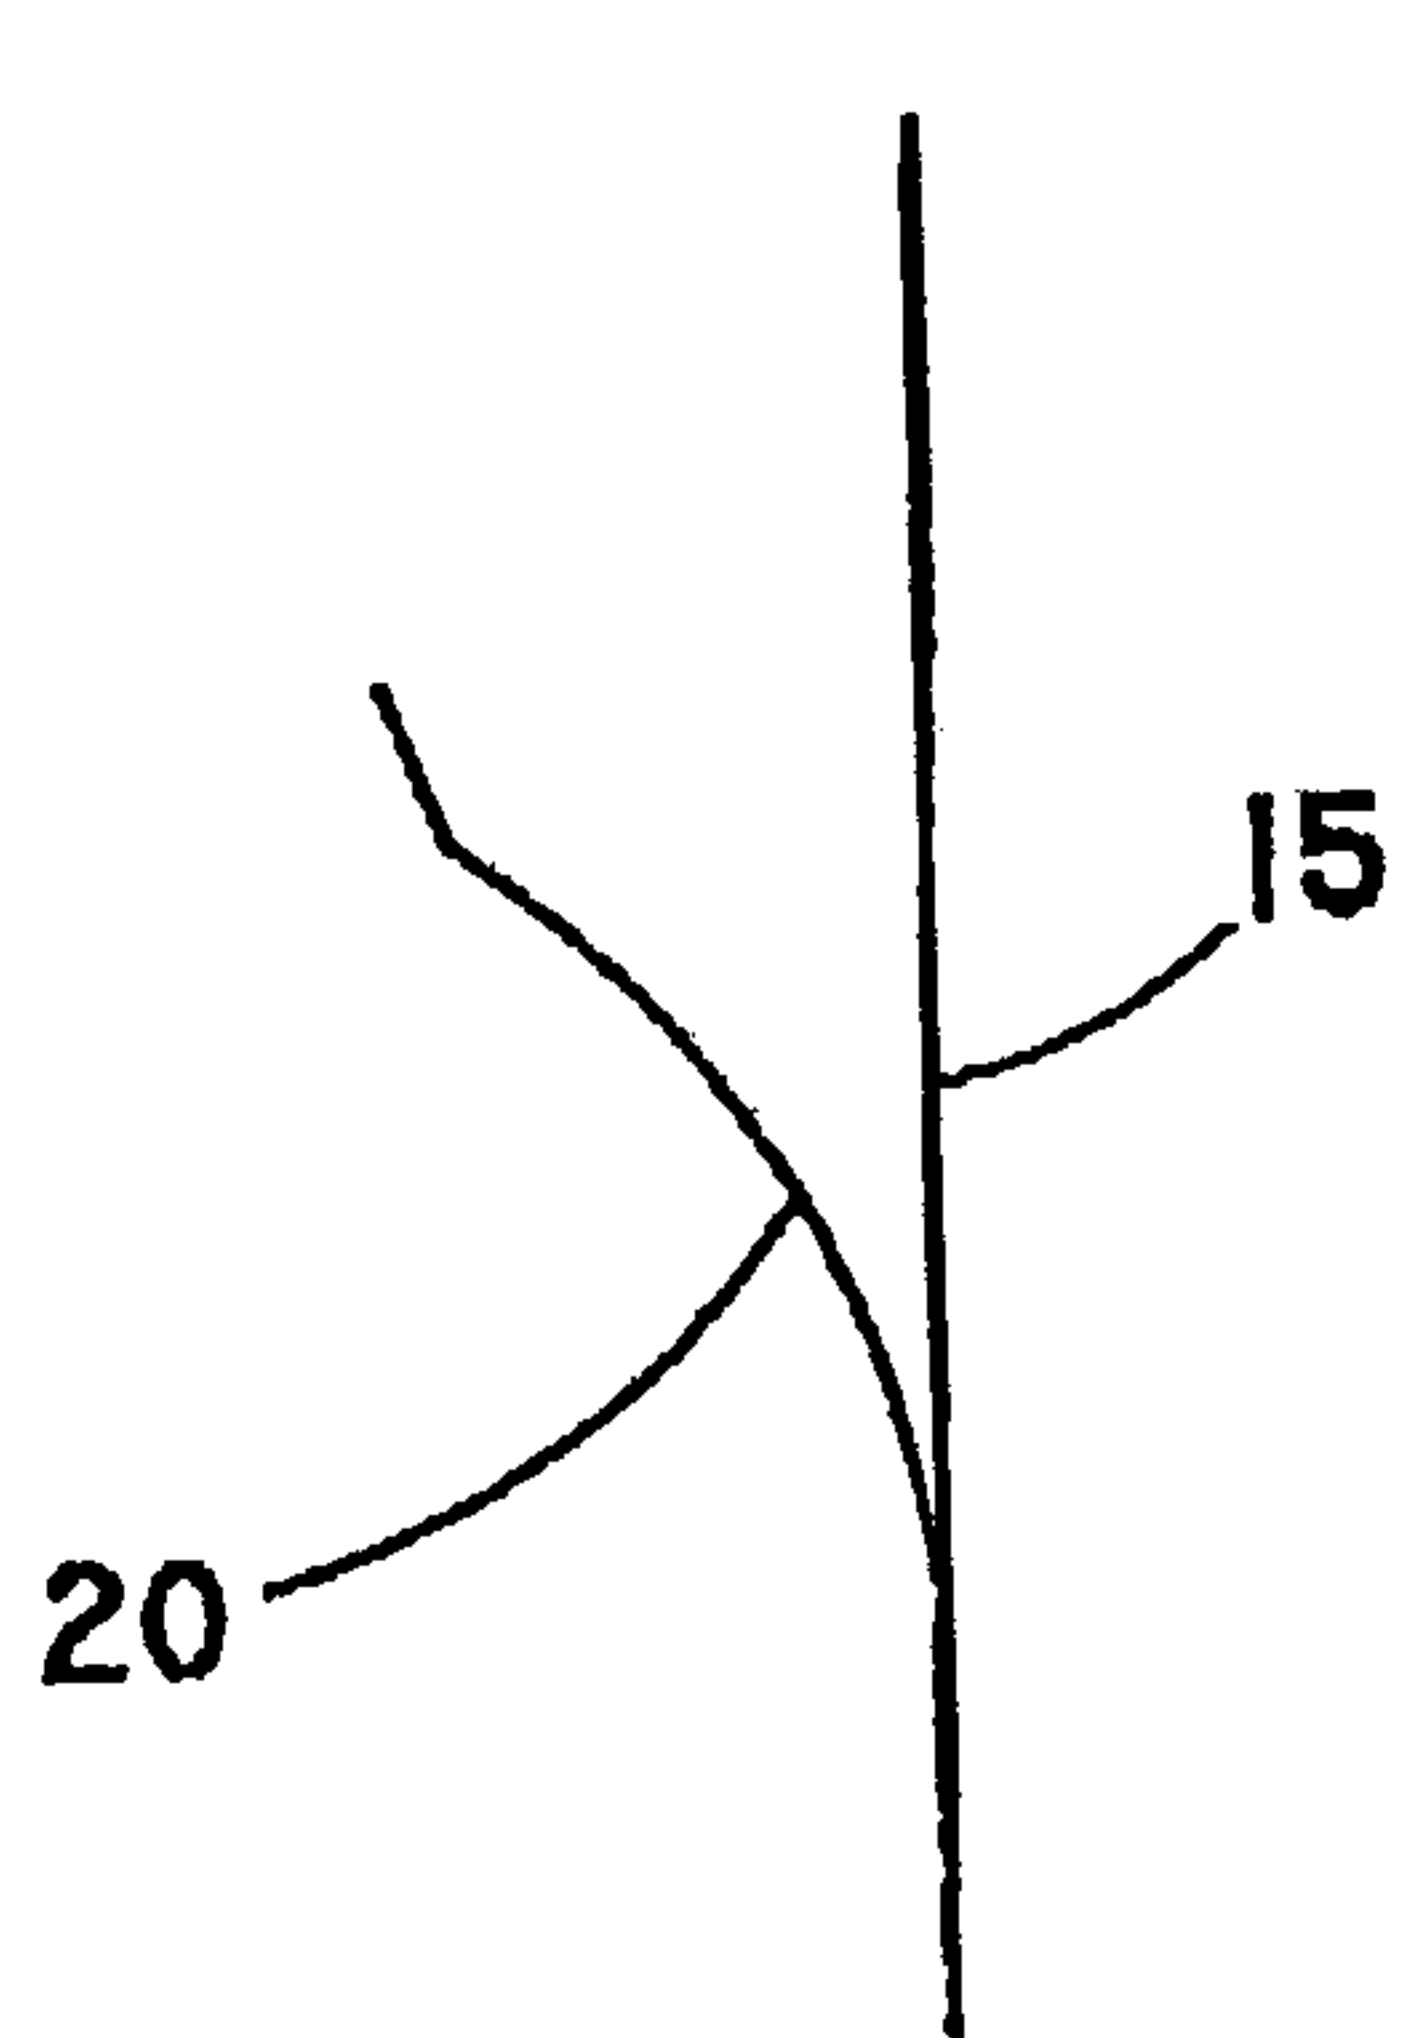


FIG. 5A

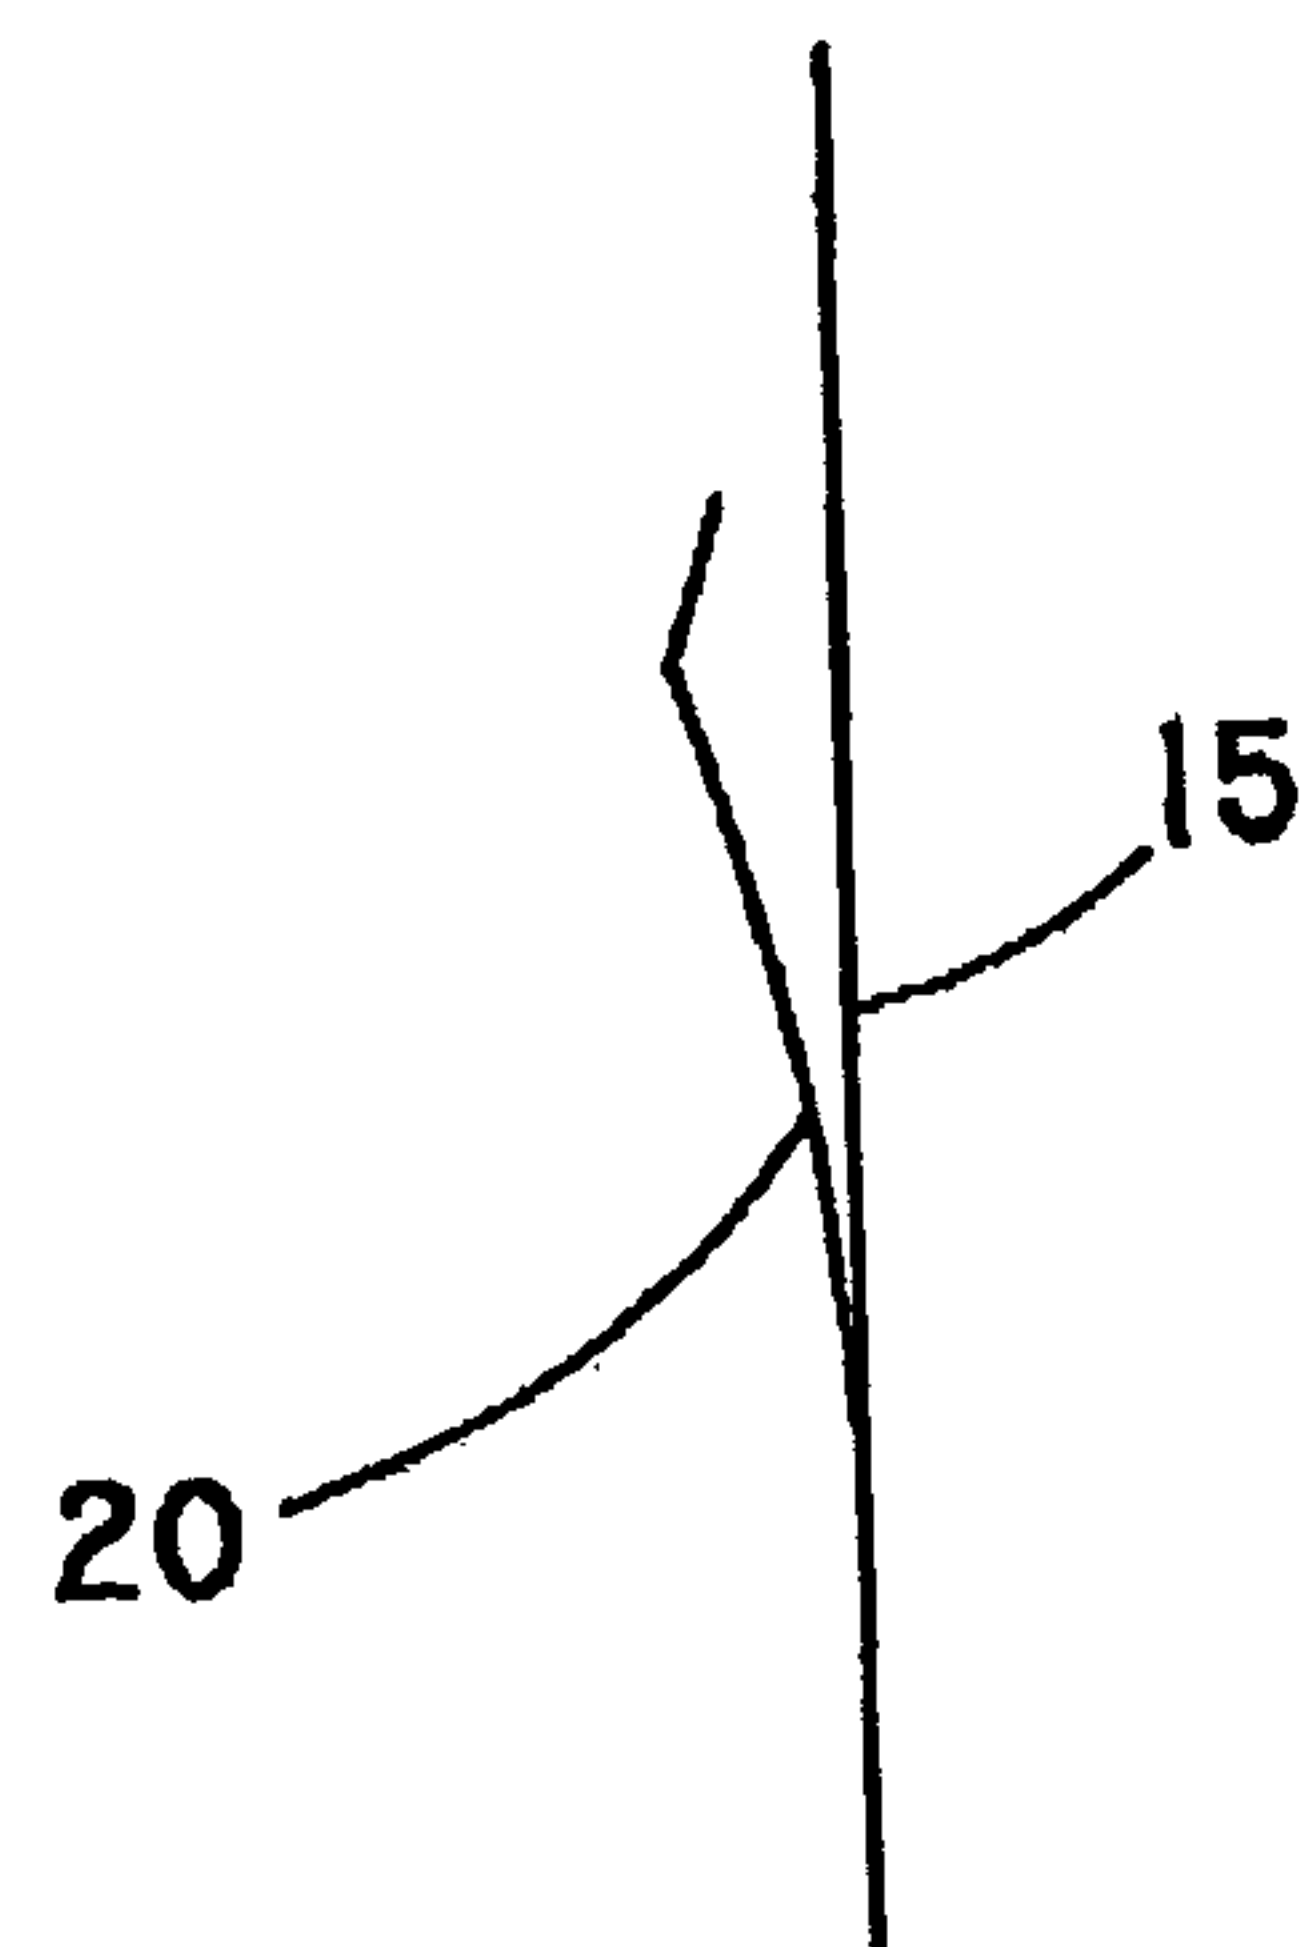


FIG. 5B

5/5

