


James H. Beaty
Coupling for Sucker Rods.

117371

PATENTED JUL 25 1871

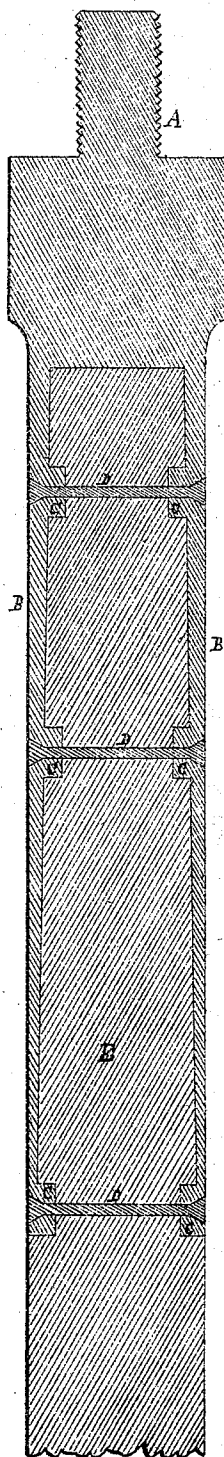

Witnesses.

A. C. Johnston

Jos. H. Davis

Inventor.

James H. Beaty
James A. Johnston his attorney

UNITED STATES PATENT OFFICE.

JAMES H. BEATTY, OF FRANKLIN, PENNSYLVANIA, ASSIGNOR TO SARAH J. BEATTY, JOSIAH B. POOR, AND WILLIAM MCKEE.

IMPROVEMENT IN SUCKER-ROD JOINTS OR COUPLINGS.

Specification forming part of Letters Patent No. 117,371, dated July 25, 1871.

To all whom it may concern:

Be it known that I, JAMES H. BEATTY, of Franklin, in the county of Venango and State of Pennsylvania, have invented a new and useful Improvement in Sucker-Rod Joint or Coupling; and I do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the accompanying drawing and to the letters of reference marked thereon.

The nature of my invention consists of a sucker-rod joint or coupling, with the inner surface of its straps provided with projections adapted to recesses made in the sucker-rods.

To enable others skilled in the art to make and use my invention, I will proceed to describe more fully its construction and operation.

The accompanying drawing which forms part of my specification is a vertical and longitudinal section of the male part of the coupling-joint and a section of the sucker-rod or pole.

A represents the screw of the coupling. B represents the straps. C represents projections on the inner surface of the straps. D represents the rivets. E represents the sucker-rod or coupling-pole, which is provided with recesses or notches which, in form, correspond in size and shape to the projections C on the interior of the straps B. The coupling-joint herein described

is constructed in all respects in the ordinary form, excepting the projections C on the interior of the straps B.

The cheapest method of constructing the herebefore-described coupling is casting it of cast-iron and subsequently annealing it, thereby forming a coupling of malleable iron. The advantage of constructing a coupling or joint for sucker-rods in the manner herein described consists in relieving the rivets from transverse strain, giving more metal for the heads of rivets, and holding the rod E more securely in its place.

The advantage of a safe and sure means for securing the sucker or pole to the coupling-joint is a desideratum with operators of oil-wells, for insecure attachments in the sucker-rod are always a very great source of annoyance.

Having thus described the nature, construction, and advantages of my improvement, what I claim as my invention is—

The straps B provided with projections C, in combination with rivets D and recesses in the rod E, constructed and arranged as herein described, and for the purpose set forth.

JAMES H. BEATTY.

Witnesses:

JAMES J. JOHNSTON,
A. C. JOHNSTON.