(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007157 A1

(51) International Patent Classification[7]: B26F 1/24, D04H 1/54, 3/14, 3/16, 1/56, 5/06

(21) International Application Number:
PCT/EP2003/007216

(22) International Filing Date: 5 July 2003 (05.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
102 32 147.7 16 July 2002 (16.07.2002) DE

(71) Applicant *(for all designated States except US)*: **COROVIN GMBH** [DE/DE]; Woltorfer Strasse 124, 31224 Peine (DE).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **MUTH, Mathias** [DE/DE]; An der Aulenkaut 41, 65197 Wiesbaden (DE). **RICHTER, Axel** [DE/DE]; Am Spielplatz 5, 31234 Edemissen (DE). **SODEMANN, Ralf** [DE/DE]; Eulenring 42, 31224 Peine (DE).

(74) Common Representative: **KEPETS FERBER, Patricia**; Corovin GmbH, Woltorfer Strasse 124, 31224 Peine (DE).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) **Title:** THERMOBONDED AND PERFORATED NONWOVEN

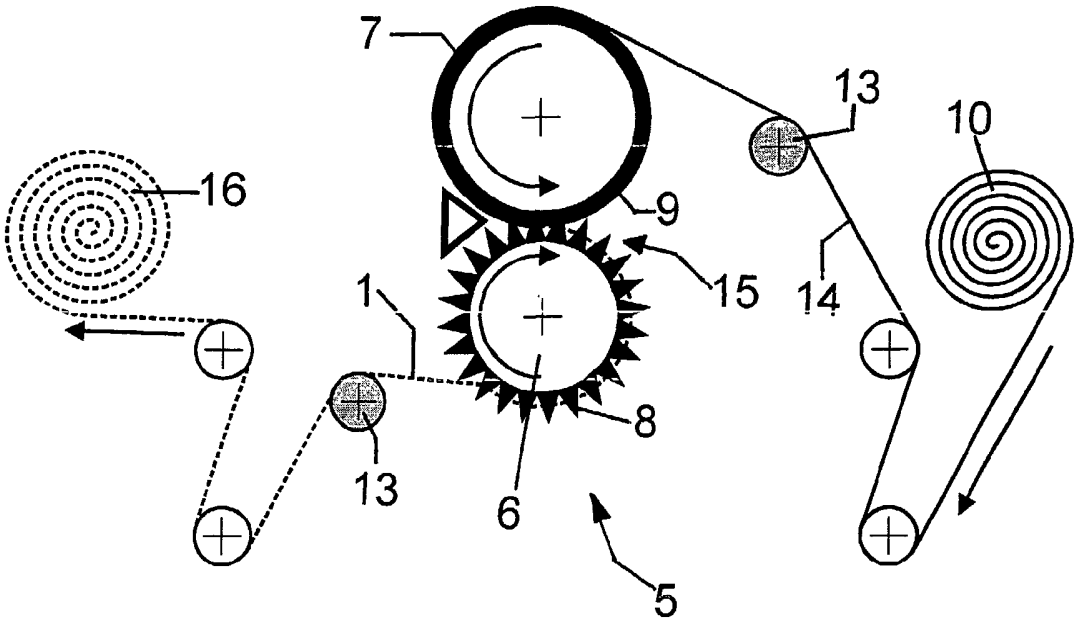

(57) **Abstract:** The present invention relates to a method for the manufacture of a perforated nonwoven material 1, whereby a prebonded nonwoven 14 with embossing points is guided to a nonwoven perforation device 5, needles 8 of a needle roller 6 engage into the prebonded nonwoven 14 and perforate it, and the perforated nonwoven material 1 then undergoes further processing. A ratio is set between the number of needles to the number of embossed points of between 0.15 and 0.25 and a ratio of hole size to embossed point size of between 0.15 and 0.25.

WO 2004/007157 A1

THERMOBONDED AND PERFORATED NONWOVEN

The present invention relates to a method of manufacturing a perforated nonwoven and a perforated nonwoven. Furthermore, a nonwoven perforation device for performing the method and/or for manufacturing the nonwoven is provided.

Perforating materials is part of the prior art if the intention is to provide specific properties in materials, such as permeability to liquid and/or vapour. For example, providing a top sheet of a material for a hygiene article with perforations is known from U.S. Patent 3,965,906. For this purpose, a needle roller is used, which is positioned diametrically opposite a brush roller. Using this perforation device, a film or a nonwoven is perforated. The nonwoven or film is to absorb liquid and conduct it through when it is used as a top sheet in a hygiene article. A perforation device which has a needle roller and a perforated roller is known from European Patent Application 1 046 479 A1 and from European Patent Application 1 048 419. Nonwoven materials and films may be passed through between the needle roller and the perforated roller and perforated. Using this device, three-dimensional perforation holes are also to be achieved in particular.

The object of the present invention is to allow continuous perforation of approximately circular holes.

This object is achieved with a method for manufacturing a perforated nonwoven, a perforated nonwoven having the features of Claim 5, a perforated nonwoven having the features of Claim 6, and a nonwoven perforation device having the features of Claim 7. Further advantageous embodiments and features are specified in the dependent claims.

The present invention provides a method of manufacturing a perforated nonwoven, a prebonded, particularly thermobonded

nonwoven having embossed points being guided to a nonwoven perforation device. Needles of the needle roller of the nonwoven perforation device engage in the nonwoven and perforate the nonwoven. The nonwoven is subsequently processed further. This may occur either directly after the nonwoven perforation device or at a later time. For example, the nonwoven is wound up using a rewinder after the perforation. The surface of the nonwoven may also be treated. For example, one or more substances may be applied. The present invention provides that the ratio between a needle number of the needle roller and an embossed point number of the thermobonded nonwoven provided with embossed points is set between 0.15 and 0.25 and a ratio of a hole size in the perforated nonwoven to an embossed point size of the thermobonded nonwoven is set between 0.15 and 0.25. A further improvement may be achieved if the ratio between perforation count and embossed point number is between 0.15 and 0.19. An additional improvement may also be observed if the ratio between hole size and embossed point size is between 0.15 and 0.19.

It has been shown that it is advantageous for achieving holes which are circular as possible in the perforated nonwoven if the corresponding perforation tool and the embossed points in the nonwoven are tailored to one another. Otherwise, the perforated holes may have notches or may be implemented as oval. In particular, it has been shown to be advantageous, for a predetermined embossed surface, to use a corresponding number of many small embossed figures, instead of manufacturing this embossed surface through a few large embossed figures and, in particular, embossing points. Experiments have shown that during a perforation step, smaller embossed figures may be displaced much more easily than large figures. In the following, the concept of embossed point is to be understood as all embossed figures which fall under the definition above. According to one embodiment, the embossed figures cover the entire surface without any intermediate space. According to

another embodiment, the embossed figures are at least partially provided with an intermediate space, in the form of a ring, for example. Further embossed figures may be round, rhomboidal, oval, rectangular, and/or approximately star-shaped. Different embossed figures may also be used together.

Parameters of experimental rollers, using which different tests were performed, may be read from the following table. The rollers used were engraved rollers. The embossed figures may, however, also be applied to a matrix through spark erosion or other production methods, for example. The matrix does not absolutely have to be a roller. Instead of a roller, a strip or something similar may also be used.

Roller	Figure shape in top view	Pressing area dimension [mm]	Pressing area [mm²]	Figures [number/ cm²]	Pressing area proportion [%]
Roller 1	Circular	0.541	0.208	69.86	14.49
Roller 2	Circular	0.756	0.449	32.65	14.66
Roller 3	Oval	0.834* 0.495	0.325	49.90	16.19

It has been shown to be advantageous if a pressing area of an embossed figure is in a range between 0.15 mm^2 and 0.4 mm^2, preferably in a range between 0.18 mm^2 and 0.35 mm^2. The number of embossed figures is to be between 43 per cm^2 and 80 per cm^2. A pressing area proportion on a roller is preferably between 10 % and 18 %, for example.

It is advantageous if a nonwoven is used which has an embossed point count between 55 points/cm^2 and 80 points/cm^2. An appropriately thermally treated nonwoven may be provided from an unwinder. Another embodiment provides that the nonwoven is guided directly from a nonwoven production device to a

thermobonding device. Subsequently, the thermally bonded nonwoven having the desired embossed point count and embossed point size is guided to the nonwoven perforation device. Between 10 perforation/cm^2 and 20 perforation/cm^2 are preferably produced in the nonwoven. Particularly in the field of hygiene applications, this number of perforations has been shown to be advantageous for absorbing the liquids which encounter the nonwoven. For hygiene applications, the perforated nonwoven is used as a top sheet, for example. Further fields of application are the household field, for example, top sheets in dishcloths, the medical sector, for cover sheets, for example, for protective clothing, and other fields. Furthermore, the nonwoven may be used in filtration applications, in construction, and/or in laminates with other materials. These may be fabrics, films made of metal or thermoplastic material, and even rigid surfaces, paper, paperboard, or even nets.

Dimensions of a needle roller, using which exemplary experiments were performed, are listed in the following table.

Roller	Needle shape in top view	Needle diameter [mm]	Needle area [mm^2]	Needles [number/cm^2]	Needle area proportion [%]
Needle roller	Circular	1.95	2.987	15.36	45.86

An insertion depth of the needles was preferably between 2 mm and 4.5 mm, particularly between 2.5 mm and 3 mm, for example. The insertion depth of the needles is particularly a function of the nonwoven thickness. Preferably, particularly for the hygiene field, nonwoven weights between 14 gsm and 50 gsm are used. In other fields, nonwoven weights of more than 50 gsm may be used, particularly in construction, for textiles, and for geotextiles.

A preferred hole size in the nonwoven is between 0.8 mm^2 and 1.8 mm^2. Furthermore, a perforated nonwoven which has embossed points caused by thermobonding has a ratio of a perforation count to an embossed point count between 0.15 and 0.25 and a ratio of a hole size to an embossed point size between 0.15 and 0.25. A further improvement may be achieved if the ratio between perforation count and embossed point count is between 0.15 and 0.19. An additional improvement may also be observed if the ratio between hole size and embossed point size is between 0.15 and 0.19.

The following table reproduces exemplary data of a perforated nonwoven. This is data which was obtained from a single-layer spunbonded nonwoven having an area weight of 30 gsm.

Hole dimensions	Area [mm^2]	1.16
	Diameter MD [mm]	1.33
	Diameter CD [mm]	1.11
	Axis ratio MD/CD	1.2
Open area	[%]	18.7
Thickness	[mm]	0.709
Tensile strength	MD [n/50mm]	26.63
	CD [N/50mm]	23.52
Extension	At rupture MD [%]	21.93
	At rupture CD [%]	30.14

MD: machine direction CD: cross direction

Different strength properties may be influenced through different variables. These variables may be the number of perforations, the number of bonding embossings in the nonwoven, their size, and also other parameters.

The corresponding parameters are preferably to be set in such a way that the nonwoven has a strength in MD which is greater than a strength in CD. In particular, the nonwoven has a

minimum strength of 6 N/50 mm in CD and 8 N/50 mm in MD. Preferably, particularly in hygiene applications if the nonwoven is used as a top sheet, for example, the nonwoven has a strength which is at least 20 N/50 mm in both directions.

The nonwoven used may be single layer or multilayer. It may have one or more polymers. Usable polymers are particularly polypropylene, polyethylene, polyamide, polyester, etc. The nonwoven may be a spunbonded nonwoven, a meltblown, a staple fiber nonwoven, or something different. The fibers of the nonwoven may be multicomponent fibers.

According to a further idea of the present invention, a perforated nonwoven is provided which has embossed points produced by thermobonding. The perforations have crater-like perforation edges in the nonwoven, which arise from the nonwoven. A longest axis of an embossed point in the nonwoven is smaller than a height of a perforation edge of a perforation in the nonwoven. In particular, the perforation edge to be considered is positioned neighboring the embossed point whose longest axis is considered in the ratio to the height of the perforation edge. It has been shown that with this type of selection of a ratio between three-dimensionality and the perforation and thermal bonding of the nonwoven, an especially large uniformity of round perforations may be observed, which may be produced continuously.

A further idea of the present invention provides that a nonwoven perforation device is provided for performing a method described above and/or for manufacturing a nonwoven described above. The nonwoven perforation device has at least one needle roller and a counter roller. The needle roller and the counter roller form a gap. A nonwoven is guided through the gap for perforation. The needle roller has a needle count between 10 needles/cm^2 and 25 needles/cm^2. At least some of the needles have a circular diameter. An effective needle diameter is

between 1.5 mm and 2.5 mm. A needle area component of the surface of the needle roller is between 35 % and 65 %. The effective needle diameter is the diameter which generates the perforations in connection with the nonwoven and is responsible for their size.

Advantageous features and embodiments arise from the following drawing. The features illustrated therein do not restrict the present invention as such, however, but rather may be combined with the features already described into further refinements of the present invention, not described here in greater detail.

Figure 1 shows a first perforated nonwoven,

Figure 2 shows a close-up of a perforation, and

Figure 3 shows a nonwoven perforation device in a schematic view.

Figure 1 shows an example of a perforated nonwoven 1. The nonwoven is single-layer and has an area weight of 30 gsm. The nonwoven is a spunbonded nonwoven, which has been produced according to the Dokan method. A standard polypropylene was used as the thermoplastic material. The nonwoven is illustrated here in a top view, black cardboard being used as an underlay. Furthermore, this view is in a scale which shows dimensions in mm. The zoom factor used here is 1.5. Beside the perforations 2, which may be seen as black holes, there are embossed points 3. The embossed points 3 are much smaller than the perforations 2. The perforations 2 are preferably larger than the embossed points 3 by at least a factor of 4.

Figure 2 shows an enlargement of Figure 1. The perforated nonwoven 1 is illustrated with a perforation 2 and the surrounding embossed points 3. It may be seen that fibers of the nonwoven 1 are displaced by the perforation procedure and

form a perforation edge 4. The fiber structures are preferably maintained in this case. The fibers have not been melted. A further embodiment provides that the fibers are heated to the softening temperature, so that neighboring fibers adhere to one another on their surface. Embossed points 3 are also partially included in this perforation edge 4. Although these embossed points cause a certain rigidity and strength in the nonwoven, the embossed point size is tailored in such a way that perforation still leads to approximately circular holes. If the embossed point size is too large in relation to the size of the perforation 2, there is the danger that the holes will have notches. Instead of circular perforations 2, oval holes or holes having another shape could also arise. It has been shown to be especially advantageous if a longest axis of an embossed point is smaller than a height of a perforation edge 4, which arises through deformation of the nonwoven during the perforation. The relatively strong embossed point is otherwise deformed through the deformation of the nonwoven in such a way that indentations arise at the edge of the perforation hole.

Figure 3 shows a nonwoven perforation device 5 having a needle roller 6 and a counter roller 7. Needles 8 are positioned on the needle roller 6. The needles 8 engage in the surface 9 of the counter roller 7. The surface 9 is preferably yielding to the needles 8. In particular, the surface 9 may have a felt material. Furthermore, the nonwoven perforation device 5 has an unwinder 10. A prebonded nonwoven 14, which is provided with embossed points, is guided from the unwinder 10 to the counter roller 7 via rolls 12. The rolls 12 preferably have a tension measuring roller 13. The tension measuring roller allows a tensile force, which acts on the nonwoven 14 to be perforated, to be checked. The tensile force may, for example, be set via the rolls 12 and via the tension measuring roller 13, particularly also in interaction with the counter roller 7 and the unwinder 10. From the tension measuring roller 13, the nonwoven 14 to be perforated is guided to the counter roller 7

and loops around it for a specific range. This range is preferably greater than 45 degrees. In this range, the nonwoven may be heated, for example. In particular, there is the possibility of heating the nonwoven to a temperature which lies below the melting temperature of the polymer used or the polymers from which the nonwoven was produced. Furthermore, the nonwoven may also be heated up to a limit of the softening temperature of the thermoplastic material. From the counter roller 7, the nonwoven 14 to be perforated is guided into a gap 15. The gap 15 is formed by the needle roller 6 and the counter roller 7. In the gap 15, the nonwoven 14 to be perforated is perforated by the needles 8. In this case, the needles 8 are engaged with the surface 9 of the counter roller 7. According to this embodiment of the nonwoven perforation device 5, this perforated nonwoven is preferably guided from the counter roller 7 to the needle roller 6. The nonwoven preferably remains on the needle roller 6 for a certain looping range. The looping range is preferably greater than 45 degrees, in particular, it is in a range between 90 degrees and 270 degrees. Keeping the perforated nonwoven 1 on the needle roller 6 particularly leads to stabilization of perforation edges. Instead of looping of the needle roller 6, the perforated nonwoven may also be guided to a winder 16 after the gap 15. Rolls 12 are preferably again positioned between the needle roller 6 and the winder 16. One of the rolls 12 is preferably a tension measuring roller 13. The perforated nonwoven 1 coming from the needle roller 6 may be again be wound on the winder 16 at an adjustable defined tension in this way.

PATENT CLAIMS

1. A method for the manufacture of a perforated nonwoven material (1), whereby a prebonded nonwoven (14) with embossed points (3) is conducted to a nonwoven perforating device (5). Needles (6) of a needle roller (6) engage in the prebonded nonwoven (14) and perforate it, and the perforated material (1) then undergoes further processing,

characterised in that

a ratio between the number of needles and the number of embossing points is set of between 0.15 and 0.25 and a ratio between hole size and embossing point size of between 0.15 and 0.25.

2. The method according to Claim 1, characterised in that the nonwoven (14) is thermobonded with a number of embossing points of between 55 points/cm^2 and 80 points/cm^2.

3. The method according to Claim 1 or 2, characterised in that between 10 perforations/cm^2 and 25 perforations/cm^2 are created in the nonwoven (14).

4. The method according to Claim 1, 2 or 3, characterised in that a hole size of between 0.8 mm^2 and 1.8 mm^2 is created in the nonwoven (14).

5. A perforated nonwoven material (1), which exhibits embossing points (3) incurred by thermobonding, characterised in that the nonwoven (14) exhibits a ratio of the number of perforations to the number of embossed points of between 0.15 and 0.25 and a ratio of hole size to embossed point size of between 0.15 and 0.25.

6. The perforated nonwoven material (1) which exhibits embossed points (3) incurred by thermobonding, whereby perforations (2) in the nonwoven material (1) exhibits perforation edges (4) similar to craters, which rise up from the nonwoven material (1), characterised in that a longest axis of an embossed point (3) is smaller than a height of a perforation edge (4) of a perforation (2) in the nonwoven material (1).

7. A nonwoven perforation device (5) for the performance of a method according to Claim 1 and/or for the manufacture of a nonwoven according to Claim 5 and/or 6, with at least one needle roller (6) and a counter-roller (7), whereby the needle roller (6) and the counter-roller (7) form a gap (15), through which a nonwoven material (14) is conducted for the purpose of perforation,

characterised in that

the needle roller (6) exhibits a number of needles of between 10 needles/cm^2 and 25 needles/cm^2, whereby the needles (8) exhibit at least in part a circular diameter, have an effective needle diameter of between 1.5 mm and 2.5 mm, and have a needle surface proportion of between 35 % and 65 %.

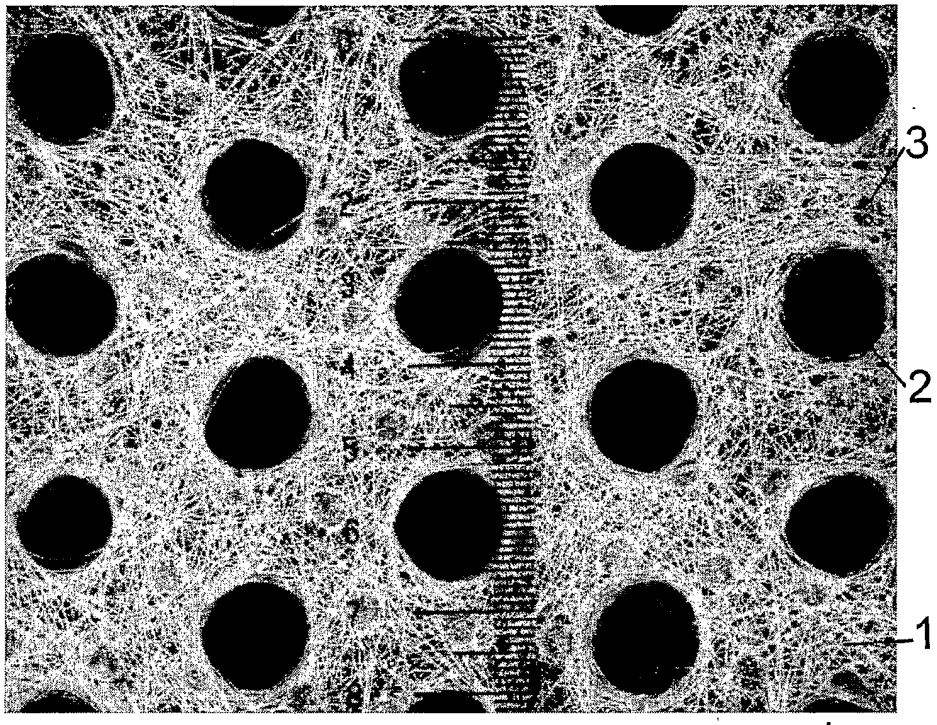


Fig. 1

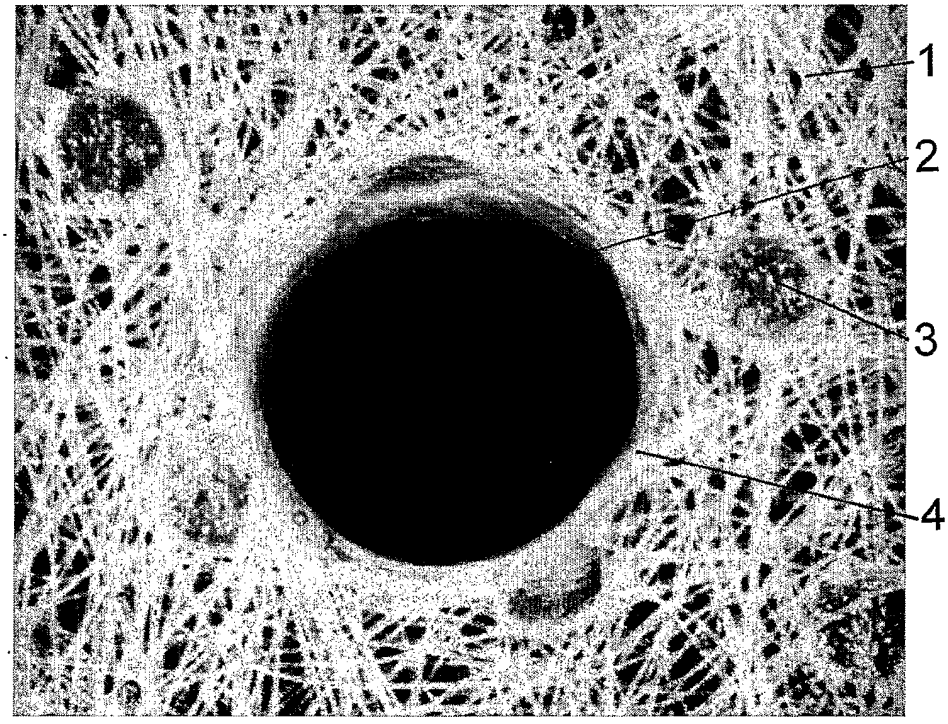


Fig. 2

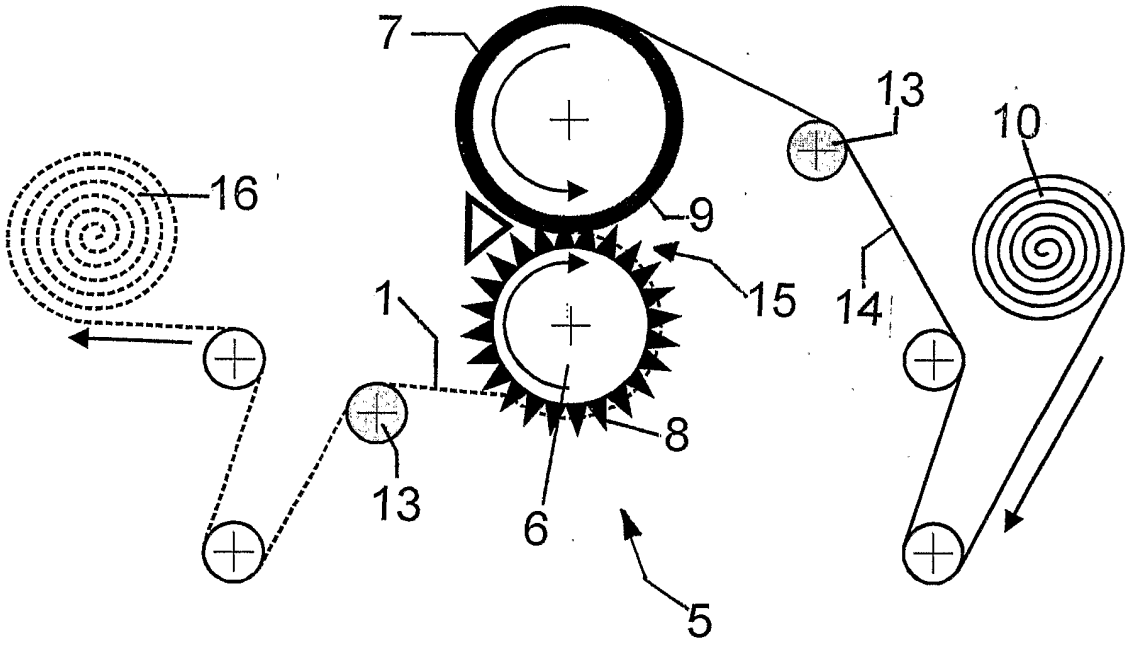


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/07216

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B26F1/24 D04H1/54 D04H3/14 D04H3/16 D04H1/56 D04H5/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B26F D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 67454 A (BAUER JOACHIM ;ETZOLD STEFAN (DE); COROVIN GMBH (DE)) 29 December 1999 (1999-12-29) page 4, line 7 -page 5, line 30 page 9, line 1 -page 9, line 14 page 10, line 5 -page 11, line 8 page 11, line 30 -page 12, line 23; figures 1,3,4	1-5,7
A	WO 00 34562 A (HCD GMBH ;WAGNER WERNER (ES)) 15 June 2000 (2000-06-15) the whole document	1-7
A	EP 1 046 479 A (BURCKHARDT CHRISTOPH AG) 25 October 2000 (2000-10-25) cited in the application the whole document	1-7

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
23 October 2003	06/11/2003

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Demay, S

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 048 419 A (BURCKHARDT CHRISTOPH AG) 2 November 2000 (2000-11-02) cited in the application the whole document	1-7
A	EP 0 214 608 A (KIMBERLY CLARK CO) 18 March 1987 (1987-03-18) page 16, line 27 -page 18, line 28; claims 1-22; figures 11-14	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/EP 03/07216

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9967454 A	29-12-1999	DE 19827567 A1	23-12-1999
		AU 5406599 A	10-01-2000
		WO 9967454 A2	29-12-1999
		DE 59903412 D1	19-12-2002
		EP 1092054 A2	18-04-2001
WO 0034562 A	15-06-2000	DE 19856223 A1	08-06-2000
		AU 3035400 A	26-06-2000
		CN 1109146 B	21-05-2003
		WO 0034562 A1	15-06-2000
		EP 1155178 A1	21-11-2001
		JP 2002531726 T	24-09-2002
EP 1046479 A	25-10-2000	EP 1046479 A1	25-10-2000
		EP 1048419 A1	02-11-2000
		US 2003085213 A1	08-05-2003
EP 1048419 A	02-11-2000	EP 1046479 A1	25-10-2000
		EP 1048419 A1	02-11-2000
		US 2003085213 A1	08-05-2003
EP 0214608 A	18-03-1987	AU 6242086 A	12-03-1987
		BR 8604312 A	05-05-1987
		CN 86107550 A	29-07-1987
		EP 0214608 A2	18-03-1987
		GB 2180271 A ,B	25-03-1987
		GB 2208666 A ,B	12-04-1989
		JP 7033628 B	12-04-1995
		JP 62125061 A	06-06-1987
		MX 162528 A	20-05-1991
		US 4886632 A	12-12-1989
		US 5188625 A	23-02-1993
		ZA 8606658 A	29-04-1987