



US 20160185074A1

(19) **United States**(12) **Patent Application Publication**
KAGAWA(10) **Pub. No.: US 2016/0185074 A1**(43) **Pub. Date: Jun. 30, 2016**(54) **HEAT-DISSIPATING FILM, AND ITS
PRODUCTION METHOD AND APPARATUS****B32B 37/06** (2006.01)**B32B 27/32** (2006.01)(71) Applicant: **Seiji KAGAWA**, Koshigaya-shi (JP)(52) **U.S. Cl.**CPC . **B32B 5/16** (2013.01); **B32B 27/32** (2013.01);**B32B 37/10** (2013.01); **B32B 37/06** (2013.01);**B32B 2250/40** (2013.01); **B32B 2264/108**(2013.01); **B32B 2307/302** (2013.01); **B32B****2307/72** (2013.01); **B32B 2457/00** (2013.01)(72) Inventor: **Seiji KAGAWA**, Koshigaya-shi (JP)(21) Appl. No.: **14/911,486**(22) PCT Filed: **Aug. 11, 2014**

(57)

ABSTRACT(86) PCT No.: **PCT/JP2014/071241**

§ 371 (c)(1),

(2) Date: **Feb. 11, 2016**(30) **Foreign Application Priority Data**

Aug. 12, 2013 (JP) 2013-167925

Publication Classification(51) **Int. Cl.****B32B 5/16** (2006.01)**B32B 37/10** (2006.01)

A heat-dissipating film comprising a heat-conductive layer obtained by burning a mixture layer of flaky carbon and a binder resin to carbonize or burn off the binder resin, and plastic films covering the heat-conductive layer, the heat-conductive layer having a density of 1.9 g/cm³ or more and thermal conductivity of 450 W/mk or more, is produced by (1) sandwiching a mixture layer of flaky carbon and a binder resin with a pair of first plastic films to form a laminated film; (2) heat-pressing the laminated film to densify the mixture layer; (3) burning the mixture layer to carbonize the binder resin in the mixture layer; (4) pressing the resultant burnt layer to form the heat-conductive layer; and (5) sealing the heat-conductive layer with second plastic films.

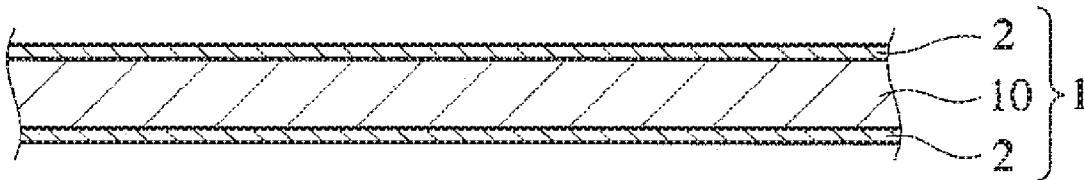


Fig. 1

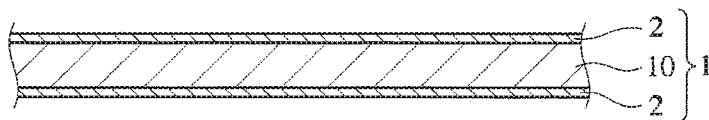


Fig. 2

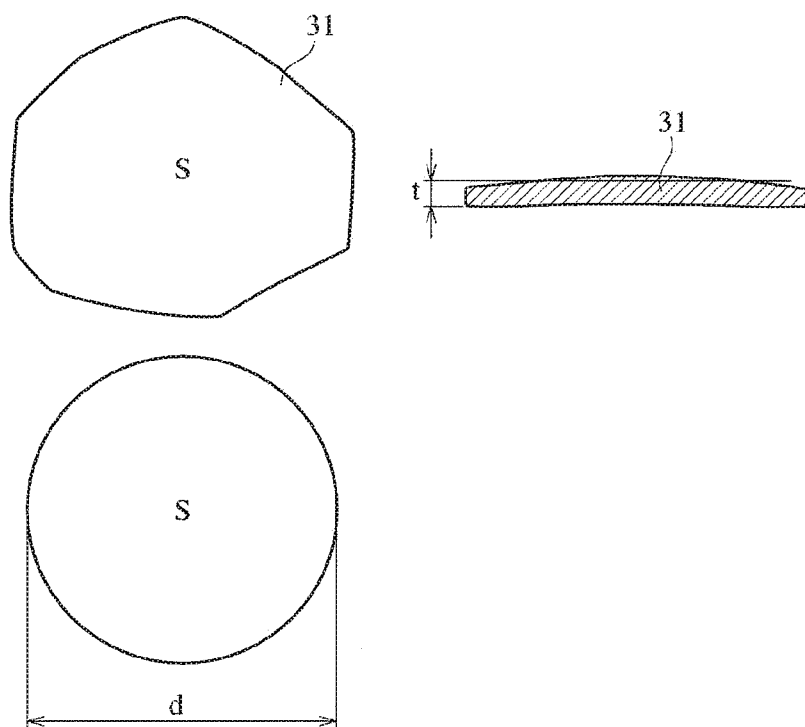


Fig. 3

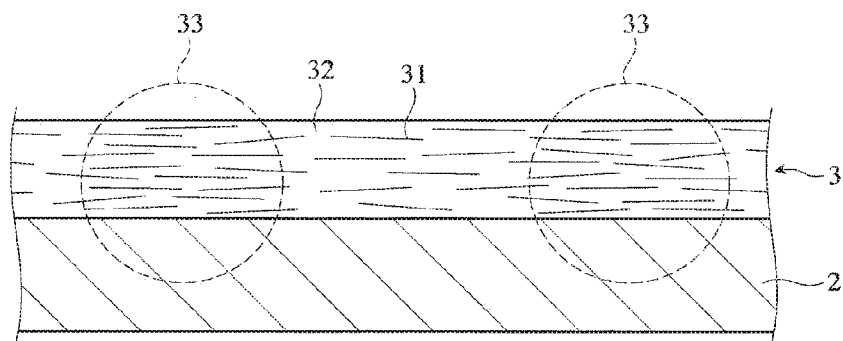


Fig. 4

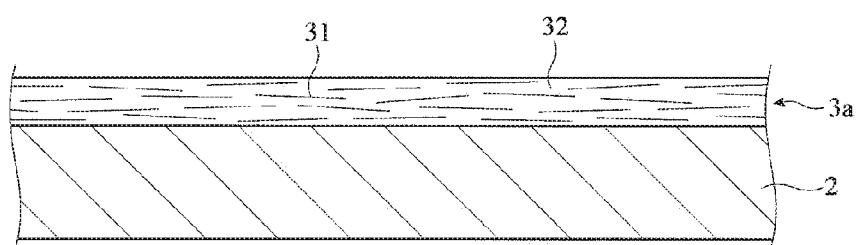


Fig. 5

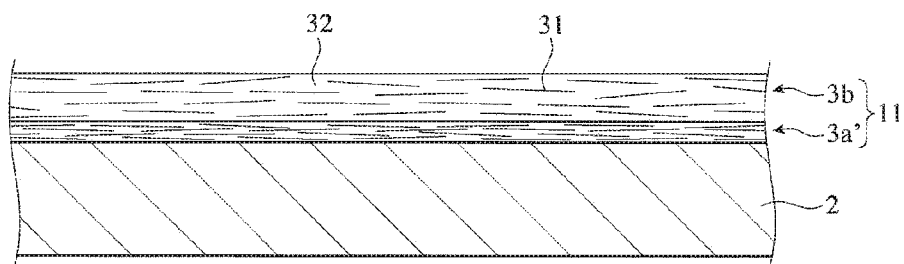


Fig. 6

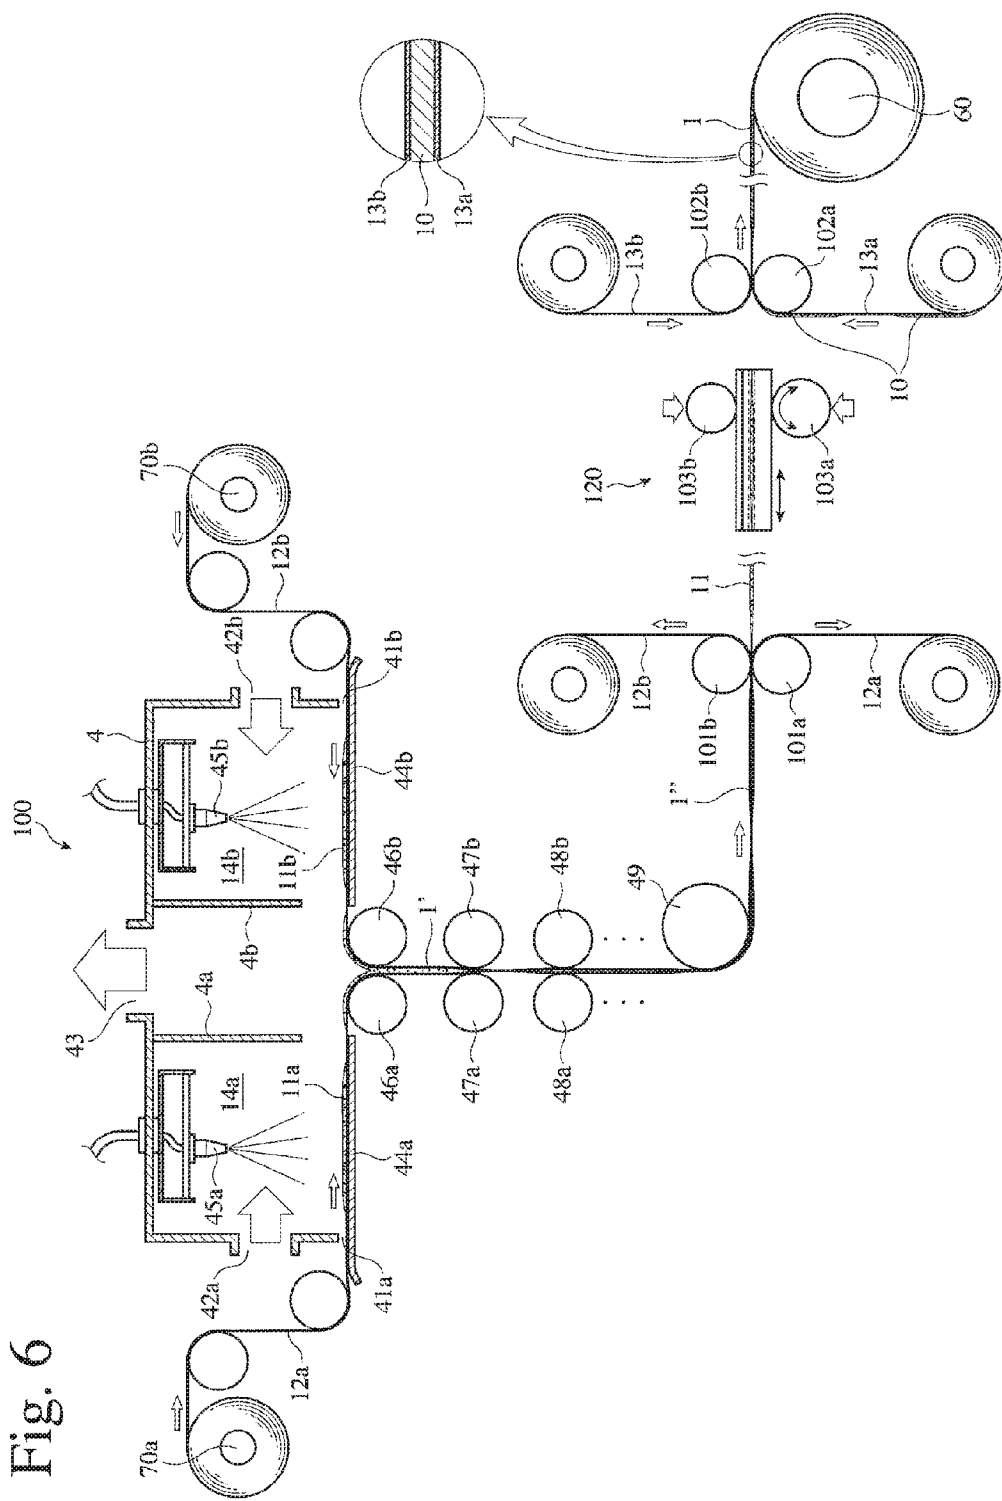


Fig. 7

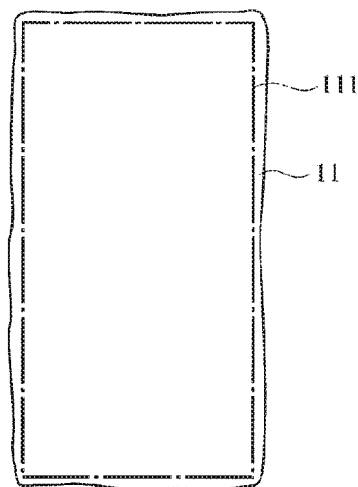


Fig. 8(a)

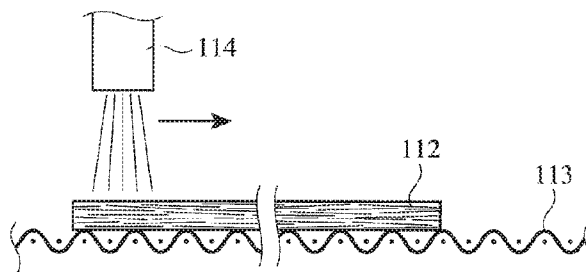


Fig. 8(b)

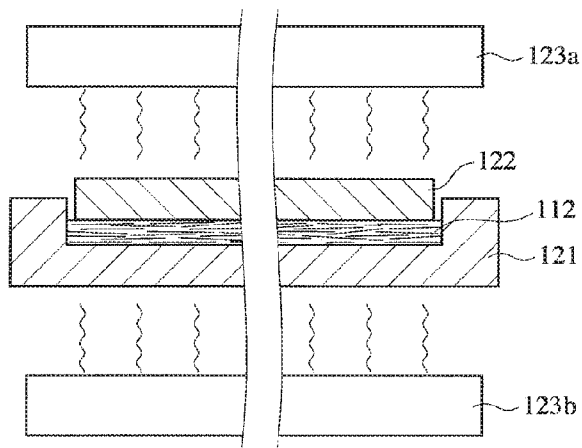


Fig. 9(a)

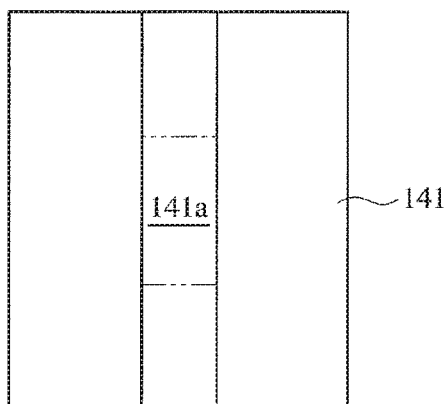


Fig. 9(b)

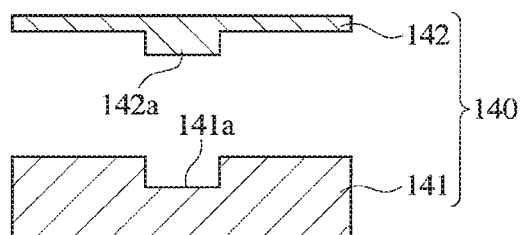


Fig. 10

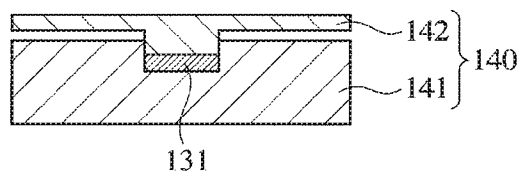


Fig. 11(a)

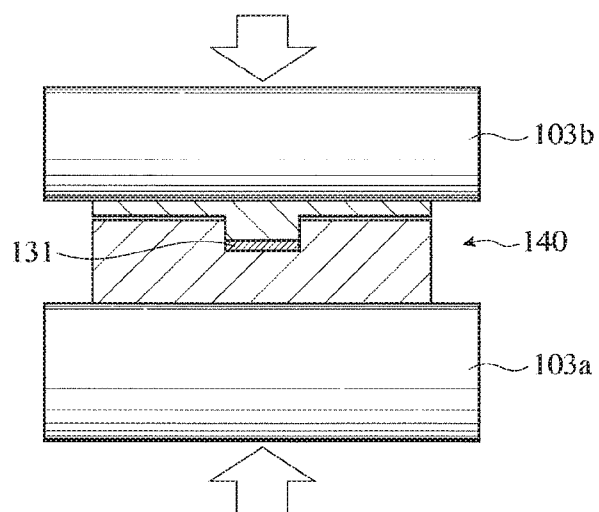


Fig. 11(b)

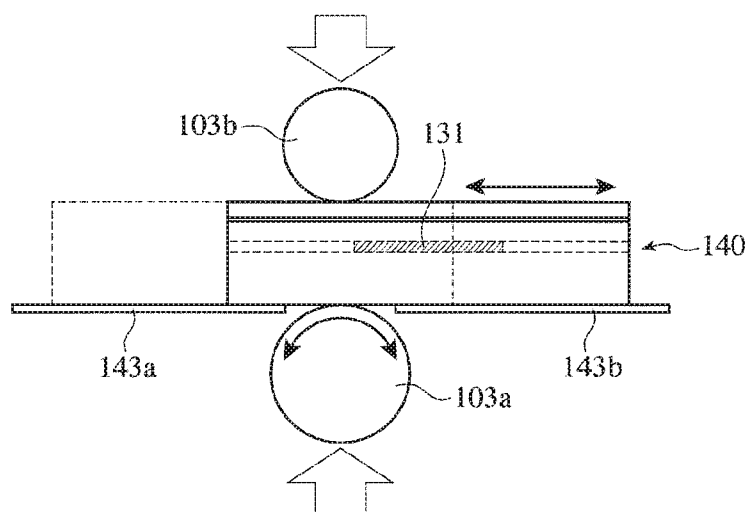


Fig. 12(a)

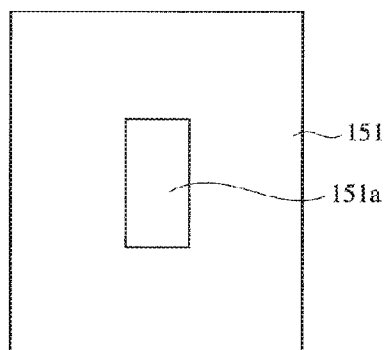


Fig. 12(b)

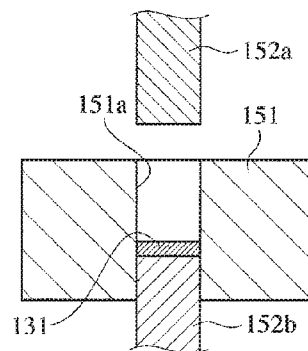


Fig. 13

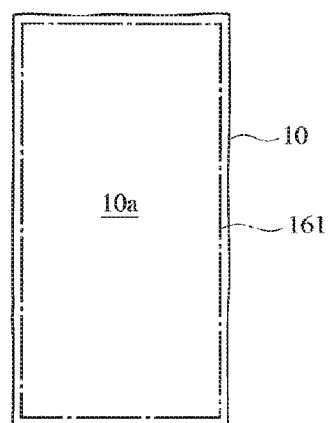


Fig. 14

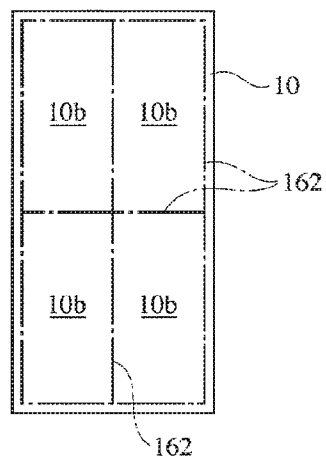


Fig. 15

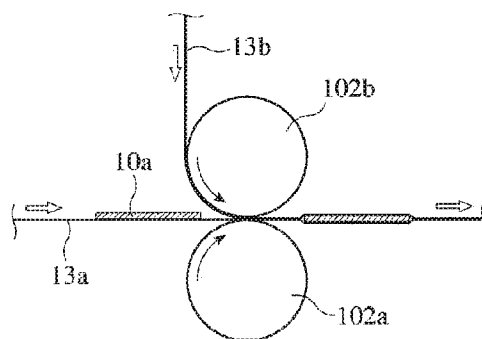


Fig. 16(a)

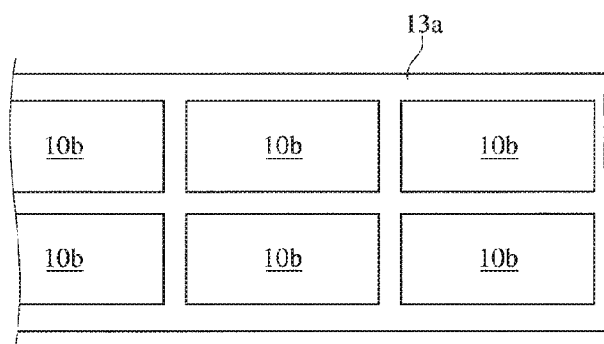


Fig. 16(b)

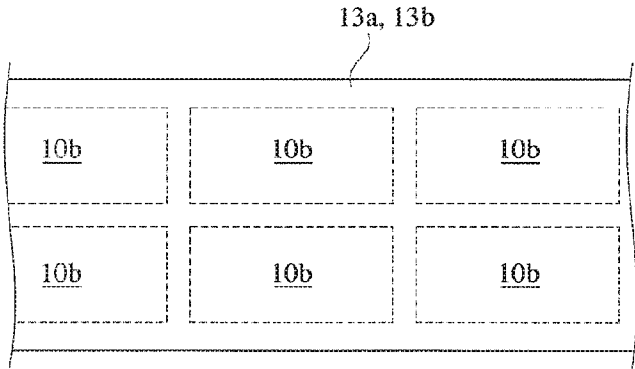


Fig. 17

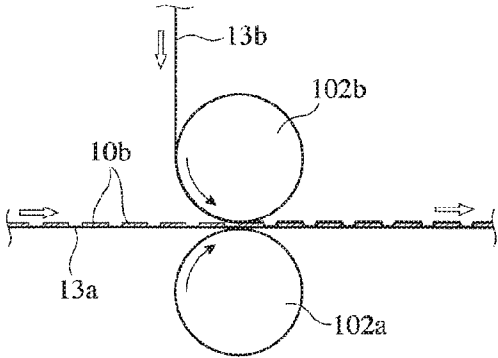


Fig. 18


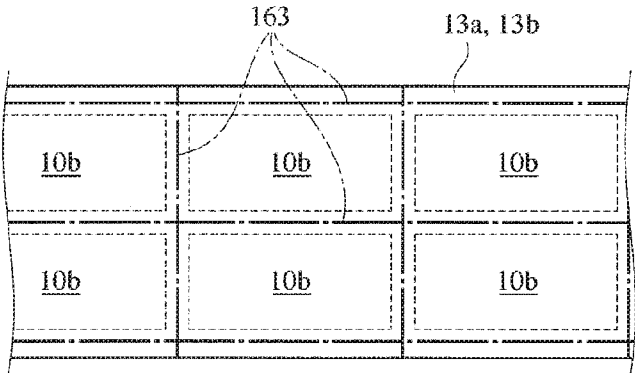


Fig. 19

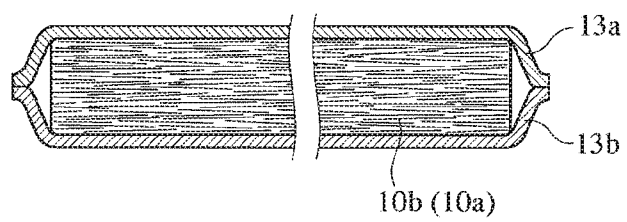

HEAT-DISSIPATING FILM, AND ITS PRODUCTION METHOD AND APPARATUS

FIELD OF THE INVENTION

[0001] The present invention relates to a heat-dissipating film for efficiently dissipating heat generated from electronic devices, etc. in small electronic appliances such as note-type personal computers, smartphones, mobile phones, etc., and its production method and apparatus.

BACKGROUND OF THE INVENTION

[0002] In small electronic appliances such as note-type personal computers, smartphones, mobile phones, etc., which have been provided with increasingly higher performance and more functions, electronic devices such as microprocessors, imaging chips, memories, etc. should be mounted densely. Accordingly, to prevent malfunction due to heat, the dissipation of heat generated from such electronic devices has become increasingly important.

[0003] As a heat-dissipating sheet composed of flaky carbon such as graphite for electronic devices, a graphite sheet obtained by heat-treating polyimide at 3000° C. in an oxygen-free atmosphere to remove hydrogen, oxygen and nitrogen, and annealing the remaining carbon for crystallization, is used. The graphite sheet has as high thermal conductivity as 800 W/mk in an in-plane direction and 15 W/mk in a thickness direction. However, because expensive polyimide is heat-treated at a high temperature, the graphite sheet is extremely expensive.

[0004] As an inexpensive heat-dissipating sheet of flaky carbon, JP 2006-306068 A discloses a heat-conductive sheet comprising at least a graphite film and an adhesive resin composition, which is a reaction-curable vinyl polymer. This graphite film is (a) expanded graphite formed by an expanding method, or (b) obtained by heat-treating a polyimide film, etc., at a temperature of 2400° C. or higher. The expanded graphite film is obtained by immersing graphite in acid such as sulfuric acid, etc. to form a graphite interlayer compound, heat-treating the graphite interlayer compound to foam it, thereby separating graphite layers, washing the resultant graphite powder to remove acid, and rolling the resultant thin-film graphite powder. However, the expanded graphite film has insufficient strength. Also, the graphite film obtained by the heat treatment of a polyimide film, etc. is disadvantageously expensive despite high heat dissipation.

[0005] JP 2012-211259 A discloses a heat-conductive sheet comprising graphite pieces, which comprise pluralities of first graphite pieces obtained by thinly cutting a thermally decomposed graphite sheet, and second graphite pieces smaller than the widths of the first graphite pieces, at least the first graphite pieces connecting both surfaces of the heat-conductive sheet. This heat-conductive sheet is obtained, for example, by blending the first and second graphite pieces with a mixture of an acrylic polymer and a solvent, and extruding the resultant blend. However, the extruded heat-conductive sheet does not have sufficient heat dissipation, because of a high volume fraction of the resin.

[0006] JP 2006-86271 A discloses a heat-dissipating sheet as thick as 50-150 μm comprising graphite bonded by a binder resin having a glass transition temperature of -50° C. to +50° C., such as an amorphous saturated copolyester, a mass ratio of graphite/binder resin being 66.7/33.3 to 95/5. This heat-dissipating sheet is produced by applying a slurry of graphite

and a binder resin in an organic solvent to a parting-agent-coated film on the side of a parting layer, drying the slurry by hot air to remove the organic solvent, and then pressing it, for example, at 30 kg/cm². JP 2006-86271 A describes that the pressing of a graphite/binder resin sheet improves its thermal conductivity. Though a slurry of graphite, a binder resin and an organic solvent is coated by one step in JP 2006-86271 A, it has been found that one-step coating provides a non-uniform graphite distribution. In addition, because a mass ratio of graphite to a binder resin is not so high in Examples (80/20 in Example 1, and 89/11 in Example 2), inherently high thermal conductivity of graphite cannot be fully used.

[0007] JP 11-1621 A discloses a high-thermal-conductivity, solid composite material for a heat dissipater comprising highly oriented graphite flakes and a binder polymer polymerized under pressure. This solid composite material is produced by mixing graphite flakes with a thermosetting monomer such as an epoxy resin to prepare a composition comprising at least 40% by volume of graphite, and polymerizing the monomer while compressing the composition under sufficient pressure to align graphite substantially in parallel. JP 11-1621 A describes that the volume fraction of graphite in the composite material can be 40-95%, and is preferably 55-85%. However, graphite flakes are unevenly distributed in an epoxy resin containing graphite flakes at as high a concentration as 95%. Accordingly, JP 11-1621 A describes only experimental results when the volume fraction of graphite flakes is 60%.

[0008] As described above, conventional heat-dissipating sheets containing graphite blended with binder resins cannot sufficiently use high thermal conductivity of graphite because of low thermal conductivity of binder resins. In addition, when the distribution of graphite is non-uniform, the heat-dissipating film exhibits further reduced heat dissipation, and provides non-uniform graphite distribution in a heat-dissipating film cut to a predetermined shape and size for being disposed in a small electronic appliance, resulting in unevenness performance.

OBJECT OF THE INVENTION

[0009] Accordingly, the first object of the present invention is to provide an inexpensive heat-dissipating film capable of exhibiting excellent heat dissipation when disposed in small electronic appliances, because flaky carbon is densely and uniformly distributed.

[0010] The second object of the present invention is to provide a method and an apparatus for producing such a heat-dissipating film at low cost.

DISCLOSURE OF THE INVENTION

[0011] As a result of intensive research in view of the above objects, the inventor has found that when a composite film comprising flaky carbon having excellent thermal conductivity and a small amount of a binder resin is burned and pressed, the binder resin is carbonized or burned off, resulting in a heat-dissipating film having a heat-conductive layer composed of densely bonded flaky carbon. The present invention has been completed based on such finding.

[0012] Thus, the heat-dissipating film of the present invention comprises a heat-conductive layer obtained by burning a mixture layer of flaky carbon and a binder resin to carbonize or burn off the binder resin, and plastic films covering the heat-conductive layer; the flaky carbon being aligned sub-

stantially in parallel in the heat-conductive layer; and the heat-conductive layer having a density of 1.9 g/cm^3 or more and thermal conductivity of 450 W/mK or more.

[0013] The flaky carbon is preferably graphite or graphene.

[0014] The heat-conductive layer preferably has a density of 2 g/cm^3 or more. Also, the heat-conductive layer preferably has thermal conductivity of 600 W/mK or more.

[0015] The heat-conductive layer preferably has a thickness (expressed by the weight of flaky carbon per 1 m^2) of $50\text{-}250 \text{ g/m}^2$.

[0016] The heat-dissipating film preferably has surface resistivity of $20 \text{ }\Omega/\text{square}$ or less. The heat-dissipating film preferably has an electromagnetic wave-shielding ratio (reflection ratio) of 90% or more.

[0017] The method of the present invention for producing the above heat-dissipating film comprises the steps of (1) sandwiching a mixture layer of flaky carbon and a binder resin with a pair of first plastic films to form a laminated film; (2) heat-pressing the laminated film to densify the mixture layer; (3) burning the mixture layer exposed by peeling the first plastic films to carbonize or burn off the binder resin in the mixture layer; (4) pressing the resultant burnt layer to form a densified heat-conductive layer; and (5) sealing the heat-conductive layer with second plastic films.

[0018] The mixture layer of the flaky carbon and the binder resin preferably comprises 5-25% by mass of flaky carbon and 0.05-2.5% by mass of a binder resin, and is formed preferably by repeating a step of applying an organic solvent dispersion, in which a mass ratio of the binder resin to the flaky carbon is 0.01-0.1, to a surface of each first plastic film and then drying the dispersion plural times.

[0019] The amount of the dispersion coated by one application is preferably $5\text{-}30 \text{ g/m}^2$ (expressed by the weight of flaky carbon per 1 m^2).

[0020] The binder resin is preferably an acrylic resin, a polystyrene resin or polyvinyl alcohol.

[0021] The organic solvent is preferably at least one selected from the group consisting of ketones, aromatic hydrocarbons and alcohols.

[0022] The application of the dispersion is preferably carried out by a spraying method.

[0023] The first plastic film preferably has a parting layer on a surface to be coated with the dispersion. The parting layer is preferably a deposited aluminum layer.

[0024] The drying step is carried out preferably at $30\text{-}100^\circ \text{C}$.

[0025] The heat pressing of the laminated film is carried out preferably by passing the laminated film between at least a pair of heating rolls. The heat-pressing temperature is preferably $150\text{-}250^\circ \text{C}$. The heat-pressing pressure is preferably 20 MPa or more.

[0026] The mixture layer is burned preferably by applying both surfaces thereof to flame, or exposing a die containing the mixture layer to a high temperature of 500°C . or higher, so that the binder resin in the mixture layer is carbonized. The mixture layer can be burned in air or an inert gas, or in vacuum.

[0027] The burnt layer is preferably pressed in a die constraining at least a pair of opposing sides of the burnt layer.

[0028] It is preferable that after the burnt layer is put in a cavity of the lower die part, the upper die part is combined with the lower die part such that the projection enters the cavity, and the combined upper and lower die parts are caused

to pass through a gap between a pair of pressing rolls plural times, thereby densifying the burnt layer.

[0029] The burnt layer in the die is preferably pressed under vibration.

[0030] The second plastic film is preferably thinner than the first plastic film. The heat-conductive layer is preferably heat-sealed by the second plastic films. The second heat-sealing plastic film preferably has a sealant layer on a side attached to the heat-conductive layer.

[0031] The heat-conductive layer is preferably cut to a desired shape, and then sealed with the second plastic films.

[0032] The apparatus of the present invention for producing the above heat-dissipating film comprises (a) means for conveying a pair of first plastic films; (b) at least one dispersion-applying means disposed for each first plastic film for applying a dispersion comprising flaky carbon and a binder resin to the first plastic film plural times; (c) a means for drying the dispersion after each application; (d) a means for laminating a pair of the first plastic films each having the resultant mixture layer of the flaky carbon and the binder resin, with the mixture layer inside; (e) a means for heat-pressing the resultant laminated film; (f) a means for peeling the first plastic films from the laminated film; (g) a means for burning the mixture layer to carbonize or burn off the binder resin in the exposed mixture layer; (h) a pressing die means for densifying the resultant burnt layer to form a heat-conductive layer; and (i) a means for sealing the heat-conductive layer with the second plastic films.

[0033] The apparatus of the present invention preferably comprises pluralities of dispersion-applying means arranged with predetermined intervals along the moving direction of each first plastic film.

[0034] It is preferable that a pair of dispersion-applying means and the laminating rolls are disposed in the chamber, and that the chamber comprises first openings through which the first plastic films enter, a pair of hot air inlets disposed near the first openings, a gas outlet, and a second opening through which the laminated film exits. In the case of comprising plural pairs of dispersion-applying means, all dispersion-applying means are preferably disposed in the chamber.

[0035] Each first plastic film is preferably conveyed horizontally on both sides of the laminating rolls by the means (a).

[0036] The dispersion-applying means is preferably a spraying nozzle.

[0037] Both of the laminating means and the heat pressing means are preferably heat rolls.

[0038] The means for burning the mixture layer is preferably a burner ejecting a flame to both surfaces of the mixture layer, or a die containing the mixture layer and exposed to a high temperature of 500°C . or higher.

[0039] The pressing die means for densifying the burnt layer preferably comprises (a) a die comprising a lower die part having a cavity, and an upper die part having a projection engageable with the cavity; (b) a pair of rolls for pressing the die from above and below; (c) guide plates extending upstream and downstream of a roll gap; and (d) a means for reciprocating the die along the guide plates, such that it passes through a gap between a pair of the pressing rolls.

[0040] The pressing die means preferably further comprises a means for giving vibration to one of the pressing rolls, thereby densifying the burnt layer by pressing under vibration

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] FIG. 1 is a cross-sectional view showing the heat-dissipating film of the present invention.

[0042] FIG. 2 is a schematic view showing a method for determining the particle size of flaky carbon.

[0043] FIG. 3 is a cross-sectional view showing a state where flaky carbon is agglomerated as a result of thickly applying a flaky carbon/binder resin dispersion on a plastic film.

[0044] FIG. 4 is a cross-sectional view schematically showing a state where flaky carbon is uniformly dispersed as a result of thinly applying a dispersion on a plastic film.

[0045] FIG. 5 is a cross-sectional view showing a state where a flaky carbon dispersion is thinly applied after the dispersion applied to the plastic film is dried.

[0046] FIG. 6 is a cross-sectional view showing the apparatus of the present invention for producing a heat-dissipating film.

[0047] FIG. 7 is a plan view showing a cutting line along which a margin of a mixture layer is cut off

[0048] FIG. 8(a) is a schematic cross-sectional view showing an example of burning methods of a mixture layer.

[0049] FIG. 8(b) is a schematic cross-sectional view showing another example of burning methods of a mixture layer.

[0050] FIG. 9(a) is a plan view showing a lower die part in a burnt layer-pressing apparatus.

[0051] FIG. 9(b) is an exploded cross-sectional view showing upper and lower die parts in a burnt layer-pressing apparatus.

[0052] FIG. 10 is a cross-sectional view showing the pressing of a burnt layer by a die comprising upper and lower die parts.

[0053] FIG. 11(a) is a partial cross-sectional view showing the pressing of the die of FIG. 10 by a pair of pressing rolls.

[0054] FIG. 11(b) is a partial cross-sectional view showing the repeated pressing of the die of FIG. 10 by a pair of pressing rolls.

[0055] FIG. 12(a) is a plan view showing a burnt layer-pressing die.

[0056] FIG. 12(b) is a cross-sectional view showing a burnt layer-pressing die.

[0057] FIG. 13 is a plan view showing a cutting line along which a margin of the pressed heat-conductive layer is cut off to provide the pressed heat-conductive layer with a predetermined size.

[0058] FIG. 14 is a plan view showing cutting lines along which the pressed heat-conductive layer is divided to those having a final shape.

[0059] FIG. 15 is a cross-sectional view showing a method of laminating a second plastic film of FIG. 13 having heat-conductive layers to another second plastic film.

[0060] FIG. 16(a) is a plan view showing heat-conductive layers of a final shape attached to a second plastic film.

[0061] FIG. 16(b) is a plan view showing a laminate comprising a second plastic film to which heat-conductive layers of a final shape are attached, and another second plastic film.

[0062] FIG. 17 is a cross-sectional view showing a method of laminating a second plastic film having heat-conductive layers of a final shape to another second plastic film.

[0063] FIG. 18 is a plan view showing cutting lines for dividing a laminate having heat-conductive layers of a final shape to individual heat-dissipating films.

[0064] FIG. 19 is a cross-sectional view showing a heat-dissipating film comprising a heat-conductive layer sealed by a pair of second plastic films.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0065] The embodiments of the present invention will be explained in detail below referring to the attached drawings without intention of restriction, and various modifications may be made within the scope of the present invention. Unless otherwise mentioned, explanations of one embodiment are applicable to other embodiments.

[0066] [1] Heat-Dissipating Film

[0067] As shown in FIG. 1, the heat-dissipating film 1 of the present invention comprises a heat-conductive layer 10, and a pair of plastic films 2, 2 adhered to both surfaces of the heat-conductive layer 10 for sealing.

[0068] (1) Heat-Conductive Layer

[0069] The heat-conductive layer 10 obtained by burning a mixture layer of flaky carbon and a binder resin is mainly composed of flaky carbon. The flaky carbon is preferably graphite or graphene. Unless otherwise mentioned, they are explained as flaky carbon below.

[0070] (a) Flaky Carbon

[0071] Flaky graphite and flaky graphene have a planar multi-layer structure constituted by two-dimensionally connected benzene rings. Because both of them have a hexagonal lattice structure, each carbon atom is bonded to three carbon atoms, one of four peripheral electrons used for chemical bonding being in a free state (free electron). Because free electrons can move along the crystal lattice, flaky graphite has high thermal conductivity.

[0072] Because both of them have a plate-like shape, their sizes are represented by the diameters of their planar surfaces. Because flaky graphite (graphene) 31 has a planar contour of an irregular shape as shown in FIG. 2, the size (diameter) of each flaky graphite (graphene) 31 is defined as a diameter d of a circle having the same area S . Because the size of each flaky graphite (graphene) 31 is expressed by a diameter d and a thickness t , the average diameter of flaky graphite (graphene) 31 used is expressed by $(Ed)/n$, wherein n represents the number of flaky graphite (graphene) 31 measured, and the average thickness of flaky graphite (graphene) 31 is expressed by $(Et)/n$. The diameter d and thickness t of flaky graphite (graphene) 31 can be determined by the image treatment of a photomicrograph of flaky graphite (graphene) 31.

[0073] The average diameter of flaky graphite may be in a range of 5-100 μm . When the average diameter of flaky graphite is less than 5 μm , bonded carbon atoms are not sufficiently long, providing the heat-conductive layer 10 with too small thermal conductivity. On the other hand, flaky graphite having an average diameter of more than 100 μm would make spray coating difficult. The average diameter of flaky graphite is preferably 5-50 μm , more preferably 10-30 μm . The average thickness of flaky graphite is 200 nm or more, preferably 200 nm to 10 μm , more preferably 200 nm to 5 μm .

[0074] The average diameter of flaky graphene may be in a range of 5-100 μm . When the average diameter of flaky graphene is less than 5 μm , bonded carbon atoms are not sufficiently long, providing the heat-conductive layer 10 with too small thermal conductivity. On the other hand, flaky graphene having an average diameter of more than 100 μm would make spray coating difficult. The average diameter of flaky graphene is preferably 5-50 μm , more preferably 10-30

μm. The average thickness of flaky graphene may be in a range of 5-50 nm. When the average thickness of flaky graphene is less than 5 nm, the heat-conductive layer **10** obtained by burning the flaky graphene/binder resin mixture has large resistance. On the other hand, when the average thickness of flaky graphene is more than 50 nm, flaky graphene is easily broken when it is uniformly dispersed in a solvent. The average thickness of flaky graphene is preferably 5-30 nm, more preferably 10-25 nm.

[0075] (b) Binder Resin

[0076] The binder resin is not particularly restricted, as long as it can be dissolved in an organic solvent and can uniformly disperse flaky carbon. It may be acrylic resins such as polymethylacrylate and polymethylmethacrylate, polystyrenes, polycarbonates, polyvinyl chloride, ABS resins, low-stereospecific polypropylene, atactic polypropylene, etc. Among them, polymethylmethacrylate, polystyrenes and low-stereospecific polypropylene are preferable.

[0077] (c) Comprising Ratio

[0078] A smaller mass ratio of the binder resin to flaky carbon can provide the heat-conductive layer **10** with higher density and thermal conductivity. However, too low a percentage of the binder resin provides insufficient strength of adhering flaky carbon in the mixture layer, so that the mixture layer is easily broken. To have high thermal conductivity and strength, the binder resin/flaky carbon mass ratio is preferably 0.01-0.1. The upper limit of the binder resin/flaky carbon mass ratio is more preferably 0.08, most preferably 0.06. Though the lower limit of the binder resin/flaky carbon mass ratio is preferably as low as possible as long as flaky carbon is securely bonded, it is 0.01 as a technical limit, and practically 0.03.

[0079] (d) Uniform Distribution of Flaky Carbon

[0080] If flaky carbon were not uniformly distributed in the mixture layer, (a) flaky carbon would be agglomerated, generating regions with insufficient fine flaky carbon, and thus failing to provide the heat-dissipating film with desired thermal conductivity; and (b) the resultant heat-dissipating film would have non-uniform thermal conductivity distribution, providing insufficient thermal conductivity when divided to pieces for individual electronic appliances or parts. To obtain a heat-conductive layer with uniform thermal conductivity distribution, a mixture layer of uniformly distributed flaky carbon should be formed in each application step.

[0081] When flaky carbon is agglomerated in the mixture layer, the mixture layer has regions in which flaky carbon is agglomerated, and regions free of or scarcely containing flaky carbon. Because the existence of regions free of or scarcely containing flaky carbon provides the heat-conductive layer with low thermal conductivity as a whole, flaky carbon should be dispersed as uniformly as possible.

[0082] (e) Surface Resistivity

[0083] The heat-dissipating film of the present invention can also function as an electromagnetic wave-shielding film. To exhibit a sufficient electromagnetic wave-shielding function, the surface resistivity of the heat-conductive layer **10** is preferably 20 Ω/square or less, more preferably 10 Ω/square or less. The surface resistivity is measured by a DC two-terminal method on a square specimen of 10 cm×10 cm cut out of the heat-conductive layer **10**.

[0084] (f) Thickness

[0085] The thermal conductivity of the heat-conductive layer **10** depends on the thickness of the heat-conductive layer **10**. Because what largely contributes to thermal conductivity

is flaky carbon in the heat-conductive layer **10** composed of flaky carbon and a binder resin at least partially carbonized by burning, the thickness of the heat-conductive layer **10** is preferably expressed by the amount of flaky carbon per a unit area. The thickness of the heat-conductive layer **10**, which is expressed by the amount of flaky carbon per a unit area, is preferably 50-250 g/m², more preferably 70-220 g/m², most preferably 80-200 g/m².

[0086] (2) Plastic Film

[0087] Resins forming the plastic film are not particularly restricted, as long as they have sufficient strength, flexibility and formability in addition to insulation. They may be, for example, polyesters (polyethylene terephthalate, etc.), polyarylene sulfide (polyphenylene sulfide, etc.), polyether sulfone, polyether ether ketone, polyamides, polyimides, polyolefins (polypropylene, etc.), etc. The thickness of the plastic film may be about 5-20 μm.

[0088] (3) Cutting of Heat-Dissipating Sheet

[0089] Because a relatively large heat-dissipating sheet can be formed in the present invention, it may be cut to a proper size, so that it is attached to small electronic appliances. In such a case, the heat-conductive layer **10** is preferably cut with a cutter having flat portions on both sides of each blade, while fusing a cut portion of the plastic film **2** by heating or ultrasonic waves, to avoid the cut cross section of the heat-conductive layer **10** from being exposed. Alternatively, as described below, the heat-conductive layer **10** may be first cut to a predetermined size, and laminated with plastic films **2**, which are then cut.

[0090] [2] Apparatus and Method for Producing Heat-Dissipating Film

[0091] FIG. 6 schematically shows an apparatus **100** for producing a heat-dissipating film. In the depicted example, the apparatus comprises a pair of dispersion-applying means laterally arranged. The production apparatus **100** comprises (a) a chamber **4** comprising a pair of dispersion-applying regions **14a**, **14b** each having an inlet **41a**, **41b** of each first plastic film **12a**, **12b** and a hot air inlet **42a**, **42b**, and a gas outlet **43** disposed at a position at which both dispersion-applying regions **14a**, **14b** are merged; (b) a pair of nozzles **45a**, **45b** mounted to a ceiling of the chamber **4** in the dispersion-applying regions **14a**, **14b** for spraying a flaky carbon/binder resin dispersion to form mixture layers **11a**, **11b** on the first plastic films **12a**, **12b**; (c) a pair of rolls **46a**, **46b** for laminating the first plastic films **12a**, **12b** having the mixture layers **11a**, **11b** with the mixture layers **11a**, **11b** inside; (d) at least a pair of heating rolls (two pairs of heating rolls **47a**, **47b**, **48a**, **48b** in the depicted example) for heat-pressing the resultant laminated film **1'**; (e) a guide roll **49** for conveying the laminated film **1'**; (f) a pair of rolls **101a**, **101b** for peeling the first plastic films **12a**, **12b** from the laminated film **1'**; (g) a means (not shown) for burning the exposed mixture layer **11**; (h) a means **120** for pressing the resultant burnt layer **110**; (i) a pair of rolls **102a**, **102b** for sealing the resultant heat-conductive layer **10** with a pair of second plastic films **13a**, **13b**; and (j) a reel **60** for winding up the resultant heat-dissipating film **1**. The first plastic films **12a**, **12b** wound off from reels **70a**, **70b** are sent to the openings **41a**, **41b** laterally arranged in the chamber **4** via pluralities of guide rolls. Though each dispersion-applying region **14a**, **14b** has one dispersion-spraying nozzle **45a**, **45b** in the depicted example, of course, each dispersion-applying region **14a**, **14b** may have pluralities of nozzles.

[0092] To withstand the laminating step and the heat-pressing step, the first plastic films **12a**, **12b** should have sufficient mechanical strength and heat resistance. Accordingly, the first plastic films **12a**, **12b** are preferably relatively thick films made of heat-resistant resins. As the heat-resistant resins, polyethylene terephthalate, polyimides, etc. are preferable. The first plastic films **12a**, **12b** are preferably as thick as 20-60 μm . The first plastic film **12** can be used again after peeling.

[0093] However, the use of thick plastic films having low thermal conductivity provides a heat-dissipating sheet **1** having a structure comprising a heat-conductive layer **10** covered with plastic films on both surfaces with low thermal conductivity. Accordingly, the plastic films covering both surfaces of the heat-conductive layer **10** should be as thin as possible. Thus, the second plastic films **13a**, **13b** are preferably as thick as 5-15 μm . Each second plastic film **13a**, **13b** preferably has a sealant layer, such that it is strongly fused to the heat-conductive layer **10** by a heat lamination method, etc. Though materials for the second plastic films **13a**, **13b** may be the same as those for the first plastic films **12a**, **12b**, it is practically preferable to use commercially available extremely thin polyethylene terephthalate films.

[0094] The chamber **4** is provided with a pair of opened vertical walls **4a**, **4b** on both lateral sides of the gas outlet **43**, and a region partitioned by each opened vertical wall **4a**, **4b** is a dispersion-applying region **14a**, **14b** having each nozzle **45a**, **45b**. There are horizontal plates **44a**, **44b** supporting the first plastic films **12a**, **12b** on both lateral sides of the laminating rolls **46a**, **46b**, and each first plastic film **12a**, **12b** is horizontally conveyed on each horizontal plate **44a**, **44b**.

[0095] (1) Preparation of Flaky Carbon Dispersion

[0096] A dispersion comprising flaky carbon, a binder resin and an organic solvent is preferably prepared by mixing a dispersion of flaky carbon in an organic solvent with a solution of a binder resin in an organic solvent. This is due to the fact that because flaky carbon is easily agglomerated, the simultaneous mixing of flaky carbon and a binder resin with an organic solvent likely results in the agglomeration of flaky carbon. In a flaky carbon dispersion obtained by mixing both solutions, the concentration of flaky carbon is preferably 5-25% by mass, more preferably 8-20% by mass, most preferably 10-20% by mass. A mass ratio of the binder resin to flaky carbon is 0.01-0.1. The mass ratio of the binder resin to flaky carbon is kept in the mixture layer without change.

[0097] Organic solvents used for the dispersion are preferably those well dispersing flaky carbon, dissolving the binder resin, and easily evaporating to shorten the drying time. Examples of such organic solvents include ketones such as methyl ethyl ketone, aliphatic hydrocarbons such as hexane, etc., aromatic hydrocarbons such as xylene, etc., and alcohols such as isopropyl alcohol, etc. Among them, methyl ethyl ketone, xylene, etc. are preferable. They may be used alone or in combination.

[0098] (2) Application and Drying of Dispersion

[0099] It has been found that when a dispersion having a desired concentration is applied to a plastic film by one operation, flaky carbon **31** in the dispersion **3** is agglomerated in a drying process as schematically shown in FIG. 3. In FIG. 3, **33** represents regions in which the flaky carbon **31** is agglomerated. Intensive research has revealed that when a dispersion is divided to as small amounts as possible and applied plural times, the agglomeration of flaky carbon **31** can be prevented. In the first application shown in FIG. 4, a dispersion layer **3a** is in a small amount, and its thickness is sufficiently small

relative to an average diameter of flaky carbon **31**, so that the dispersion of flaky carbon **31** is kept without agglomeration when the dispersion layer **3a** is dried. Accordingly, flaky carbon **31** bonded with a trace amount of a binder resin is substantially uniformly distributed in a mixture layer **3a'** obtained by drying the dispersion layer **3a**.

[0100] The amount of a dispersion applied by one operation is preferably 5-30 g/m^2 , more preferably 7-20 g/m^2 , as the weight of flaky carbon per a unit area. When the amount of a dispersion is less than 5 g/m^2 , it takes too much time to form the mixture layer. When the amount of a dispersion applied by one operation exceeds 30 g/m^2 , flaky carbon is likely agglomerated. To apply such a small amount of a dispersion uniformly, a spraying method is preferable.

[0101] After the dispersion layer **3a** is dried, the next application is carried out. Though the dispersion layer **3a** may be spontaneously dried, heating may be carried out to such an extent as to avoid the deformation of the plastic film, to reduce the application time. The heating temperature is determined depending on the boiling point of an organic solvent used. For example, when methyl ethyl ketone is used, the heating temperature is preferably 30-100° C., more preferably 50-80° C. Drying need not be carried out until an organic solvent in the applied dispersion layer **3a** is completely evaporated, but may be carried out to such a level that flaky carbon does not become free in the next application.

[0102] When the second application of a dispersion is carried out on the dried first mixture layer **3a'**, a new dispersion layer **3b** is formed substantially without dissolving the first mixture layer **3a'**, as schematically shown in FIG. 5. When the dispersion layer **3b** is dried, the second mixture layer **3b'** is formed integrally with the first mixture layer **3a'**. Thus, by repeating a cycle of applying and drying the dispersion plural times, a relatively thick, integral mixture layer comprising flaky carbon aligned in parallel is obtained. The number of cycles of applying and drying the dispersion is determined depending on the thickness of a mixture layer to be formed.

[0103] To carry out the above step of applying and drying the dispersion by the apparatus **100** shown in FIG. 6, the first plastic films **12a**, **12b** wound off from the reels **70a**, **70b** are first stopped in the chamber **4**. In this state, a portion of each first plastic film **12a**, **12b** in each dispersion-applying region **14a**, **14b** is uniformly sprayed with a dispersion ejected from each nozzle **45a**, **45b**. To achieve the uniform application of a dispersion, each nozzle **45a**, **45b** is freely movable. A dispersion layer formed on each of the first plastic films **12a**, **12b** is dried by hot air. By repeating this step of applying and drying a dispersion plural times, a mixture layer **11a**, **11b** having predetermined thickness is formed on each of the first plastic films **12a**, **12b**.

[0104] (3) Lamination and Heat Pressing of Mixture Layer

[0105] When the first plastic films **12a**, **12b**, on which the mixture layers **11a**, **11b** are formed, are laminated by a pair of rolls **46a**, **46b** with the mixture layers **11a**, **11b** inside, the mixture layers **11a**, **11b** are adhered to each other to form an integral mixture layer **11**.

[0106] The laminating rolls **46a**, **46b** are preferably heated to a high temperature, such that the mixture layers **11a**, **11b** are completely fused to each other by lamination. Though variable depending on the type of the binder resin, the temperature of the laminating rolls **46a**, **46b** is preferably 100-250° C., more preferably 150-200° C. The pressing pressure of the laminating rolls **46a**, **46b** may not be high, but may be, for example, 1-10 MPa.

[0107] To a new portion of each first plastic film **12a**, **12b** reaching the dispersion-applying region **14a**, **14b**, a step of applying and drying a dispersion is repeated plural times, to form each mixture layer **11a**, **11b** having predetermined thickness. Thus, after the step of applying and drying a dispersion is repeated plural times, each first plastic film **12a**, **12b** is intermittently conveyed to form a laminated film **1'** intermittently having mixture layers **11** between a pair of first plastic films **12a**, **12b**.

[0108] As shown in FIGS. 4 and 5, flaky carbon **31** is dispersed substantially in parallel in the dispersion layer **3a**, but it is not completely in parallel. Accordingly, only an organic solvent among the flaky carbon **31** is evaporated when the dispersion layer **3a** is dried, leaving voids among substantially parallel flaky carbon particles **31** bonded with a trace amount of the binder resin. Because the mixture layers **3a'** having voids among flaky carbon particles **31** are laminated, the mixture layers **11a**, **11b** to be laminated are porous. Accordingly, the mere lamination of the first plastic films **12a**, **12b** having the mixture layers **11a**, **11b** would not form a dense mixture layer **11**.

[0109] Accordingly, a laminated film **1'** obtained by passing the laminating roll pairs **46a**, **46b** should be heat-pressed by single-stage or multi-stage heat-pressing roll pairs **47a**, **47b**, **48a**, **48b** disposed downstream. Variable depending on the type of a binder resin, the heat-pressing conditions are preferably a temperature of 100-250° C. and pressure of 20 MPa (about 200 kgf/cm²) or more. When the heat-pressing temperature is lower than 100° C., the heat-conductive layer **10** is not sufficiently densified. Also, even if the heat-pressing temperature is elevated to higher than 250° C., the binder resin is not provided with higher fluidity, economically disadvantageous. The heat-pressing temperature is preferably 120-200° C., more preferably 150-180° C. When the heat-pressing pressure is less than 20 MPa, the mixture layer **11** is not sufficiently densified.

[0110] Though the heat-pressing rolls **47a**, **47b**, **48a**, **48b** may be arranged in a single- or multi-stage, their multi-stage arrangement is preferable to produce a laminated film **1'** comprising a sufficiently dense mixture layer **11**. The number of stages of the heat-pressing rolls **47a**, **47b**, **48a**, **48b** may be properly determined depending on a compression rate.

[0111] (4) Burning of Mixture Layer

[0112] Because the heat-pressed mixture layer **11** has slightly rugged or irregular edge portions due to the flowing of the binder resin, it is preferably cut to a predetermined shape and size, for example, along the broken line **111** as shown in FIG. 7. For example, as shown in FIG. 8(a), the cut mixture layer **112** is placed on a wire net **113**, and burned by flame at about 900-1200° C., which is ejected from a burner **114**. Burning may be carried out only on one surface of the mixture layer **112**, but it is preferable to burn both surfaces of the mixture layer **112**. The binder resin is carbonized or burned off in the mixture layer **112** exposed to flame ejected from the burner **114**. Amorphous carbon generated by carbonizing the binder resin may remain among the flaky carbon. Because of volume reduction by carbonizing or burning off the binder resin, voids generated thereby are removed by pressing to densify the flaky carbon, thereby providing a heat-conductive layer **10** having higher thermal conductivity.

[0113] FIG. 8(b) shows another method of burning the mixture layer **112**. This method uses a die comprising a lower die part **121** having a cavity and an upper die part **122** slightly larger than the cavity. After the mixture layer **112** is put in the

lower die part **121**, the upper die part **122** is placed on the mixture layer **112**, and sandwiched by a pair of heaters **123a**, **123b** to heat the mixture layer **112**. The temperature of the heaters **123a**, **123b** may be about 500-1000° C., and the heating time is determined to avoid the binder resin from being excessively burned off. The burning of the mixture layer may be carried out in air or an inert gas, or in vacuum.

[0114] The carbonization or burning-off of the binder resin by burning the mixture layer includes not only when the binder resin is 100% carbonized or burned off, but also when the binder resin is partially carbonized or burned off. Though the binder resin is carbonized or burned off preferably as much as possible to obtain high thermal conductivity, at least 90% of the binder resin need only be carbonized or burned off.

[0115] (5) Pressing of Burnt Layer

[0116] To densify the burnt layer **131**, a die **140** comprising a lower die part **141** having a cavity **141a**, and an upper die part **142** having a projection **142a** received in the cavity **141a** is used as shown in FIGS. 9(a) and 9(b). In the depicted example, the cavity **141a** longitudinally extends in the lower die part **141**, with the same width as that of the burnt layer **131**. As shown in FIG. 10, after the burnt layer **131** is put in the cavity **141a**, the upper die part **142** is placed on the lower die part **141**, such that the projection **142a** covers the burnt layer **131**. In this case, because the thickness of the burnt layer **131** is sufficiently smaller than the depth of the cavity **141a**, the projection **142a** of the upper die part **142** enters the cavity **141a**, thereby accurately positioning the upper die part **142** relative to the lower die part **141**.

[0117] As shown in FIGS. 6, 11(a) and 11(b), a pressing die means for densifying the burnt layer **131** comprises (a) a die **140** comprising a lower die part **141** and an upper die part **142** combined to sandwich the burnt layer **131**, (b) a pair of rolls **103a**, **103b** for pressing the die **140**, (c) guide plates **143a**, **143b** extending upstream and downstream of the gap of the rolls **103a**, **103b**, and (d) a means (not shown) for reciprocating the die **140** along the guide plates **143a**, **143b** such that the die **140** passes through the gap of a pair of pressing rolls **103a**, **103b**.

[0118] Among a pair of pressing rolls **103a**, **103b**, the lower pressing roll **103a** is a driving roll, and the upper pressing roll **103b** is a follower roll. With the follower roll **103b** having a slightly smaller diameter than that of the driving roll **103a**, the upper die part **142** is not bent by pressing. The reciprocation range of the die **140** is sufficiently longer than the burnt layer **131**. Reciprocation may be conducted once or several times. A pressing force applied to the die **140** may be increased as passing through the gap of the pressing rolls **103a**, **103b**. The burnt layer **131** is turned to a heat-conductive layer **10** by pressing the die **140**.

[0119] With the lower pressing roll **103a** vibrated by a vibration motor (not shown), the burnt layer **131** is further densified. The vibration frequency is preferably 50-500 Hz, more preferably 100-300 Hz.

[0120] FIGS. 12(a) and 12(b) show another example of dies used in the pressing means for densifying the burnt layer. This die **150** comprises a die body **151** having a vertically penetrating cavity **151a**, an upper punch **152a** inserted into the cavity **151a** from above, and a lower punch **152b** inserted into the cavity **151a** from below. After the lower punch **152b** is inserted into the cavity **151a**, a burnt layer **131** is put on the lower punch **152b**, and the upper punch **152a** inserted into cavity **151a** from above is moved downward to press the burnt

layer **131** for densification. With the same vibration as above applied to the upper punch **152a**, a larger pressing effect is obtained.

[0121] (6) Sealing of heat-conductive layer

[0122] Because the pressed heat-conductive layer **10** has slight irregularity in edge portions, (1) the edge portions are cut off from the heat-conductive layer **10** along the broken line **161** to obtain a heat-conductive layer **10a** of a predetermined size as shown in FIG. **13**, or (2) the heat-conductive layer **10** is divided along the broken lines **162** to heat-conductive layers **10b** of a final size as shown in FIG. **14**. In the case shown in FIG. **14**, the size, shape and number of the heat-conductive layers **10b** may be arbitrarily determined.

[0123] In the case of a large heat-conductive layer **10a** as shown in FIG. **13**, a second plastic film **13a** to which the heat-conductive layers **10a** are attached with predetermined intervals is laminated with another second plastic film **13b** by a pair of rolls **102a**, **102b**, and the laminated film is cut in every heat-conductive layer **10a** to obtain individual heat-dissipating films, as shown in FIG. **15**. With the second plastic film **13a** having an adhesive layer, the attached heat-conductive layers **10a** are not displaced. The second plastic films **13a**, **13b** are preferably heat-laminated via the heat-conductive layers **10a**.

[0124] When cut to heat-conductive layers **10b** of a final size as shown in FIG. **14**, one second plastic film **13a**, to which pluralities of heat-conductive layers **10b** are attached with predetermined intervals as shown in FIG. **16(a)**, is first laminated with another second plastic film **13b** by a pair of rolls **102a**, **102b** as shown in FIG. **17**, to obtain a laminated film shown in FIG. **18**. As shown in FIG. **18**, the laminated film is divided along the broken lines **163** to obtain individual heat-dissipating films.

[0125] As shown in FIG. **19**, each heat-conductive layer **10a** (**10b**) is sandwiched by a pair of second plastic films **13a**, **13b**, whose edge portions are heat-sealed.

[0126] The present invention will be explained in further detail by Examples below, without intention of restricting the present invention thereto.

EXAMPLE 1

[0127] A dispersion comprising 25% by mass of flaky graphite (UP-35N available from Nippon Graphite Industries, Co., Ltd., ash: less than 1.0%, and average particle size: 25 μm), 1.25% by mass of polymethylmethacrylate (PMMA), and 73.75% by mass of methyl ethyl ketone was applied to each aluminum-deposited surface of two aluminum-deposited polyethylene terephthalate (PET) films (first plastic films) **12a**, **12b** as thick as 30 μm , and dried at 40° C. for 2 minutes to obtain each coating layer of flaky graphite and PMMA having a thickness of 50 g/m^2 (expressed by the grams of flaky graphite per 1 m^2). This procedure was repeated 5 times in total to form a mixture layer **11a**, **11b** (thickness: 100 g/m^2) of flaky graphite and PMMA on each PET film **12a**, **12b**.

[0128] As shown in FIG. **6**, a pair of PET films **12a**, **12b** each having a mixture layer **11a**, **11b** were laminated at 120° C. by a pair of rolls **46a**, **46b**, with the mixture layers **11a**, **11b** inside, and then heat-pressed at 150° C. under 20 MPa by plural pairs of heating rolls **47a**, **47b**, **48a**, **48b**, to form a laminated film **1'** comprising the mixture layer **11**.

[0129] After peeling both PET films **12a**, **12b** from the laminated film **1'**, each surface of the mixture layer **11** was exposed to a flame (temperature: about 1000° C.) ejected

from a gas burner **114** shown in FIG. **8(a)**, to burn the mixture layer **11**. The burnt layer was placed in a cavity **141a** of the die **140** shown in FIG. **9**, and repeatedly pressed under a load of 7 tons by a pair of rolls **103a**, **103b** with vibration of 200 Hz, as shown in FIGS. **11(a)** and **11(b)**.

[0130] After the resultant heat-conductive layer **10** was cut to a predetermined size, its density, specific heat, and heat diffusivity (m^2/s) in in-plane and thickness directions were measured. The thermal conductivity (W/mK) was determined from the product of the heat diffusivity and the heat capacity (density \times specific heat). It was thus found that the heat-conductive layer **10** had a density of 1.97 g/cm^3 , and thermal conductivity of 499 W/mk in an in-plane direction and 17.7 W/mk in a thickness direction.

[0131] As shown in FIG. **15**, one PET film **13a**, to which a heat-conductive layer **10a** was attached, was laminated with another PET film **13b** by a pair of rolls **102a**, **102b**. The laminated film **1'** was cut to individual heat-dissipating films.

EXAMPLE 2

[0132] A heat-conductive layer was formed in the same manner as in Example 1 except for changing the binder resin to low-stereospecific polypropylene, thereby producing a heat-dissipating film. The same measurements as in Example 1 indicate that the heat-conductive layer had a density of 1.98 g/cm^3 , and thermal conductivity of 516 W/mK in an in-plane direction and 22.9 W/mk in a thickness direction.

EXAMPLE 3

[0133] A dispersion comprising 6% by mass of flaky graphene (H-15 available from XG Sciences, average diameter: 15 μm), 0.06% by mass of polymethylmethacrylate (PMMA), and 93.94% by mass of methyl ethyl ketone was applied to two PET films **12a**, **12b** as thick as 30 μm , and dried at 40° C. for 2 minutes to form coating layers of flaky graphene and PMMA as thick as 5 g/m^2 (expressed by the grams of flaky graphene per 1 m^2). This procedure was repeated 15 times in total to form a mixture layer **11a**, **11b** of flaky graphene and PMMA (containing 75 g/m^2 of flaky graphene per 1 m^2) on each PET film **12**.

[0134] As shown in FIG. **6**, a pair of PET films **12a**, **12b** each having a mixture layer **11a**, **11b** were laminated at 120° C. by a pair of rolls **46a**, **46b**, with the mixture layers **11a**, **11b** inside, and then heat-pressed at 150° C. under 20 MPa by plural pairs of heating rolls **47a**, **47b**, **48a**, **48b**, to form a laminated film **1'** comprising a heat-conductive layer **11** as thick as 100 μm (containing 150 g/m^2 of flaky graphene per 1 m^2).

[0135] After peeling both PET films **12a**, **12b** from the laminated film **1'**, each surface of the mixture layer **11** was exposed to a flame (temperature: about 1000° C.) ejected from a gas burner **114** shown in FIG. **8(a)**, to burn the mixture layer **11**. The burnt layer was placed in a cavity **141a** of the die **140** shown in FIG. **9**, and repeatedly pressed under a load of 7 tons by a pair of rolls **103a**, **103b** with vibration of 200 Hz, as shown in FIGS. **11(a)** and **11(b)**.

[0136] The resultant heat-conductive layer **10** had a density of 1.98 g/cm^3 , and thermal conductivity of 514 W/mk in an in-plane direction and 5.8 W/mk in a thickness direction.

EFFECTS OF THE INVENTION

[0137] Because a mixture layer of flaky carbon and a binder resin is densified by heat pressing, burned to carbonize or

burn off the binder resin, and then pressed to form a dense heat-conductive layer in the present invention, the heat-conductive layer has high density and thermal conductivity without unevenness in performance. Further, because the dispersion of flaky carbon and a binder resin is applied to a plastic film to form a mixture layer, the production cost can be reduced. Accordingly, the heat-dissipating film of the present invention uniformly has high thermal conductivity. The heat-dissipating film of the present invention having such features is suitable for use in small electronic appliances such as note-type personal computers, smartphones, mobile phones, etc.

DESCRIPTION OF REFERENCE NUMERALS

- [0138] 1: Heat-dissipating film
- [0139] 10: Heat-conductive layer
- [0140] 11, 11a, 11b: Mixture layer
- [0141] 12a, 12b: First plastic film
- [0142] 13a, 13b: Second plastic film
- [0143] 2: Plastic film
- [0144] 3: Dispersion
- [0145] 3a: Dispersion layer
- [0146] 3a': Dried binder resin/flaky carbon layer
- [0147] 3b: Next dispersion layer
- [0148] 31: Flaky carbon
- [0149] 32: Organic solvent
- [0150] 33: Region in which flaky carbon is agglomerated
- [0151] 34: Region free of or scarcely containing flaky carbon
- [0152] 4: Chamber
- [0153] 41a, 41b: Inlet for first plastic film
- [0154] 42a, 42b: Inlet for hot air
- [0155] 43: Gas outlet
- [0156] 45a, 45b: Dispersion-spraying nozzle
- [0157] 46a, 46b: Laminating roll
- [0158] 47a, 47b, 48a, 48b: Heat-pressing roll
- [0159] 49: Guide roll
- [0160] 60, 70a, 70b: Reel
- [0161] 100: Apparatus for producing heat-dissipating film
- [0162] 101a, 101b: A pair of rolls for peeling first plastic film
- [0163] 102a, 102b: A pair of rolls for adhering second plastic film
- [0164] 103a, 103b: A pair of rolls for pressing die

1. A heat-dissipating film comprising a heat-conductive layer obtained by burning a mixture layer of flaky carbon and a binder resin to carbonize or burn off said binder resin, and plastic films covering said heat-conductive layer; said flaky carbon in said heat-conductive layer being aligned substantially in parallel; and said heat-conductive layer having a density of 1.9 g/cm³ or more and thermal conductivity of 450 W/mk or more.

2. The heat-dissipating film according to claim 1, wherein said flaky carbon is graphite or graphene.

3. The heat-dissipating film according to claim 1, wherein said heat-conductive layer has a density of 2 g/cm³ or more and thermal conductivity of 600 W/mk or more.

4. The heat-dissipating film according to claim 1, wherein said heat-conductive layer has a thickness of 50-250 g/m² (expressed by the weight of flaky carbon per 1 m²).

5. (canceled)

6. A method for producing a heat-dissipating film comprising the steps of (1) sandwiching a mixture layer of flaky carbon and a binder resin with a pair of first plastic films to

form a laminated film; (2) heat-pressing said laminated film to densify said mixture layer; (3) burning said mixture layer exposed by peeling said first plastic films to carbonize or burn off said binder resin in said mixture layer; (4) pressing the resultant burnt layer to form a densified heat-conductive layer; and (5) sealing said heat-conductive layer with second plastic films.

7. The method for producing a heat-dissipating film according to claim 6, wherein a step of applying a dispersion comprising 5-25% by mass of flaky carbon and 0.05-2.5% by mass of a binder resin in an organic solvent, a mass ratio of said binder resin to said flaky carbon being 0.01-0.1, to a surface of each first plastic film, and then drying said dispersion is repeated plural times, to form said mixture layer.

8. The method for producing a heat-dissipating film according to claim 6, wherein the amount of said dispersion applied by one operation is 5-30 g/m² (expressed by the weight of flaky carbon per 1 m²).

9. The method for producing a heat-dissipating film according to claim 6, wherein said binder resin is an acrylic resin, a polystyrene resin or polyvinyl alcohol.

10. The method for producing a heat-dissipating film according to claim 6, wherein said laminated film is heat-pressed by passing through at least a pair of heating rolls.

11. The method for producing a heat-dissipating film according to claim 10, wherein the heat-pressing temperature is 150-250° C., and the heat-pressing pressure is 20 MPa or more.

12. The method for producing a heat-dissipating film according to claim 6, wherein to carbonize said binder resin in said mixture layer, said mixture layer is burned by exposing both surfaces thereof to a flame, or exposing a die containing said mixture layer to a high temperature of 500° C. or higher.

13. The method for producing a heat-dissipating film according to claim 6, wherein said burnt layer is pressed in a die constraining at least a pair of opposing sides of said burnt layer.

14. The method for producing a heat-dissipating film according to claim 6, wherein a lower die part having a cavity and an upper die part having a projection received in said cavity are used wherein after said burnt layer is put in the cavity of said lower die part, said upper die part is combined with said lower die part such that said projection enters said cavity; and wherein the combined upper and lower die parts are caused to pass through a gap between a pair of pressing rolls plural times, to densify said burnt layer.

15. The method for producing a heat-dissipating film according to claim 13, wherein said burnt layer is pressed while vibrating a die containing said burnt layer.

16. An apparatus for producing a heat-dissipating film comprising (a) a means for conveying a pair of first plastic films; (b) at least one dispersion-applying means disposed for each first plastic film, such that a dispersion comprising flaky carbon and a binder resin is applied to said first plastic film plural times; (c) a means for drying each applied dispersion; (d), a means for laminating a pair of said first plastic films each having the resultant mixture layer comprising said flaky carbon and said binder resin, with the said mixture layer inside; (e) a means for heat-pressing the resultant laminated film; (f) a means for peeling said first plastic films from said laminated film; (g) a means for burning said mixture layer, such that the exposed binder resin in said mixture layer is carbonized; (h) a pressing die means for densifying the result-

ant burnt layer to form a heat-conductive layer; and (i) a means for sealing said heat-conductive layer with second plastic films.

17. The apparatus for producing a heat-dissipating film according to claim **16**, which comprises pluralities of dispersion-applying means arranged with predetermined intervals along the movement direction of each first plastic film.

18. The apparatus for producing a heat-dissipating film according to claim **16**, wherein a pair of dispersion-applying means and laminating rolls are disposed in said chamber; and wherein said chamber comprises first openings through which the first plastic films enter, a pair of hot air inlets disposed near said first openings, a gas outlet, and a second opening through which said laminated film exits.

19. The apparatus for producing a heat-dissipating film according to claim **16**, wherein said means for burning said mixture layer is a burner ejecting a flame onto each surface of said mixture layer, or a die containing said mixture layer and exposed to a high temperature of 500° C. or higher.

20. The apparatus for producing a heat-dissipating film according to claim **16**, wherein said pressing die means for densifying the burnt layer comprises (a) a die comprising a lower die part having a cavity, and an upper die part having a projection engageable with said cavity; (b) a pair of pressing rolls for pressing said die from above and below; (c) guide plates extending upstream and downstream of a gap of said rolls; and (d) a means for reciprocating said die along said guide plates, such that it passes through a gap between a pair of said pressing rolls.

21. (canceled)

* * * * *