

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 583 533 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.06.1998 Bulletin 1998/24

(51) Int Cl.⁶: **G08B 5/00**

(21) Application number: **92850288.9**

(22) Date of filing: **10.12.1992**

(54) Road reflector with non-fogging function

Verkehrsspiegel mit einer Antibeschlag-Eigenschaft

Miroir pour la sécurité routière à qualité anti-condensation

(84) Designated Contracting States:
AT BE CH DE DK FR GB IT LI NL SE

(30) Priority: **01.05.1992 JP 112718/92**

(43) Date of publication of application:
23.02.1994 Bulletin 1994/08

(73) Proprietors:
• **Fujii, Katsumasa**
Okayama City, Okayama Prefecture (JP)
• **Nakashima, Hiroshi**
Okayama City, Okayama Prefecture (JP)

(72) Inventors:
• **Fujii, Katsumasa**
Okayama Pref. (JP)
• **Morishita, Yukio**
Okayama Pref. (JP)

- **Kokami, Yukio**
Okayama Pref. (JP)
- **Nagasaki, Nobuyuki**
Okayama Pref. (JP)
- **Nanjo, Yasuo**
Okayama Pref. (JP)
- **Tamura, Katsumi**
Tsuyama City, Okayama Pref. (JP)

(74) Representative: **Mossmark, Anders et al**
Albihns Patentbyrå Göteborg AB
P.O.Box 142
401 22 Göteborg (SE)

(56) References cited:
• **PATENT ABSTRACTS OF JAPAN vol. 14, no. 499**
(M-1042)1990 &

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 583 533 B1

Description

The present invention relates to a road reflector having a function for preventing a road reflector from fogging which is liable occur at the time of a cold season.

A road reflector is a safety device placed at positions of reduced visibility, such as intersections, bending curves and the like, but the reflector is fogged during the cold night and morning from autumn to spring and becomes not only useless but also dangerous in traffic. Therefore, its solution has strongly been expected.

The main reason why a road reflector is fogged from the cold night to morning is as follows.

That is, the temperature of a mirror surface drops below the dew point temperature of ambient air by radiational cooling, and water drops are condensed on the mirror surface or ice grains are adhered to the mirror surface. Therefore, in order to prevent the road reflector from fogging, the mirror surface should be kept at higher temperature than the ambient air temperature.

Japanese Utility Model Application Laid-open No. 61-19,890, as a prior art, proposes to form a latent heat regenerating layer between a mirror surface plate and a back plate, but the road reflector is placed at various places around the country, and a temperature around the reflector is different by area. In order to exhibit a sufficient effect at every temperature, it is effective to utilize a latent heat regenerator having large heat regenerating energy.

Water has the largest regenerating amount. In case of a reflector, a regenerator having 3-4 times the latent heat regeneration at a certain temperature but less than half the water at the other temperature zone is not suitable for a reflector. Moreover, it is a preferable method to form a regenerating layer between a surface mirror plate and a back plate, but if heat insulation material is not provided on the back plate side, heat is dissipated from the back plate direction and the heat dissipation increase and almost no effect is caused.

Japanese Patent Application Laid-open No. 63-167,803 further proposes a method of injecting an anti-freeze into a sealed vessel made between a mirror surface plate and a back plate. The problems of this method are that a road reflector index by Japan Highway Association provides for a stainless steel mirror plate of $\phi 600$ mm diameter in circle and 0.8 mm in thickness, $\phi 800$ mm diameter in circle and 0.9 in thickness, and $\phi 1000$ mm diameter in circle and 1.0 mm in thickness, and that an image distortion should be collated with a limit sample by the naked eye.

In the same manner as in Japanese Utility Model Application Laid-open No. 61-19,890, the above proposal does not provide any heat insulation material on the back plate side, heat dissipates from the back plate direction, and it has almost no effect. This proposal is to inject an anti-freeze into the inside, but a mirror is $\phi 800$ mm in circle and an average space between the mirror surface and the back plate is 3 cm, 15 kg of an anti-

freeze should be injected, so that it tends to push the mirror surface to the curved direction and lower direction so as to swell in the lower part and it is not for use by distortion of an image.

Moreover, Japanese Patent application Laid-open No. 2-20,508 proposes to provide a liquid regenerating agent-containing vessel on the mirror surface side between a road reflector mirror plate and a back plate, to arrange heat insulation material on the back plate side, to collect heat from the mirror surface within a time zone of high air temperature in the daytime, to warm the mirror surface from the regenerating agent when the air temperature is lowered from the night to early morning, and to maintain a mirror surface temperature higher than the ambient air temperature.

The problem in this method is that a liquid regenerating agent is circulated by convection when air temperature is increased from early morning, a temperature of the regenerating agent is increased at the upper portion, but it is slowly increased at the lower portion.

Therefore, the temperature in the lower portion of the mirror plate is delayed to increase because the temperature rise of the lower portion of the regenerating agent is delayed even when the air temperature is increased, and in this period, the temperature of the mirror plate is lower than the ambient air temperature to make the mirror surface dim. Moreover, when the air temperature is lowered from the night to the early morning, the regenerating agent within the inside is convected, the radiation of the regenerating agent is accelerated, and the regenerating effect is lowered.

As described above, hitherto proposed techniques do not fully function in broad meteorological condition.

The present invention aims to obviate said shortcoming by taking the above points into consideration.

The present invention is to provide a road reflector having a sufficient anti-fogging function from a lowering cycle to a rising cycle of temperature, since the main cause of fogging a road reflector is because water in air is condensed on a mirror surface when temperature of the mirror surface drops below the dew point temperature of ambient air by radiational cooling.

This object is achieved by a road reflector according to claim 1.

For a better understanding of the invention, reference is made to the accompanying drawings, in which:

Fig. 1 is a partially broken cross-sectional view by slicing the essential part showing one embodiment of the present invention.

Fig. 2 is a partially broken perspective view showing one embodiment of a vessel containing a regenerating agent.

Fig. 3 is a graph showing behaviors of temperature changes by comparing and measuring performances of the road reflector (A) of the present invention and the prior products (B) and (D).

Fig. 4 is a graph showing behaviors of temperature changes by comparing and measuring performances of

the road reflector (A) of the present invention and the prior products (B) and (D).

Throughout different views of the drawing in Figs. 1-4, 1 is mirror plate, 1A is mirror surface, 1B is rear surface of mirror, 2 is back plate, 3 is roof plate, 4 is regenerating agent containing-vessel, 5 is regenerating agent, 6A is heat insulation material, 6B is heat insulation material, 7 is fastening portion for mirror surface back plate, 8 is supporting plate, 9 is connecting piece, 10 is pivot, 11 is positioning fittings, 12 is elongated groove, 13 is column, 14 is clamp fitment, 15 is uniform liquid amount seal, 16 is outer peripheral seal, 16 is injection hole, and 18 is heat buffer.

The present invention is explained more in detail with respect to a Road Reflector with non-fogging function.

A regenerating portion is the main portion of the present system, and as a regenerating agent, use may be made of gel-like material which regenerates latent heat having uniform specific heat within a wide temperature range.

That is, if the regenerating agent is gel-like, there is no convention, the regenerating energy of the regenerating agent is effectively utilized for a long period of time, there is no possibility of leaking, and there is shown a preferable tendency to vibration during transportation. Moreover, it is possible to mold into desired curvature, and it is also possible to integrate the molded article by fitting to a road reflector by hand.

For the purpose of reducing manufacturing cost, such a method is possible that a vessel which base is a mirror is formed and a liquid regenerating agent is gelled therein.

As a vessel having less permeable loss, use is made of a three-layered film sandwiching an aluminum foil with polyethylene films from both sides. In this case, it is preferable to use a gel-like regenerating agent viewed from effective application of regenerating energy and fear of liquid leakage.

A preferable regenerating agent has a large regenerating amount per volume through all the area within a wide temperature range from -40°C to $+40^{\circ}\text{C}$ and does not freeze at low temperature as possible, such as an aqueous solution of ethylene glycol, propylene glycol, diethylene glycol and the like.

Any method can be used for gelling a regenerating agent. For example, there is a method of gelling a regenerating agent with the use of a proper amount of high water absorbing resin available on the market, or a method of adding 5-10 wt% of polyvinyl alcohol available on the market, solving at high temperature, and freezing it, or a method of adding a bifunctional monomer such as ethylene glycol, dimethacrylate and the like to a watersoluble monomer such as hydroxyethyl methacrylate and the like and carrying out a polymerization reaction. Any method can be used for gelling.

As a heat insulation material, use is made of such material having independent air bubbles and a role as

a buffer, such as urethane foam and expanded styrol.

The present invention will be further explained in detail by referring to examples.

Fig. 1 is a cross-sectional view of a road reflector according to the present invention. Fig. 2 is a partly broken perspective view of a vessel for containing a regenerating agent.

In Fig. 1, 1 is a metallic mirror plate having a mirror surface 1A of suitable curvature, 2 is an integrally joined back plate having a space for housing suitable contents, and 3 is a roof projected from said mirror plate upwardly. In the present invention, a heat buffer 18 is provided adjacent to the inner side of the mirror plate 1. Next, a vessel 4 for containing a gel-like regenerating agent is housed by adhering to the heat buffer 18, a gel-like regenerating agent 5 is filled within the vessel 4, heat insulation material 6A is adhesively arranged on the rear of this regenerating agent-containing vessel 4, and further heat insulation material 6B is arranged between the heat insulation material 6A and the back plate 2, thereby preventing the surface of the reflector 1 from fogging by moisture condensation.

Reference numeral 7 is a fastening portion for integrally connecting the mirror plate 1 and the back plate 2. 8 is a supporting plate fitted to the rear of the back plate 2. 9 is a connecting piece, and 10 is a pivot for pivoting the connecting piece 9 to the supporting plate 8. 11 is a fitting for positioning between the supporting plate 8 and the connecting piece 9. 12 is an arc-like elongated groove for adjusting the fitting 11. 13 is a column for supporting the connecting piece 9, and 14 is a clamp fitting thereof. As a regenerating agent, it is preferable to use a gel-like regenerating agent having a large regenerating amount per volume in the whole zone of a wide temperature range from about -40°C to $+40^{\circ}\text{C}$, without freezing at low temperature with no toxicity, and being stable for a long period of time.

Moreover, compatibility of the regenerating agent with a vessel should be fully taken into consideration.

The present invention takes the above conditions into consideration, and in case of using a mirror of 800 mm ϕ in diameter for example, 2.5% high water absorbing resin is added to a compounded solution of propylene glycol and water and injected into the vessel 4 for use. The gel-like regenerating agent 5 is contained in the vessel 4 and fixed between the heat buffer 18 and the heat insulation material 6A. In case of a road reflector of 800 mm ϕ , a suitable curvature radius of the mirror surface is 3000 mm.

It is desirable to adhere the vessel 4 for containing the regenerating agent 5 to the inside surface 1B of the mirror plate 1 via the heat buffer 18 with respect to the curve of the mirror surface. It is also desirable to make regenerating agent volumes per unit area of the center portion and the outer peripheral portion of the mirror plate 1 substantially the same. Moreover, as explained above, a use temperature is from -40°C to $+40^{\circ}\text{C}$, so that it is necessary to prevent the vessel 4 from breaking

by volume expansion of the regenerating agent 5 and to prevent the regenerating agent 5 from dissipating to the outside.

Under consideration of these conditions, the present invention uses a round vessel as the vessel 4 by using a three-layered film made by sandwiching an aluminum foil with polyethylene film and a polyester film, but the vessel is not limited thereto. The vessel 4 for containing a regenerating agent is composed of a film 2 with a uniform liquid amount seal 15 and an outer peripheral seal 16 at certain intervals to control a permeable loss for making the gel-like regenerating agent 5 substantially the same volume over the whole mirror surface. The vessel 4 is provided with an injection hole for injecting the regenerating agent 5.

Heat insulation materials 6A and 6B are inserted between the vessel 4 and the back plate 2. The heat insulation materials 6A and 6B are made by laminating two sheets of 40 mm thick $\times$ 800 mm ϕ and 20 mm thick $\times$ 400 mm ϕ , putting in a polyethylene film bag, and water-proofing. At a time zone of high air temperature during the daytime, heat is collected from the mirror surface, transmitted to the regenerating agent 5 and regenerated. When the air temperature is lowered from the night to early morning, the mirror surface 1A is warmed from the inside by dissipating heat only from the side of the mirror plate 1, and the temperature is kept higher than the ambient air temperature. Moreover, the regenerating agent is gelled so as to dissipate a quantity of regenerated heat by taking much time.

A sponge used as heat insulation material plays a role of a buffer by adhering the vessel 4 to the inner surface 1B of the mirror surface with the aid of its resilience.

Fig. 3 shows a result of comparing the road reflector A of the present invention with the prior road reflector B having a non-fogging device with the use of a liquid regenerating agent on the back of a reflector.

As shown in Fig. 3, it shows records and graphs of ten day's observation for a mirror surface temperature and its ambient temperature at 6:30 every morning in the wintertime, that the mirror surface temperature (A) of the reflector of the present invention is higher than the mirror surface temperature (B) of the reflector having no-fogging function and higher than the ambient temperature (C) over the whole zone of an observation period. The prior product (B) shows substantially the same temperature as the ambient temperature (C).

Fig. 4 shows a result of comparing the road reflector of the present invention with a road reflector having a non-fogging device of the system proposed by Japanese Patent Application Laid-open No. 2-204,508, which is called a prior product (D) hereinafter.

Fig. 4 show records and graphs of the mirror surface temperature and its ambient temperature of both the reflectors for 24 hours, and that the mirror surface temperature of the reflector of the present invention shows a high temperature from the night to 10 o'clock in the morning as compared with the prior product (D). This is

because the ambient temperature starts to lower from the evening, and regenerated temperature energy released from the regenerating agent, which is gelled in the present invention, continues its regenerating effect for a long time. While, the prior product (D) which mirror surface temperature is increased without any time lag with increase of the ambient temperature from the morning cannot continue a regenerating effect by a convection action because of the use of a liquid regenerating agent.

It shows from the above comparative test result that the reflector of the present invention shows an extremely effective non-fogging effect.

The present invention relates to improvement of a road reflector provided at intersections and hardly visible places, uses a gel-like regenerating agent as a regenerating agent, and utilizes long regenerating time, so as to prevent the reflector from fogging generated during the cold season and from the night to the early morning with high humidity and to constantly perform a function of the road reflector, and has such a remarkable effect that safety of traffic can be increased.

The prior road reflector has tried to prevent fogging in various ways, but a non-fogging effect is not sufficient, and hindered at the cold or humid season, but the present invention solves the problem by such a simple mechanism that a heat buffer is inserted on the inside of the mirror surface of the reflector, a soft vessel containing a gel-like regenerating agent is adhered thereto, a heat insulation material is attached to the back thereof and a back plate is heat-insulatingly buffered. As a result, fogging by surface condensation of the mirror plate can be prevented as compared with the use of an anti-freeze and liquid regenerating agent, heat is well conducting, and the mirror surface is prevented from distorting, so as to remarkably increase its effect and to be useful industrially.

Claims

1. Road reflector with non-fogging function comprising: a mirror plate (1), a back plate (2) secured to said mirror plate (1) in the periphery of said mirror plate so as to make a sealed container, a heat insulating material (6A, 6B) inserted against the rear side of said mirror plate (1) within said container, wherein the road reflector comprises a regenerating agent (5) containing vessel (4) attached to the rear side of said mirror plate (1) within said container as being heat transferable, a heat insulating material (6A, 6B) attached to the rear side of said vessel (4), thereby uniting said road reflector integrally with the mirror plate, the regenerating agent containing vessel (4) and the heat insulating materials (6A, 6B), characterized in that said road reflector further comprises a heat buffer (18) inserted and attached between the rear side of said mirror plate (1) and said

regenerating agent (5) containing vessel (4).

2. Road reflector as defined in claim 1, wherein said road reflector further comprises a roof plate (3) attached to the upper portion of said mirror plate, a supporting plate (8) attached to the rear side of the back plate (2), a connecting piece (9) pivotally connected to said supporting plate (8) by a pivot (10), an elongated groove (12) and a positioning fitting (11) so as to allow positioning between said supporting plate (8) and said connecting piece (9), and a clamp fitting (14) for securing said connecting piece (9) to a column (13).

Patentansprüche

1. Verkehrsspiegel mit einer Antibeschlag-Eigenschaft, bestehend aus:
einer Spiegelplatte (1), einer Rückplatte (2), die an der Spiegelplatte (1) an dem Umfangsrand der Spiegelplatte derart befestigt ist, daß ein abgedichteter Behälter gebildet ist, einem Wärmeisolationmaterial (6A, 6B), das gegen die Rückseite der Spiegelplatte (1) innerhalb des Behälters eingesetzt ist, wobei zu dem Verkehrsspiegel ein ein Regeneriermittel (5) enthaltender Behälter (4) gehört, der an der Rückseite der Spiegelplatte (1) innerhalb des Behälters wärmeübertragend angebracht ist, wobei das wärmeisolierende Material (6A, 6B) an der Rückseite des Behälters zur Vereinigung des Verkehrsspiegels in einstückiger Form mit der Spiegelplatte, dem das Regeneriermittel enthaltenden Behälter (4) und den wärmeisolierenden Material (6A, 6B) angebracht ist, dadurch gekennzeichnet, daß zu dem Verkehrsspiegel weiterhin ein Wärmepuffer (18) gehört, der zwischen der Rückseite der Spiegelplatte (1) und dem das Regeneriermittel (5) enthaltenden Behälter (4) eingesetzt angebracht ist.
2. Verkehrsspiegel nach Anspruch 1, wobei zu dem Verkehrsspiegel weiterhin eine an dem oberen Abschnitt der Spiegelplatte angebrachte Deckplatte (3), eine an der Rückseite der Rückplatte (2) angebrachte Halteplatte (8), ein schwenkbar mit der Halteplatte (8), über ein Schwenkgelenk (10) befestigtes Teil (9), eine Längsnut (12) und ein Positionierbeschlag (11) zur Positionierung zwischen der Halteplatte (8) und dem Anschlußteil (9) und ein Spannbeschlag (14) zur Befestigung des Verbindungsteils (9) an eine Säule (13) gehören.

Revendications

1. Réflecteur routier ayant une fonction de suppression de buée, comprenant une plaque (1) de miroir, une plaque arrière (2) fixée à la plaque (1) de miroir à la périphérie de celle-ci afin qu'un récipient étanche soit délimité, un matériau d'isolation thermique (6A, 6B) introduit entre la face arrière de la plaque de miroir (1) à l'intérieur du récipient, le réflecteur routier comprenant une cuve (4) contenant un agent de régénération (5) fixée à la face arrière de la plaque de miroir (1) dans le récipient afin qu'elle permette le transfert de chaleur, un matériau d'isolation thermique (6A, 6B) fixé à la face arrière de la cuve (4), si bien que le réflecteur routier est associé sous forme solidaire à la plaque de miroir, à la cuve (4) contenant l'agent de régénération et aux matériaux d'isolation thermique (6A, 6B), caractérisé en ce que le réflecteur routier comporte en outre un tampon thermique (18) introduit et fixé entre la face arrière de la plaque de miroir (1) et la cuve (4) contenant l'agent de régénération (5).
2. Réflecteur routier selon la revendication 1, dans lequel le réflecteur routier comporte en outre une plaque de toit (3) fixée à la partie supérieure de la plaque de miroir, une plaque de support (8) fixée à la face arrière de la plaque arrière (2), une pièce de raccordement (9) raccordée de manière pivotante à la plaque de support (8) par un pivot (10), une gorge allongée (12) et un embout de positionnement (11) destinés à permettre le positionnement entre la plaque de support (8) et la pièce de raccordement (9), et un embout de serrage (14) destiné à fixer la pièce de raccordement (9) à une colonne (13).

FIG. 1

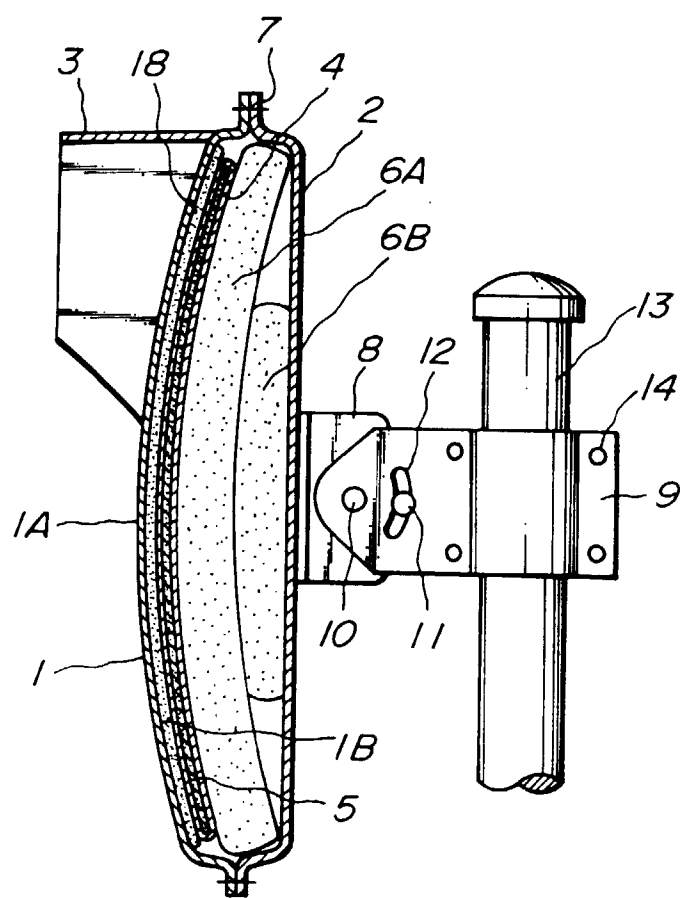


FIG. 2

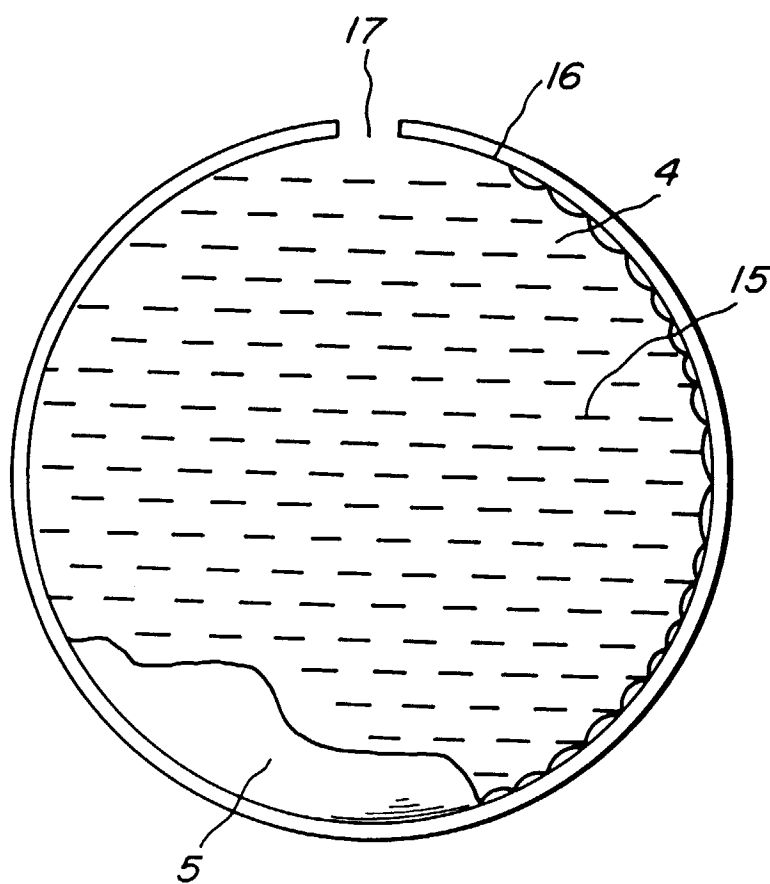


FIG. 3

A --- Present Invention

B o---o Prior Art

C — Ambient Temp.
(Mirror Temp.)

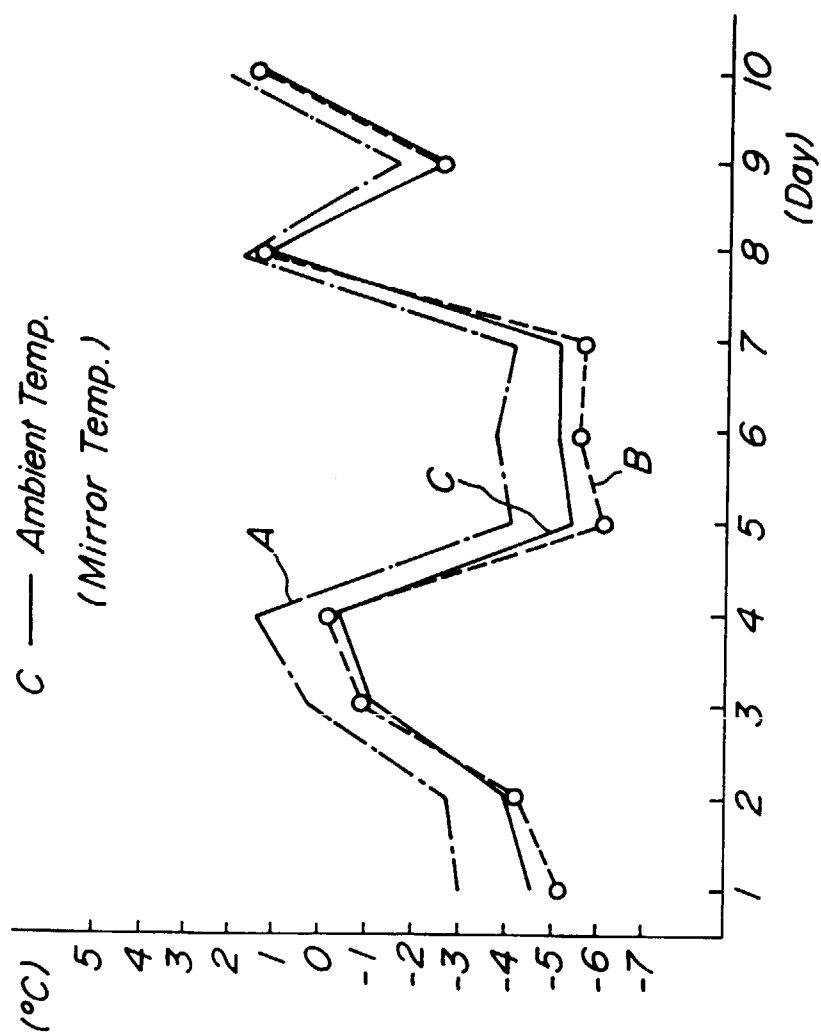


FIG. 4