



(43) International Publication Date
7 November 2013 (07.11.2013)

(51) International Patent Classification:
E21B 33/128 (2006.01) *E21B 17/01* (2006.01)
E21B 7/14 (2006.01)

(21) International Application Number:
PCT/US2013/036600

(22) International Filing Date:
15 April 2013 (15.04.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/460,199 30 April 2012 (30.04.2012) US

(71) Applicant: **BAKER HUGHES INCORPORATED**
[US/US]; P.o. Box 4740, Houston, TX 77210 (US).

(72) Inventors: **WILAMOWITZ, Elisabeth**; Au Chateau, F-32260 Moncorneil-grazan (FR). **LEHR, Joerg**; Riethkamp 44, 29229 Celle (DE).


(74) Agent: **CARSON, Matt, W.**; Baker Hughes Incorporated, Intellectual Property Counsel, P.o. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: HEAT TREATMENT FOR REMOVAL OF BAUSCHINGER EFFECT OR TO ACCELERATE CEMENT CURING

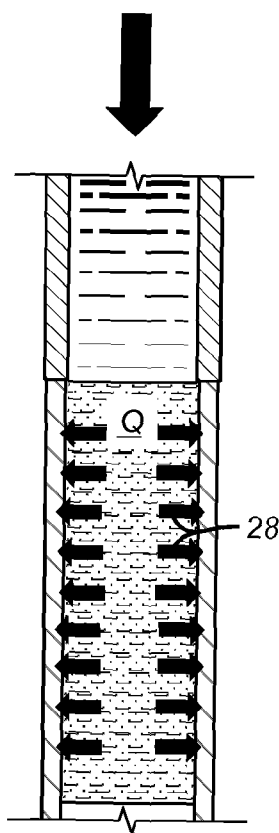

(57) Abstract: Materials are delivered within an expanded string before the string is subsequently compressively loaded such that the heat given off by the reaction of the delivered materials raises the fluid temperature in the recently expanded string to temperatures in a range of about 150-300 degrees Centigrade. The materials can be separated for delivery and then allowed to contact to initiate the reaction. Alternatively the materials can be delivered in separate conveyances for more immediate start of the exothermic reaction at the needed location or locations. To the extent there is curing cement about the expanded tubular, then the heat generated also reduces curing time to full setup of the sealing material. The applied heat counteracts or eliminates the Bauschinger effect.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

HEAT TREATMENT FOR REMOVAL OF BAUSCHINGER EFFECT OR TO ACCELERATE CEMENT CURING

Inventors: Elisabeth Wilamowitz and Joerg Lehr

FIELD OF THE INVENTION

[0001] The field of the invention is to heat treat a tubular string that has been expanded so that it retains as much as possible its original compressive yield strength and modulus of elasticity as it had prior to expansion with an additional benefit of accelerating curing of cement or other seal material around the expanded tubular.

BACKGROUND OF THE INVENTION

[0002] The Bauschinger Effect describes material weakening due to plastic deformation followed by load reversal. In expanded casings, this occurs when the casing is first expanded and when later during operation of the well the pressure comes from the outside (formation pressure, pressing salt formations or other). Expansion creates tensile stress in a circumferential direction,

whereas the outside pressure which the casing has to withstand during operation of the well creates compressive stress in the circumferential direction. This is the nature of the load reversal on the tubular after expansion as compared to during expansion. The expanded casing or tubular loses up to 30% or more in compressive yield strength and up to 20% or more in modulus of elasticity (or E-Mod.). The Bauschinger Effect can be compensated with heat treatment at temperatures of 150 to about 300°C or more for several hours. Bauschinger Effect compensation results in the expanded tubular material regaining some of its initial compressive yield strength and E-Mod. Full Bauschinger compensation means that the material regains its strength and elasticity as they were before the expansion.

[0003] The present invention uses an exothermic chemical reaction between one liquid and another substance which may be fluid or solid or other material. The reactants can be pumped into the borehole where they react and create heat. Long casing sections can be treated at the same time. Keeping the reactants apart from one another prior to the reaction may be done in different ways, including but not limited to, pumping two fluid columns separated by a spacer fluid. The heat which is created by this reaction can be used to

compensate the Bauschinger Effect. The heat can also be used to aid and speed up cement curing. Faster cement curing maybe of interest in any kind of cemented tubular, whereas Bauschinger Effect compensation is only of interest in expandable tubulars. The minimum temperature for Bauschinger Effect Compensation is between about 150 and about 300°C.

[0004] US Publication 2011/0114323A1 teaches chemical exothermic reactions for treatment of oilfield deposits. The patent application describes reactions which reach temperatures up to 245°C. In general chemical reactants and procedures which are used for removal of oilfield deposit may be applicable to compensation the Bauschinger Effect as well. Other references relating to using exothermic reactions to remove paraffin deposits are USP 4,755,230 and 5,484,488.

[0005] In other contexts, references that address the Bauschinger effect in pipe manufacturing for downhole applications are:

US Publication 20080286504 Steel Plate or Steel Pipe with Small Occurrence of Bauschinger Effect and Methods of Production of Same;

USP 7818986 Multiple Autofrettage; USP 7459033 Oil Country Tubular Goods Excellent in Collapse Characteristics After Expansion and Method of Production Thereof;

US20050217768 Oil Country Tubular Goods Excellent in Collapse Characteristics After Expansion and Method of Production Thereof;

US Publication 20090320965 UOE Steel Pipe Excellent in Collapse Strength and Method of Production Thereof;

USP 7967926 UOE Steel Pipe Excellent in Collapse Strength and Method of Production Thereof;

USP 7892368 UOE Steel Pipe Excellent in Collapse Strength and Method of Production Thereof;

US Publication 20050178456 UOE Steel Pipe with Excellent Crash Resistance, and Method Of Manufacturing the UOE Steel Pipe;

USP 7575060 Collapse Resistance of Tubing;

USP 4772771 Method for the Production of High Strength Electric Seam Welded Oil-Well Pipe;

US Publication 20100119860 Steel Pipe Excellent in Deformation Characteristics and Method of Producing the Same;

US Publication 20090092514 Steel Pipe for High Strength Line Pipe Superior in Strain Aging Resistance and Steel Plate for High Strength Line Pipe and Methods Of Production of the Same;

US Publication 20100038076 Expandable Tubulars for Use in Geologic Structures.

[0006] What is needed and provided by the present invention is a way to counteract the Bauschinger effect after the tubular string is expanded in the subterranean location and preferably before the string is compressively loaded. Another advantage of the present invention can be the acceleration of the curing time for cement or other temperature sensitive material for curing whether the sealant is placed before or after tubular expansion. In the preferred embodiment an exothermic chemical reaction is made to occur within the expanded tubular while the expanded tubular wall is protected from differential loading that causes compressive stress in the tubular wall. This stress management can be accomplished with variation of mud densities within the expanded string. Reactants can be delivered while separated with a buffer fluid or another barrier that degrades or disappears over time. The exothermic nature of the reaction raises the tubular temperature for a sufficient time and to a required temperature so that the tubular material regains its yield strength lost in the expansion or a portion thereof as well as its modulus of elasticity. If cement or other sealant has been placed in the wellbore about the expanded tubular, either before or after the expansion, the heat generated also accelerates the curing time of the cement used in either a single wall or dual wall strings. Those skilled in the art will more readily appreciate these and other aspects of the present invention by a review of the detailed description of the preferred embodiment with the associated drawings while appreciating that the full scope of the invention is to be determined from the appended claims.

SUMMARY OF THE INVENTION

[0007] Materials are delivered within an expanded string before the string is subsequently compressively loaded such that the heat given off by the reaction of the delivered materials raises the fluid temperature in the recently expanded string to temperatures in a range of about 150-300 degrees

Centigrade. The materials can be separated for delivery and then allowed to contact to initiate the reaction. Alternatively the materials can be delivered in separate conveyances for more immediate start of the exothermic reaction at the needed location or locations. To the extent there is curing cement about the expanded tubular, then the heat generated also reduces curing time to full setup of the sealing material. The applied heat counteracts or eliminates the Bauschinger effect.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a section view of a tubular being expanded with the wall in tension;

[0009] FIG. 2 shows compressive loading from formation fluids on the expanded tubular;

[0010] FIG. 3 is a section view showing the compressive forces on the tubular from formation fluids after expansion;

[0011] FIG. 4 is a graphical representation of strength loss due to the Bauschinger effect;

[0012] FIGS. 5-10 show a sequence for creating heat in the expanded tubular to compensate for the Bauschinger effect with initial reactant separation using a spacer between them;

[0013] FIGS. 11-13 show a sequence of delivering reactants with individual tubular delivery pipes to initiate an exothermic reaction in the expanded tubular;

[0014] FIGS. 14-19 are similar to FIGS. 5-10 with the addition of cement in the annulus whose curing time is reduced from the heat generated in the reaction;

[0015] FIGS. 20-25 are similar to FIGS. 14-19 with the difference being that the expanded tubular is multi-wall with cement in between.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0016] FIG. 1 illustrates a tubular **10** being expanded about 20-30% as represented schematically by arrows **12** with arrows **14** showing the tensile stress in the wall of the tubular **10**. After expansion, as shown in FIG. 2, the well fluids in the surrounding annular space can exert a compressive force as indicated by arrows **16**. The well fluids create compressive circumferential stress in the wall of the tubular **10** as illustrated in FIG. 3. The Bauschinger

effect is graphically illustrated in FIG. 4 as a loss of strength as indicated by the curve on the left appearing below the curve on the right in the stress/strain curve. It is this loss of strength and modulus for the expanded pipe that is known as the Bauschinger effect. The present invention seeks to recapture such loss in strength and modulus after expansion using added heat. The heat can also accelerate cement curing as will be explained below.

[0017] Referring to FIGS. 5-10 the tubular **10** is shown in the expanded condition in FIG. 5 with the first reactant **20** such as an acid added by pumping from the surface. A spacer **22** that does not react with reactant **20** is next pumped in, followed by the other reactive ingredient **24**. Drilling mud or some other non-reactive fluid **26** is pumped on top of reactant **24** to spot the reactants **20** and **24** at the desired location in the tubular string **10**. FIG. 9 schematically illustrates mixing of the reactants **20** and **24** which creates an exothermic chemical reaction and gives off heat **Q**. Arrows **28** represent mixing through the spacer **22** which can occur from flow induced turbulence or static or dynamic inline mixers of a type known in the art. Heating to a range of about 150-300 degrees Centigrade for preferably a time of several hours is preferred for full yield strength and modulus recovery. The warmer the temperature the shorter the heating cycle can be for a full recovery of yield strength and modulus of elasticity. FIG. 10 shows the tubular **10** after the heat treating.

[0018] FIGS. 11-13 shows discrete delivery tubes **30** and **32** such as coiled tubing that can have perforations **34** and **36** in a random or ordered pattern and preferably near the lower end as shown in FIG. 12. Each reactant is delivered in a discrete tube and they mix in the vicinity of the openings **34** and **36**. Static or dynamic inline mixers can also be deployed as schematically illustrated by arrows **38**. The result is the same as explained above for FIGS. 5-10.

[0019] FIGS. 14-19 are the same as FIGS. 5-10 with the addition of cement or other thermally curing sealant **40**. The result is similar to FIGS. 5-10 with the additional benefit that the cement curing is accelerated with the heat **Q** generated in the exothermic reaction.

[0020] FIGS. 20-25 are similar to the FIGS. 14-19 except instead of a single wall tubular **10** being cemented and expanded, a double wall string **42**

with an internal cement layer **40** is expanded and cemented. String **42** is described in US Publication 2011/0114336.

[0021] Those skilled in the art will realize that the Bauschinger effect occurs in borehole construction that results in a monobore or in progressively smaller tubulars as the borehole gets deeper. The high expansion rates now used for casing in the order of 20-30% combined with the use of low alloyed steel are possible but the tubular exhibits low initial strength which is further reduced as a result of the expansion. As a result the collapse stability is decreased due to the Bauschinger effect as is the depth that the expanded tubular string can tolerate. Independently there are the time issues for the cement to set up, whether it is delivered before or after the tubular string is expanded. The present invention where heat is generated preferably with an exothermic reaction mitigates these issues by allowing strength recovery that is lost due to the Bauschinger effect either partially or totally depending on the temperature generated for the well fluids and the exposure duration.

[0022] It should be noted that the Bauschinger effect kicks in when the loading is reversed after expansion. Before expansion the tubular properties in expansion and compression loading are comparable. Due to the Bauschinger effect the compression loading capability noticeably drops by as much as 30% and possibly more depending on the degree of expansion. This effect is dependent also on the material being expanded. Presently, there are no uniform standards for measurement of the yield strength and modulus of elasticity reductions experienced during expansion of metal tubulars.

[0023] The onset of the chemical exothermic reaction can coincide with well shut in to accelerate the reaction and to attain somewhat higher overall temperatures for the well fluids. Even in situations where there is no tubular expansion, the use of the exothermic chemical reaction can be beneficial for accelerating of the curing of the cement or other sealant. In addition the availability of the heat generated in the reaction can also provide more versatility in using lower viscosity cement that will be easier to pump in an annular space already made smaller with tubular expansion. Lower cement densities can be considered which can lower the compressive stress on the expanded tubular with the shorter curing times that are made possible by the heat generation in the wellbore.

[0024] The range of times for the application of the heat can be as short as several minutes and can last several hours depending on the degree of reversal of the Bauschinger effect that is desired. Higher generated temperatures result in greater property recoveries from the losses of the Bauschinger effect with shorter exposure times.

[0025] Some reactants that are useful in creating the desired heat are discussed in US Publication 2011/0114323 and are generally acid/base reactions that have delivered temperatures in the range of 245 degrees Centigrade. Those combinations are fully incorporated herein as though actually set forth.

[0026] Also envisioned are alternative heat sources such as electric heaters, geothermal heat sources, and surface circulation systems with heating added at the surface such as boilers generating steam for heat exchangers with pumped well fluids through them, or solar heaters, to name a few examples. The well fluids can be heated in place or while there is circulation or reverse circulation as the exothermic reaction occurs.

[0027] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below:

We claim:

1. A completion method, comprising:
delivering a tubular string to a predetermined subterranean location;
expanding said string;
raising the temperature of well fluid at the subterranean location to a predetermined temperature;
reversing a Bauschinger effect from said expanding with said raising the temperature.
2. The method of claim 1, comprising:
reducing differential compressive loading on said string from formation fluids at the subterranean location during said raising the temperature.
3. The method of claim 1, comprising:
using an exothermic reaction for raising the temperature.
4. The method of claim 1, comprising:
raising said temperature after said expanding.
5. The method of claim 1, comprising:
accelerating the curing of a sealing material with said raising the temperature.
6. The method of claim 3, comprising:
separating reactants that react exothermically when delivering said reactants to a predetermined location in said string.
7. The method of claim 6, comprising:
pumping a spacer into said string between said reactants for said separation.
8. The method of claim 7, comprising:
mixing said reactants with a static or dynamic mixer in said string.
9. The method of claim 6, comprising:
using discrete delivery tubes to separate said reactants during delivery to the predetermined location in said string.
10. The method of claim 10, comprising:
using coiled tubing with lower end wall perforations for said discrete delivery tubes.

11. The method of claim 5, comprising:
placing said sealing material in an annular space about said tubular string before or after said expanding.
12. The method of claim 11, comprising:
selecting a lower viscosity or density cement than would otherwise be selected due to said raising the temperature.
13. The method of claim 11, comprising:
using cement as said sealing material;
disposing said cement between multiple walls that define said string.
14. A completion method, comprising:
delivering a tubular string to a predetermined subterranean location;
sealing an annular space about said string with a sealing material whose curing rate is responsive to temperature;
raising the temperature of well fluid at the subterranean location to a predetermined temperature to accelerate said curing.
15. The method of claim 14, comprising:
expanding said string;
using an exothermic reaction for said raising the temperature.
16. The method of claim 15, comprising:
separating reactants that react exothermically when delivering said reactants to a predetermined location in said string.
17. The method of claim 16, comprising:
pumping a spacer into said string between said reactants for said separation.
18. The method of claim 17, comprising:
mixing said reactants with a static or dynamic mixer in said string.
19. The method of claim 16, comprising:
using discrete delivery tubes to separate said reactants during delivery to the predetermined location in said string.
20. The method of claim 19, comprising:
using coiled tubing with lower end wall perforations for said discrete delivery tubes.

21. The method of claim **14**, comprising:
placing said sealing material in an annular space about said tubular string before or after said expanding.
22. The method of claim **14**, comprising:
selecting a lower viscosity or density cement than would otherwise be selected due to said raising the temperature.
23. The method of claim **14**, comprising:
using cement as said sealing material;
disposing said cement between multiple walls that define said string.
24. The method of claim **16**, comprising:
reversing a Bauschinger effect from said expanding with said raising the temperature.

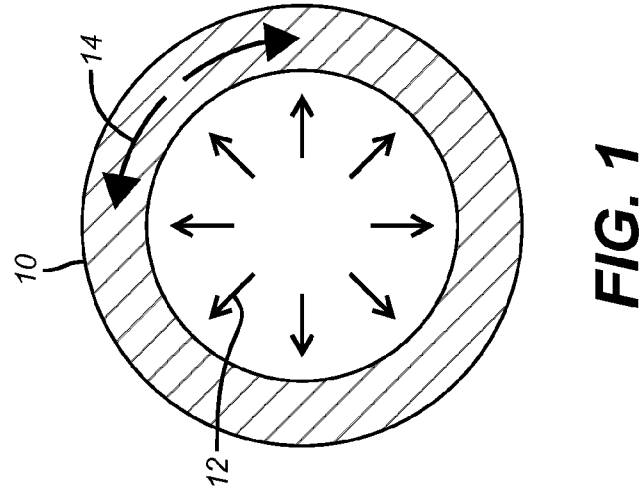


FIG. 1

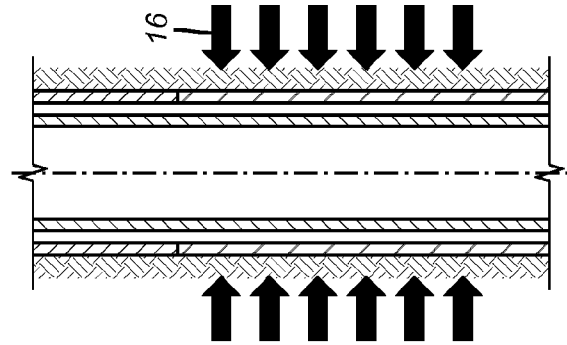


FIG. 2

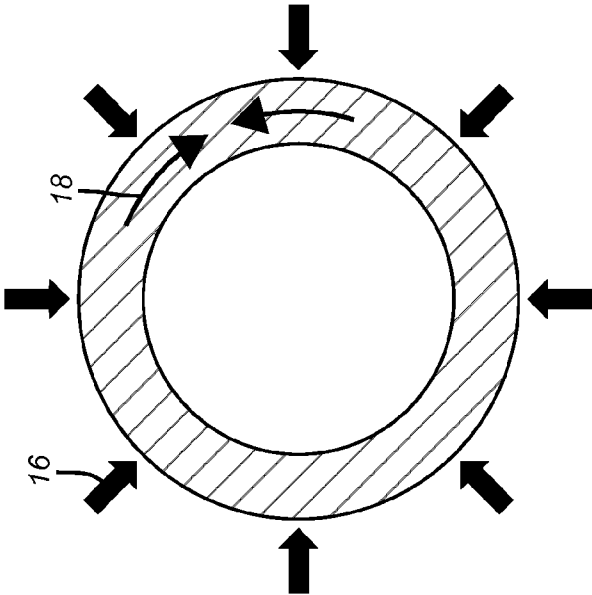


FIG. 3

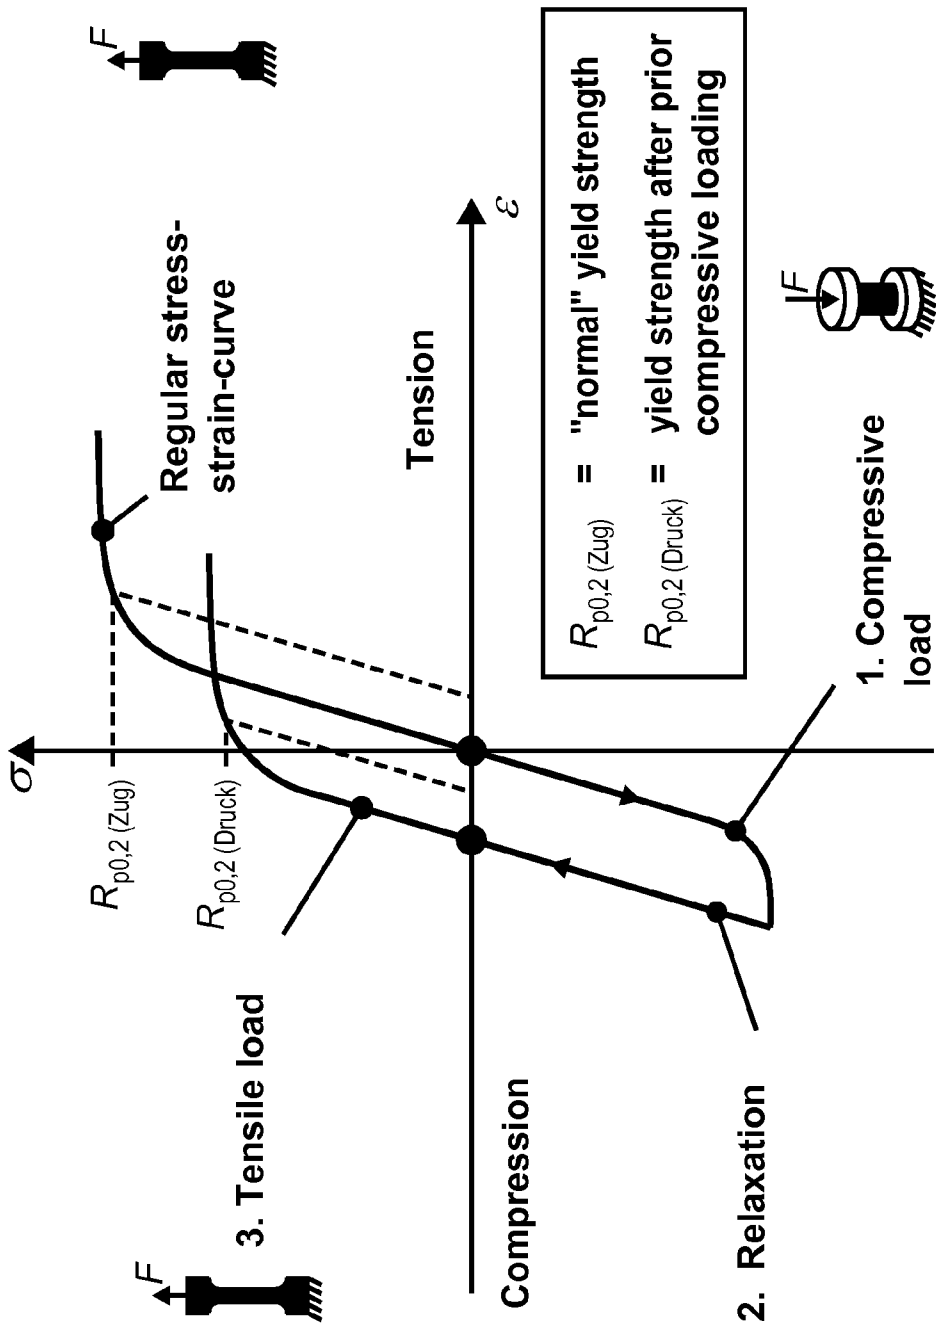


FIG. 4

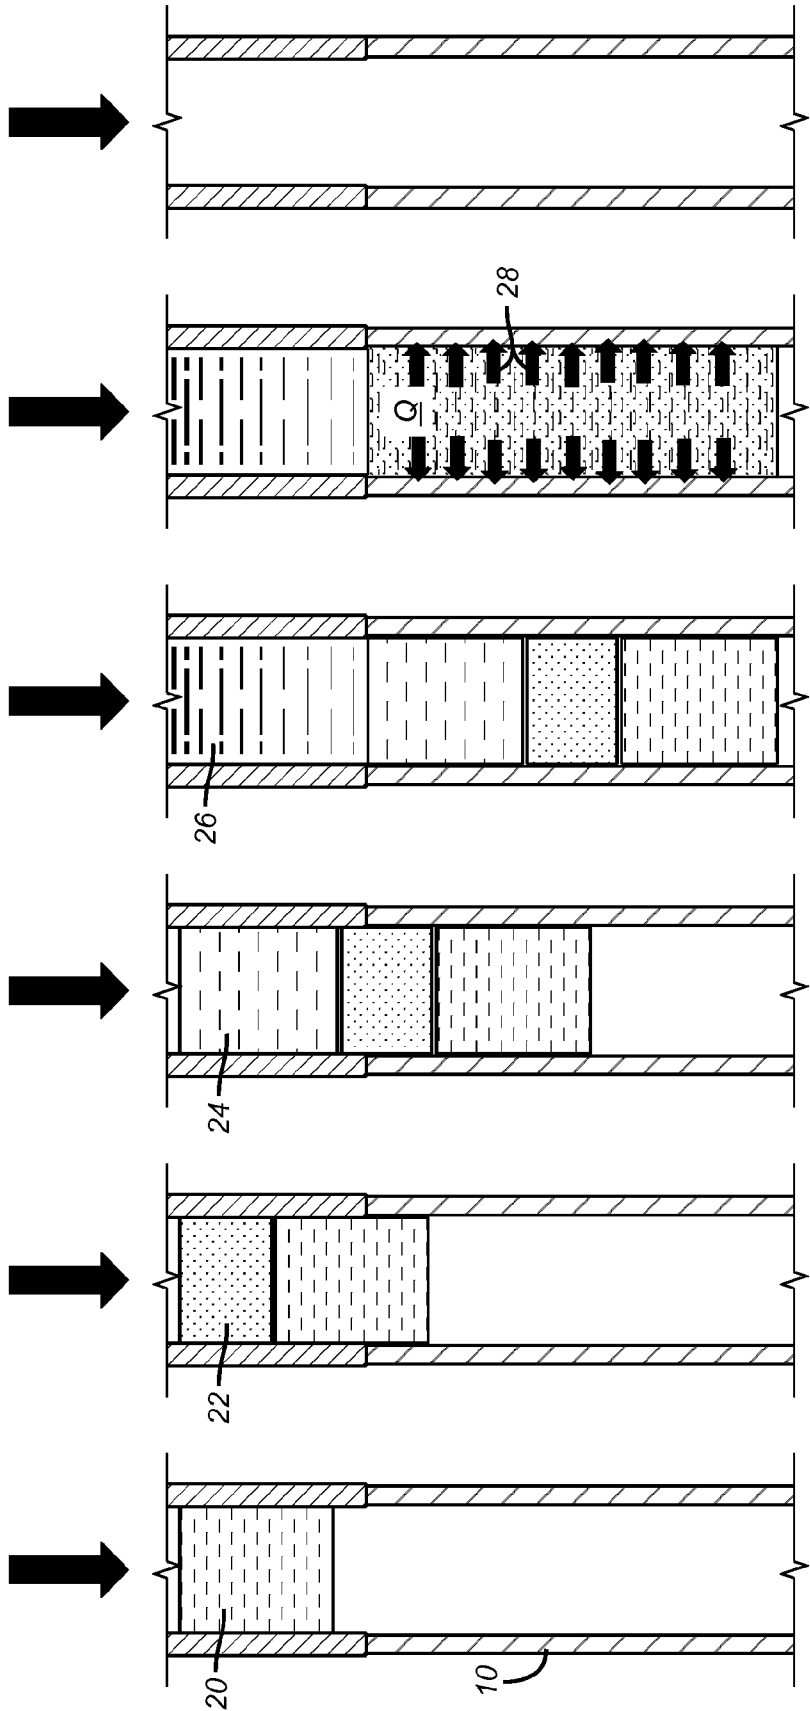


FIG. 5 **FIG. 6** **FIG. 7** **FIG. 8** **FIG. 9** **FIG. 10**

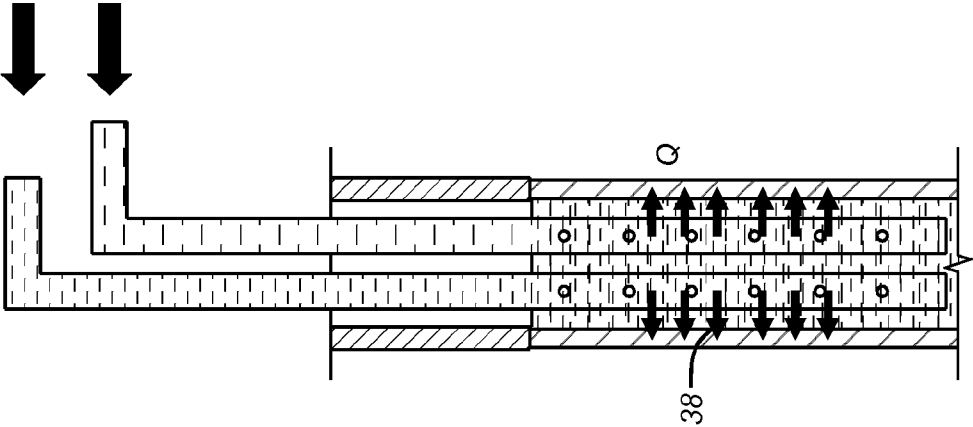


FIG. 11

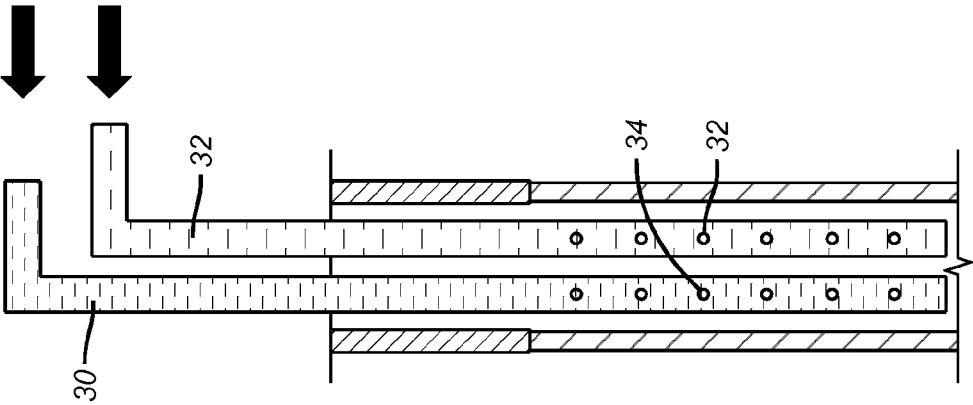


FIG. 12

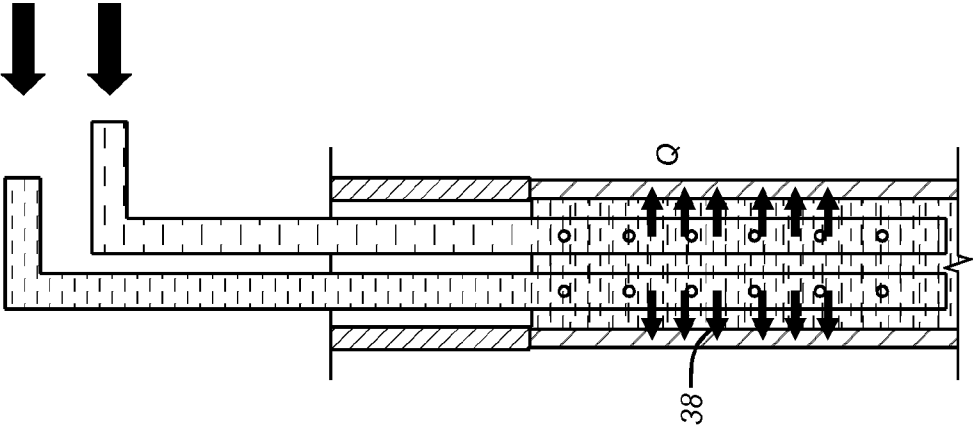


FIG. 13

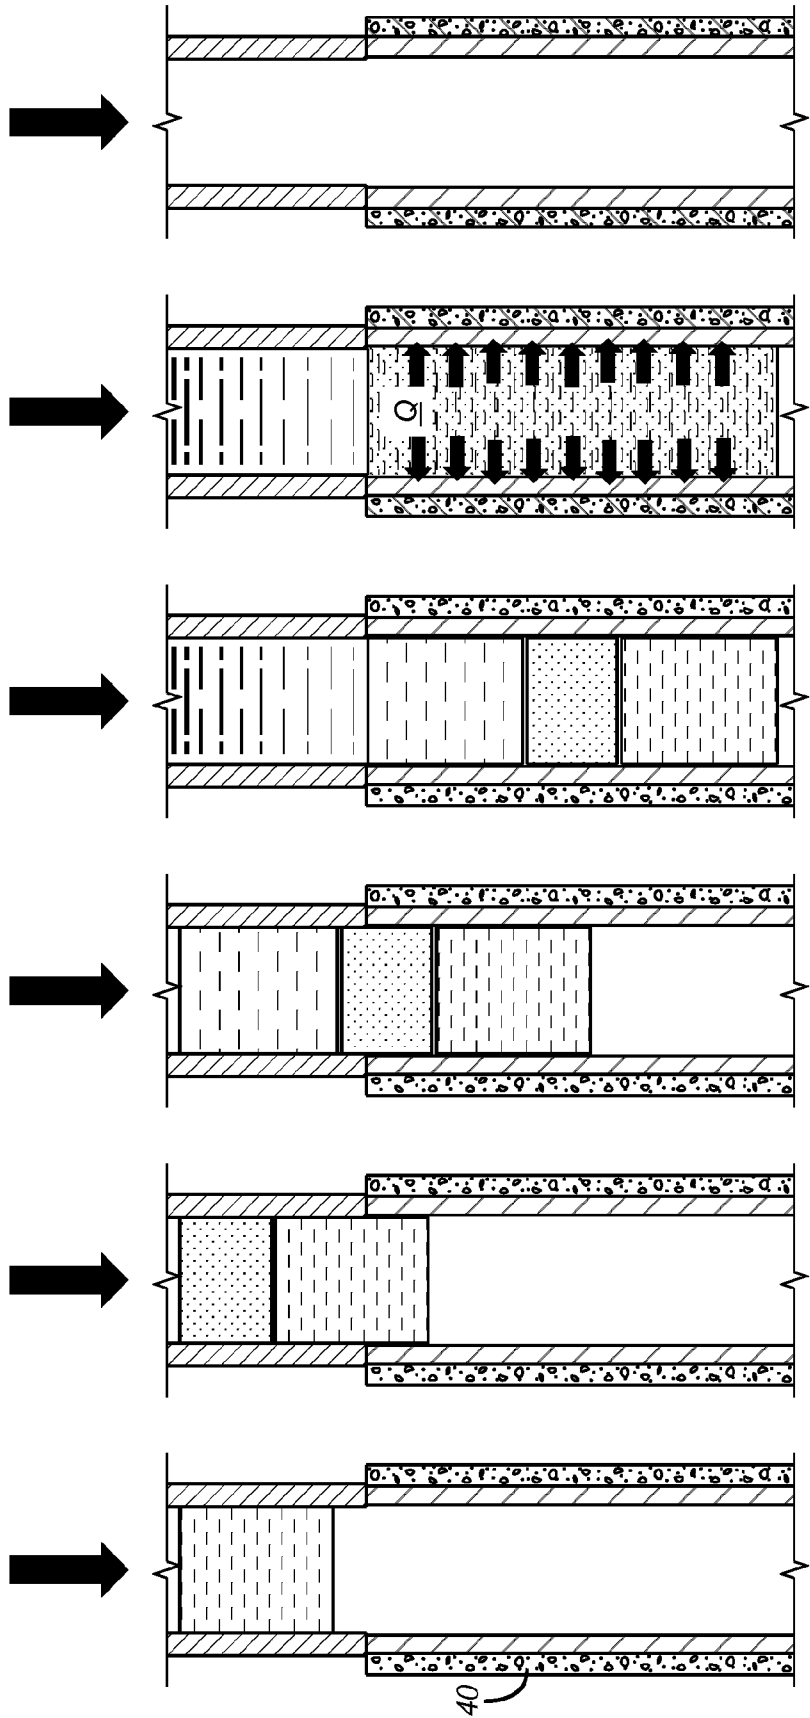


FIG. 19

FIG. 18

FIG. 17

FIG. 16

FIG. 15

FIG. 14

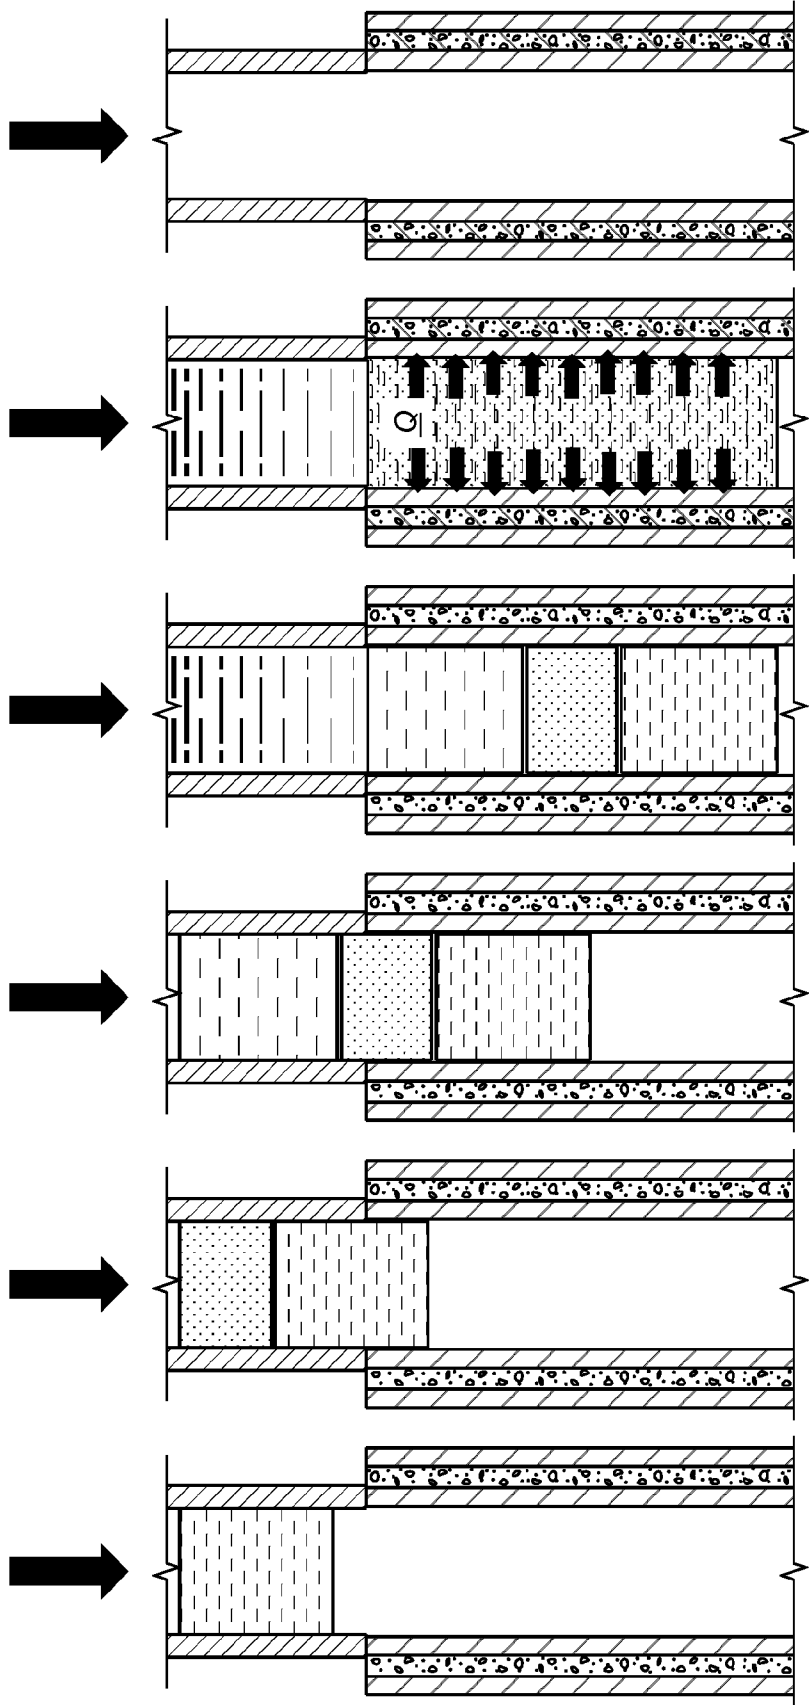


FIG. 20 FIG. 21 FIG. 22 FIG. 23 FIG. 24 FIG. 25

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/036600**A. CLASSIFICATION OF SUBJECT MATTER****E21B 33/128(2006.01)i, E21B 7/14(2006.01)i, E21B 17/01(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
E21B 33/128; E21B 7/14; E21B 17/01Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: expanded tubular, Bauschinger effect, well fluid, heat treatment, and cement curing**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005-0194190 A1 (BECKER THOMAS E. et al.) 08 September 2005 See paragraphs [0005], [0009], [0011] and figure 1.	14,22-23
A		1-13, 15-21, 24
Y	US 2010-0206570 A1 (OCAMPOS, ERNESTO RAFAEL FONSECA et al.) 19 August 2010 See paragraphs [0737]-[0740] and figure 68.	14,22-23
A	WO 2006-014333 A2 (ENVENTURE GLOBAL TECHNOLOGY, LLC) 09 February 2006 See paragraphs [0034], [0040] and figures 1-4, 36a.	1-24
A	US 2843512 A (LODGE, JOSEPH W.) 15 July 1958 See column 1, line 53 - column 3, line 3.	1-24
A	US 2011-0114323 A1 (JENNINGS, DAVID W. et al.) 19 May 2011 See abstract and paragraph [0009].	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 July 2013 (25.07.2013)

Date of mailing of the international search report

26 July 2013 (26.07.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City,
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005-0194190 A1	08/09/2005	AR 048066 A1	29/03/2006
		US 7156172 B2	02/01/2007
		WO 2005-085587 A2	15/09/2005
		WO 2005-085587 A3	01/12/2005
US 2010-0206570 A1	19/08/2010	AU 2006-239886 A1	02/11/2006
		AU 2006-239958 A1	02/11/2006
		AU 2006-239961 A1	02/11/2006
		AU 2006-239962 A1	02/11/2006
		AU 2006-239963 A1	02/11/2006
		AU 2006-239988 A1	02/11/2006
		AU 2006-239996 A1	02/11/2006
		AU 2006-239997 A1	02/11/2006
		AU 2006-239999 A1	02/11/2006
		AU 2006-240033 A1	02/11/2006
		AU 2006-240043 A1	02/11/2006
		AU 2006-240173 A1	02/11/2006
		AU 2006-240175 A1	02/11/2006
		AU 2006-306404 A1	03/05/2007
		AU 2006-306411 A1	03/05/2007
		AU 2006-306412 A1	03/05/2007
		AU 2006-306414 A1	03/05/2007
		AU 2006-306471 A1	03/05/2007
		AU 2006-306472 A1	03/05/2007
		AU 2006-306475 A1	03/05/2007
		AU 2006-306476 A1	03/05/2007
		AU 2006-340864 A1	04/10/2007
		AU 2007-240346 A1	01/11/2007
		AU 2007-240353 A1	01/11/2007
		AU 2007-240367 A1	01/11/2007
		AU 2007-261281 A1	27/12/2007
		AU 2007-309735 A1	02/05/2008
		AU 2007-319714 A1	22/05/2008
		AU 2008-242796 A1	30/10/2008
		AU 2008-242797 A1	30/10/2008
		AU 2008-242799 A1	30/10/2008
		AU 2008-242801 A1	30/10/2008
		AU 2008-242803 A1	30/10/2008
		AU 2008-242805 A1	30/10/2008
		AU 2008-242807 A1	30/10/2008
		AU 2008-242808 A1	30/10/2008
		AU 2008-242810 A1	30/10/2008
		AU 2008-312713 A1	23/04/2009
		AU 2009-251533 A1	03/12/2009
		AU 2009-303604 A1	22/04/2010
		AU 2009-303605 A1	22/04/2010
		AU 2009-303606 A1	22/04/2010
		AU 2009-303608 A1	22/04/2010
		AU 2009-303609 A1	22/04/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		AU 2009-303610 A1	22/04/2010
		CA 2605720 A1	02/11/2006
		CA 2605724 A1	02/11/2006
		CA 2605729 A1	02/11/2006
		CA 2605734 A1	02/11/2006
		CA 2605737 A1	02/11/2006
		CA 2606165 A1	02/11/2006
		CA 2606176 A1	02/11/2006
		CA 2606181 A1	02/11/2006
		CA 2606210 A1	02/11/2006
		CA 2606216 A1	02/11/2006
		CA 2606217 A1	02/11/2006
		CA 2606218 A1	02/11/2006
		CA 2606295 A1	02/11/2006
		CA 2626319 A1	04/10/2007
		CA 2626905 A1	03/05/2007
		CA 2626946 A1	03/05/2007
		CA 2626959 A1	03/05/2007
		CA 2626962 A1	03/05/2007
		CA 2626965 A1	03/05/2007
		CA 2626969 A1	03/05/2007
		CA 2626970 A1	03/05/2007
		CA 2626972 A1	03/05/2007
		CA 2649348 A1	27/12/2007
		CA 2649379 A1	01/11/2007
		CA 2649394 A1	01/11/2007
		CA 2649503 A1	01/11/2007
		CA 2649802 A1	02/05/2008
		CA 2650089 A1	22/05/2008
		CA 2653797 A1	06/12/2007
		CA 2665862 A1	02/05/2008
		CA 2665864 A1	02/05/2008
		CA 2665865 A1	02/05/2008
		CA 2665869 A1	02/05/2008
		CA 2666206 A1	02/05/2008
		CA 2666947 A1	02/05/2008
		CA 2666956 A1	02/05/2008
		CA 2666959 A1	02/05/2008
		CA 2667274 A1	02/05/2008
		CA 2684420 A1	30/10/2008
		CA 2684422 A1	30/10/2008
		CA 2684430 A1	30/10/2008
		CA 2684437 A1	30/10/2008
		CA 2684442 A1	30/10/2008
		CA 2684466 A1	30/10/2008
		CA 2684468 A1	30/10/2008
		CA 2684471 A1	30/10/2008
		CA 2684485 A1	30/10/2008
		CA 2684486 A1	30/10/2008
		CA 2698564 A1	23/04/2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2700732 A1	23/04/2009
		CA 2700735 A1	23/04/2009
		CA 2700737 A1	23/04/2009
		CA 2700998 A1	23/04/2009
		CA 2701166 A1	23/04/2009
		CA 2701169 A1	23/04/2009
		CA 2718767 A1	03/12/2009
		CA 2738804 A1	22/04/2010
		CA 2738805 A1	22/04/2010
		CA 2738939 A1	22/04/2010
		CA 2739039 A1	22/04/2010
		CA 2739088 A1	22/04/2010
		CA 2758192 A1	14/10/2010
		CA 2776521 A1	14/04/2011
		CA 2777117 A1	14/04/2011
		CA 2777119 A1	14/04/2011
		CA 2793627 A1	13/10/2011
		CA 2794569 A1	13/10/2011
		CA 2794689 A1	13/10/2011
		CN 101163780 A	16/04/2008
		CN 101163851 A0	16/04/2008
		CN 101163852 A0	16/04/2008
		CN 101163852 B	04/04/2012
		CN 101163853 A	16/04/2008
		CN 101163853 B	21/03/2012
		CN 101163854 A0	16/04/2008
		CN 101163854 B	20/06/2012
		CN 101163855 A0	16/04/2008
		CN 101163855 B	28/09/2011
		CN 101163856 A	16/04/2008
		CN 101163856 B	20/06/2012
		CN 101163857 A0	16/04/2008
		CN 101163857 B	28/11/2012
		CN 101163858 A0	16/04/2008
		CN 101163858 B	22/02/2012
		CN 101163859 A	16/04/2008
		CN 101163859 B	10/10/2012
		CN 101163860 A	16/04/2008
		CN 101163860 B	16/01/2013
		CN 101297021 A	29/10/2008
		CN 101297096 A	29/10/2008
		CN 101297096 B	19/06/2013
		CN 101300401 A	05/11/2008
		CN 101300401 B	11/01/2012
		CN 101313126 A	26/11/2008
		CN 101313126 B	16/01/2013
		CN 101316913 A	03/12/2008
		CN 101316916 A	03/12/2008
		CN 101316982 A	03/12/2008
		CN 101316982 B	20/06/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006-014333 A2	09/02/2006	CN 101316983 A	03/12/2008
		CN 101316983 B	28/11/2012
		CN 101316984 A	03/12/2008
		CN 101427004 A	06/05/2009
		CN 101454536 A	10/06/2009
		CN 101454536 B	29/05/2013
		CN 101466914 A	24/06/2009
		CN 101553640 A	07/10/2009
		CN 101553640 B	29/05/2013
		CN 101563523 A	21/10/2009
		CN 101680286 A	24/03/2010
		CN 101680287 A	24/03/2010
		CN 101680292 A	24/03/2010
		CN 101680292 B	29/05/2013
		CN 101688442 A	31/03/2010
		CN 101827999 A	08/09/2010
		CN 102007266 A	06/04/2011
		CN 102187052 A	14/09/2011
		CN 102187053 A	14/09/2011
		CN 102187054 A	14/09/2011
		CN 102187055 A	14/09/2011
		CN 102203377 A	28/09/2011
		CN 102612640 A	25/07/2012
		CN 102612789 A	25/07/2012
		CA 2535817 A1	24/02/2005
		CA 2537242 A1	22/09/2005
		CA 2575811 A1	16/02/2006
		CA 2576985 A1	23/02/2006
		CA 2576989 A1	30/03/2006
		CA 2577043 A1	23/02/2006
		CA 2577067 A1	23/02/2006
		CA 2577083 A1	23/02/2006
		CN 101035963 A0	12/09/2007
		CN 101133229 A0	27/02/2008
		CN 101305155 A	12/11/2008
		CN 101410587 A	15/04/2009
		CN 1878926 A	13/12/2006
		EP 1771637 A2	11/04/2007
		EP 1792040 A2	06/06/2007
		EP 1792043 A2	06/06/2007
		EP 1792044 A2	06/06/2007
		GB 2419913 A	10/05/2006
		GB 2420810 A	07/06/2006
		GB 2420811 A	07/06/2006
		GB 2421262 A	21/06/2006
		GB 2425137 A	18/10/2006
		GB 2431953 A	09/05/2007
		GB 2432178 A	16/05/2007
		GB 2432383 A	23/05/2007

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		GB 2432384 A	23/05/2007
		GB 2432385 A	23/05/2007
		GB 2432386 A	23/05/2007
		GB 2432605 A	30/05/2007
		GB 2432609 A	30/05/2007
		GB 2432866 A	06/06/2007
		GB 2432867 A	06/06/2007
		GB 2433756 A	04/07/2007
		GB 2436114 A	19/09/2007
		GB 2436115 A	19/09/2007
		GB 2441696 A	12/03/2008
		GB 2442645 A	09/04/2008
		GB 2443124 A	23/04/2008
		JP 2007-521430 A	02/08/2007
		JP 2008-509300 A	27/03/2008
		JP 2008-510067 A	03/04/2008
		JP 2008-510069 A	03/04/2008
		JP 2008-510086 A	03/04/2008
		US 2006-0283603 A1	21/12/2006
		US 2007-0163785 A1	19/07/2007
		US 2007-0205001 A1	06/09/2007
		US 2007-0215360 A1	20/09/2007
		US 2007-0266756 A1	22/11/2007
		US 2008-0000645 A1	03/01/2008
		US 2008-0035251 A1	14/02/2008
		US 2008-0115931 A1	22/05/2008
		US 2008-0236230 A1	02/10/2008
		US 2008-0257542 A1	23/10/2008
		US 2009-0193871 A1	06/08/2009
		US 2009-0301733 A1	10/12/2009
		US 2010-0024348 A1	04/02/2010
		US 7819185 B2	26/10/2010
		US 8196652 B2	12/06/2012
		WO 2005-017303 A2	24/02/2005
		WO 2005-017303 A3	15/03/2007
		WO 2005-024170 A2	17/03/2005
		WO 2005-024170 A3	16/02/2006
		WO 2005-024171 A2	17/03/2005
		WO 2005-024171 A3	16/03/2006
		WO 2005-028803 A2	31/03/2005
		WO 2005-028803 A3	13/12/2012
		WO 2005-079186 A2	01/09/2005
		WO 2005-079186 A3	17/11/2005
		WO 2005-086614 A2	22/09/2005
		WO 2005-086614 A3	13/12/2012
		WO 2006-014333 A3	09/04/2009
		WO 2006-017459 A2	16/02/2006
		WO 2006-020723 A2	23/02/2006
		WO 2006-020723 A3	01/03/2007
		WO 2006-020726 A2	23/02/2006

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036600

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2006-020726 A3	10/01/2008
		WO 2006-020734 A2	23/02/2006
		WO 2006-020734 A3	09/11/2006
		WO 2006-020809 A2	23/02/2006
		WO 2006-020809 A3	12/07/2007
		WO 2006-020810 A2	23/02/2006
		WO 2006-020810 A3	31/08/2006
		WO 2006-020827 A2	23/02/2006
		WO 2006-020827 A3	15/06/2006
		WO 2006-020913 A2	23/02/2006
		WO 2006-020913 A3	28/09/2006
		WO 2006-020960 A2	23/02/2006
		WO 2006-020960 A3	16/10/2008
		WO 2006-033720 A2	30/03/2006
		WO 2006-033720 A3	27/09/2007
US 2843512 A	15/07/1958	None	
US 2011-0114323 A1	19/05/2011	CA 2780890 A1	26/05/2011
		EP 2501898 A2	26/09/2012
		EP 2501898 A4	15/05/2013
		WO 2011-062799 A2	26/05/2011
		WO 2011-062799 A3	21/07/2011