(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 September 2010 (10.09.2010)

PCT

(10) International Publication Number
WO 2010/102127 A1

(51) International Patent Classification:
H04W 24/08 (2009.01)

(21) International Application Number:
PCT/US2010/026239

(22) International Filing Date:
4 March 2010 (04.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/157,474 4 March 2009 (04.03.2009) US

(71) Applicant *(for all designated States except US)*: **CISCO TECHNOLOGY, INC.** [US/US]; 170 West Tasman Drive, San Jose, CA 95134-1706 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **RAMANKUTTY, Rajesh** [US/US]; 111 Cadogan Way, Nashua, NH 03062 (US). **CHOWDHURY, Kuntal** [US/US]; 6 Odyssey Way, Andover, MA 01810 (US). **GIBBS, Andrew** [US/US]; 140 Hidden Road, Andover, MA 01810 (US).

(74) Agents: **BROWN, Benjamin K.** et al.; Wilmer Cutler Pickering Hale And Dorr LLP, 60 State Street, Boston, MA 02109 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

[Continued on next page]

(54) Title: DETECTING OVERLOADS IN NETWORK DEVICES

(57) Abstract: Systems and methods are provided to allow detection of the load conditions on network devices. The load detection can occur using a mobility management device to track establishment of sessions and attempts at session establishment to determine the loading conditions on various network devices. This information can then be used by a selection logic to determine which devices are selected to send session establishment messaging for new session establishment requests. This can provide quicker setup times as highly loaded network devices or network devices experiences other failures are selected less until conditions are back to normal.

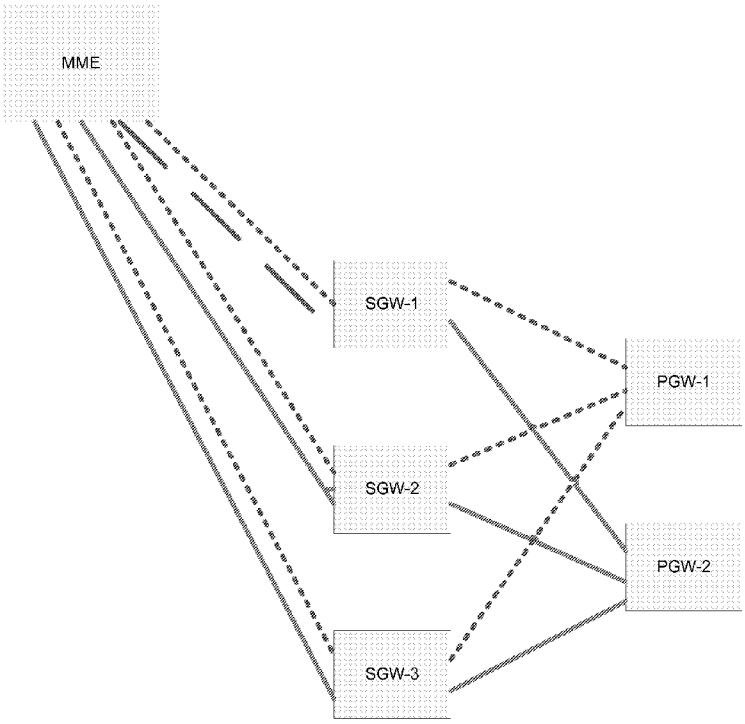


FIG. 3

WO 2010/102127 A1

TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

DETECTING OVERLOADS IN NETWORK DEVICES

Cross-Reference to Related Applications

[0001] This application claims benefit under 35 U.S.C. § 119(e) of U.S. Provisional Patent Application No.: 61/157,474, entitled "Detecting Overloads in Network Devices," filed March 4, 2009, which is hereby incorporated by reference herein in its entirety.

Field of the Disclosure

[0002] This disclosure relates to a system and method for detecting overloads in network devices in a communication network.

Background

[0003] Wireless networks are telecommunications networks that use radio waves to carry information from one node in the network to one or more receiving nodes in the network. Wired communication can also be used in portions of a wireless network, such as between cells or access points. Cellular telephony is characterized by the use of radio cells that provide radio coverage for a geographic area, with multiple cells arranged to provide contiguous radio coverage over a larger area.

[0004] The first generation of wireless telephone technology used analog mobile phones in which analog information signals were transmitted. As technology progressed a second generation (2G) of wireless service was introduced. In 2G systems, digital information signals were used to modulate a carrier. These 2G technologies used time division multiplexed access (TDMA) or code division multiple access (CDMA) technologies to distinguish multiple users. Such networks that were upgraded to handle higher-speed packet data in networks referred to as 2.5G and 3G networks. The 3rd Generation Partnership Project (3GPP) and the 3rd Generation Partnership Project 2 (3GPP2) respectively developed the GSM/UMTS/HSDPA and cdmaOne/CDMA2000 technologies. The next evolution is 4G technology, which is referred to as long term evolution-system architecture evolution (LTE-SAE) and uses orthogonal frequency division multiple access (OFDMA) technology.

[0005] Other wireless protocols have also developed, including WiFi, an implementation of various IEEE 802.11 protocols, WiMAX, an implementation of IEEE 802.16, and HiperMAN, which is based on an ETSI alternative to IEEE 802.16.

[0006] Wireless communication technologies are used in connection with many applications, including, for example, satellite communications systems, portable digital assistants (PDAs), laptop computers, and mobile devices (e.g., cellular telephones, user equipment). One benefit that users of such applications can obtain is the ability to connect to a network (e.g., the Internet) as long as the user is within range of such a wireless communication technology.

Summary of the Disclosure

[0007] Systems and methods are provided to allow detection of the load conditions on network devices. The load detection can occur using a mobility management device to track establishment of sessions and attempts at session establishment to determine the loading conditions on various network devices. This information can then be used by a selection logic to determine which devices are selected to send session establishment messaging for new session establishment requests. This can provide quicker setup times as highly loaded network devices or network devices experiences other failures are selected less until conditions are back to normal.

[0008] In some embodiments, a method for dynamically detecting gateway load conditions at a mobility management entity (MME) in a communication network is disclosed that includes a plurality of packet data network gateways (PGWs) and a plurality of serving gateways (SGWs), each of the serving gateways for communicating with the MME and with one or more PGWs. The method further includes sending a plurality of session establishment requests from the MME to a plurality of SGWs, the session establishment requests configured to be further sent from the SGWs to one or more PGWs, receiving a plurality of corresponding session establishment responses from the plurality of SGWs, the responses including information relating to whether a session can be established with a PGW in combination with an SGW, the responses indicating a success or failure in the ability to establish a session with a combined SGW and PGW, from the information relating to success or failure of PGW-SGW combinations, and in response to information relating to a failure, determining whether the failure is at the PGW or the SGW, and identifying any PGW and

SGW gateways that are determined to have failed, the method thus determining from information relating to failures of combinations of SGWs and PGWs whether the failure is caused by the PGW, whether the failure is caused by the SGW, or whether the failure is at both the PGW and the SGW.

[0009] In certain embodiments, a method for dynamically detecting load conditions from a control node in a communication network is disclosed that includes a plurality of gateways, the method including sending a plurality of session establishment requests from the control node to a plurality of gateways through a plurality of intervening gateways, receiving a plurality of corresponding session establishment responses from the plurality of gateways through the plurality of intervening gateways, storing the corresponding session establishment responses in a data structure at the control node, determining the failure conditions of at least one of the gateways and intervening gateways based on the data structure, including determining from failure information whether the failure condition is at the gateway or the intervening gateway, and identifying any gateways which are determined to be failing, wherein the intervening gateways are configured to forward session establishment requests from the control node to one or more gateways, and are also configured to forward session establishment responses from one or more gateways to the control node.

[0010] In yet other embodiments, a mobility management entity (MME) for dynamically detecting load conditions in a communication network is disclosed that includes a plurality of serving gateways (SGWs) and a plurality of packet data gateways (PGWs). The MME includes a physical interface configured to send a plurality of session establishment requests from the MME to a plurality of PGWs through the plurality of SGWs, and to receive a plurality of corresponding session establishment responses from the plurality of PGWs through the plurality of SGWs, a storage medium configured to store the plurality of corresponding session establishment responses in a data structure, and a processing unit, in communication with the storage medium, that is configured to deduce the failure conditions of at least one of the PGWs and SGWs based on the data structure and identify any PGWs and SGWs which are determined to be failing, the processing unit for determining based on success and failure information, whether a failure is at the PGW or SGW when a failure indication indicates that a combination of a SGW and a PGW has failed.

Brief Description of the Drawings

[0011] FIG. 1 illustrates a network diagram in accordance with certain embodiments;

[0012] FIGS. 2 and 3 illustrate new session signaling in accordance with certain embodiments;

[0013] FIG. 4 illustrates a selection logic in accordance with certain embodiments; and

[0014] FIG. 5 illustrates a chassis in accordance with certain embodiments.

Detailed Description

[0015] Systems and methods of detecting overloads in network devices in communication systems are disclosed in certain embodiments. In some networks, it can be difficult to determine the exact cause of the failure to establish a new call or establish a new data session with the network. Since many network devices may be involved in setting up a call, a mobility management device, such as a mobility management entity (MME), may not be able to detect which network device is overloaded in the network. Since a mobility management device determines which network devices end up handling a call or data session, the mobile management device can benefit from knowing which devices are more heavily loaded than others.

[0016] FIG. 1 illustrates a network diagram in accordance with certain embodiments. FIG. 1 illustrates both a universal mobile telecommunication system (UMTS) release 8 network and a LTE network. The network diagram of FIG. 1 includes user equipment (UE) 110, an evolved nodeB (eNB) 112, a nodeB 114, a radio network controller (RNC) 116, a mobility management entity (MME)/user plane entity (UPE) 118, a system architecture evolution gateway (SAE GW) 120, a policy and charging rules function (PCRF) 122, home subscriber server (HSS) 124, core IP network 126, internet 128, and Serving General packet radio service Support Node (SGSN) 130. The MME 118, SAE GW 120, and SGSN 130 can be implemented in a chassis as described below. The SAE GW 120 can include a serving gateway (SGW) as well as a packet data network gateway (P-GW). In some embodiments, the SGW and P-GW can be implemented on separate network devices. The main component of the SAE architecture is the Evolved Packet Core (EPC), also known as SAE Core. The EPC includes the MME, SGW and P-GW components.

[0017] MME 118 is a control node for the LTE access network. The MME 118 is responsible for UE 110 tracking and paging procedures including retransmissions. MME 118 handles the bearer activation/deactivation process and is also responsible for choosing the SGW for a UE 110 at the initial attach and at time of an intra-LTE handover. The MME 118 also authenticates the user by interacting with the HSS 124. The MME 118 also generates and allocates temporary identities to UEs and terminates Non-Access Stratum (NAS) signaling. The MME 118 checks the authorization of the UE 110 to camp on the service provider's Public Land Mobile Network (PLMN) and enforces UE roaming restrictions. The MME 118 is the termination point in the network for ciphering/integrity protection for NAS signaling and handles the security key management. Lawful interception of signaling is also supported by the MME 118. The MME also provides the control plane function for mobility between LTE and 2G/3G access networks with the S3 interface terminating at the MME 118 from the SGSN 130. The MME 118 also terminates the S6a interface towards the home HSS for roaming UEs.

[0018] The SGW routes and forwards user data packets, while also acting as the mobility anchor for the user plane during inter-eNB handovers and as the anchor for mobility between LTE and other 3GPP technologies (terminating S4 interface and relaying the traffic between 2G/3G systems and PDN GW). For idle state UEs, the SGW terminates the down link data path and triggers paging when down link data arrives for the UE 110. The SGW manages and stores UE contexts, e.g. parameters of the IP bearer service and network internal routing information. The SGW also performs replication of the user traffic in case of lawful interception. The P-GW provides connectivity to the UE 110 to external packet data networks by being the point of exit and entry of traffic for the UE 110. A UE 110 may have simultaneous connectivity with more than one P-GW for accessing multiple packet data networks. The P-GW performs policy enforcement, packet filtering for each user, charging support, lawful interception, and packet screening. The P-GW also provides an anchor for mobility between 3GPP and non-3GPP technologies such as WiMAX and 3GPP2 (CDMA 1X and EvDO).

[0019] Currently, it can be difficult to directly determine at an MME whether a SGW or a PGW is overloaded and causing a new call or data session establishment failures. The messaging between the MME and the SGW does not specify the conditions particularly related to the SGW or the PGW. For example, if the SGW is overloaded, the MME will

receive an error, but the same error can be received if the PGW is overloaded. FIG. 2 illustrates signaling relating to call or data session establishment in accordance with some embodiments. Evolved General Packet Radio Service (GPRS) Tunneling Protocol for Control plane (GTPv2-C) can be used in the messaging communications between the MME, the SGW, and the PGW. Other protocols such as GTP-C or variants based on GPRS tunneling protocol can also be used. In FIG. 2, the MME sends a create session request 210 message to create a new session to the SGW. The MME can select the SGW and the PGW to use for creating a new session. The new session allows tunnels to be setup and upon establishment of a session data can begin following through the network to the UE. The data can include voice calls, content, or any other type of packet information. The MME uses the tracking area identity (TAI) to resolve to a pool of SGWs and the MME uses access point name (APN) to resolve to a pool of PGWs. The MME can then pick a SGW and a PGW from these pools. The SGW sends a create session request message 212 to the PGW.

[0020] The create session request 212 message prompts a create session response 214 message which can include a cause if the session cannot be established at the PGW. The error cause for the failure to establish a session can be such things as "No memory available", "No resources available", etc. The create session response 216 received from the SGW lists the same cause as the PGW and the error cause does not describe where the failure originated. The failure could also be because of a hardware failure and the create session response 216 would not be able to detail where the problem originated. Create session response 218 illustrates the problem in that the responsive messaging does not indicate whether the problem is at the SGW or the PGW.

[0021] In some embodiments, the MME can be implemented to deduce the overload conditions of the gateways (e.g., SGW and PGW). The implementation can use a data structure such as a table to record the results of transaction combinations. The data structure can include a time entered to determine how old information results are. Once a certain amount of time has elapsed, an entry can be discarded. The data structure can also overwrite an old entry with a new entry to keep information current. The data structure can be a database or a table of the form below:

SGW	PGW	Result-Code
SGW-1	PGW-1	Fail
SGW-1	PGW-2	Fail

SGW-2	PGW-1	Fail
SGW-2	PGW-2	Success
SGW-1	PGW-1	Fail
SGW-1	PGW-2	Success

[0022] FIG. 3 illustrates session establishment signaling in accordance with certain embodiments. The table above can be created from sending a number of session create requests as shown in FIG. 3 with MME, SGW-1, SGW-2, SGW-3, PGW-1, and PGW-2. By analyzing the data in the data structure, the MME can determine that the responses involving PGW-1 were failing (i.e., trying to reach the PGW-1 via SGW-1, SGW-2 and SGW-3 all failed). This implies that the PGW-1 is overloaded or some other failure has occurred. Some of the requests sent to PGW-2 resulted in successful responses, but the requests sent thru SGW-1 to PGW-2 resulted in failure. This implies that the SGW-2 is overloaded or otherwise incapacitated. This example shows how the information obtained from the session create messaging organized in the data structure allows loading to be determined. Based on the above analysis the MME may mark or otherwise designate PGW-1 and SGW-1 as overloaded.

[0023] When a network device is marked as overloaded, the mobility management device can modify distribution of session establishment signaling. This can include sending to a PGW or SGW that is determined to be overloaded. The distribution of signaling can be implemented by the MME assigning a lower weight in a round-robin selection among the similar gateways during the SGW selection and PGW-selection logic. The selection logic can be implemented in any applicable storage device such a computer readable medium. The MME can recompute the overload-detection logic every time it gets a response from the SGW, thus whenever the SGW or PGW is relieved of the overload condition it can be chosen at normal weight (priority).

[0024] In some embodiments, this selection logic allows operators to deploy a MME with 3rd party SGWs and PGWs. That is, the MME can communicate within the standard messaging with other gateway devices and determine overload condition to avoid setup delays. Other proprietary methods are possible to solve this problem of detecting an overload condition. This can be accomplished by introducing a new cause-code to specify whether the overload is in the SGW or PGW separately. Additionally, the mobility management device can poll the network devices to receive real-time load information such as the number of

session operating on the network device. This can be used to populate a data structure and the selection logic can employ an algorithm that assigns weights to the various network devices to dynamically choose the network devices best suited to handle the call or data session.

[0025] FIG. 4 illustrates a selection logic in accordance with certain embodiments. The selection logic can be stored in a computer readable medium that is accessible by a processor on a chassis implementing the MME. In 402, a new UE connection is signaled over the non access stratum (NAS) protocol to the MME. In 404, the MME forms a tracking area identity fully qualified domain name (TAI FQDN) from the eNodeB cell ID (eCID) including the tracking area identity. Using DNS straightforward-name authority pointer (S-NAPTR) procedure, the MME resolves the FDQN to a shortlist of SGW addresses and supported S5/S8 protocols. These are sorted based on a combination of NAPTR returned priority, on already existing sessions, and overload weighting. The overload weighting can be SGW or PGW loading conditions as represented in the data structure.

[0026] In 406, the MME finds SGWs in the shortlist created in 404. If no SGWs are found in the shortlist in 406, this UE cannot connect using NAS and the MME signals the UE that a session cannot be established in 408. If a SGW can be found in 406, a PGW is selected in 410 based on the S5/S8 protocol. In 412, the MME checks whether the SGW supports the same S5/S8 protocol as the PGW. If not in 414, the SGW is removed from the MME shortlist and the process starts over with a modified shortlist in 406. If the SGW does support the same protocol in 412, then the MME checks if the SGW is the last one in the shortlist in 416. If the SGW is the last one in the shortlist in 416, this SGW is chosen in 418 and a create session request is sent to the selected SGW.

[0027] If the SGW is not the last one in the shortlist 416, then the MME checks whether the SGW is marked as overloaded in 420. If the SGW is marked as overloaded in 420, this entry can be checked for when the SGW was marked and the number of times the SGW has been selected from the shortlist. If the time meets a threshold or a threshold number of tries have been passed up, this SGW is chosen and the new result is written into the data structure. For example, if the attempt is successful then the SGW is unmarked. If the attempt is unsuccessful, then the entry is rewritten as being unsuccessful resetting the time and number of attempts. If the threshold is not met in 420 and the SGW is marked as overloaded, then

this is removed from the shortlist in 414. The PGW can go through the same overloaded check in the selection logic to determine the PGW selected.

[0028] The chassis described above can implement multiple and different integrated functionalities. In some embodiments, a mobility management entity (MME), a serving gateway (SGW), a PDN gateway (P-GW), an access gateway, a packet data serving node (PDSN), a foreign agent (FA), or home agent (HA) can be implemented on a chassis. Other types of functionalities can also be implemented on a chassis in other embodiments are a Gateway General packet radio service Serving Node (GGSN), a serving GPRS support node (SGSN), a packet data inter-working function (PDIF), an access service network gateway (ASNGW), a base station, a access network, a User Plane Entity (UPE), an IP Gateway, an access gateway, a session initiation protocol (SIP) server, a proxy-call session control function (P-CSCF), and an interrogating-call session control function (I-CSCF), a serving gateway (SGW), and a packet data network gateway (PDN GW). In certain embodiments, one or more of the above-mentioned other types of functionalities are integrated together or provided by the same functionality. For example, an access network can be integrated with a PDSN. A chassis can include a PDSN, a FA, a HA, a GGSN, a PDIF, an ASNGW, a UPE, an IP Gateway, an access gateway, or any other applicable access interface device. In certain embodiments, a chassis is provided by Starent Networks, Corp. of Tewksbury, Massachusetts in a ST16 or a ST40 multimedia platform.

[0029] The features of a chassis that implements a gateway, in accordance with some embodiments, are further described below. FIG. 5 illustrates positioning of cards in the chassis in accordance with some embodiments. The chassis includes slots for loading application cards 990 and line cards 992. A midplane 994 can be used in the chassis to provide intra-chassis communications, power connections, and transport paths between the various installed cards. The midplane 994 can include buses such as a switch fabric, a control bus, a system management bus, a redundancy bus, and a time division multiplex (TDM) bus. The switch fabric is an IP-based transport path for user data throughout the chassis implemented by establishing inter-card communications between application cards and line cards. The control bus interconnects the control and management processors within the chassis. The chassis management bus provides management of system functions such as supplying power, monitoring temperatures, board status, data path errors, card resets, and other failover features. The redundancy bus provides transportation of user data and

redundancy links in the event of hardware failures. The TDM bus provides support for voice services on the system.

[0030] The chassis supports at least four types of application cards: a switch processor card, a system management card, a packet service card, and a packet accelerator card. The switch processor card serves as a controller of the chassis and is responsible for such things as initializing the chassis and loading software configurations onto other cards in the chassis. The packet accelerator card provides packet processing and forwarding capabilities. Each packet accelerator card is capable of supporting multiple contexts. Hardware engines can be deployed with the card to support parallel distributed processing for compression, classification traffic scheduling, forwarding, packet filtering, and statistics compilations. The system management card is a system control and management card for managing and controlling other cards in the gateway device. The packet services card is a high-speed processing card that provides multithreaded point-to-point, packet data processing, and context processing capabilities, among other things.

[0031] The packet accelerator card performs packet-processing operations through the use of control processors and a network processing unit. The network processing unit determines packet processing requirements; receives and transmits user data frames to/from various physical interfaces; makes IP forwarding decisions; implements packet filtering, flow insertion, deletion, and modification; performs traffic management and traffic engineering; modifies/adds/strips packet headers; and manages line card ports and internal packet transportation. The control processors, also located on the packet accelerator card, provide packet-based user service processing. The line cards when loaded in the chassis provide input/output connectivity and can also provide redundancy connections as well.

[0032] The operating system software can be based on a Linux software kernel and run specific applications in the chassis such as monitoring tasks and providing protocol stacks. The software allows chassis resources to be allocated separately for control and data paths. For example, certain packet accelerator cards can be dedicated to performing routing or security control functions, while other packet accelerator cards are dedicated to processing user session traffic. As network requirements change, hardware resources can be dynamically deployed to meet the requirements in some embodiments. The system can be virtualized to support multiple logical instances of services, such as technology functions (e.g., a PDN GW, SGW, PDSN, ASNGW, PDIF, HA, GGSN, or IPSG).

[0033] The chassis' software can be divided into a series of tasks that perform specific functions. These tasks communicate with each other as needed to share control and data information throughout the chassis. A task is a software process that performs a specific function related to system control or session processing. Three types of tasks operate within the chassis in some embodiments: critical tasks, controller tasks, and manager tasks. The critical tasks control functions that relate to the chassis' ability to process calls such as chassis initialization, error detection, and recovery tasks. The controller tasks mask the distributed nature of the software from the user and perform tasks such as monitor the state of subordinate manager(s), provide for intra-manager communication within the same subsystem, and enable inter-subsystem communication by communicating with controller(s) belonging to other subsystems. The manager tasks can control system resources and maintain logical mappings between system resources.

[0034] Individual tasks that run on processors in the application cards can be divided into subsystems. A subsystem is a software element that either performs a specific task or is a culmination of multiple other tasks. A single subsystem can include critical tasks, controller tasks, and manager tasks. Some of the subsystems that can run on a chassis include a system initiation task subsystem, a high availability task subsystem, a recovery control task subsystem, a shared configuration task subsystem, a resource management subsystem, a virtual private network subsystem, a network processing unit subsystem, a card/slot/port subsystem, and a session subsystem.

[0035] The system initiation task subsystem is responsible for starting a set of initial tasks at system startup and providing individual tasks as needed. The high availability task subsystem works in conjunction with the recovery control task subsystem to maintain the operational state of the chassis by monitoring the various software and hardware components of the chassis. Recovery control task subsystem is responsible for executing a recovery action for failures that occur in the chassis and receives recovery actions from the high availability task subsystem. Shared configuration task subsystem provides the chassis with an ability to set, retrieve, and receive notification of chassis configuration parameter changes and is responsible for storing configuration data for the applications running within the chassis. Resource management subsystem is responsible for assigning resources (e.g., processor and memory capabilities) to tasks and for monitoring the task's use of the resources.

[0036] Virtual private network (VPN) subsystem manages the administrative and operational aspects of VPN-related entities in the chassis, which include creating separate VPN contexts, starting IP services within a VPN context, managing IP pools and subscriber IP addresses, and distributing the IP flow information within a VPN context. In some embodiments, within the chassis, IP operations are done within specific VPN contexts. The network processing unit subsystem is responsible for many of the functions listed above for the network processing unit. The card/slot/port subsystem is responsible for coordinating the events that occur relating to card activity such as discovery and configuration of ports on newly inserted cards and determining how line cards map to application cards. The session subsystem is responsible for processing and monitoring a mobile subscriber's data flows in some embodiments. Session processing tasks for mobile data communications include: A10/A11 termination for CDMA networks, GSM tunneling protocol termination for GPRS and/or UMTS networks, asynchronous PPP processing, packet filtering, packet scheduling, Difserv codepoint marking, statistics gathering, IP forwarding, and AAA services, for example. Responsibility for each of these items can be distributed across subordinate tasks (called managers) to provide for more efficient processing and greater redundancy. A separate session controller task serves as an integrated control node to regulate and monitor the managers and to communicate with the other active subsystem. The session subsystem also manages specialized user data processing such as payload transformation, filtering, statistics collection, policing, and scheduling.

[0037] In some embodiments, the software needed for implementing a process or a database includes a high level procedural or an object-orientated language such as C, C++, C#, Java, or Perl. The software may also be implemented in assembly language if desired. Packet processing implemented in a chassis can include any processing determined by the context. For example, packet processing may involve high-level data link control (HDLC) framing, header compression, and/or encryption. In certain embodiments, the software is stored on a storage medium or device such as read-only memory (ROM), programmable-read-only memory (PROM), electrically erasable programmable-read-only memory (EEPROM), flash memory, or a magnetic disk that is readable by a general or special purpose-processing unit to perform the processes described in this document.

[0038] Although the present invention has been described and illustrated in the foregoing exemplary embodiments, it is understood that the present disclosure has been made only by

way of example, and that numerous changes in the details of implementation of the invention may be made without departing from the spirit and scope of the invention, which is limited only by the claims which follow.

What is claimed is:

1. A method for dynamically detecting gateway load conditions at a mobility management entity (MME) in a communication network including a plurality of packet data network gateways (PGWs) and a plurality of serving gateways (SGWs), each of the serving gateways for communicating with the MME and with one or more PGWs, the method comprising:

sending a plurality of session establishment requests from the MME to a plurality of SGWs, the session establishment requests configured to be further sent from the SGWs to one or more PGWs;

receiving a plurality of corresponding session establishment responses from the plurality of SGWs, the responses including information relating to whether a session can be established with a PGW in combination with an SGW, the responses indicating a success or failure in the ability to establish a session with a combined SGW and PGW;

from the information relating to success or failure of PGW-SGW combinations, and in response to information relating to a failure, determining whether the failure is at the PGW or the SGW; and

identifying any PGW and SGW gateways that are determined to have failed,

the method thus determining from information relating to failures of combinations of SGWs and PGWs whether the failure is caused by the PGW, whether the failure is caused by the SGW, or whether the failure is at both the PGW and the SGW.

2. The method of claim 1, further comprising the MME selecting an SGW for a new session based on the determined failure conditions of the SGWs and the determined failure conditions of the PGWs.

3. The method of claim 2, wherein if a MME determines that a given SGW or PGW has failed, the SGW or PGW determined to have failed is not selected by the MME for establishment of a new session, and it is removed from a list of available resources at the MME that is designated for use by new sessions.

4. The method of claim 1, wherein a failure indication indicates that a gateway is overloaded.

5. The method of claim 1, wherein sending and receiving messages at the MME is done using the General Packet Radio Service (GPRS) Tunneling Protocol for Control Plane (GTPv2-C) protocol.

6. The method of claim 1, further comprising storing the session establishment responses in a data structure at the MME, where the data structure includes information about age of session establishment response information, and session establishment response information is discarded once the age exceeds a specified threshold.

7. A method for dynamically detecting load conditions from a control node in a communication network including a plurality of gateways, the method comprising:

sending a plurality of session establishment requests from the control node to a plurality of gateways through a plurality of intervening gateways;

receiving a plurality of corresponding session establishment responses from the plurality of gateways through the plurality of intervening gateways;

storing the corresponding session establishment responses in a data structure at the control node;

determining the failure conditions of at least one of the gateways and intervening gateways based on the data structure, including determining from failure information whether the failure condition is at the gateway or the intervening gateway; and

identifying any gateways which are determined to be failing,

wherein the intervening gateways are configured to forward session establishment requests from the control node to one or more gateways, and are also configured to forward session establishment responses from one or more gateways to the control node.

8. The method of claim 7, wherein the plurality of gateways include a serving gateway (SGW) and the intervening gateways include a packet data network gateway (P-GW).

9. The method of claim 7, wherein if the control node determines that a given gateway has failed, the failed gateway is not selected by the control node for establishment of a new session, and it is removed from a list of available resources at the control node that is designated for use by new sessions.

10. The method of claim 7, wherein evaluation of success or failure of a given gateway comprises sending a plurality of session establishment requests to the gateway through at least two intervening gateways and receiving the corresponding session establishment responses at the control node, where each of the corresponding session establishment responses contains a failure result code.

11. The method of claim 7, wherein evaluation of success or failure of a given intervening gateway comprises sending at least two session establishment requests through the intervening gateway to another gateway and receiving the corresponding session establishment responses at the control node, where each of the corresponding session establishment responses contains a failure result code.

12. The method of claim 7, wherein a failure indication of a gateway indicates that the gateway is overloaded.

13. The method of claim 7, wherein the data structure includes a table with information about age of session establishment response information stored in the data structure, and session establishment response information is discarded once the age exceeds a specified threshold.

14. A mobility management entity (MME) for dynamically detecting load conditions in a communication network including a plurality of serving gateways (SGWs) and a plurality of packet data gateways (PGWs), the MME comprising:

a physical interface configured to send a plurality of session establishment requests from the MME to a plurality of PGWs through the plurality of SGWs, and to receive a plurality of corresponding session establishment responses from the plurality of PGWs through the plurality of SGWs;

a storage medium configured to store the plurality of corresponding session establishment responses in a data structure; and

a processing unit, in communication with the storage medium, that is configured to deduce the failure conditions of at least one of the PGWs and SGWs based on the data structure and identify any PGWs and SGWs which are determined to be failing, the processing unit for determining based on success and failure information, whether a failure is at the PGW or SGW when a failure indication indicates that a combination of a SGW and a PGW has failed.

15. The MME of claim 14, wherein the MME subsequently selects a SGW for a new session based on the determined failure conditions of the SGWs and the determined failure conditions of the PGWs.

16. The MME of claim 14, wherein the MME determines that a PGW is failing when the MME sends a plurality of session establishment requests to the PGW through at least two SGWs, the MME receives the corresponding session establishment responses, and each of the corresponding session establishment responses contains a failure result code.

17. The MME of claim 14, wherein the MME determines that a SGW is failing when the MME sends at least two session establishment requests through the SGW to a PGW, the MME receives the corresponding session establishment responses, and each of the corresponding session establishment responses contains a failure result code.

18. The MME of claim 14, wherein failure of a gateway is defined to include being overloaded.

19. The MME of claim 14, wherein the MME sends and receives messages using the General Packet Radio Service (GPRS) Tunneling Protocol for Control Plane (GTPv2-C) protocol.

20. The MME of claim 14, wherein the data structure includes a table with information about age of session establishment response information stored in the data structure, and session establishment response information is discarded once the age exceeds a specified threshold.

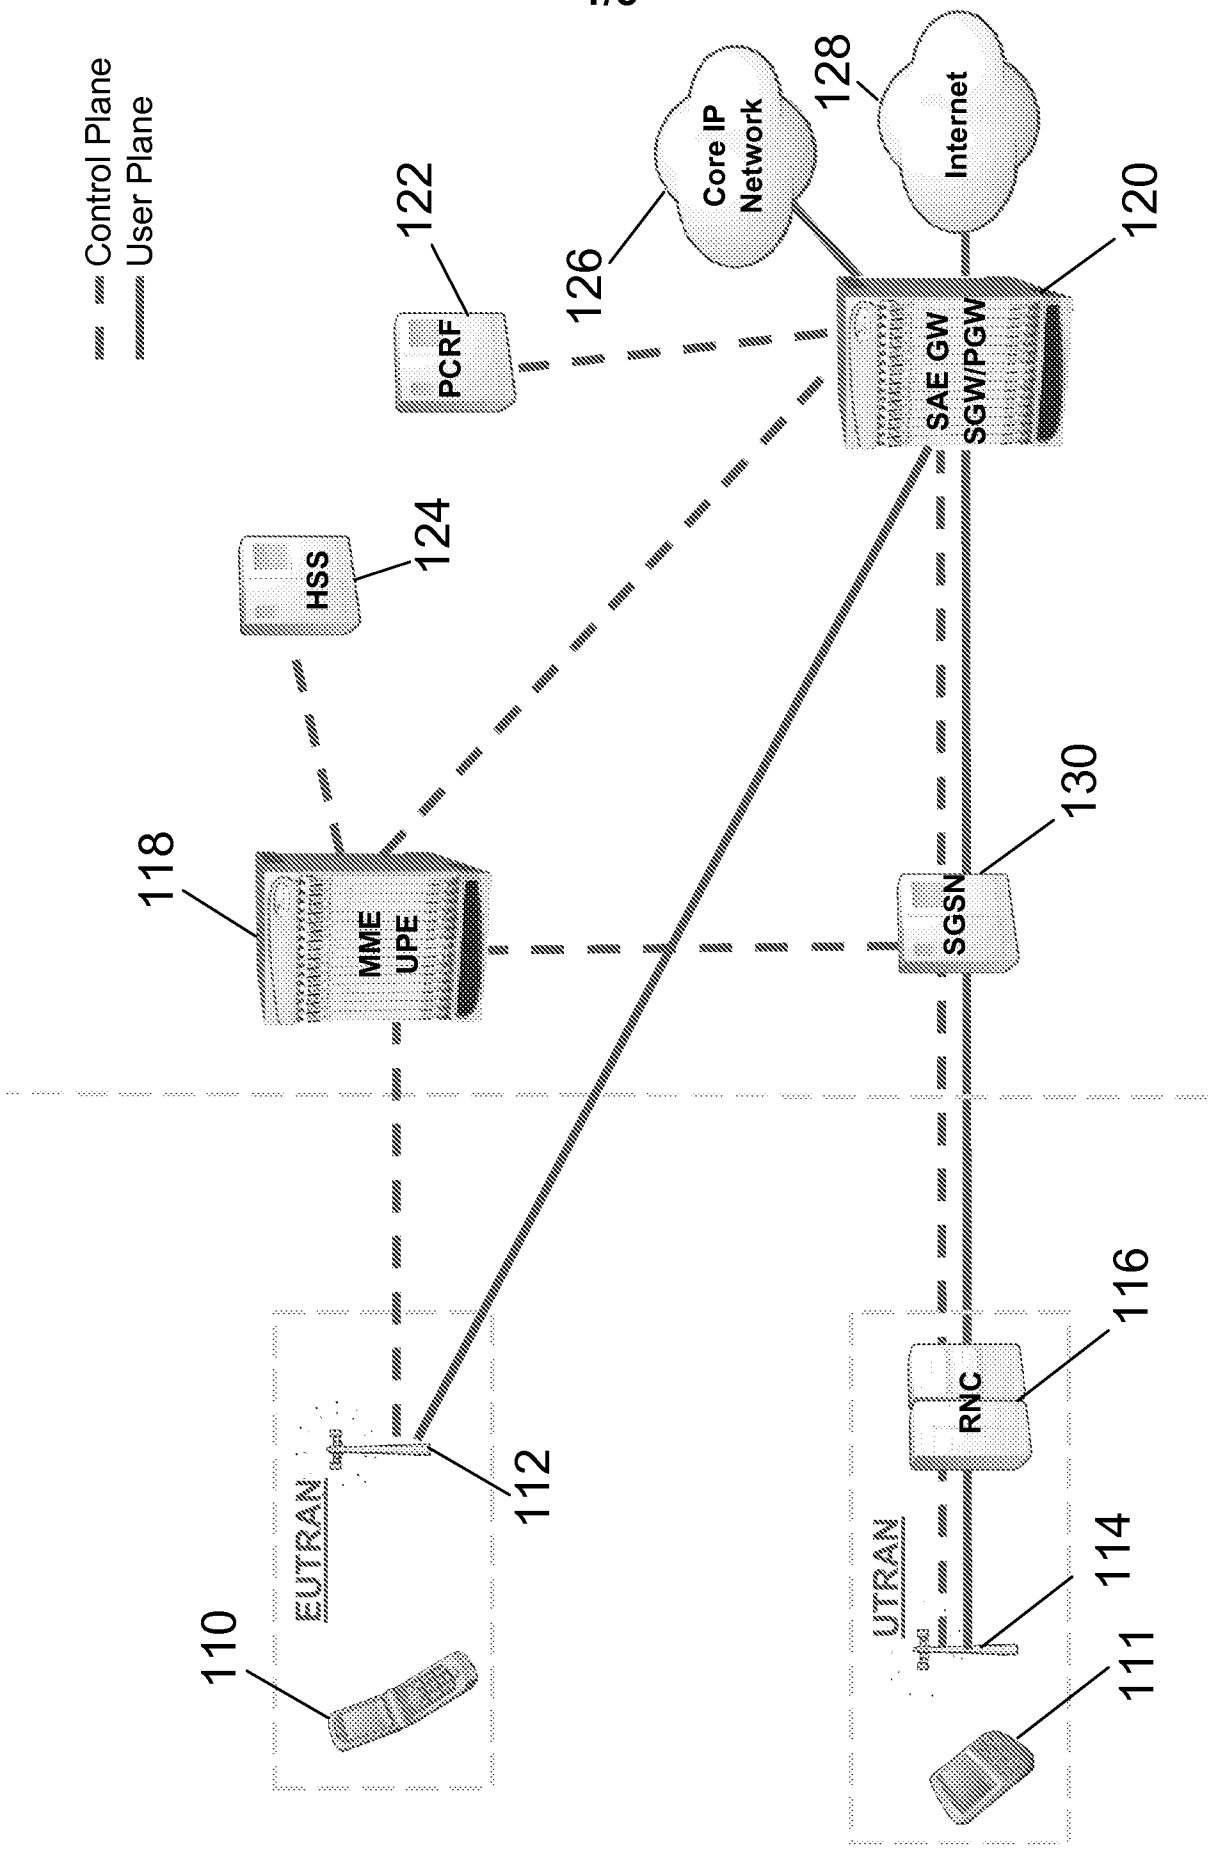

Control Plane
User Plane
Core IP Network
Internet
128
122
126
PCRF
SAE GW
SGW/PGW
120
HSS
124
118
MME
UPE
SGSN
130
EUTRAN
112
RNC
116
UTRAN
114
110
111

FIG. 1

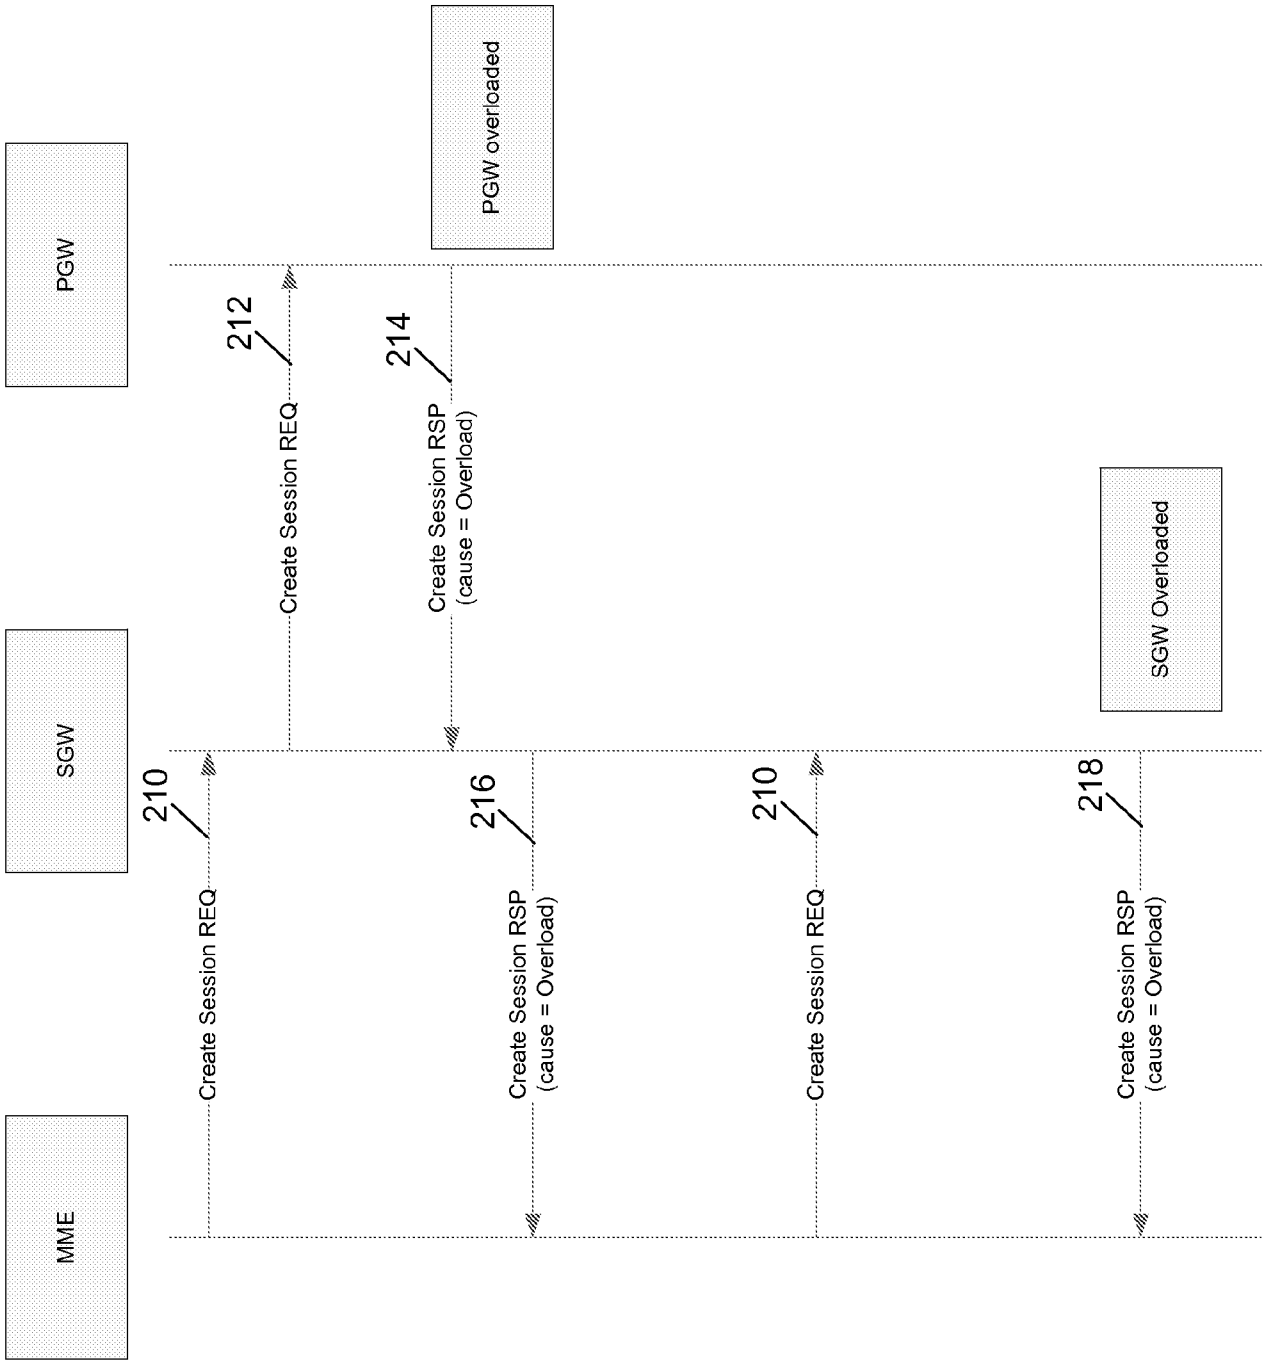

MME
SGW
PGW
PGW overloaded
SGW Overloaded
210
Create Session REQ
212
Create Session REQ
214
Create Session RSP
(cause = Overload)
216
Create Session RSP
(cause = Overload)
210
Create Session REQ
218
Create Session RSP
(cause = Overload)

FIG. 2

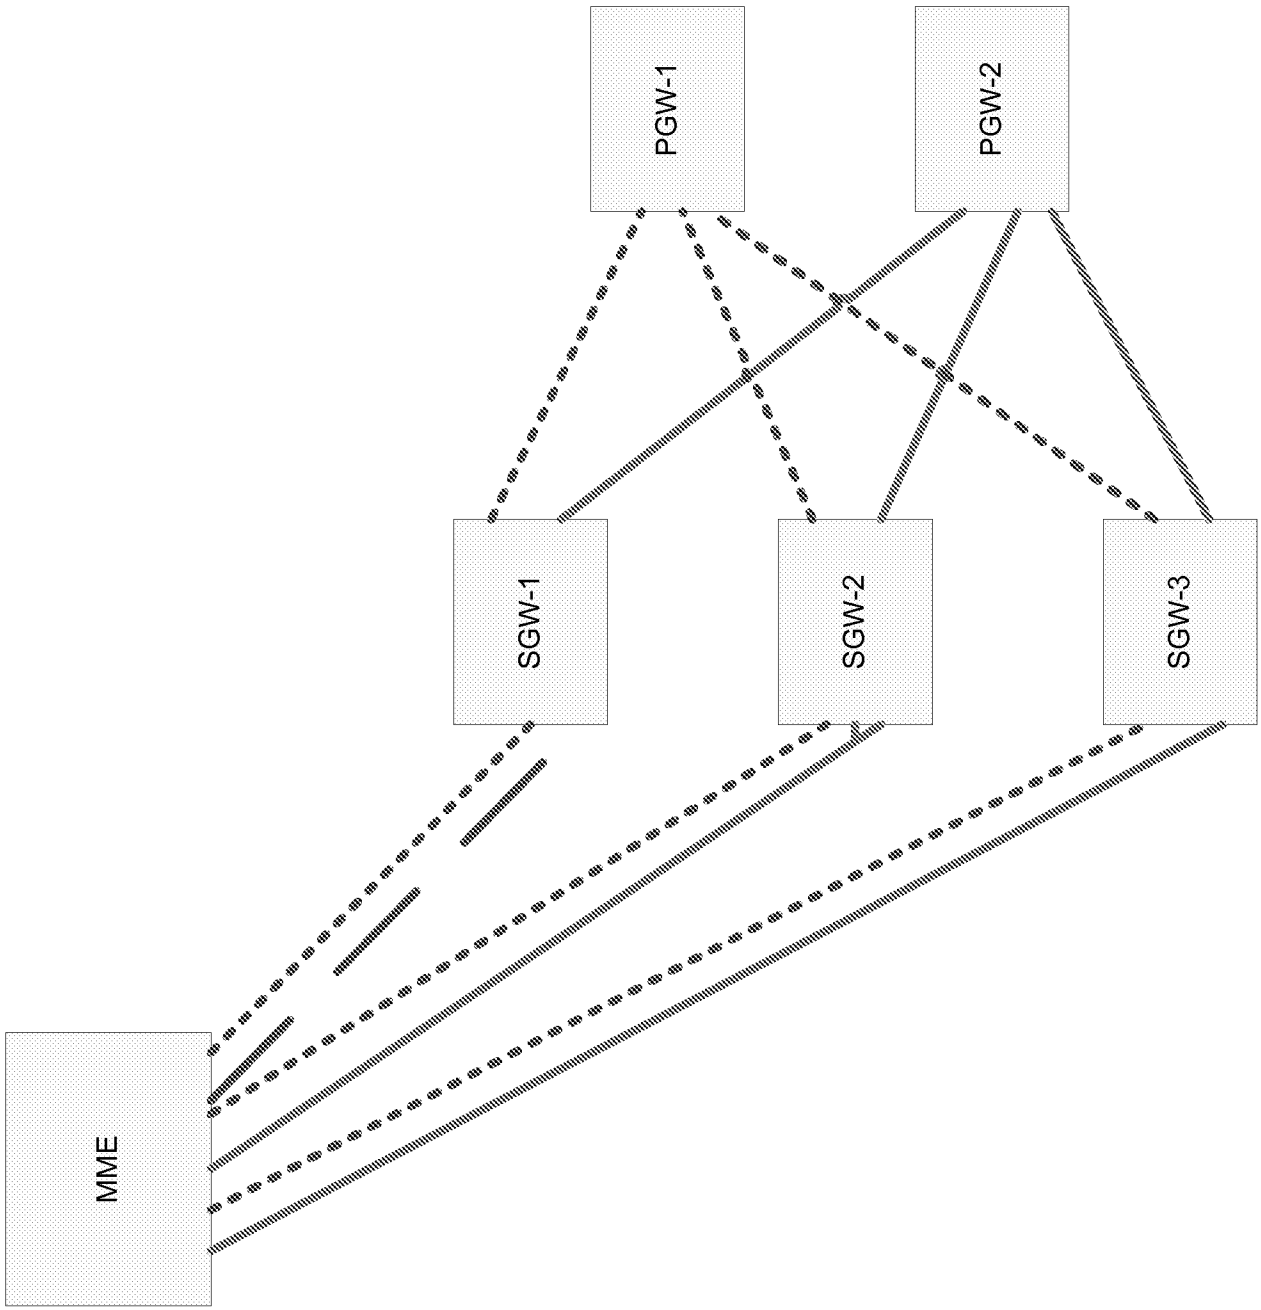


FIG. 3

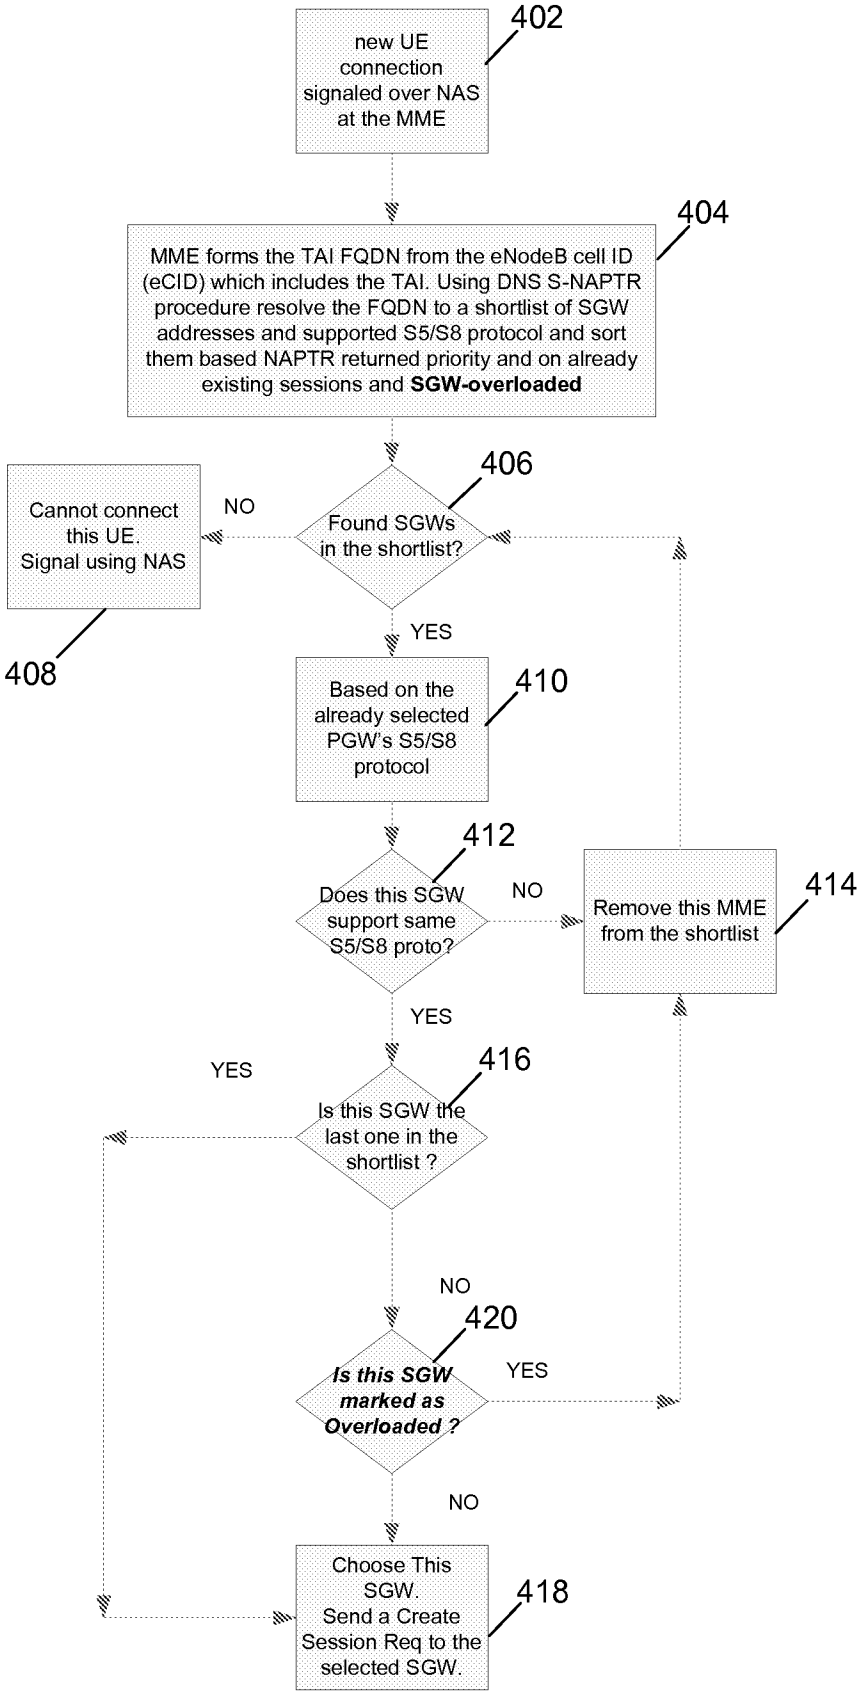

new UE connection signaled over NAS at the MME
402
MME forms the TAI FQDN from the eNodeB cell ID (eCID) which includes the TAI. Using DNS S-NAPTR procedure resolve the FQDN to a shortlist of SGW addresses and supported S5/S8 protocol and sort them based NAPTR returned priority and on already existing sessions and SGW-overloaded
404
Found SGWs in the shortlist?
406
NO
Cannot connect this UE. Signal using NAS
408
YES
Based on the already selected PGW's S5/S8 protocol
410
Does this SGW support same S5/S8 proto?
412
NO
Remove this MME from the shortlist
414
YES
Is this SGW the last one in the shortlist ?
416
YES
NO
Is this SGW marked as Overloaded ?
420
YES
NO
Choose This SGW. Send a Create Session Req to the selected SGW.
418

FIG. 4

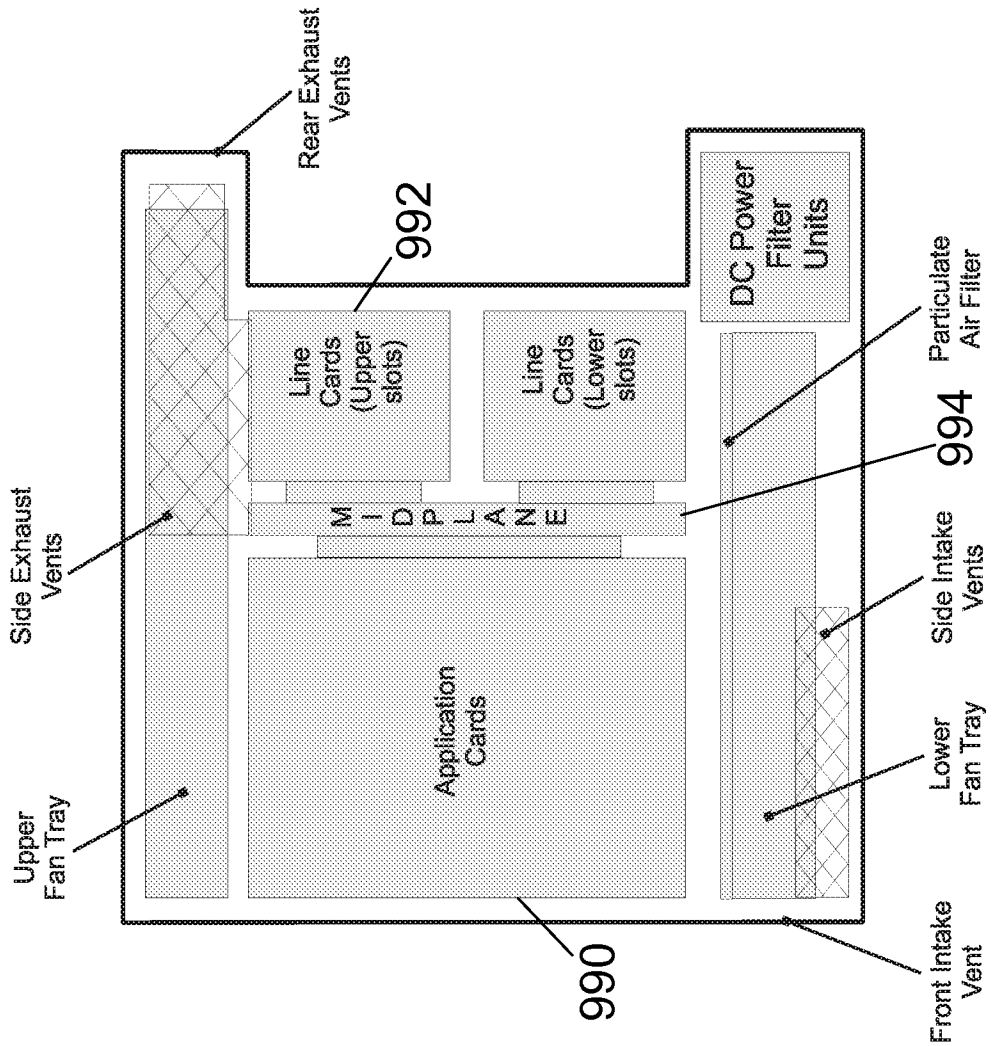

Rear Exhaust Vents
992
DC Power Filter Units
Line Cards (Upper slots)
Line Cards (Lower slots)
Particulate Air Filter
994
MIDPLANE
Side Exhaust Vents
Side Intake Vents
Application Cards
Upper Fan Tray
Lower Fan Tray
990
Front Intake Vent

FIG. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/026239

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W24/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/056622 A1 (NOKIA CORP [FI]; HIPPELAEINEN LASSI [FI]; AUTERINEN OTSO [FI]) 18 July 2002 (2002-07-18) abstract page 4, line 17 - page 5, line 7 page 5, line 33 - page 6, line 20 page 7, line 22 - page 8, line 12 ----- -/--	1-20

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
3 June 2010	18/06/2010

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Larcinese, Concetta

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/026239

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Cisco Systems: "Gateway Load balancing Protocol Overview" 1 January 2004 (2004-01-01), pages 1-25, XP002585458 Retrieved from the Internet: URL:http://www.cisco.com/en/US/prod/collateral/iosswrel/ps6537/ps6550/prod_presentation0900aecd801790a3.pdf> [retrieved on 2010-06-02] page 6, line 14 - line 20	1-20
A,P	WO 2009/150499 A1 (ERICSSON TELEFON AB L M [SE]; CAMPBELL LOUDON LEE [US]) 17 December 2009 (2009-12-17) abstract figure 6	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2010/026239

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 02056622 A1	18-07-2002	FI 20010095 A	17-07-2002
		US 2004081086 A1	29-04-2004
WO 2009150499 A1	17-12-2009	NONE	