




(86) **Date de dépôt PCT/PCT Filing Date:** 2017/02/02  
(87) **Date publication PCT/PCT Publication Date:** 2017/11/09  
(45) **Date de délivrance/Issue Date:** 2023/12/05  
(85) **Entrée phase nationale/National Entry:** 2018/10/24  
(86) **N° demande PCT/PCT Application No.:** EP 2017/025018  
(87) **N° publication PCT/PCT Publication No.:** 2017/190843  
(30) **Priorité/Priority:** 2016/05/02 (DE10 2016 005 312.7)

(51) **Cl.Int./Int.Cl. H04L 12/403** (2006.01)  
(72) **Inventeur/Inventor:**  
FUCHS, MANUEL, DE  
(73) **Propriétaire/Owner:**  
SEW-EURODRIVE GMBH & CO. KG, DE  
(74) **Agent:** CPST INTELLECTUAL PROPERTY INC.

(54) **Titre : PROCEDURE D'INITIALISATION D'UN SYSTEME DE BUS ET SYSTEME DE BUS ASSOCIE**  
(54) **Title: METHOD FOR INITIALISING A BUS SYSTEM, AND BUS SYSTEM**

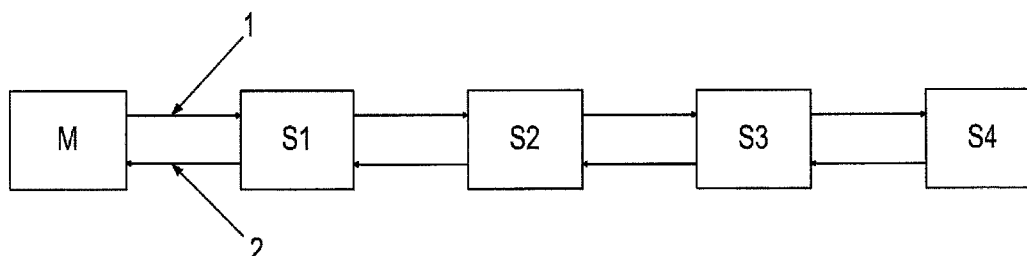

(57) **Abrégé/Abstract:**

A method for initializing a bus system, and a bus system having a master module and serially disposed bus subscribers, including the temporally successive method steps: in a first method step, the master module asks the bus subscribers to log in to the master module, and in a second method step, a first bus subscriber disposed downstream from the master module logs in to the master module, and in a third method step, the first bus subscriber waits for a predefined period of time to see whether a second bus subscriber disposed downstream from the first bus subscriber logs in to the master module, and in a fourth method step, the first bus subscriber closes the bus system if no second bus subscriber logs in to the master module within the predefined period of time, or in a fourth method step, in particular an alternative method step, a second bus subscriber logs in to the master module within the predefined period of time and waits for a further predefined period of time to see whether a third bus subscriber downstream from the second bus subscriber logs in to the master module, and the second bus subscriber closes the bus system if no third bus subscriber logs in to the master module within the further predefined period of time.

- 31 -

**Abstract:**

A method for initializing a bus system, and a bus system having a master module and serially disposed bus subscribers, including the temporally successive method steps: in a first method step, the master module asks the bus subscribers to log in to the master module, and in a second method step, a first bus subscriber disposed downstream from the master module logs in to the master module, and in a third method step, the first bus subscriber waits for a predefined period of time to see whether a second bus subscriber disposed downstream from the first bus subscriber logs in to the master module, and in a fourth method step, the first bus subscriber closes the bus system if no second bus subscriber logs in to the master module within the predefined period of time, or in a fourth method step, in particular an alternative method step, a second bus subscriber logs in to the master module within the predefined period of time and waits for a further predefined period of time to see whether a third bus subscriber downstream from the second bus subscriber logs in to the master module, and the second bus subscriber closes the bus system if no third bus subscriber logs in to the master module within the further predefined period of time.

## METHOD FOR INITIALIZING A BUS SYSTEM, AND BUS SYSTEM

### **Technical Field**

The present invention relates to a method for initializing a bus system and to a bus system.

5

### **Background**

It is known that data lines of bus systems require a terminating impedance when they have a linear topology. A terminating impedance is necessary even at each end of the data line.

10

From the U.S. patent 5,535,336 A, a network of bus subscribers with dynamic addressing is known.

15

From the German patent DE 10 2010 002 758 A1, a bus building-technology system having a daisy-chain topology is known.

### **Summary**

20

Therefore, the present invention is based on the objective of further developing a method for initializing a bus system and of further developing a bus system, in which the safety is improved.

25

According to the present invention, the objective in the method for initializing a bus system is achieved according to the features herein described, and in the bus system it is achieved according to the features herein described.

30

Important features of the present invention in the method for initializing a bus system, which has a master module and serially disposed bus subscribers, are that the method includes the temporally successive method steps:

in a first method step, the master module asks the bus subscribers to log in to the master module,

and in a second method step, a first bus subscriber downstream from the master module logs in to the master module,

5 and in a third method step, the first bus subscriber waits for a predefined period of time to see whether a second bus subscriber downstream from the first bus subscriber logs in to the master module,

and in a fourth method step, the first bus subscriber closes the bus system if no second bus subscriber logs in to the master module within the predefined period of time,

10

or in which in a fourth method step, in particular an alternative method step, a second bus subscriber logs in to the master module within the predefined period of time and waits for a further predefined period of time to see whether a third bus subscriber, downstream from the second bus subscriber, logs in to the master module, and the second bus subscriber closes  
15 the bus system if no third bus subscriber logs in to the master module within the further predefined period of time.

This has the advantage that the bus system automatically initializes itself with the aid of the present method. The bus system recognizes which one is the bus subscriber at the greatest  
20 distance from the master module, and this bus subscriber automatically closes the bus system. This relieves an operator of the bus system from connecting a terminating impedance within the system. The safety is improved as a result.

The predefined periods of time are advantageously adaptable to the bus subscribers, so that  
25 there is a sufficient wait to allow a bus subscriber that needs a longer period of time for the activation to log in safely as well.

In an advantageous embodiment, in a fifth method step, a fourth bus subscriber downstream from the first bus subscriber and/or the second bus subscriber transmits a login to the  
30 master module after all predefined periods of time have elapsed, and in a sixth method step, the first bus subscriber or the second bus subscriber opens the bus system and forwards the login of the fourth bus subscriber to the master module. This offers the advantage that a bus subscriber that requires a longer period of time for the activation is easily able to be retroactively logged in.

In an advantageous further embodiment, a release is granted to the bus system in a fifth method step, in particular by a control superordinate to the master module. This has the advantage that after a successful initialization, the bus system receives an external release  
5 in an additional method step with the aid of the release. The bus system transitions to a production mode in which the bus subscribers are actuated by the master module only after the release.

In an advantageous embodiment, a fourth bus subscriber, downstream from the first bus  
10 subscriber and/or the second bus subscriber, transmits a login to the master module in a sixth method step after all predefined time periods have elapsed, the first bus subscriber or the second bus subscriber blocking the login of the fourth bus subscriber to the master module in a seventh method step. This has the advantage that in the production mode, i.e. after the granted release, no bus subscriber is admitted to the bus system. The admittance  
15 to the bus system is advantageously blocked with the aid of an upstream bus subscriber, thereby reducing the loading of the master module. In this way, the security is improved.

In an advantageous embodiment, in an eighth method step, the release of the bus system is revoked, in particular by a control superordinate to the master module, and in a ninth method  
20 step, the first bus subscriber or the second bus subscriber forwards the login of the fourth bus subscriber to the master module. This offers the advantage that the fourth bus subscriber is automatically admitted to the bus system in a new startup of the bus system.  
In an advantageous embodiment, in a tenth method step, the fourth bus subscriber waits a predefined period of time to see whether a bus subscriber downstream from the fourth bus  
25 subscriber logs in to the master module, and in an eleventh method step, the fourth bus subscriber closes the bus system if no bus subscriber downstream from the fourth bus subscriber logs in to the master module within the predefined period of time. This has the advantage that when a late bus subscriber, in particular the fourth bus subscriber, has  
logged in to the bus system, this bus subscriber automatically checks whether it is the bus  
30 subscriber most remote from the master module, in particular the last bus subscriber, and closes the bus system as the case may be.

In an advantageous embodiment, the temporally successive method steps are carried out for the allocation of addresses to the bus subscribers:

In a method step, the master module allocates a first address to a first bus subscriber and transmits this first address to the first bus subscriber, the first address in particular being a natural number  $n$ , the first address in particular being 0 or 1,

5

and in a following method step, the first bus subscriber increments the first address by one and allocates it to a second bus subscriber as the second address and transmits this second address to the second bus subscriber, the second address in particular being the natural number  $(n+1)$ ,

10

and in a further method step, the second bus subscriber logs in to the master module with its second address.

This has the advantage that the assignment of the addresses to the bus subscribers takes place automatically. As a result, the initialization of the bus system is able to be executed in a safe and rapid manner.

During the addressing, a data packet advantageously passes an inactive bus subscriber so that the next active bus subscriber of the bus system receives the address and uses it to log in to the master module.

20

In an advantageous embodiment, in a fourth method step, the second bus subscriber increments the second address by one and allocates this address to a third bus subscriber as the third address and transmits this third address to the third bus subscriber, the third address in particular being the natural number  $(n+2)$ , and in a fifth method step, the third bus subscriber logs in to the master module using its third address. This has the advantage that each bus subscriber, in particular each active bus subscriber, is automatically able to be addressed with the aid of the present method.

25

In an advantageous embodiment, the address  $m$  is allocated to an  $m^{\text{th}}$  bus subscriber in a further method step, and the  $m^{\text{th}}$  bus subscriber logs in to the master module using the address  $m$ ,  $m$  being a natural number, and  $m$  in particular being unequal to  $n$ ,  $m$  in particular being equal to 15, and the  $m^{\text{th}}$  bus subscriber allocates the address  $m$  to a bus subscriber downstream from the  $m^{\text{th}}$  bus subscriber, and transmits the address  $m$  to the downstream

30

bus subscriber, the  $m^{\text{th}}$  bus subscriber in particular not incrementing the address,  $(m-1)$  being the maximally possible number of bus subscribers in the bus system. This has the advantage that the number of the bus subscribers is able to be limited. Data packets do not become too long in this way, and the transmission speed is improved. The number of bus subscribers is advantageously automatically restricted.

In an advantageous embodiment, the master module aborts the method and transmits an error report when a bus subscriber using the address  $m$  logs in to the master module. This has the advantage that the bus system automatically recognizes when too many bus subscribers are logging in. The error report is advantageously sent to a superordinate control. In an advantageous manner, the master module generates a warning signal, in particular a warning tone or a warning light.

In an advantageous embodiment, the temporally successive method steps are carried out for the emergency shutdown of the bus system:

In a first method step, a bus subscriber and/or the master module recognize(s) an error status,

and in a second method step, the bus subscriber and/or the master module transmit(s) an emergency signal to all bus subscribers and to the master module,

and in a third method step, a further bus subscriber receives the emergency signal, immediately forwards it to an adjacent bus subscriber and simultaneously evaluates it,

and in a fourth method step, the further bus subscriber shuts itself down.

This has the advantage that all bus subscribers of the bus system are able to be shut down within a short period of time. The emergency signal is advantageously not fully evaluated right away but is simultaneously forwarded to all bus subscribers and to the master module as soon as it has been identified as an emergency signal.

In an advantageous embodiment, the emergency signal interrupts a data packet. This has the advantage that the emergency signal is immediately sent to all bus subscribers and to

the master module as soon as the error status has been identified. In an advantageous manner, there is no need to wait until the data packet has been transmitted in its entirety. As a result, a rapid shutdown of all bus subscribers is possible, and the security is improved.

5 In an advantageous embodiment, the transmission of the interrupted data packet is not continued and the interrupted data packet is discarded. This has the advantage that an error that occurs in the data packet due to the interruption has no effect on the bus system. The security is therefore improved.

10 In an advantageous embodiment, all data packets have an identical length, in particular signal length, and the length of the emergency signal, in particular the signal length, is shorter than the length of the data packets. This has the advantage that the emergency signal is able to be transmitted faster than a data packet. As a result, the security is improved.

15

In an advantageous embodiment, two consecutive data packets are temporally spaced apart from each other by a transmission pause, and the emergency signal interrupts a transmission pause. This has the advantage that the emergency signal may be transmitted immediately and independently of the status of the data line. The emergency signal is  
20 advantageously transmittable at any time, regardless of whether a data packet just happens to be transmitted or a transmission pause exists at the time when the emergency signal is transmitted.

The emergency signal is advantageously shorter than the transmission pause.

25

In an advantageous embodiment, the bus system has two data lines, the bus subscriber and/or the master module transmitting the emergency signal simultaneously with the aid of both data lines. This has the advantage that the emergency signal reaches all bus subscribers in a communications ring faster when it is transmitted with the aid of the two  
30 data lines in two opposite directions than when the emergency signal is transmitted by only one data line in one direction.

Important features of the present invention in the bus system, the bus system being able to be initialized using a method for initializing a bus system as previously described and/or as



recited in one of the patent claims directed to the method for initializing a bus system, are that the bus system has a master module and bus subscribers, which are disposed in series, the master module and the bus subscribers being connected to one another with the aid of at least one data line.

5

This has the advantage that the bus system is automatically able to be initialized with the aid of the present method. The bus system is developed to recognize which one is the bus subscriber at the greatest distance from the master module. This bus subscriber is developed to close the bus system automatically. This reduces the loading of an operator of the bus system because the operator does not have to connect a terminating impedance within the system. This improves the security.

In an advantageous embodiment, the bus system has at least one first data line and one second data line. This offers the advantage that a data packet is able to be sent from the master module to the bus subscribers with the aid of the first data line, and a data packet is able to be sent from a respective bus subscriber to the master module with the aid of the second data line, in particular at the same time. The speed of the data transmission is thus increased and the security improved. For the closing of the bus system, the first data line is advantageously connected to the second data line by the last bus subscriber, in particular short-circuited. The first and the second data line form a communications ring.

In an advantageous embodiment, a data packet is transmittable from the master module to the bus subscribers using the first data line. This has the advantage that the first data line and the second data line may be disposed in parallel. In an advantageous manner, data packets are transmittable at any time from the master module to the bus subscribers using the first data line. As a result, the data transmission from the master module to the bus subscribers will not be interrupted in order to transmit a respective data packet from an individual bus subscriber to the master module.

In an advantageous embodiment, a respective data packet may be transmitted from an individual bus subscriber to the master module with the aid of the second data line. This has the advantage that the first data line and the second data line may be placed in parallel. In an advantageous manner, data packets are transmittable from a respective bus subscriber to the master module at any time via the second data line. As a result, the data transmission

from the bus subscribers to the master module will not be interrupted in order to transmit a data packet from the master module to an individual bus subscriber.

In an advantageous embodiment, the respective data line has at least one data cable in each case, and each bus subscriber is connected by a respective data cable to the bus

5 subscriber upstream or downstream from it or to the master module. This has the advantage that the respective data line may have a modular development. As a result, a further bus subscriber is easily connected to the bus system with the aid of a further data cable.

In an advantageous embodiment, each data cable has two mating plug connector parts and

10 each bus subscriber has a first plug connector part for the connection to the respective upstream bus subscriber with the aid of an individual data cable, and each bus subscriber has a second plug connector part for the connection to the respective downstream bus subscriber. This has the advantage that the bus subscribers of the bus system are easily connected to each other in a reversible manner. As a result, a further bus subscriber is

15 easily connectable to the bus system, or a bus subscriber is easily separated from its upstream bus subscriber and/or from its downstream bus subscriber.

In an advantageous embodiment, the respective data cable of the first data line and the respective data cable of the second data line are disposed between two adjacent bus

20 subscribers in a cable sheath, the cable sheath in particular surrounding the data cables in the circumferential direction, in particular enveloping it. This has the advantage of reducing the wiring expense. The first and the second data line are advantageously connected by a shared plug connector part so that only one plug connector part has to be plugged into the bus subscriber in order to connect a bus subscriber to its upstream or downstream bus

25 subscriber. The plug connection is advantageously implementable in a manner that prevents a polarity reversal.

In an advantageous embodiment, a supply line and/or a ground lead for the bus subscribers is disposed in the cable sheath. This has the advantage of reducing the wiring expense. The

30 data cables and the supply line and/or the ground lead are advantageously connected to a shared plug connector part so that only one plug connector part is to be plugged into the bus subscriber in order to connect a bus subscriber to its upstream or downstream bus subscriber. The plug connection is advantageously implementable in a manner that prevents a polarity reversal.

35

In an advantageous embodiment, each bus subscriber has a switch, which is connected to a respective data line, the switch being developed to interrupt the data transmission along the respective data line. This has the advantage that the individual bus subscriber is developed to use the switch to stop data packets that are not meant to reach the master module. In this way the bus subscriber relieves the load of the master module.

In an advantageous embodiment, each bus subscriber has a time-measuring means. This has the advantage that the time-measuring means allows the individual bus subscriber to measure a time span within which a further bus subscriber responds to a data packet, and in particular sends a further data packet. The further data packet is thus able to be evaluated as a function of this time span, in particular is able to be blocked by the switch. This relieves the loading of the master module.

In an advantageous embodiment, each bus subscriber has a logic circuit, and the logic circuit in particular makes it possible to evaluate data packets of the master module and/or of the bus subscribers. This offers the advantage that the switch and/or the time-measuring means is/are able to be actuated with the aid of the logic circuit, in particular as a function of a data packet.

In an advantageous manner, the respective logic circuit has a storage means, which may be used for storing data packets. As a result, a data packet that was stopped by a bus subscriber may be stored by its storage means and be transmitted to the master module and/or to a bus subscriber at a later point in time.

In an advantageous embodiment, each bus subscriber has an electronic circuit, the electronic circuit including the switch and/or the time-measuring means and/or the logic circuit, the switch and/or the time-measuring means and/or the logic circuit in particular being integrated into the electronic circuit. This has the advantage that the electronic circuit may have a compact and reliable development.

Further advantages result from the dependent claims. The present invention is not restricted to the feature combination of the claims. One skilled in the art will discover further meaningful combination possibilities of claims and/or individual claim features and/or features of the description and/or the figures, in particular from the stated objective and/or from the objective resulting from a comparison with the related art.

### **Brief Description of the Drawings**

The present invention will now be described in greater detail with the aid of figures:

5

Figure 1 shows a schematic representation of a bus system according to the present invention.

Figure 2 shows the time characteristic of data packets on a data bus.

10

Figure 3 shows the time characteristic of data packets and an emergency signal on the data bus in a first case example.

Figure 4 shows the time characteristic of data packets and an emergency signal on the data bus in a second case example.

15

### **Detailed Description**

The bus system according to the present invention has a master module M and bus subscribers (S1, S2, S3, S4), which are disposed in series and connected to one another. The bus system has a first bus subscriber S1 disposed downstream from master module M. The bus system has a second bus subscriber S2 downstream from first bus subscriber S1, first bus subscriber S1 being situated upstream from second bus subscriber S2. Second bus subscriber S2 is disposed upstream from a third bus subscriber S3, and third bus subscriber S3 is situated downstream from second bus subscriber S2. Third bus subscriber S3 is disposed upstream from a fourth bus subscriber S4, and fourth bus subscriber S4 is disposed downstream from third bus subscriber S3.

20

25

A bus subscriber (S1, S2, S3, S4) situated downstream from another bus subscriber (S1, S2, S3, S4) is situated at a greater distance from master module M in the direction of the series arrangement than the other bus subscriber (S1, S2, S3, S4). The other bus subscriber (S1, S2, S3, S4), which is disposed at a shorter distance from master module M than the bus subscriber (S1, S2, S3, S4) in the direction of the series arrangement, is located upstream from the bus subscriber (S1, S2, S3, S4).

30

For example, the bus system is an industrial plant which has various devices as bus subscribers (S1, S2, S3, S4), such as drives or electronic components, e.g., drive converters for electric motors.

5

The data bus has a first data line 1 and a second data line 2, which in each case serially connect the bus subscribers (S1, S2, S3, S4) and master module M to one another.

10 With the aid of first data line 1, master module M sends data packets (3, 4) such as control commands to the bus subscribers (S1, S2, S3, S4). With the aid of second data line 2, the bus subscribers (S1, S2, S3, S4) send data packets (3, 4) such as status information to master module M.

15 Each bus subscriber (S1, S2, S3, S4) has a first interface and a second interface, which are preferably developed as a plug connector part in each case. Each data line (1, 2) has at least one data cable. Each data cable has a first mating plug connector part and at least one second mating plug connector part for a data transmission between the bus subscribers (S1, S2, S3, S4) along the respective data line (1, 2).

20 As a result, each bus subscriber (S1, S2, S3, S4) is able to be connected to a second plug connector part of an upstream bus subscriber (S1, S2, S3, S4) using a first plug connector part and the respective data cable, and it is able to be connected by a second plug connector part and the respective data cable to a first plug connector part of a downstream bus subscriber (S1, S2, S3, S4).

25 The respective data cable of first data line 1 and the respective data cable of second data line 2 are preferably guided in a shared cable sheath. A supply line and/or a ground lead for the bus subscribers (S1, S2, S3, S4) are preferably also disposed in this cable sheath.

30 Each bus subscriber (S1, S2, S3, S4) has a switch, in particular an electronic circuit, which is connected to the respective data line (1, 2). The switch may be used to interrupt the data transmission along the respective data line (1, 2).

Each bus subscriber (S1, S2, S3, S4) has a time-measuring means, in particular a timer.  
The time-measuring means is preferably integrated into the electronic circuit of the bus subscriber (S1, S2, S3, S4).

- 5 Using the electronic circuit, the data transmission along the respective data line (1, 2) is therefore able to be interrupted after a predefined time has elapsed.

Each bus subscriber (S1, S2, S3, S4) has a logic circuit. The logic circuit is preferably integrated into the electronic circuit of the bus subscriber (S1, S2, S3, S4).

10

Using the logic circuit, data packets on the data bus are able to be evaluated, and the sender of a data packet, in particular, is identifiable.

- 15 In the event that a bus subscriber (S1, S2, S3, S4) is inactive, a data packet is forwarded without interruption and without a time delay through the inactive bus subscriber (S1, S2, S3, S4) to the downstream or upstream bus subscriber (S1, S2, S3, S4). A data packet passes through an inactive bus subscriber (S1, S2, S3, S4) without obstruction.

The data bus is preferably implemented in a digital form.

20

- For the initialization of the bus system, master module M sends a request to the bus subscribers (S1, S2, S3, S4) situated downstream to log in to master module M. An active bus subscriber (S1, S2, S3, S4) downstream from master module M logs in to master module M and forwards the request for the login to master module M to bus subscribers (S1, S2, S3, S4) downstream from it. The logged in bus subscriber (S1, S2, S3, S4) then waits for a predefined period of time to see whether a bus subscriber (S1, S2, S3, S4) downstream from it logs in to master module M.

- 30 If no downstream bus subscriber (S1, S2, S3, S4) logs in to the master module, then the last logged in bus subscriber (S1, S2, S3, S4) closes the bus system as soon as the predefined period of time has elapsed, by connecting first data line 1 and second data line 2 to each other, in particular short-circuiting them. A data packet that is transmitted with the aid of first data line 1 from master module M to the bus subscribers (S1, S2, S3, S4) is thus forwarded

into second data line 2 at the final bus subscriber (S1, S2, S3, S4) and routed back to the master module.

5 The last bus subscriber (S1, S2, S3, S4) is the particular bus subscriber (S1, S2, S3, S4) that logs in last to master module M and has no downstream bus subscribers (S1, S2, S3, S4).

The request to log in to master module M is routed through an inactive bus subscriber (S1, S2, S3, S4) without this subscriber itself logging in to master module M.

10

After the bus system has been closed, a release is granted by a superordinate control or by an operator and the operation of the bus system begins.

15 In the event that a bus subscriber (S1, S2, S3, S4) logs in late, i.e. after the predefined period of time after the login of the last bus subscriber (S1, S2, S3, S4) has elapsed, then this bus subscriber (S1, S2, S3, S4) sends a data packet to master module M. If a release was already granted, this data packet is stopped by an upstream bus subscriber (S1, S2, S3, S4) that is logged in to master module M and will not be forwarded to master module M.

20 As soon as the release has been revoked, a data packet of the late bus subscriber (S1, S2, S3, S4) is forwarded to master module M and the late bus subscriber (S1, S2, S3, S4) is admitted to the bus system.

25 In the event that the late bus subscriber (S1, S2, S3, S4) has no downstream bus subscribers (S1, S2, S3, S4) that are logged in to master module M, then it becomes the new last bus subscriber (S1, S2, S3, S4) and closes the bus system after waiting out the predefined period of time for the login of a bus subscriber (S1, S2, S3, S4).

30 The predefined period of time for the login of a bus subscriber (S1, S2, S3, S4) is able to be adapted to the bus subscribers (S1, S2, S3, S4). The period of time may be selected in such a way that bus subscribers (S1, S2, S3, S4) that have a longer start-up time are reliably logged in to master module M.

- During the initialization of the bus system, bus addresses for the bus subscribers (S1, S2, S3, S4) are automatically assigned. For this purpose, master module M sends the bus address "1" to first bus subscriber S1. First bus subscriber S1 logs in to master module M using this bus address and increments the bus address by 1 and forwards it to its
- 5 downstream bus subscriber (S1, S2, S3, S4). The downstream bus subscriber (S1, S2, S3, S4) logs in to master module M using the incremented bus address, i.e. bus address "2" in this instance, increments this bus address by 1 again and forwards it to its downstream bus subscriber (S2, S3, S4).
- 10 In an effort to restrict the number of bus subscribers (S1, S2, S3, S4) in the bus system, a bus subscriber (S1, S2, S3, S4) that is given a bus address that is greater than the maximally allowed number of bus subscribers (S1, S2, S3, S4), will not further increment this bus address but forwards the same bus address to its downstream bus subscriber (S1, S2, S3, S4), which uses this bus address to log in to master module M. As soon as master
- 15 module M receives a bus address that is greater than the maximally allowed number of bus subscribers (S1, S2, S3, S4), master module M aborts the initialization of the bus system and transmits an error report to a control superordinate to master module M.

- If a bus subscriber (S1, S2, S3, S4) that is not yet active, i.e. an inactive bus subscriber (S1, S2, S3, S4), receives a bus address from a bus subscriber (S1, S2, S3, S4) upstream from it or from master module M, then this bus address is looped through the inactive bus
- 20 subscriber (S1, S2, S3, S4) without being incremented, and assigned to a downstream bus subscriber (S1, S2, S3, S4).

- 25 Figures 2 through 4 show the time characteristic of data packets 3 that are transmitted with the aid of a respective data line (1, 2). Each data packet 3 has a predefined length that is a function of the number of bus subscribers (S1, S2, S3, S4) of the bus system.

- The data transmission is interrupted for a predefined period of time between two temporally
- 30 successive data packets 3, which means that two temporally successive data packets 3 are temporally spaced apart with the aid of a transmission pause 6.

As soon as a bus subscriber (S1, S2, S3, S4) or master module M detects an error, data packet 4 transmitted at that instant is immediately interrupted and an emergency signal 5 is



transmitted by the respective bus subscriber (S1, S2, S3, S4) or by master module M, as illustrated in Figure 3. This emergency signal 5 causes an immediate shutdown of all bus subscribers (S1, S2, S3, S4).

- 5     The interrupted data packet 4 is immediately terminated and not further processed by the bus subscribers (S1, S2, S3, S4).

If a bus subscriber (S1, S2, S3, S4) or master module M detects an error during a transmission pause 6, then transmission pause 6 will be interrupted and an emergency  
10    signal 5 be sent by the respective bus subscriber (S1, S2, S3, S4) or by master module M, as illustrated in Figure 4. This emergency signal 5 causes an immediate shutdown of all bus subscribers (S1, S2, S3, S4).

The respective bus subscriber (S1, S2, S3, S4) transmits emergency signal 5 on both data  
15    lines (1, 2). In other words, emergency signal 5 is transmitted from the respective bus subscriber (S1, S2, S3, S4) in the direction of master module M on the second data line and is transmitted by the respective bus subscriber (S1, S2, S3, S4) away from master module M on first data line 1.

20    The respective bus subscribers (S1, S2, S3, S4) immediately process the emergency signal 5 and at the same time forward it to the downstream bus subscriber (S1, S2, S3, S4) so that the bus subscribers (S1, S2, S3, S4) shut down immediately. In other words, emergency signal 5 is not first stored and processed but immediately forwarded to all bus subscribers (S1, S2, S3, S4) and to master module M.

25

The emergency signal 5 preferably has a shorter length than the data packets (3, 4) and/or transmission pause 6.

## **List of Reference Numerals**

M master module

S1 first bus subscriber

S2 second bus subscriber

S3 third bus subscriber

S4 fourth bus subscriber

1 first data line

2 second data line

3 data packet

4 data packet

5 emergency signal

6 transmission pause

## Claims

1. A method for initializing a bus system, comprising a master module (M) and bus subscribers (S1, S2, S3, S4) disposed in series,  
the method having the temporally consecutive method steps:

In a first method step, the master module (M) asks the bus subscribers (S1, S2, S3, S4) to log in to the master module (M),

and in a second method step, a first bus subscriber (S1) downstream from the master module (M) logs in to the master module (M),

and in a third method step, the first bus subscriber (S1) waits for a predefined period of time to see whether a second bus subscriber (S2) downstream from the first bus subscriber (S1) logs in to the master module (M),

and in a fourth method step, the first bus subscriber (S1) closes the bus system, if no second bus subscriber (S2) logs in to the master module (M) within the predefined period of time,

or in an alternative fourth method step, , a second bus subscriber (S2) logs in to the master module (M) within the predefined period of time and waits for a further predefined period of time to see whether a third bus subscriber (S3) downstream from the second bus subscriber (S2) logs in to the master module (M), and the second bus subscriber (S2) closes the bus system if no third bus subscriber (S3) logs in to the master module (M) within the further predefined period of time.

2. The method as recited in Claim 1,  
wherein the closing the bus system includes short-circuiting a first data line with a second data line by a last bus subscriber.
3. The method as recited in Claim 1 or 2,  
wherein

in a fifth method step, a fourth bus subscriber (S4) downstream from at least one of the first bus subscriber (S1) or the second bus subscriber (S2) sends a login to the master module after all predefined time periods have elapsed,

and in a sixth method step, the first bus subscriber (S1) or the second bus subscriber (S2) opens the bus system and forwards the login of the fourth bus subscriber (S4) to the master module (M).

4 The method as recited in Claim 1 or 2,

wherein

in a fifth method step, a release is grated to the bus system.

5. The method of claim 4, wherein the release is grated by a control superordinate to the master module (M).

6 The method as recited in Claim 4 or 5,

wherein

in a sixth method step, a fourth bus subscriber (S4) downstream from at least one of the first bus subscriber (S1) or the second bus subscriber (S2) sends a login to the master module after all predefined time periods have elapsed,

and in a seventh method step, the first bus subscriber (S1) or the second bus subscriber (S2) blocks the login of the fourth bus subscriber (S4) to the master module (M).

7. The method as recited in Claim 6,

wherein

in an eighth method step, the release of the bus system is revoked,

and in a ninth method step, the first bus subscriber (S1) or the second bus subscriber (S2) forwards the login of the fourth bus subscriber (S4) to the master module (M).

8. The method of claim 7, wherein the release is revoked by a control superordinate to the master module (M).

9. The method as recited in Claim 7 or 8,

wherein

in a tenth method step, the fourth bus subscriber (S4) waits for a predefined period of time to see whether a bus subscriber downstream from the fourth bus subscriber (S4) logs in to the master module (M),

and in an eleventh method step, the fourth bus subscriber (S4) closes the bus system if no bus subscriber downstream from the fourth bus subscriber (S4) logs in to the master module (M) within the predefined period of time.

10 A bus system, the bus system being able to be initialized with the aid of a method as recited in any one of Claims 1 to 9,

wherein

the bus system comprises the master module (M) and the bus subscribers (S1, S2, S3, S4), which are disposed in series, and

the master module (M) and the bus subscribers (S1, S2, S3, S4) are connected to one another by at least one of the first data line or the second data line (1, 2).

11 The bus system as recited in Claim 10,

wherein

the bus system comprises both the first data line (1) and the second data line (2).

12 The bus system as recited in Claim 11,

wherein

a data packet (3) is transmittable from the master module (M) to the bus subscribers (S1, S2, S3, S4) with the aid of the first data line (1),

or

a respective data packet (3) is transmittable from an individual bus subscriber (S1, S2, S3, S4) to the master module (M) with the aid of the second data line (2).

13. The bus system as recited in any one of Claims 10 to 12,

wherein

the respective data line (1, 2) has at least one data cable in each case, and each bus subscriber (S1, S2, S3, S4) is connected by an individual data cable to the bus subscriber (S1, S2, S3, S4) upstream or downstream or to the master module (M).

14. The bus system of claim 13, wherein each data cable has two mating plug connector parts, and each bus subscriber (S1, S2, S3, S4) has a first plug connector part for the connection to the respective upstream bus subscriber with the aid of a respective data cable, and each bus subscriber (S1, S2, S3, S4) has a second plug connector part for the connection to the respective downstream bus subscriber.

15. The bus system as recited in Claim 10,  
wherein  
the individual data cable of the first data line (1) and the individual data cable of the second data line (2) are disposed between two adjacent bus subscribers (S1, S2, S3, S4) in a shared cable sheath, the cable sheath surrounding the data cables in the circumferential direction.

16. The bus system as recited in claim 15, wherein the cable sheath envelopes the data cables.

17. The bus system of claim 15 or 16, wherein at least one of a supply line or a ground lead for the bus subscribers (S1, S2, S3, S4) are disposed in the cable sheath.

18. The bus system as recited in any one of Claims 10 to 17,  
wherein  
each bus subscriber (S1, S2, S3, S4) has a switch, and the switch is connected to a respective data line (1, 2), the switch being developed to interrupt the data transmission along the respective data line (1, 2).

19. The bus system as recited in any one of Claims 10 to 18,  
wherein  
each bus subscriber (S1, S2, S3, S4) has a time-measuring means.

20. The bus system as recited in any one of Claims 10 to 19,  
wherein  
each bus subscriber (S1, S2, S3, S4) has a logic circuit.

21. The bus system of claim 20, wherein data packets of at least one of the master module (M) or the bus subscribers (S1, S2, S3, S4) are able to be evaluated with the aid of the logic circuit.
22. The bus system as recited in any one of Claims 10 to 21  
wherein  
each bus subscriber (S1, S2, S3, S4) has an electronic circuit,  
the electronic circuit having at least one of the switch, or the time-measuring means, or the logic circuit.
23. The bus system of claim 22, wherein the at least one of the switch, or the time-measuring means, or the logic circuit are integrated into the electronic circuit.

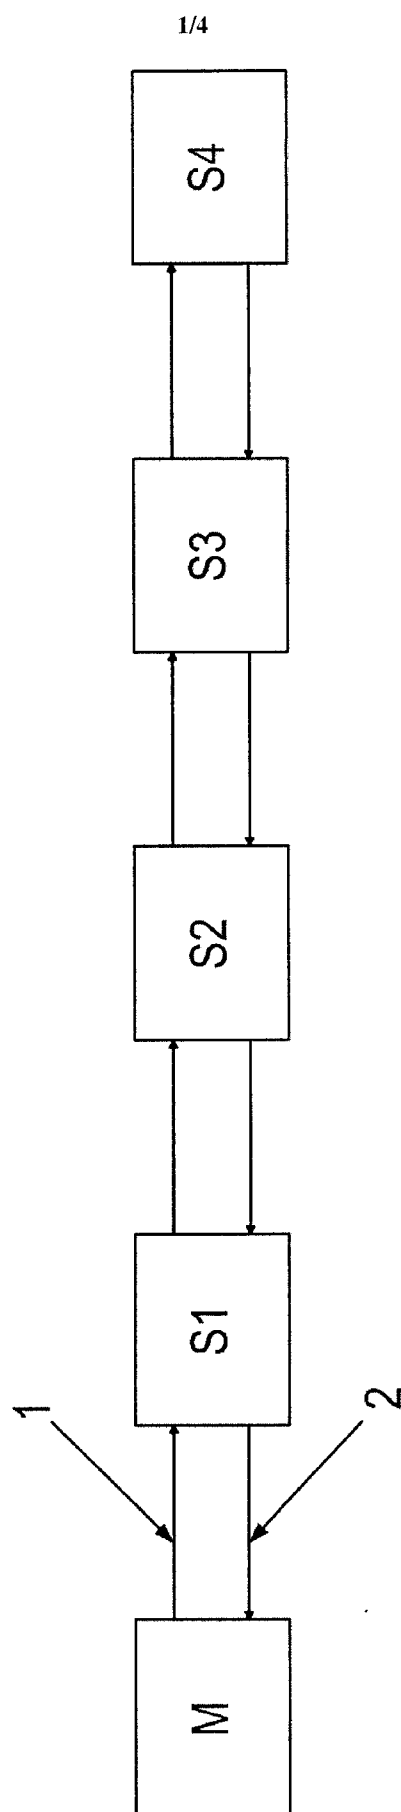


Fig. 1



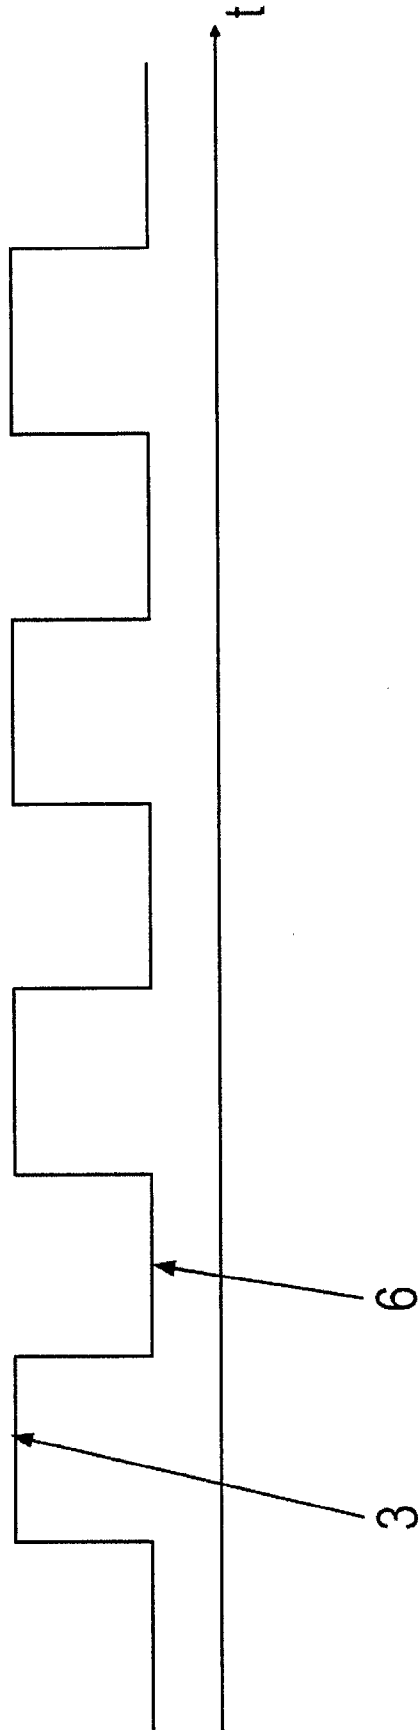
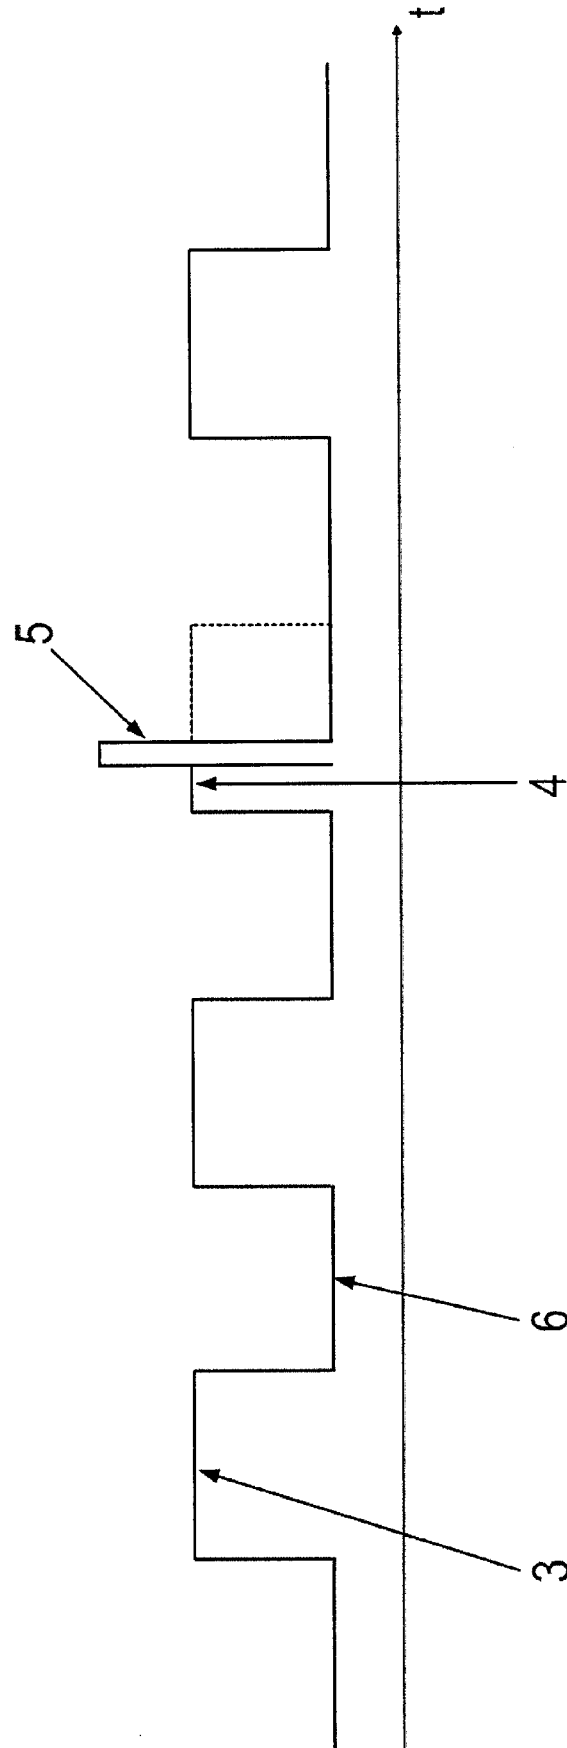


Fig. 2



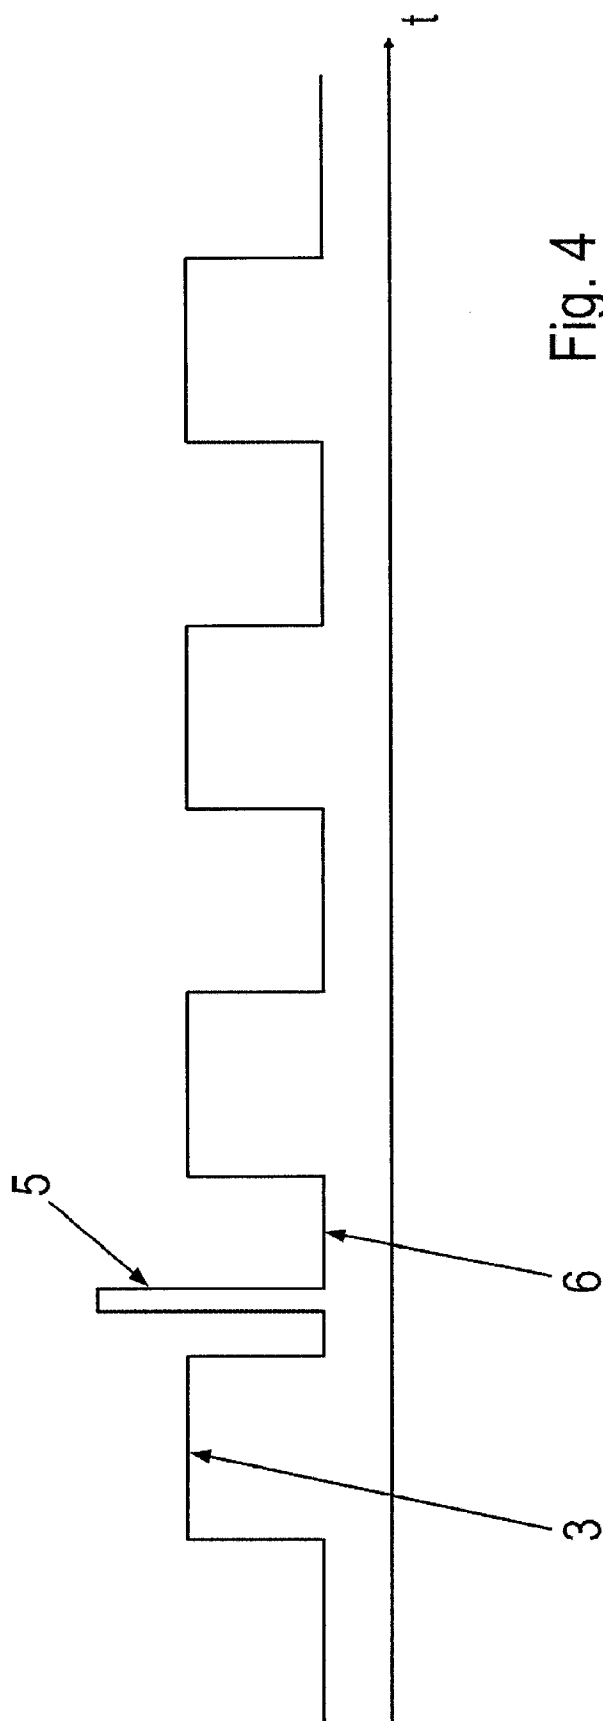


Fig. 4

