Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2345514 C 2009/07/21

(11)(21) 2 345 514

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(22) Date de dépôt/Filing Date: 2001/04/26

(41) Mise à la disp. pub./Open to Public Insp.: 2001/10/28

(45) Date de délivrance/Issue Date: 2009/07/21

(30) Priorité/Priority: 2000/04/28 (GB0010238.4)


(51) Cl.Int./Int.Cl. *A47C 7/60* (2006.01), *A47C 1/032* (2006.01), *A47C 3/026* (2006.01), *A47C 3/03* (2006.01)

(72) Inventeurs/Inventors:
HOBB, GORDON DENNIS, CA;
HOBB, DAVID LLOYD, CA

(73) Propriétaire/Owner:
LEGGETT & PLATT CANADA CO./SOCIETE LEGGETT & PLATT CANADA, CA

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : MECANISME DE VERROUILLAGE POUR FAUTEUIL ET COMMANDE A POUSSOIR ASSOCIEE
(54) Title: LOCKING MECHANISM FOR CHAIR AND PUSHBUTTON CONTROL THEREFOR

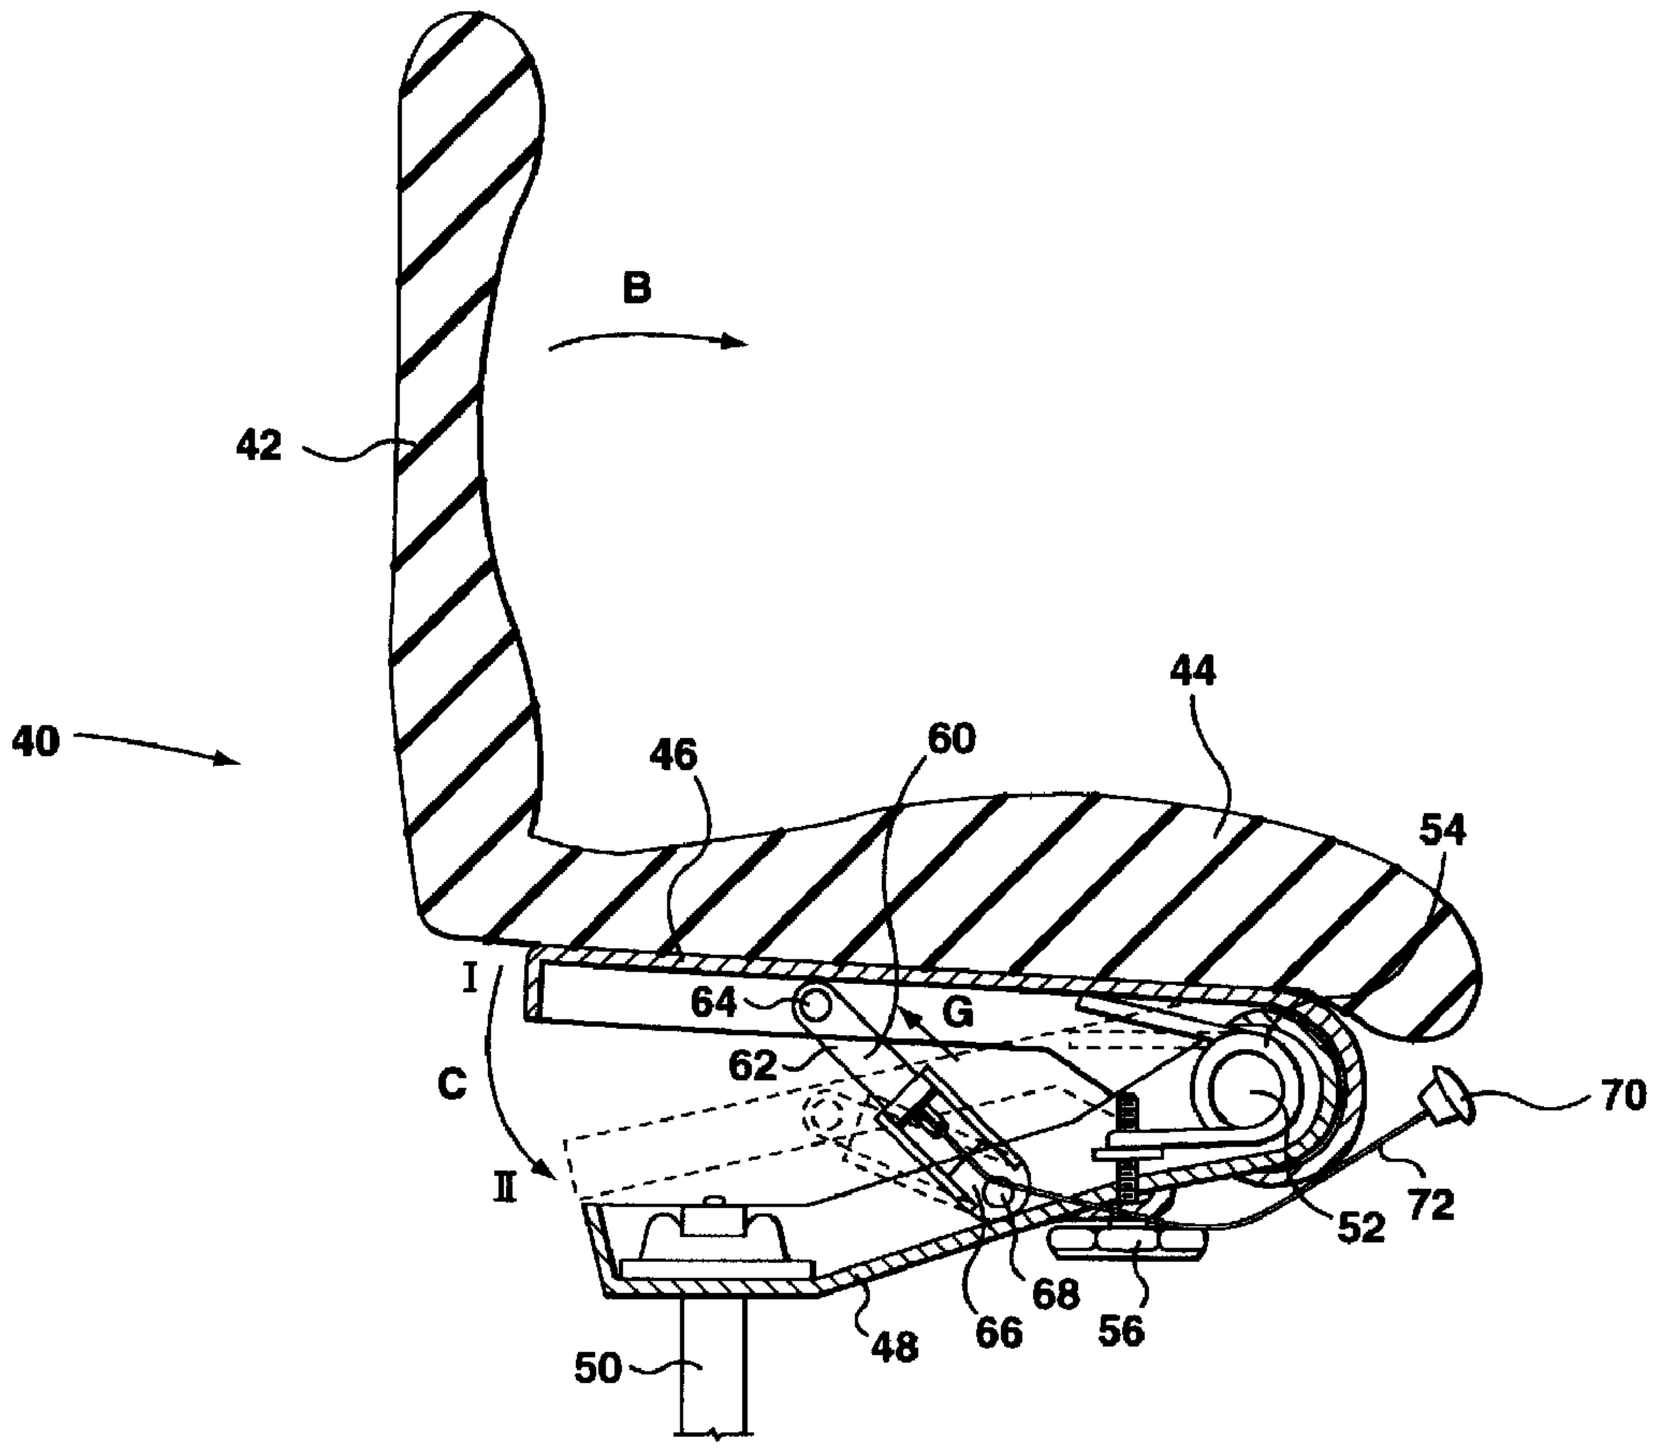

(57) Abrégé/Abstract:
A first chair part may be fixed relative to a second chair part by way of a sliding member attached to the first part which slides in a body attached to the second chair part. The chair parts are fixed relative to each other when a pin associated with the body

CA 2345514 C 2009/07/21

(11)(21) 2 345 514

(13) C

(57) Abrégé(suite)/Abstract(continued):
engages in one of several apertures in the sliding member to fix the chair parts. A bent leaf spring may have an end engaging a collar on the pin. The other end of the leaf spring may be pulled to urge the leaf spring to pivot about a fulcrum created by the bend. However, if there is a force trying to move the sliding member with respect to the body (as may result from a spring between the two chair parts), a consequent shear force on the pin may be sufficiently strong to resist the urging of the leaf spring. In such case, the leaf spring will simply bend when its other end is pulled until the force between the body member and slider is relieved. The other end of the leaf spring may be pulled with an actuator device having a track bearing member with a closed loop track. An actuator member is linked to the other end of the leaf spring and has a track follower received by the track. The actuator member may be pushed against the urging of a spring to move the track follower between first and second locating positions on the track. Movement of the track follower from the first to the second locating position and back again causes no net rotation of the actuator member relative to the track bearing member.

ABSTRACT

A first chair part may be fixed relative to a second chair part by way of a sliding member attached to the first part which slides in a body attached to the second chair part. The chair parts are fixed relative to each other when a pin associated with the body engages in one of several apertures in the sliding member to fix the chair parts. A bent leaf spring may have an end engaging a collar on the pin. The other end of the leaf spring may be pulled to urge the leaf spring to pivot about a fulcrum created by the bend. However, if there is a force trying to move the sliding member with respect to the body (as may result from a spring between the two chair parts), a consequent shear force on the pin may be sufficiently strong to resist the urging of the leaf spring. In such case, the leaf spring will simply bend when its other end is pulled until the force between the body member and slider is relieved. The other end of the leaf spring may be pulled with an actuator device having a track bearing member with a closed loop track. An actuator member is linked to the other end of the leaf spring and has a track follower received by the track. The actuator member may be pushed against the urging of a spring to move the track follower between first and second locating positions on the track. Movement of the track follower from the first to the second locating position and back again causes no net rotation of the actuator member relative to the track bearing member.

LOCKING MECHANISM FOR CHAIR AND PUSHBUTTON CONTROL THEREFOR

The present invention relates to locking mechanisms for chairs and to pushbutton controls therefor, and relates particularly, but not exclusively, to locking mechanisms and pushbutton controls for enabling adjustment of the inclination of the back and/or seat of an office chair.

Mechanisms for adjusting the inclination of the back and seat of an office chair relative to each other and to the ground are known in which pivoting movement of the seat relative to the ground and/or of the back relative to the seat is controlled by locking the seat or back in position by means of one or more small pressurised gas cylinders. It is also known to utilise a multi-plate clutch arrangement in which interlocking sets of parallel plates are placed under compression to prevent them from moving relative to each other, which in turn prevents pivoting of the back and/or seat of the chair. The chair back and/or seat are generally biassed by springs towards the upright position, and the desired orientation of the chair is chosen by releasing the locking mechanism and moving the back and/or seat of the chair to the desired inclination, and locking the chair in that orientation.

Locking mechanisms of the gas cylinder type generally suffer from the disadvantage that the gas cylinders are expensive and need to be purchased from specialist manufacturers. They also have a relatively short life expectency, typically two to three years in the normal use of a chair.

Locking mechanisms of the multi-plate clutch type suffer from the disadvantage that they are costly because of the significant number of parts involved, thus making assembly more difficult. Furthermore, the locking action of the locked mechanism can often be overcome if sufficient force is applied to the chair.

Furthermore, these locking mechanisms require an eccentric cam to be attached to the mechanism, and the locking mechanism often requires a considerable force to operate the cam, which in turn makes the mechanism difficult to operate.

In addition both types of known mechanism suffer from the drawback that, because the multi-plate clutch and gas cylinder locking mechanisms usually form an integral part of the main mechanism of each individual chair, it is difficult to produce a single mechanism that can be used in several different types of chair.

A potentially more serious disadvantage of office chairs of both of these types is that when the back of the chair is locked in a reclined position, it can be inadvertently released when a person is not sitting fully back against the chair. As a result, because the chair is generally biassed by springs towards an upright position, the back of the chair can be projected forwards under the biassing force of the springs with sufficient force to cause injury.

It is known to address this problem by providing a locking mechanism in which push-pull rods or bars slot into one or more holes or slots incorporated in the main chair mechanism to lock the back of the chair in one or more inclined positions relative to the seat. Because the back of the chair is still biassed by springs towards the upright position of the chair, when the occupant is not sitting fully back against the chair the locking mechanism is placed under load by the springs. This makes it difficult to remove the rod or bar from the hole or slot, and it is therefore difficult to release the locking mechanism unless the occupant leans against the spring pressure to remove the load from the locking rod or bar. In addition, the locking bar is generally part of the main chair mechanism, which makes it difficult to produce a locking mechanism suitable for several different types of chair, and can also make the chair difficult to operate.

Pushbutton controls are used in office chairs to provide a simple actuating device for controlling the relative positioning of parts of a chair, for instance the angle of inclination of the seat. Such systems commonly use a first push of a button to unlock the reclining mechanism and a second push of the button to re-lock the reclining mechanism in a new desired position. It is known in such situations to use pushbutton controls of similar construction to those used in ball point pens, where the pushing of a button causes an engaging member to follow a track which encircles a rod, this rod being connected to the button and the mechanism the pushbutton activates. Because the track encircles the rod, the movement of the engaging member against the edge or edges of the track results in the rotation of the rod. In the

example of a ball point pen the rod is generally in the form of the pen refill, all of which is caused to rotate as the button is pressed to engage the pen into a working position.

Where such a mechanism is used in a chair, a cable attached to the rod would also be caused to rotate. It is therefore necessary to put a rotating joint between the rod and the cable thus allowing the rod to rotate without causing the cable to rotate. Such a system has the disadvantage that in the event that the rotating joint becomes jammed, for example through mechanical failure or ingress of dirt, the rotation is then applied to the cable which causes tension to be put in the cable and ultimately causing the mechanism that the pushbutton controls to fail.

Preferred embodiments of the invention seek to overcome the above disadvantages of the prior art.

SUMMARY OF THE INVENTION

According to an aspect of the present invention there is provided a device for adjusting the relative positions of first and second parts of a chair, the device comprising: a body member adapted to be fixed relative to the first part of the chair and having at least one aperture therethrough; a sliding member having a plurality of engaging locations and adapted to be fixed relative to the second part of the chair and to slide relative to the body member; at least one engaging member adapted to pass through a respective said aperture in said body member and engage a said engaging location to fix said first and second parts relative to each other in one of a plurality of positions; a biasing member for urging the or each engaging member into engagement with a said engaging location; and an actuator for disengaging the or each said engaging member from a said engaging location, wherein the actuator is prevented from disengaging the or each said engaging member when a force between said body member and sliding member exceeds a predetermined amount, said actuator comprising at least one flexible member adapted to pivot relative to said body member to disengage the or each said engaging member and to flex to prevent pivoting thereof when the force between said body member and sliding member exceeds said predetermined amount.

By providing actuator means which is prevented from disengaging the or each engaging member when the force between the body member and sliding member is too great, the advantage is provided that when a force is applied between the body member and the sliding member, for instance when the occupant of the seat is sitting forward in the chair or there is no occupant in the seat, and the spring which tends to tilt the seat forward is applying a forward tilting force, the flexible actuator means is unable to disengage the engaging member and is caused to flex. This therefore reduces the risk of injury by accidentally causing the engaging member to be released when a person is not sitting fully back in the chair. Such a system also provides the advantage that when the engaging member is inserted into the engaging means, the application of excess force in attempting to alter the relative positions of the first and second parts of the chair is unlikely to cause the engaging member to become disengaged from the engaging means. It is therefore very difficult to forcibly overcome the locking mechanism.

The actuator may comprise at least one flexible member adapted to pivot relative to the body member to disengage the or each said engaging member and to flex to prevent pivoting thereof when the force between the body member and sliding member exceeds the predetermined amount.

The or each said flexible member may comprise a first portion for displacing a respective engaging member when said flexible member pivots relative to the body member, and a second portion adapted to flex when the force between the body member and sliding member exceeds the predetermined amount.

In a preferred embodiment each said engaging location comprises a respective aperture at least partially extending into said sliding member.

The apertures may extend through said sliding member.

In a preferred embodiment, the device further comprises a support for the or each engaging member, and the biasing member comprises at least one respective spring acting between said support and a said engaging member.

According to another aspect of the present invention there is provided a device for adjusting the relative positions of first and second parts of a chair, the device comprising: a body member adapted to be fixed relative to the first part of the chair and having at least one aperture therethrough; a sliding member having a plurality of engaging locations and adapted to be fixed relative to the second part of the chair and to slide relative to the body member; at least one engaging member adapted to pass through a respective said aperture in said body member and engage a said engaging location to fix said first and second parts relative to each other in one of a plurality of positions; a biasing member for urging the or each engaging member into engagement with a said engaging location; and an actuator for disengaging the or each said engaging member from a said engaging location, wherein the actuator is prevented from disengaging the or each said engaging member when a force between said body member and sliding member exceeds a predetermined amount, said actuator comprising a leaf spring having a medial bend to form a fulcrum such that levering one end of said actuator applies a disengaging force to the or each said engaging member.

According to another aspect of the present invention there is provided an actuator device for adjusting the position of an elongated member relative to a component, the device comprising: a track bearing member adapted to be fixed relative to the component, the track bearing member having a track in the form of a closed loop, wherein the track is adapted to receive a track follower and has first and second locating positions for said track follower; an actuator member connected to an end of the elongate member and slidably located with respect to the track bearing member, and comprising said track follower to be received in the track; and a biasing member for urging the actuator member outwardly with respect to the track bearing member to urge said track follower into said first or second locating position; wherein said actuator member is adapted to be pushed inwardly with respect to the track bearing member against said biasing member to move said track follower between said first and second locating positions, and movement of said track follower from said first locating position to said second locating position and back to said first locating position causes no net rotation of said actuator member relative to the track bearing member.

By providing a device such that movement of the engaging member from the first locating position to the second and back to the first causes no net rotation of the actuator member relative to the housing, the advantage is provided that repeated operation of the actuator

member does not cause rotation of the elongate member. As a result, repeated operation does not cause additional tension beyond that of normal operation to be applied to the elongate member.

In a preferred embodiment the actuator member comprises a hand-operated button.

In a preferred embodiment, said biasing member comprises at least one spring.

The track is preferably a groove cut into the inner surface of said casing.

According to a further aspect of the present invention, there is provided a chair adjustment mechanism, comprising: a body member adapted to be fixed relative to a first part of a chair; a sliding member having a plurality of engaging locations and adapted to be fixed relative to a second part of the chair and to slide relative to the body member; an engaging member associated with the body for movement between an engaging position engaging at least one of said engaging locations to fix said first part with respect to said second part and a disengaging position out of engagement with said plurality of engaging locations; an actuator operable to move said engaging member to said disengaging position wherein said actuator is prevented from disengaging said engaging member only when a force between said body member and said sliding member exceeds a predetermined amount; and a flexible member adapted to pivot relative said body member to disengage said engaging member and to flex to prevent pivoting thereof when said force between said body member and sliding member exceeds said predetermined amount.

According to another aspect of the present invention, there is provided a chair adjustment mechanism, comprising: a body member adapted to be fixed relative to a first part of a chair; a sliding member having a plurality of engaging locations and adapted to be fixed relative to a second part of the chair and to slide relative to the body member; an engaging member associated with the body for movement between an engaging position engaging at least one of said engaging locations to fix said first part with respect to said second part and a disengaging position out of engagement with said plurality of engaging locations; an actuator having a flexible member arranged such that when said engaging member is in said engaging position and said actuator is actuated, if a force between said body member and

said sliding member does not exceed a predetermined amount, said actuator pivots relative to said body member to move said engaging member to said disengaging position and, if said force exceeds said predetermined amount, said actuator flexes and does not pivot such that said engaging member remains in said engaging position.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings, in which:

Figure 1 is a schematic cross-sectional elevation view of part of an office chair embodying the present invention;

Figure 2 is a detailed cross-sectional view of the locking mechanism shown in Figure 2;

Figure 3 is a cross-sectional view of a pushbutton actuator mechanism of a second embodiment of the present invention;

Figure 4 is an elevation view of an internal surface of the housing of the pushbutton mechanism of figure 3; and

Figure 5 is an end view of the part of the housing shown in Figure 4.

DETAILED DESCRIPTION

In overview, a first chair part may be fixed relative to a second chair part by way of a sliding member attached to the first part which slides in a body attached to the second chair part. In an illustrative embodiment, the chair parts are fixed relative to each other when a pin associated with the body engages in one of several apertures in the sliding member to fix the chair parts. A bent leaf spring may have an end engaging a collar on the pin. The other end of the leaf spring may be pulled to urge the leaf spring to pivot about a fulcrum created by the bend. However, if there is a force trying to move the sliding member with

respect to the body (as may result from a spring between the two chair parts), a consequent shear force on the pin may be sufficiently strong to resist the urging of the leaf spring. In such case, the leaf spring will simply bend when its other end is pulled until the force between the body member and slider is relieved. The other end of the leaf spring may be pulled with an actuator device having a track bearing member with a closed loop track. An actuator member is linked to the other end of the leaf spring and has a track follower received by the track. The actuator member may be pushed against the urging of a spring to move the track follower between first and second locating positions on the track. Movement of the track follower from the first to the second locating position and back again causes no net rotation of the actuator member relative to the track bearing member.

Referring in detail to **Figure 1**, an office chair **40** of the forward pivot or knee tilt type includes a back **42** and a seat **44** attached to a seat frame **46**. A supporting frame **48** is mounted to a support **50** and hinged to seat frame **46** about a pivot axis **52**. The seat back **42** and seat **44** are urged in the direction of arrow **B** in **Figure 2** between a rest position **I** and an inclined position **II** by means of a heavy duty torsion spring **54** which is sufficiently strong to counterbalance the weight of an occupant of the chair as the chair is inclined, and to return the chair bearing the weight of the occupant to its rest position. A hand wheel **56** is used to adjust the pre-tension of torsion spring **54**.

A locking device **60** is located between the seat frame **46** and the supporting frame **48** and comprises a sliding member **62** hinged to the seat frame **46** by means of a pivot pin **64**, and a body member **66** attached by a pivot pin **68** to the supporting frame **48**. The locking device **60** is activated by a cable **72** and knob **70** but alternatively knob **70** could be replaced with a pushbutton mechanism (**Figure 3**) to cause cable **72** to release the locking mechanism **60**.

Referring to **Figure 2**, the locking mechanism **60** is shown in greater detail. The mechanism **60** comprises a sliding member in the form of a slide bar **62** having an engaging portion comprising a series of apertures **74** and includes an aperture **76** for receiving the pivot pin **64**. The slide bar **62** is received in a slot in body member **66**.

Body member **66** includes a housing **78**. Contained within the housing **78** is an engaging member in the form of a pin **80**. The pin **80** extends through an aperture **82** in body member **66** and into one of the apertures **74** in slider bar **62**. Pin **80** has a fixed collar **84** located around it so that a biasing member, such as spring **86**, can act between housing **78** and collar **84** to tend to push pin **80** in the direction of apertures **74** and **82**. To allow pin **80** to be removed from aperture **74**, a flexible actuating member **88** also engages collar **84** to apply a force in the opposite direction to spring **86**. Flexible actuating member **88** is divided by a bend **90** into an elongate flexible portion **92** to which cable **72** is attached, and an engaging portion **94** which engages collar **84**. When cable **72** is pulled in direction **F**, activating member **88** pivots on a fulcrum **90** created by a bend in the member **88** to apply a force on collar **88** of pin **80** against spring **86**. Actuating member **88** may be fabricated of spring steel such that it is in the nature of a leaf spring.

The operation of the mechanism of **Figures 1** and **2** will now be described.

In **Figure 2**, pin **80** is shown in an engaged position, that is extending through aperture **82** and into one of apertures **74**.

When pin **80** is in the engaged position and no occupier is sitting in the chair, or the occupier is sitting too far forward to counteract the effect of torsion spring **54**, the torsion spring **54** urges seat frame **46** and support frame **48** away from each other (the opposite direction to arrow **C** in **Figure 2**), which in turn urges the slide bar **62** in the direct of arrow **G** shown in **Figure 1** and **2**. Because pin **80** is in the engaged position, extending through apertures **82** and **74**, slide bar **62** is unable to move.

When the occupier of the chair is sitting in a reclined position, applying a greater force to recline the chair than the opposing force provided by torsion spring **54**, the slide bar **62** is urged in direction **H** shown in **Figure 3**. However, when the pin **80** is in the engaged position slide bar **62** is unable to move.

In order to disengage pin **80**, cable **72** is pulled in direction **F** which in turn pulls on the elongate portion **92** of flexible engaging member **88**. As the engaging member pivots at

bend **90** engaging portion **94** applies a force to collar **84** against spring **86** thereby lifting pin **80** from aperture **74**. However, when a significant force is being applied to slide bar **82** urging it in directions **G** or **H**, for instance under the force of torsion spring **54**, the shear force between slide bar **62** and mechanism body **66** is sufficient to make pin **80** difficult to remove. When cable **72** is pulled in direction **F** and such a force is being applied to pin **80**, flexible actuating member **88** is caused to bend along its elongate portion **92**, as a result of which pin **80** is not removed from aperture **74**.

When sliding bar **62** is not being urged in directions **G** or **H**, and there is only a limited or no shear force being applied to pin **80** between slide bar **62** and body **66**, the movement of cable **72** in direction **F** does not result in the flexing of elongate portion **92** of flexible actuating member **88** and allows engaging portion **94** to remove pin **80** from recesses **74** against the force of spring **86**. The elongate portion **92** of the actuating member **88** must be sufficiently rigid that it does not flex when the only force preventing removal of pin **60** from recess **74** is the biasing force provided by spring **86**.

As a result, when the occupier of the chair is sitting too far forward or not sitting in the chair, and the force of torsion spring **54** is urging the seat **42** into an upright position, the flexing of elongate portion **92** of actuating member **88** prevents the disengagement of pin **80** and thereby prevents the inclination of the chair **40**, whether accidental or otherwise.

Referring to **Figure 3**, an actuator device **100** comprises a track bearing member in the nature of casing **102** from which a button **104** partially extends. Button **104** is an actuating member formed in two parts: a first part **106** and a second part **108**. Button **104** is connected to a rod (link) **110** and is biased against casing **102** by a biasing member, such as spring **112**.

Within the casing **102**, a track **114** is cut into the internal surface. A track follower in the form of a pin **116** is inserted into the track and biased against track **114** by spring **118**. Track **114** is generally formed in a removable piece **120** of casing **102**.

Referring to **Figures 4** and **5**, removable part **120** of casing **102** has track **114** cut therein. Track **114** is in the form of a closed loop having first and second locating positions **121** and **122** and first and second limit stops **124** and **126**. The track **114** further comprises various sides **128, 130, 132, 134, 136, 138** and **140**.

In **Figure 4**, pin **116** is shown at the first locating position **121**. When pressure is applied to button **104** in direction **M** against the force of spring **112**, pin **116**, which is connected to button **104**, is caused to moved in direction **P**. As pin **116** travels in direction **P**, it engages edge **128** of track **114** and as it continues to move in direction **P**, is caused to follow edge **128**. The following of edge **128** causes slight rotational movement of button **104**. In the example shown in **Figure 3**, first part **106** of button **104** and second part **108** of button **104** are able to rotate relative to each other and therefore this rotational movement occurs in second part **108**. As pressure is further applied to button **104**, pin **116** continues to move along edge **128** in direction **P** and once it reaches the end thereof, and continues in direction **P** until it reaches edge **130** of track **114**. The continued application of pressure to button **104** further causes pin **116** to travel along edge **130** until it reaches first limit stop **124**. It is then no longer possible to push button **104** any further into casing **102** since limit stop **124** marks the maximum extent of possible movement of pin **116** and therefore button **104**.

When pressure is released from button **104**, spring **112** causes button **104** to move in direction **N** and causes pin **116** to move in direction **Q** away from first limit stop **124** along edge **132**. As pin **116** continues to move in direction **Q** and moves beyond the end of edge **132** it engages edge **134** and follows this edge **134** to second engaged position **122**. This again causes a slight rotation of button **104**.

In moving from the first locating position **121** to the second locating position **122**, rod **110** and any other rods or cables attached thereto are caused to move a distance **T**. If rod **110** is linked to cable **72** in **Figure 2**, this movement can be the movement required to move pin **80** from aperture **74**.

If further pressure is applied to button **104** in direction **M**, pin **116** is caused to move away from second locating position **122** in direction **P** along edge **136**. Once beyond edge **136** if

pressure is continually applied to button **104**, pin **116** will engage edge **138** which it will move along until it reaches second limit stop **126**.

If pressure is then released from button **104**, spring **112** causes button **104** to move in direction **N** and pin **116** to move in direction **Q**. Pin **116** will follow edge **140** and return to first locating position **120**.

In moving from second locating position **122** back to first locating position **121**, pin **116** and therefore rod **10** have returned through a distance **T**. If rod **110** were connected to cable **172**, this movement would allow the release of pin **80** to return into one of apertures **74** thereby relocking the locking mechanism.

From the foregoing, it will be apparent that movement of the track follower from the first locating position to the second locating position and back to the first locating position causes no net rotation of second part **108** of button **104** relative to the casing **102**.

It is noted that the biasing spring **86** may not be needed if the body member **66** is oriented such that the pin **80** is vertically oriented. In such case, the weight of the pin will cause it to rest on sliding member **62** and drop into an aperture **74** in the sliding member **62** whenever it is aligned with an aperture. With this arrangement, forces in direction **G** or **H** must still be relieved in order for the pin **80** to be disengaged from an aperture.

While the actuator device **100** has been described as comprising a track bearing member in the nature of casing **102** with an inwardly facing track **114**, equally, the casing could be replaced with a track bearing member with an outwardly facing track. In such case, the second part **108** of the button **104** would surround an end of the track bearing member and would have an inwardly directed track follower.

While the illustrative embodiment shows the locking device **60** located between the seat frame and supporting frame, it will be apparent that the locking device may also be used between other chair parts, such as, for example, between a seat and a backrest.

It will be appreciated by persons skilled in the art that the above embodiments have been described by way of example only and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A device for adjusting the relative positions of first and second parts of a chair, the device comprising:

a body member adapted to be fixed relative to the first part of the chair and having at least one aperture therethrough;

a sliding member having a plurality of engaging locations and adapted to be fixed relative to the second part of the chair and to slide relative to the body member;

at least one engaging member adapted to pass through a respective said aperture in said body member and engage a said engaging location to fix said first and second parts relative to each other in one of a plurality of positions;

a biasing member for urging the or each engaging member into engagement with a said engaging location; and

an actuator for disengaging the or each said engaging member from a said engaging location, wherein the actuator is prevented from disengaging the or each said engaging member when a force between said body member and sliding member exceeds a predetermined amount,

said actuator comprising at least one flexible member adapted to pivot relative to said body member to disengage the or each said engaging member and to flex to prevent pivoting thereof when the force between said body member and sliding member exceeds said predetermined amount.

2. A device according to claim 1, wherein the or each said flexible member comprises a first portion for displacing a respective engaging member when said flexible member pivots relative to said body member, and a second portion adapted to flex when the force between said body member and sliding member exceeds said predetermined amount.

3. A device according to claim 2, wherein each said engaging location comprises a respective aperture at least partially extending into said sliding member.

4. A device according to claim 3, wherein said at least one aperture extends through said sliding member.

5. A device according to claim 4, further comprising a support for the or each said engaging member, and said biasing member comprises at least one respective spring acting between said support and a said engaging member.

6. The device of claim 5, wherein said engaging member comprises a pin reciprocally mounted in said body member and wherein said support comprises a collar on said pin.

7. A device for adjusting the relative positions of first and second parts of a chair, the device comprising:

a body member adapted to be fixed relative to the first part of the chair and having at least one aperture therethrough;

a sliding member having a plurality of engaging locations and adapted to be fixed relative to the second part of the chair and to slide relative to the body member;

at least one engaging member adapted to pass through a respective said aperture in said body member and engage a said engaging location to fix said first and second parts relative to each other in one of a plurality of positions;

a biasing member for urging the or each engaging member into engagement with a said engaging location; and

an actuator for disengaging the or each said engaging member from a said engaging location, wherein the actuator is prevented from disengaging the or each said engaging member when a force between said body member and sliding member exceeds a predetermined amount,

said actuator comprising a leaf spring having a medial bend to form a fulcrum such that levering one end of said actuator applies a disengaging force to the or each said engaging member.

8. An actuator device for adjusting the position of an elongated member relative to a component, the device comprising:

a track bearing member adapted to be fixed relative to the component, the track bearing member having a track in the form of a closed loop, wherein the track is adapted

to receive a track follower and has first and second locating positions for said track follower;

an actuator member connected to an end of the elongate member and slidably located with respect to the track bearing member, and comprising said track follower to be received in the track; and

a biasing member for urging the actuator member outwardly with respect to the track bearing member and to urge said track follower into said first or second locating positions;

wherein said actuator member is adapted to be pushed inwardly with respect to the track bearing member against said biasing member to move said track follower between said first and second locating positions, and movement of said track follower from said first locating position to said second locating position and back to said first locating position causes no net rotation of said actuator member relative to the track bearing member.

9. A device according to claim 8, wherein the track bearing member is a casing and the actuator member comprises a hand operated button slidably received by said casing.

10. A device according to claim 9, wherein said track is a groove cut into the inner surface of said casing.

11. The device of claim 10 wherein said casing slidably receives an end of the elongate member.

12. A device according to claim 11, wherein said biasing member comprises at least one spring.

13. The actuator device of claim 8 wherein said track comprises a first segment for directing said track follower from said first locating position to a first limit stop, a second segment for directing said track follower from said first limit stop to said second locating position, a third segment for directing said track follower from said second locating position to a second limit stop, and a fourth segment for directing said track follower from

said second limit stop to said first locating position.

14. A chair adjustment mechanism, comprising:

a body member adapted to be fixed relative to a first part of a chair;

a sliding member having a plurality of engaging locations and adapted to be fixed relative to a second part of the chair and to slide relative to the body member;

an engaging member associated with the body member for movement between an engaging position engaging at least one of said engaging locations to fix said first part with respect to said second part and a disengaging position out of engagement with said plurality of engaging locations;

an actuator operable to move said engaging member to said disengaging position wherein said actuator is prevented from disengaging said engaging member only when a force between said body member and said sliding member exceeds a predetermined amount; and

a flexible member adapted to pivot relative said body member to disengage said engaging member and to flex to prevent pivoting thereof when said force between said body member and sliding member exceeds said predetermined amount.

15. The mechanism of claim 14 further comprising a biasing member for biasing said engaging member toward said engaging position.

16. The mechanism of claim 14 wherein said actuator comprises:

a track bearing member adapted to be fixed relative to said body member, said track bearing member having a track formed as a closed loop, said track adapted to receive a track follower, said track having first and second locating positions for said track follower;

an actuator member connected to an end of said actuator and slidably located with respect to said track bearing member, said actuator member supporting said track follower;

a biasing member for urging said actuator member outwardly with respect to said track bearing member to urge said track follower into said first or second locating position;

wherein said actuator member is adapted to be pushed inwardly with respect to said track bearing member against said biasing member to move said track follower between said first and second locating positions, and movement of said track follower from said first locating position to said second locating position and back to said first locating position causes no net rotation of said actuator member relative to said track bearing member.

17. A chair adjustment mechanism comprising:

a body member adapted to be fixed relative to a first part of a chair;

a sliding member having a plurality of engaging locations and adapted to be fixed relative to a second part of the chair and to slide relative to the body member;

an engaging member associated with the body member for movement between an engaging position engaging at least one of said engaging locations to fix said first part with respect to said second part and a disengaging position out of engagement with said plurality of engaging locations;

an actuator having a flexible member arranged such that when said engaging member is in said engaging position and said actuator is actuated, if a force between said body member and said sliding member does not exceed a predetermined amount, said actuator pivots relative to said body member to move said engaging member to said disengaging position and, if said force exceeds said predetermined amount, said actuator flexes and does not pivot such that said engaging member remains in said engaging position.

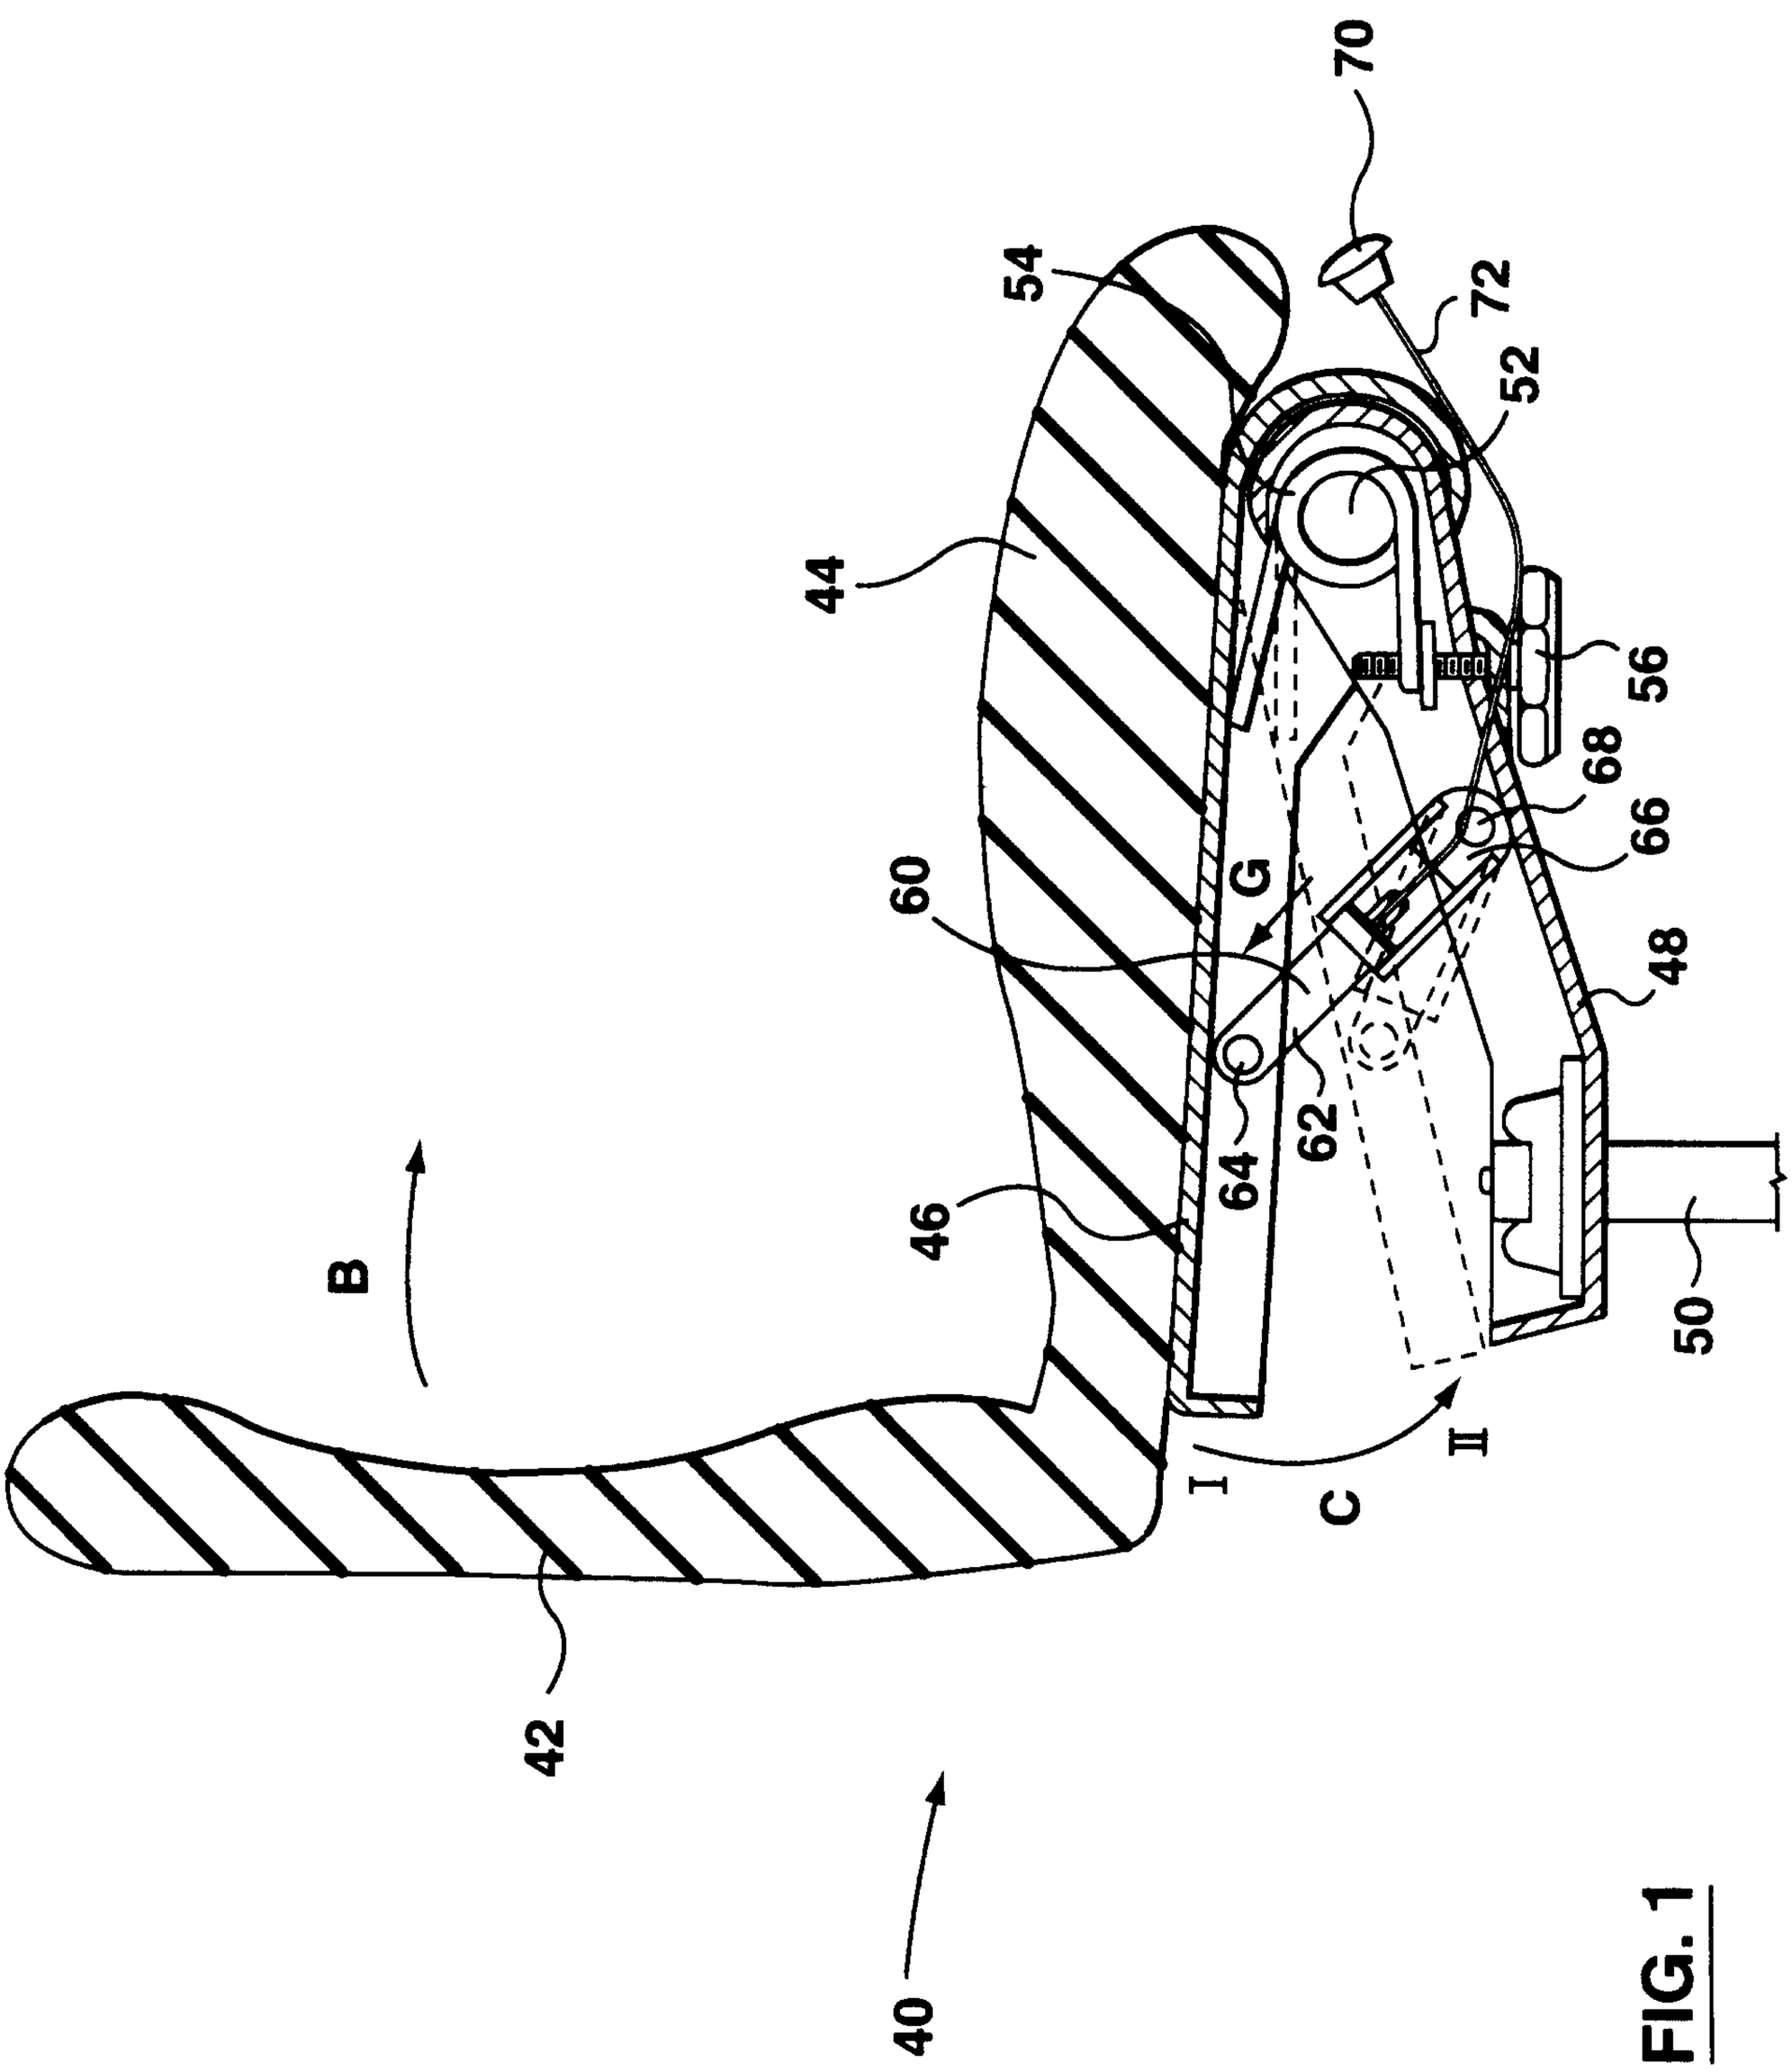


FIG. 1

Patent Agents
Fetherstonhaugh & Co.

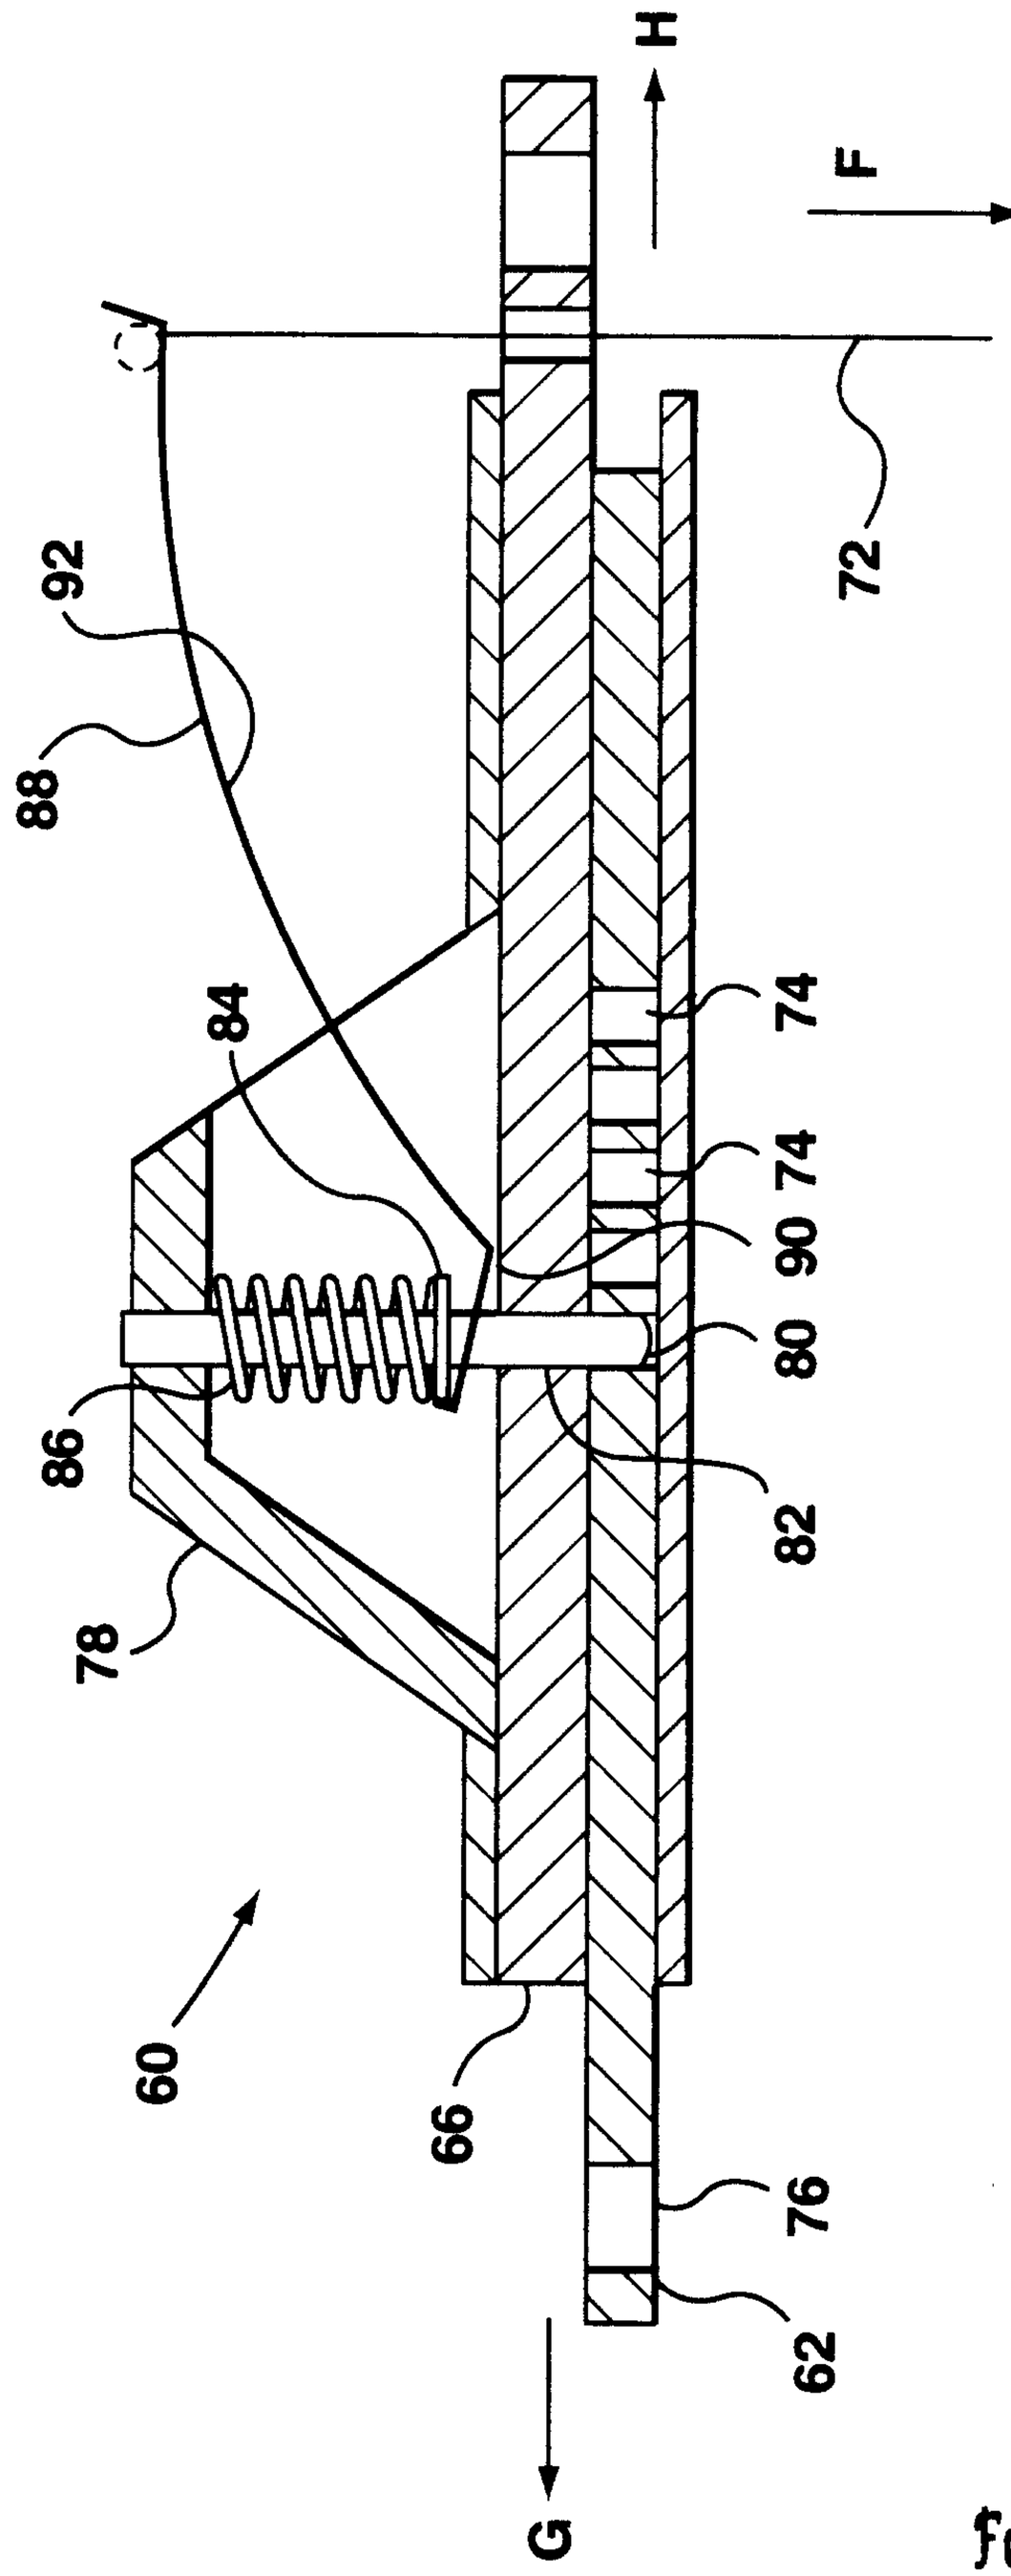


FIG. 2

Patent Agents
Fetherstonhaugh & Co.

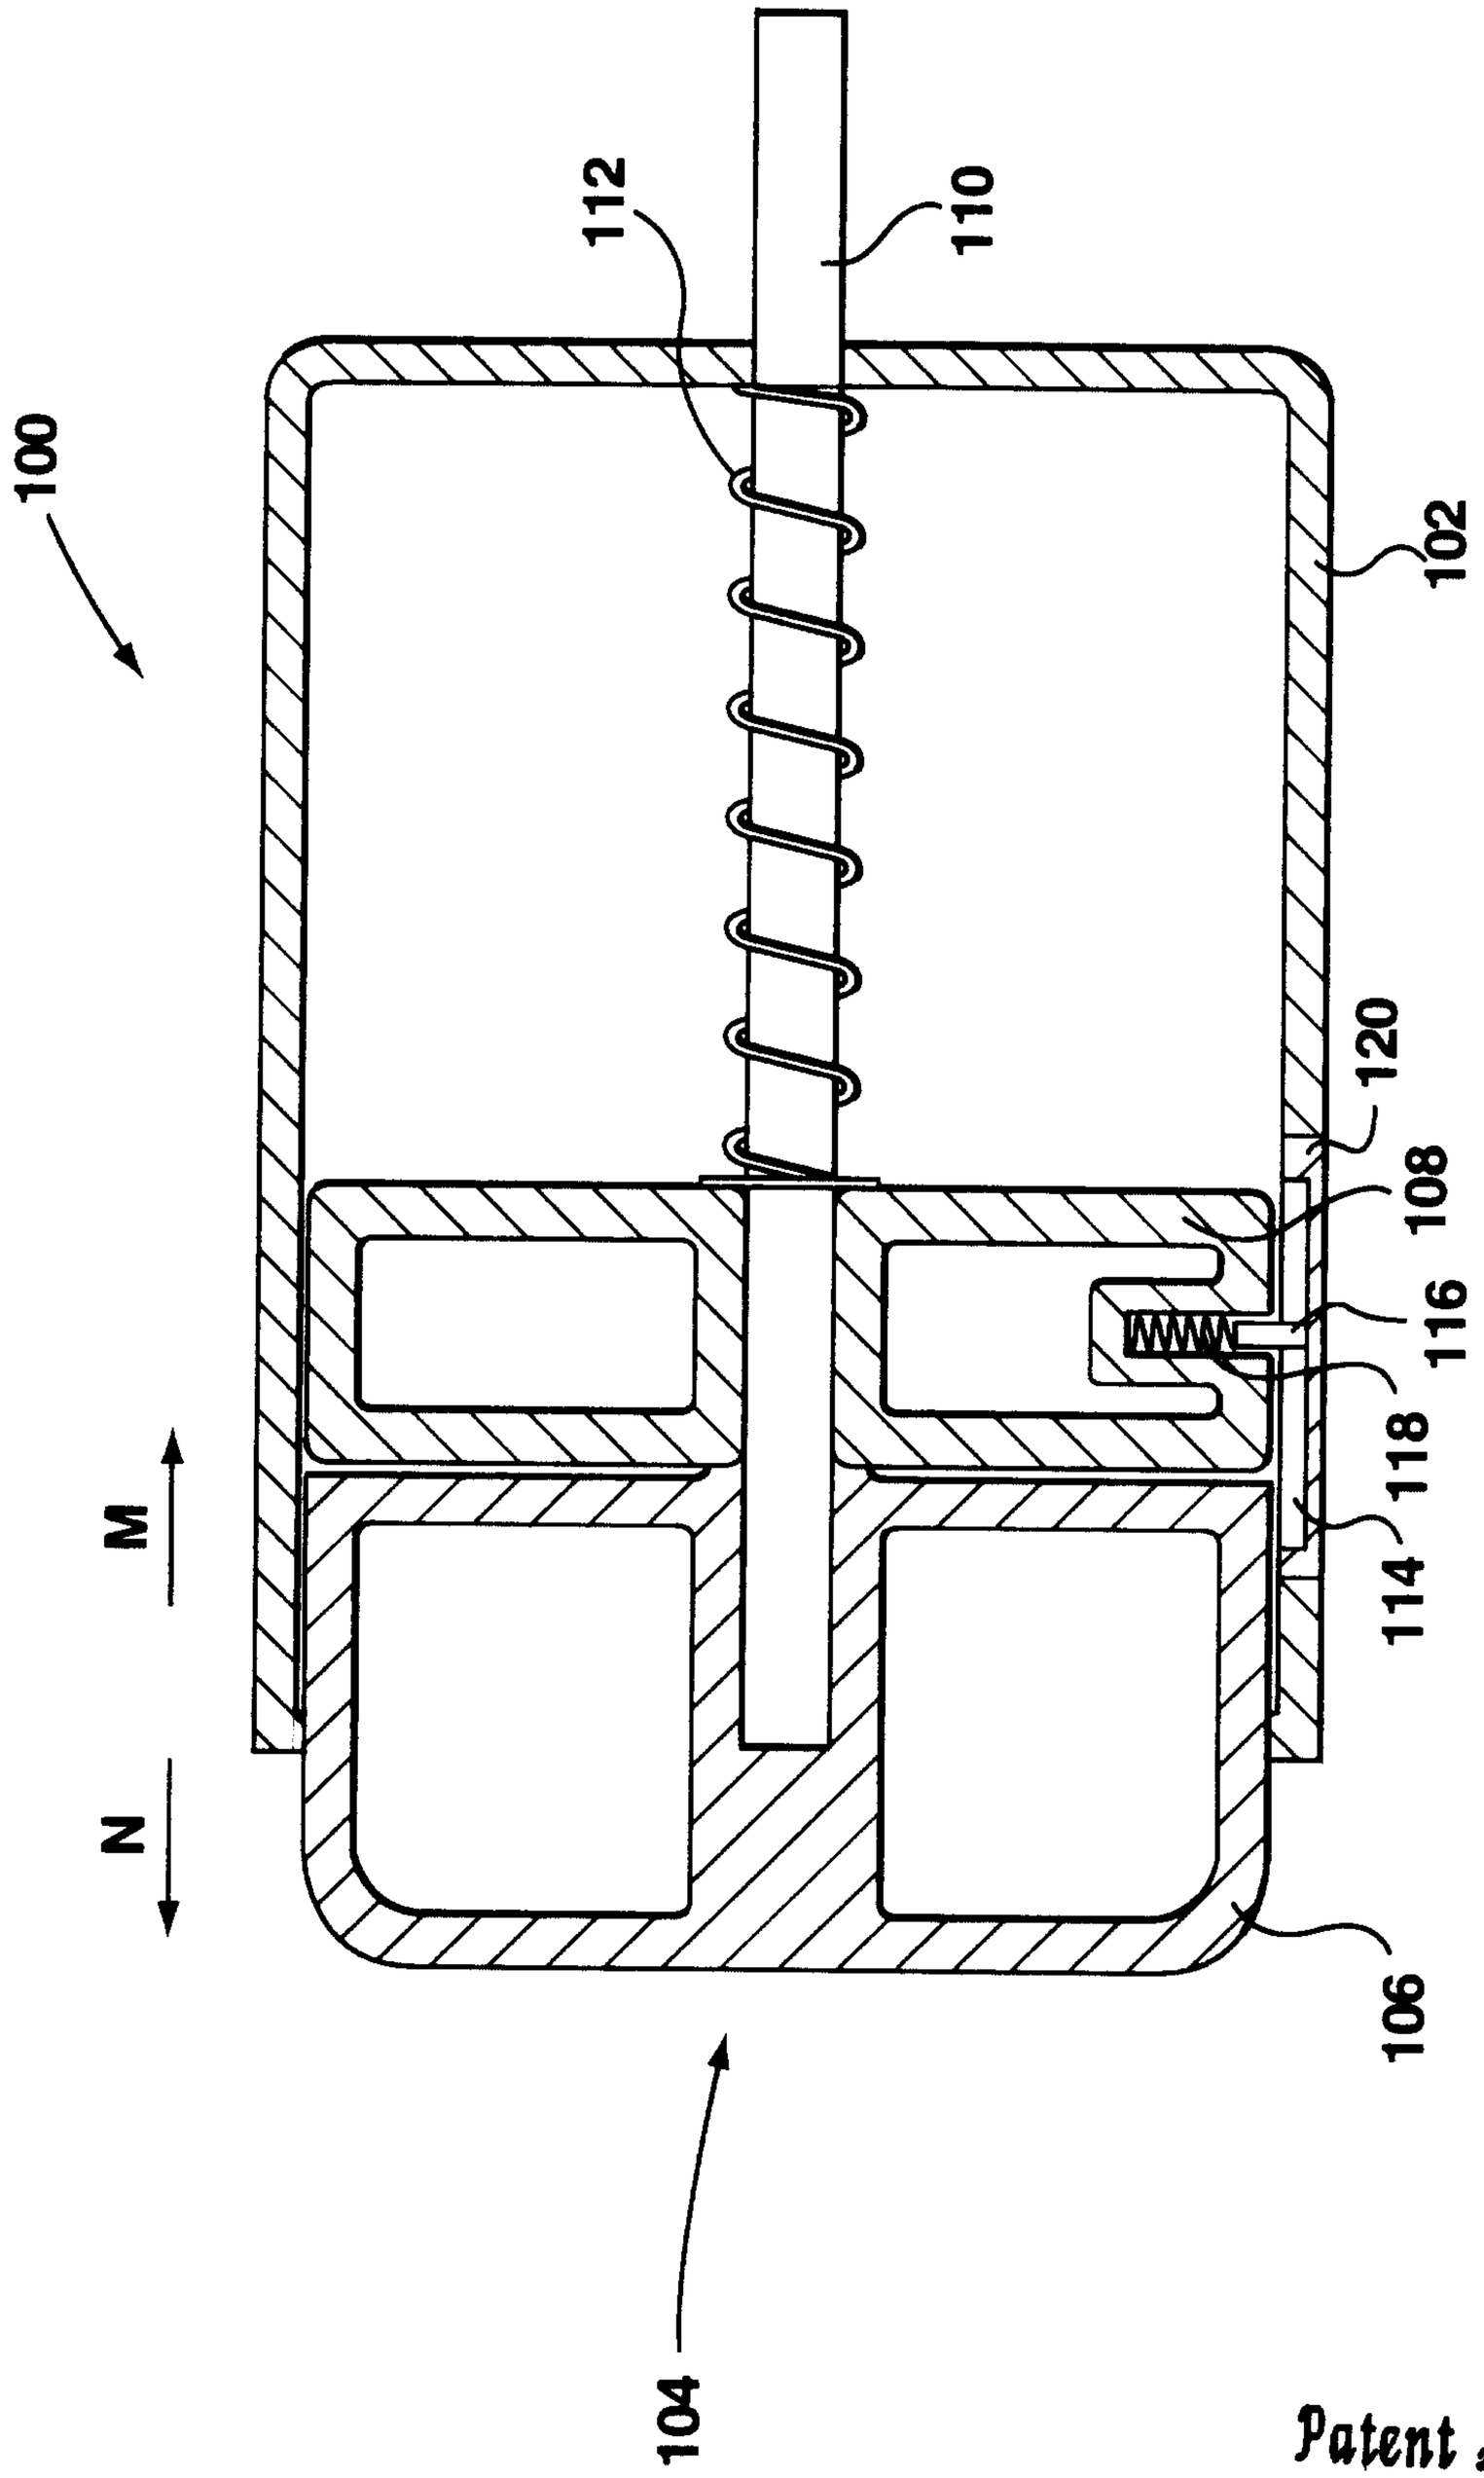


FIG. 3

Patent Agents
Fetherstonhaugh & Co.

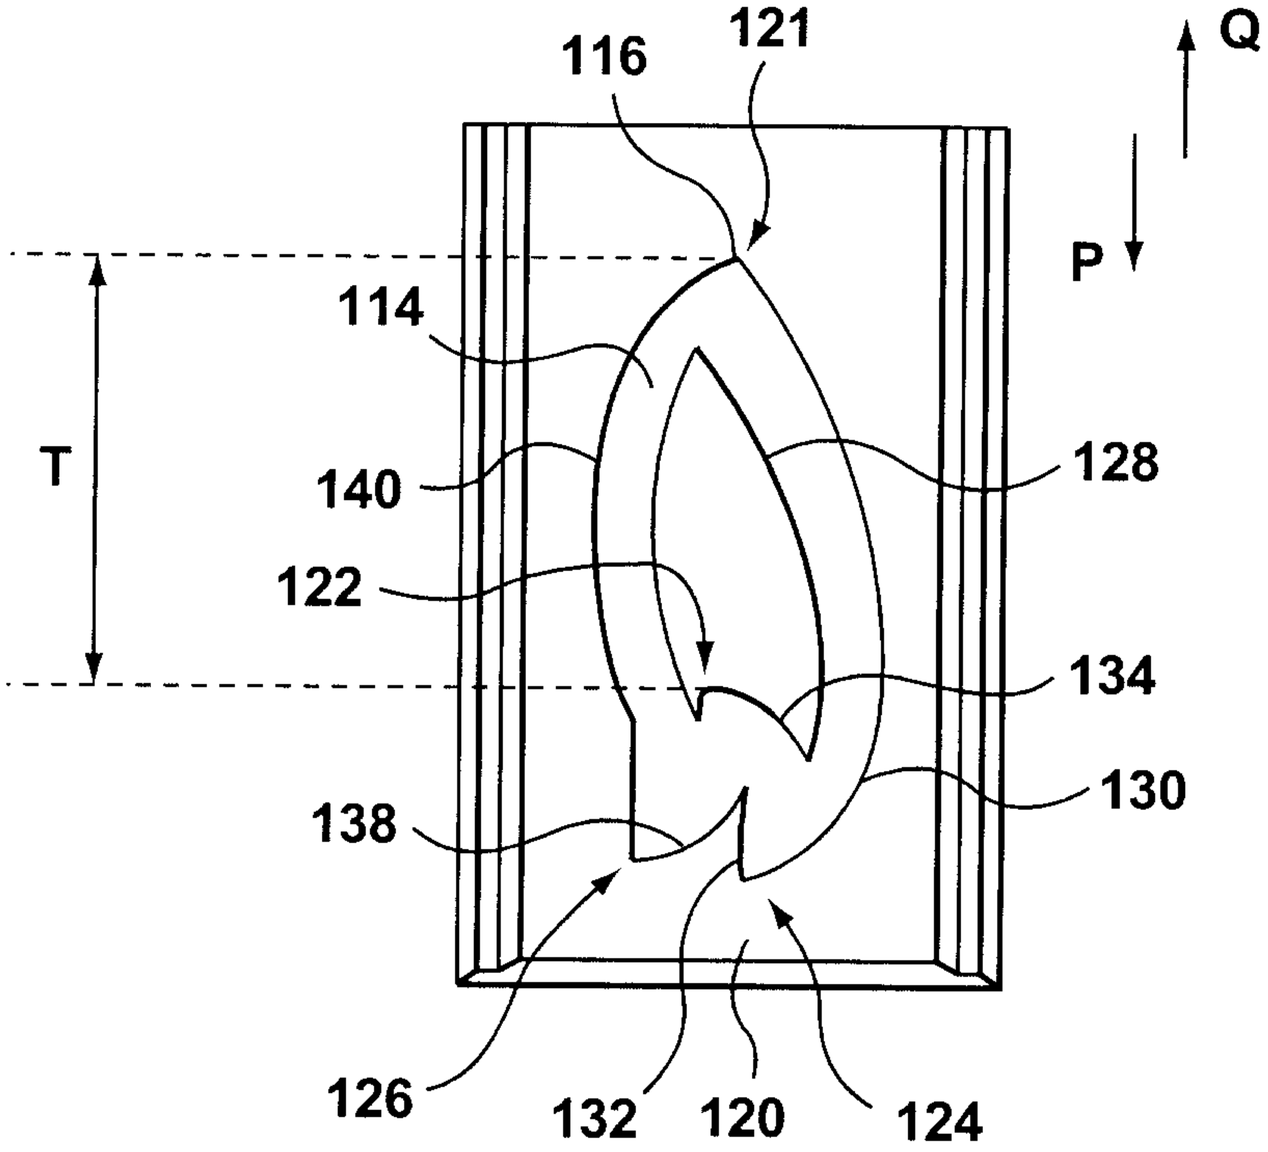


FIG. 4

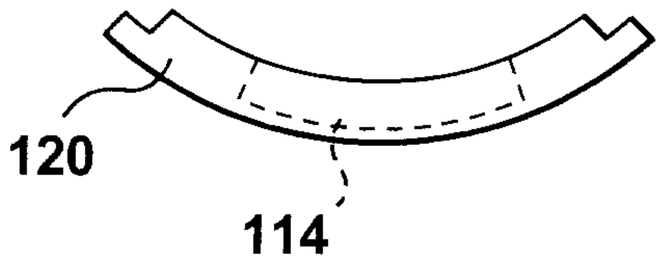
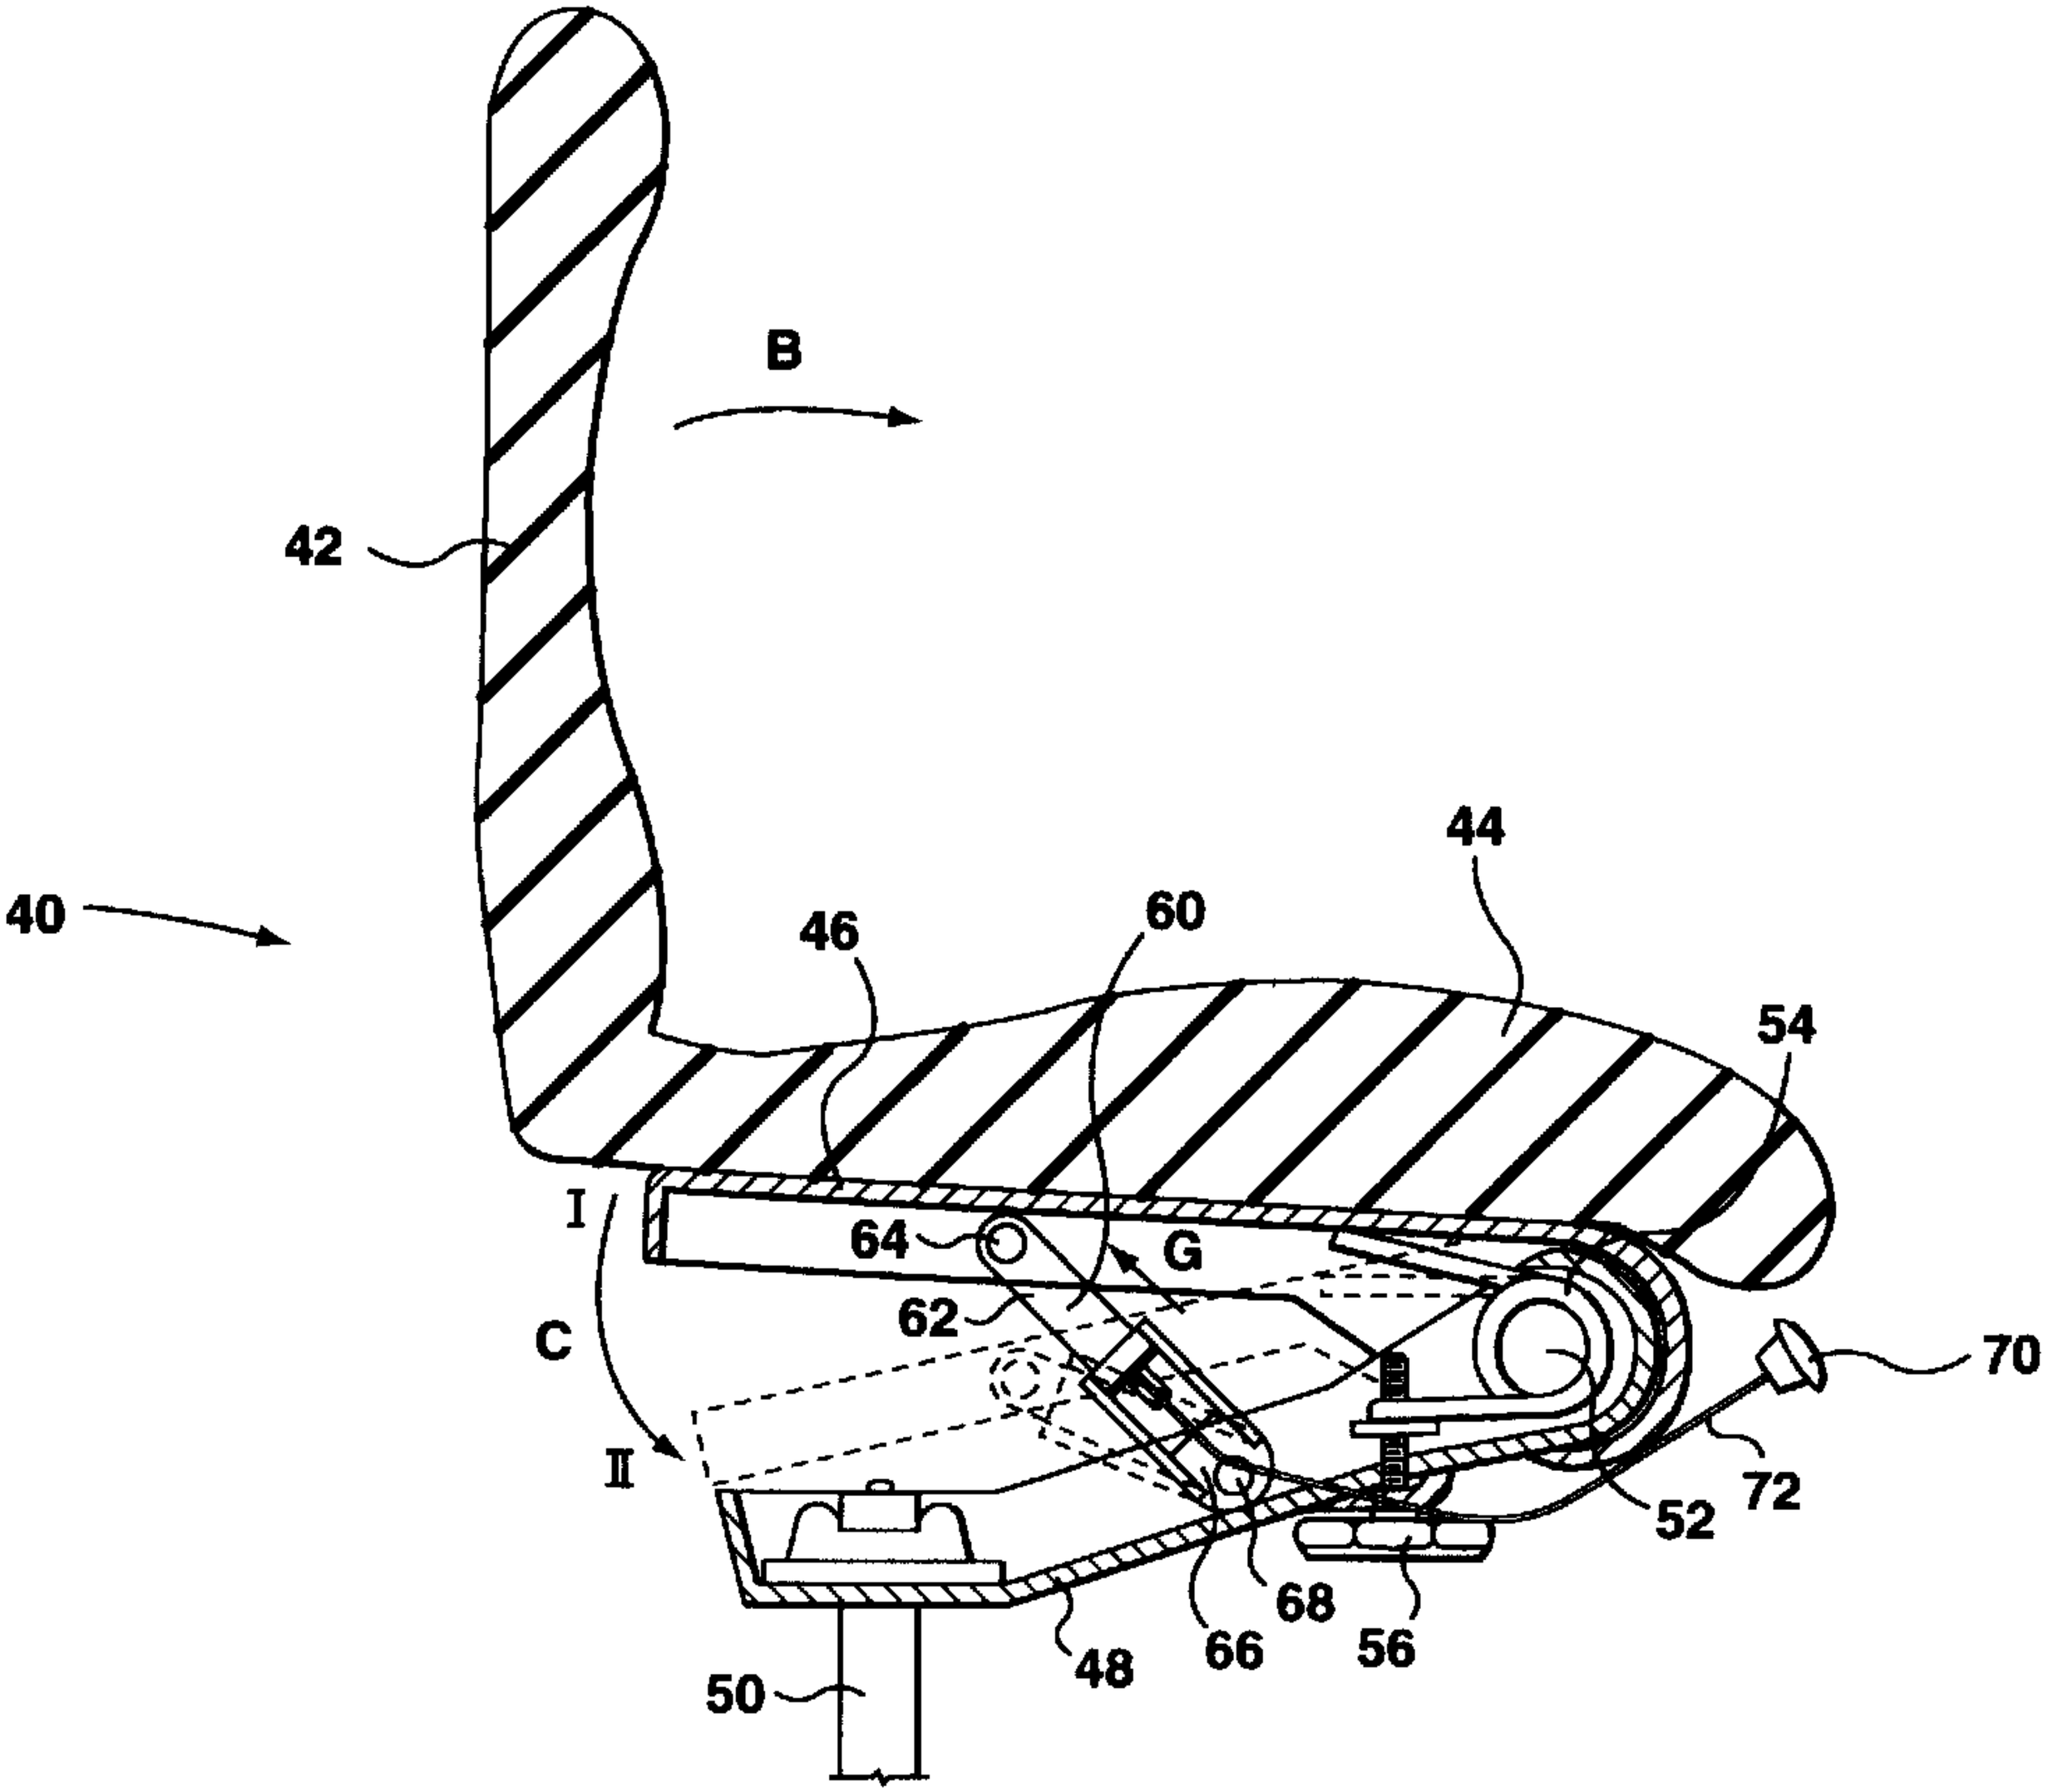


FIG. 5

Patent Agents
Fetherstonhaugh & Co.


B
42
40
44
46
60
54
I
64
G
62
C
70
II
72
52
68
66
56
48
50