

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 April 2010 (22.04.2010)

PCT

(10) International Publication Number
WO 2010/045418 A1

(51) International Patent Classification:
B26B 19/40 (2006.01) *A45D 26/00* (2006.01)
B26B 21/44 (2006.01)

(21) International Application Number:
PCT/US2009/060771

(22) International Filing Date:
15 October 2009 (15.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/106,258 17 October 2008 (17.10.2008) US

(71) Applicant (for all designated States except US): **THE GILLETTE COMPANY** [US/US]; Prudential Tower Building, Boston, Massachusetts 02199 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAWES, Christopher, Martin** [GB/GB]; Blackthorn, The Coombe, Street-

ley-on-Thames, Reading Berkshire RG8 9QL (GB). **BURROWES, Lee** [GB/GB]; The Orchard, Viggory Lane, Horsell Surrey GU21 4XH (GB). **SALEMME, James, Leo** [US/US]; 10 Governor Hutchinson Road, Billerica, Massachusetts 01821 (US).

(74) Common Representative: **THE GILLETTE COMPANY**; c/o Eileen L. Hughett, The Procter & Gamble Company, Global Patent Services, 299 East Sixth Street, Sycamore Building, 4th Floor Cincinnati, Ohio 45202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,

[Continued on next page]

(54) Title: FLUID DISPENSING HAIR REMOVAL DEVICE

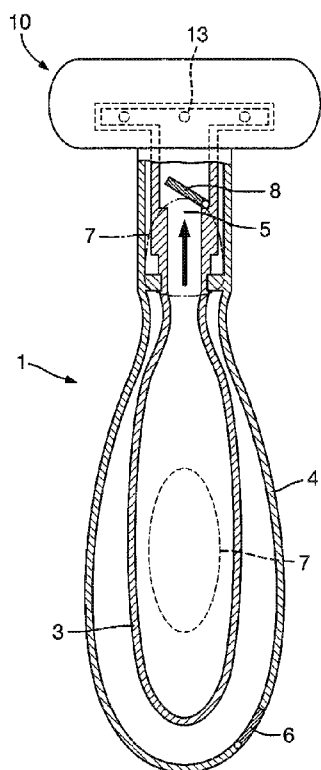


Fig.2A.

(57) Abstract: A hair removal device is provided, comprising a handle and a collapsible reservoir suitable for containing a fluid to be dispensed during use of the hair removal device, the hair removal device additionally comprising a deformably rigid container enclosing the collapsible reservoir, a fluid outlet adapted to allow fluid to exit both the collapsible reservoir and the deformably rigid container, a first one-way valve adapted to allow air to enter but not exit the deformably rigid container, and a pressure applicator, adapted to pressurize air in the deformably rigid container, thereby collapsing the collapsible reservoir and causing fluid to be expelled through fluid outlet.



SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

Published:

— *with international search report (Art. 21(3))*

FLUID DISPENSING HAIR REMOVAL DEVICE

FIELD OF THE INVENTION

The present invention concerns hair removal devices, such as razors, which are capable of dispensing a fluid during use.

BACKGROUND OF THE INVENTION

Shaving devices capable of dispensing a fluid, such as a shaving preparation or a lubricant are known, but have a number of shortcomings.

A problem associated with some prior art fluid-dispensing razors is that the fluid is loaded directly into a reservoir disposed within the razor such that, on dispensing, it may be replaced by and come into contact with ambient air or, alternatively, it may directly contact the dispensing mechanism. These kinds of executions raise the prospect of contamination, which, for a device such as a razor, is a problem that must be avoided, especially if fluid remains in the razor between shaves, allowing microbial build-up. Such an execution is known from WO 05/058560 A1.

FR-A-2 629 385 discloses a razor having an aerosol cartridge. Such devices are complex and expensive to produce. They also pollute the atmosphere with propellants and, in addition, aerosol canisters are generally not reusable, so must also be disposed of as well. This patent application also suggests replacing the pressurized cartridge with a liquid pump, but provides no details of either how to achieve that, or how to do so in a manner that maintains the product to be dispensed sterile.

WO 05/058560 A1 discloses a fluid dispensing razor having a flexible bladder filled with shaving aid located in the handle. On actuating a button in the handle, a ratchet mechanism advances a piston which compresses the bladder to expel shaving aid through holes located around the shaving blades. This execution is mechanically complex to manufacture and has the disadvantage that the non-uniform application of pressure on the bladder may result in the accumulation of shaving aid in volumes where the pressure is lower, thereby resulting in incomplete emptying of the bladder during use.

WO 05/065897 discloses an arrangement comprising a bladder filled with shaving aid. A pinch roller driven by a drive mechanism serves to compress the bladder and expel the shaving aid. This arrangement is technically very complex.

Reference can also be made to GB 2 246 314 A, which teaches a razor in which a tubular sack of soap is disposed in the handle. Upon squeezing pressure plates in the handle, spring plates are, in turn, pressurized which squeeze the sack to force soap through holes in the shaving head. Once again, the non-uniform application of pressure to the external surface of the sack, may cause soap to accumulate in volumes of lower pressure such that it may not be not possible completely to empty the sack during use.

US 2006/0150386 A1 teaches a similar arrangement to that disclosed in the preceding patent application. According to this patent application, a razor is taught in which a flexible bladder comprising shaving agent is located within the handle. Dispensing takes place by squeezing flexible regions of the handle which act directly on the bladder to compress it and expel shaving agent. Once again, dispensing in this manner may result in incomplete emptying of the bladder and a concomitant waste of shaving agent.

It would be desirable to provide a fluid-dispensing hair removal device, which is mechanically simple to construct, which does not allow the fluid to come into contact with ambient air or the dispensing mechanism and which permits a more complete dispensing of fluid during use than traditional fluid-dispensing hair removal devices.

SUMMARY OF THE INVENTION

According to the invention, a hair removal device is provided, comprising a handle and a collapsible reservoir suitable for containing a fluid to be dispensed during use of the hair removal device, the hair removal device additionally comprising a deformably rigid container enclosing the collapsible reservoir, a fluid outlet adapted to allow fluid to exit both the collapsible reservoir and the deformably rigid container, a first one-way valve adapted to allow air to enter but not exit the deformably rigid container, and a pressure applicator, adapted to pressurize air in the deformably rigid container, thereby collapsing the collapsible reservoir and causing fluid to be expelled through fluid outlet.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a razor according to the present invention.

Figure 2A is a schematic view of a razor according to the present invention, illustrating valves in fluid dispensing mode.

Figure 2B is a schematic view of a razor according to the present invention, illustrating valves in air intake mode.

Figures 3A and 3B represent a detailed view of a particular embodiment of the present invention, illustrating how fluid may flow out of the hair removal device and air may flow in.

DETAILED DESCRIPTION OF THE INVENTION

Hair removal devices according to the present invention comprise fluid disposed within a collapsible reservoir which reservoir is, itself, enclosed within a deformably rigid container. The deformably rigid container which encloses the collapsible reservoir must be sufficiently rigid not to collapse at the same time as the collapsible reservoir, although, as discussed below, it can comprise deformable, non-rigid portion(s) as pressure applicator(s). Suitably deformably rigid materials of construction of the deformably rigid container include polyethylene, polypropylene, PET, PVC, and mixtures thereof. The deformably rigid container may be comprised within the handle of the fluid-dispensing hair removal device or, indeed, the handle of the fluid-dispensing hair removal device may itself define the deformably rigid container. If the handle defines the deformably rigid container, then the handle must be sufficiently deformably rigid not only to retain its shape as the collapsible reservoir collapses, but also to function as a handle.

The collapsible reservoir may be manufactured separately from and then introduced into the deformably rigid container or the two may be manufactured together in a single process.

In a preferred manufacturing process, the two are manufactured together in a single process, such that, following manufacture and prior to use, the collapsible reservoir is removably laminated to the deformably rigid container. An exemplary process includes extrusion blow molding of a multi-layer parison comprising an outer layer, which will become the deformably rigid container, an inner layer, which will become the collapsible reservoir and an intermediate layer, between the inner layer and the outer layer, which serves to prevent the inner and outer layers from permanently adhering to one another. The intermediate layer may extend over the entire

interfacial surface between the inner and outer layers, or may be left out at some important locations at the interface, such as at a fluid outlet, in order to effect bonding between the inner and outer layers at that or those locations and thereby prevent delamination in those locations. During the manufacturing process, the multi-layer parison is extruded and then blown. In subsequent use, air forced between the inner and outer layers acts to “delaminate” or peel away the inner layer forming the collapsible reservoir. The collapsible reservoir thereby becomes separated from the outer layer forming the deformably rigid container, while the outer layer enclosing the collapsible reservoir essentially retains its shape.

In an alternative, preferred manufacturing process, injection-moulded inner and outer pre-forms are assembled together and then subsequently blow-moulded to form the collapsible reservoir and the deformably rigid container.

Typical materials of construction of the collapsible reservoir include nylon, PET, PVC, LDPE polypropylene, and mixtures thereof. Evidently, if the collapsible reservoir and the deformably rigid container enclosing it are made of similar or identical materials, then the necessary differences in rigidity will be achieved in ways known to the skilled person, such as via differences in wall thicknesses. Reference may be made to the following documents which discuss technologies for making so-called “delaminating” or “multi-layer” containers: US 5,316,135; US 5,447,687; US 5,501,625; US 6,244,852; US 6,109,468; US 5,435,452; US 5,513,761; US 5,567,377; US 5,711,454; US 5,921,438; US 6,691,494; US 6,266,943; US 6,691,494; US 6,266,943; US 6,670,007.

The collapsible reservoir must be contained within the deformably rigid container in such a fashion that any air introduced into the deformably rigid container will serve to pressurize it and collapse the collapsible reservoir, rather than flowing out again. It is desired that air introduced into the deformably rigid container acts to pressurize the contents of the container, as such, in one embodiment the container does not contain any air outlets. As a result in one embodiment, the air inlet comprises a first one-way valve that allows air in but not out. Suitable one-way valves include umbrella or flapper valves and are known to the person skilled in the art.

The fluid comprised within the collapsible reservoir must be allowed to exit the collapsible reservoir and the deformably rigid container for use during the hair removal process. To facilitate

this, an opening is provided in the collapsible reservoir and a further opening is provided within the deformably rigid container and these openings are aligned with one another and connected together during the manufacturing process to provide a fluid outlet.

The collapsible reservoir must be connected to the deformably rigid container in such a way at the fluid outlet that air cannot escape from the container. This seal may be effected in a number of ways known by the skilled person. One such way is described above and involves the collapsible reservoir and the deformably rigid container being bonded together during the manufacturing process by virtue of their comprising materials which naturally bond and by virtue of omitting any intermediate layer in the vicinity of the fluid outlet to prevent such bonding. More typically, the collapsible reservoir and the deformably rigid container are arranged such as to be mechanically sealed together at the fluid outlet. For example, the relative sizes of the deformably rigid container and the collapsible reservoir at the fluid outlet may be such that they are forced together. If the collapsible reservoir and the deformably rigid container are manufactured together in a single manufacturing process, then an air-tight seal, such as a mechanical seal, may automatically result from that manufacturing process.

Advantageously, the fluid outlet is provided with a second one-way valve to allow fluid to exit but not enter the collapsible reservoir. This has the advantage of reducing the possibility of contamination of the fluid by contaminated air or by contaminated fluid being drawn back into the collapsible reservoir. Suitable one-way valves include duck-bill valves, flapper valves, slit valves and umbrella valves.

In order to pressurize the air in the deformably rigid container and cause the collapsible reservoir to collapse, the hair removal device must comprise a pressure applicator. In a simple form, when the collapsible reservoir is comprised within the handle, such a pressure applicator may simply comprise deformable portions of the handle. Such deformable portions may suitably be made of plastic or elastomeric material having memory, such that, following deformation from its rest position, it will tend to return to that rest position after removal of the depression force. In use, on depressing such a deformable portion, the air within the deformably rigid container is compressed, serving to collapse the collapsible reservoir and force fluid out of the reservoir for use during the hair removal process. As soon as the user ceases to depress the deformable portion, it returns to its rest position giving rise to an under-pressure within the deformably rigid

container, which is compensated by air flowing into the container through the first one-way valve. Hair removal devices according to the invention may comprise one or more pressure applicators. In the event that the hair removal device comprises a plurality of pressure applicators, then the pressure applicators may have different capacities for applying pressure. For example, one pressure applicator may only apply a small pressure, thereby effecting the dispensing of a small amount of fluid, whereas another applicator may apply a larger pressure and effect the dispensing of a larger amount of fluid. The different applicators may also comprise information for the consumer to inform them of the different dispensing capacities.

Ideally, the pressure applicator facilitates the displacement of an accurately repeatable amount of air that ideally corresponds to an accurately repeatable dispensed dosage of fluid from the hair removal device. Such a dosage may be at any desirable level, but is advantageously from 0.001 to 4ml. A suitable device for displacing the same amount of air each time is a so-called "mono-stable button". As used herein, a mono-stable button is a button which, when depressed from its rest position, displaces a fixed volume of air, but then returns to its rest position immediately thereafter. In displacing a fixed amount of air, it causes essentially the same amount of fluid to be displaced from the hair removal device. Mono-stable buttons are frequently used on telephone key pads and for pumping fluid and priming liquid systems, such as in petrol engines. Suitable mono-stable buttons are known to those skilled in the art.

Preferably, the pressure applicator(s) will give a signal, such as a tactile signal, for example a click, to the user, that they have been actuated and, therefore, that dispensing shall occur.

In a further advantageous embodiment, the hair removal device may comprise a plurality of pressure applicators disposed at different locations on the handle, to allow the user to grip the handle in a plurality of different ways and yet still facilitate fluid dispensing. For example, a user may grip the handle in an entirely different way if he or she is holding the device vertically or horizontally, or making a long shaving stroke along a leg, or a short one on an under-arm or the face. In order to facilitate simple fluid dispensing in both orientations, the hair removal device may comprise a plurality of pressure applicators at situated different locations, such as on different parts of the handle, so that at least one is always within comfortable range of a user's finger.

Once fluid leaves the fluid outlet it enters the head of the hair removal device to be distributed onto the skin of the user. This may take place through one or more holes or slits in the skin-facing surface of the head.

In one embodiment, the head of the hair removal device comprises an applicator for dispensing the fluid. In one embodiment, the applicator is flat and wide for dispensing a thin but wide ribbon of the fluid. In one embodiment, the applicator forms a dispensing orifice comprising a smaller orifice dimension having a length of from about 0.5 mm to about 10 mm, alternatively from about 1 mm to about 3 mm, and a larger orifice dimension having a length of from about 20 mm to about 80 mm, alternatively from about 30 mm to about 70 mm, alternatively from about 40 mm to about 50 mm. Preferably, the smaller orifice dimension is a vertical dimension and the larger orifice dimension is a horizontal dimension. The smaller and larger orifice dimensions are measured as the vertical and horizontal distances, respectively between opposing edges of the applicator which forms the orifice. This type of applicator is particularly suitable when the device contains a depilatory, a lubricating fluid, a moisturizer, or any other suitable hair removal composition. In one embodiment, the applicator has a spreading member which is separate from the dispensing orifice. When a spreading member is used, the device can dispense the fluid via one or more holes or slits which can be positioned proximally towards the handle (where the spreading member is positioned distally away from the deformably rigid container) such that when the user is pulling the device in a direction towards the handle, fluid can be dispersed and the spreading member can be used to spread the fluid onto the skin surface. In one embodiment, the spreading member has a length of from about 20 mm to about 80 mm, alternatively from about 30 mm to about 70 mm, alternatively from about 40 mm to about 50 mm.

In one embodiment, the applicator has a skin contacting edge which is flat, concave or convex. Those of skill in the art will understand that different shapes for the skin contacting edge can be preferred based on the desired part of the body upon which the device is intended for use. For example, a hair removal device intended for use on the face may have an applicator having a straight edge. A hair removal device intended for use on legs may have an applicator having a concave edge. Non-limiting examples of suitable head configurations are disclosed in U.S. Design Patent Nos. D399,601 to Desnos, D203,892 to Muscatiello, and 651,420 to Haglock; U.S. Patent Nos. 3,088,470 to Hall, 3,858,985 to Fiveash, 2004 0168743A1 to Garwood; WO Publ. No. 97/18043A1 to Weiss; and GB 1 390 153 to Laboratorio Guidotti & C. S.p.A.

Those of skill in the art will understand that the applicator can also serve as a dispensing member for a second fluid. In one embodiment, the applicator would include a slit type orifice which could remain in a closed orientation until pressure is applied, opening the slit type orifice and allowing fluid to dispense.

The handle of the hair removal device may be permanently or removably fixed to the hair removal device. Advantageously, the handle is detachable from the hair removal device. If the handle comprises the deformably rigid container enclosing the collapsible reservoir, then such an arrangement facilitates replacement of the collapsible reservoir. In such a case, if the reservoir is empty, then the handle, comprising the deformably rigid container and collapsible reservoir are simply removed and replaced by a new handle comprising a deformably rigid container enclosing a new collapsible reservoir which is full of fluid. The empty handle can then be recycled.

The fluid-dispensing hair removal device according to the invention may be a shaving device, such as a razor, but is not limited to such devices and may instead be a device which employs other means, such as light, especially laser light, or even depilatories (as disclosed in US Patents 4618344, 5645825A, 6743419, and US Patent Publication US2004/0228820A1), to remove hair. In one embodiment, the hair removal device comprises at least one of a razor, a scraping edge or scraper, a light, and a depilatory, optionally more than one. Like the spreading edge, the scraper or scraping edge can be straight, concave or convex shaped.

For the event that the hair removal device is a razor, then the razor cartridge comprising the blades may be permanently or removably fixed to hair removal device. Advantageously, the cartridge is detachable from the hair removal device, such that it may be replaced, as needed.

The fluid comprised within the reservoir of the hair removal device is advantageously a cosmetic fluid, more preferably a shaving preparation. Examples of such fluids include, but are not limited to; oil-in-water emulsions, water-in-oil emulsions, single phase aqueous polymer solutions, high level surfactant based solutions. Within such fluids, additional ingredients may be incorporated, examples of which include: high molecular weight polymers, cationically charged polymers, lipid based materials, silicone based compounds, surfactants, vitamins and vitamin derivatives, skin conditioning agents, hair removal waxes, other hair removal compositions, and depilatories.

Reference is made to the figures, which disclose a non-limiting embodiment of the invention. Figure 1 illustrates a hair removal device (1) is disclosed in the form of a razor, having a shaving cartridge (10) comprising blades (not shown). The razor comprises a handle (2) which acts as the deformably rigid container (4) enclosing a collapsible reservoir, which, in turn, contains fluid, such as shaving aid, to be dispensed. Pressure applicators (7) may also be seen, which are configured as flexible portions of the handle (2). These pressure applicators (7) may be depressed by a user to pressurize the air space in the handle and thereby also the collapsible reservoir (3), thereby forcing fluid out of the collapsible reservoir (3).

Figures 2A and 2B are schematic drawings, illustrating some important functional aspects of the hair removal device (1) of figure 1.

Figure 2A illustrates the deformably rigid container (4), which may also be the handle, which encloses the collapsible reservoir (3). Pressure applicators (7) may also be seen. These are configured as flexible portions of the handle which have memory. In use they may be depressed on application of force by a user. Following removal of the applied force, they return to their rest state. Importantly, first one-way valve (6) is also shown, which functions to allow air to enter the deformably rigid container (4) but not exit. In Figure 2A, this valve is shut, because the device is in fluid-dispensing mode. As a result, fluid contained within the collapsible reservoir is being expelled (as indicated by the arrow) through fluid outlet (5) via second one-way valve (8), which is open. This has been effected by depressing, one or more of the pressure applicators (7) to compress the air in deformably rigid container (4) and thereby also compress the collapsible reservoir (3). This, in turn, causes fluid contained within the collapsible reservoir to be expelled via fluid outlet (5).

The features shown in Figure 2B are identical to those shown in Figure 2A, except that this figure illustrates the valves in air-intake mode: following release of the force applied by the user, the pressure applicator (7) returns to its rest state, thereby generating an under-pressure in the deformably rigid container (4), which, in turn, serves to draw air in via first one-way valve (6), as shown by the arrow, to allow the pressure to equilibrate within the deformably rigid container (4). As a result, first one-way valve (6) is shown open in this figure, whereas the absence of pressure on second one-way valve (8) has caused it to close, as shown.

Figures 3A and 3B illustrate a working embodiment of a valve system shown schematically in Figure 2. Once again, The collapsible reservoir (3) and the deformably rigid container (4) are shown. With reference to Figure 3A, in response to a pressure increase in the deformably rigid container (4), fluid flows in the direction shown by the arrows through the fluid outlet (5), which is equipped with second one-way valve (8) to prevent fluid re-entry. Air may not flow into the deformably rigid container (4), because first one-way valve (6) is forced shut by the increased pressure. With reference to Figure 3B, in response to a pressure decrease in the deformably rigid container (4), second one-way valve (8) is forced shut, but first one-way valve (6) opens to allow air to flow in the direction of the arrows. There is an air gap (not shown) through threaded portion (11) to allow air to flow through an opening (12) and thereby into the space between the collapsible reservoir (3) and the deformably rigid container (4).

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm.”

Every document cited herein, including any cross referenced or related patent or application, is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any invention disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such invention. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

CLAIMS

What is claimed is:

1. A hair removal device (1) comprising a handle (2) and a collapsible reservoir (3) suitable for containing a fluid to be dispensed during use of the hair removal device, the hair removal device (1) additionally comprising a deformably rigid container (4) enclosing the collapsible reservoir (3), a fluid outlet (5) adapted to allow fluid to exit both the collapsible reservoir (3) and the deformably rigid container (4), a first one-way valve (6) adapted to allow air to enter but not exit the deformably rigid container (4), and a pressure applicator (7), adapted to pressurize air in the deformably rigid container, thereby collapsing the collapsible reservoir (3) and causing fluid to be expelled through the fluid outlet (5).
2. The hair removal device (1) of claim 1, wherein the handle (2) comprises the deformably rigid container (4).
3. The hair removal device (1) of claim 1 or 2, additionally comprising a second one-way valve (8) disposed at fluid outlet (5), to allow fluid to exit but not enter the reservoir (3).
4. The hair removal device (1) of any preceding claim, wherein the pressure applicator (7) is defined by one or more deformable portions (9) of the handle (2), whereby depressing a deformable portion (8) away from its rest position acts to pressurize the air disposed in the deformably rigid container (4) and releasing the deformable portion (8) causes it to return to its rest position and draw air through the first one-way valve (6) into the deformably rigid container (4).
5. The hair removal device (1) of any preceding claim, wherein the pressure applicator (7) comprises a dosing mechanism, to ensure that the same amount of air is displaced and a dose of fluid is dispensed every time pressure is applied.
6. The hair removal device (1) of any preceding claim, wherein the pressure applicator comprises one or more mono-stable buttons (9), whereby depressing a mono-stable button (9) acts to pressurize the air by a defined amount to ensure that a dose of fluid is

dispensed every time that the mono-stable button is depressed and releasing the mono-stable button (9) causes it to return to its rest position and draw air through the first one-way valve (6) into the deformably rigid container (4).

7. The hair removal device (1) of any preceding claim, wherein the handle (2) is detachable.
8. The hair removal device (1) of any preceding claim, wherein the device is a razor.
9. The hair removal device (1) of any preceding claim, wherein the device employs light to remove hair.
10. The hair removal device of any preceding claim, wherein the device employs a depilatory to remove hair.
11. The hair removal device (1) of any preceding claim, containing a shaving preparation.
12. The hair removal device (1) of any preceding claim, wherein the fluid outlet comprises an applicator which is flat and wide for dispensing the fluid, said applicator optionally forming a dispensing orifice comprising a smaller orifice dimension having a length of from 0.5 mm to 10 mm, and a larger orifice dimension having a length of from 20 mm to 80 mm.
13. The hair removal device (1) of any preceding claim, wherein the applicator has a skin contacting edge which is selected from the group consisting of a flat edge, a concave edge, and a convex edge.
14. The hair removal device (1) of any preceding claim, wherein the fluid outlet comprises one or more holes or slits and a spreading member which is positioned distally away from the deformably rigid container.
15. The hair removal device (1) of any preceding claim, wherein the spreading member has a skin contacting edge which is selected from the group consisting of a flat edge, a concave edge, and a convex edge and/or a scraper or scraping edge.

Fig.1.

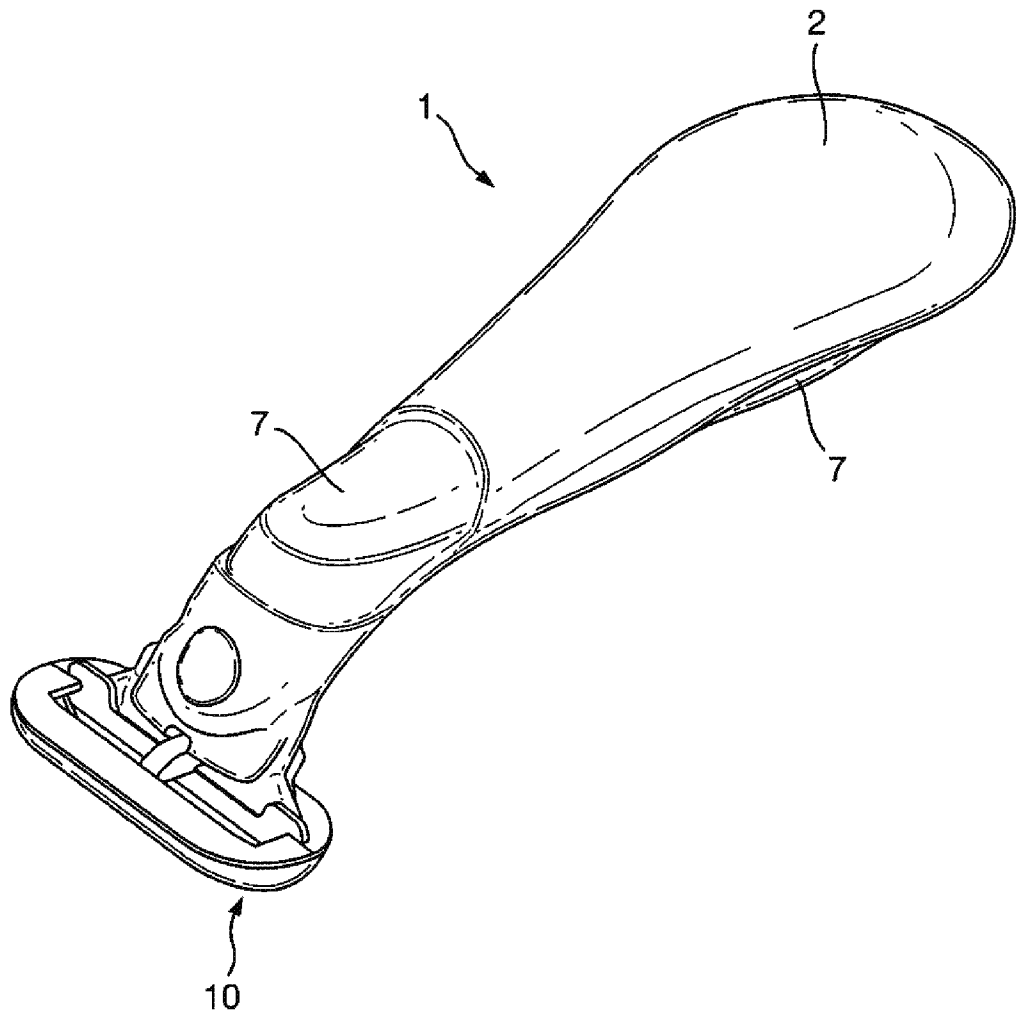


Fig.2A.

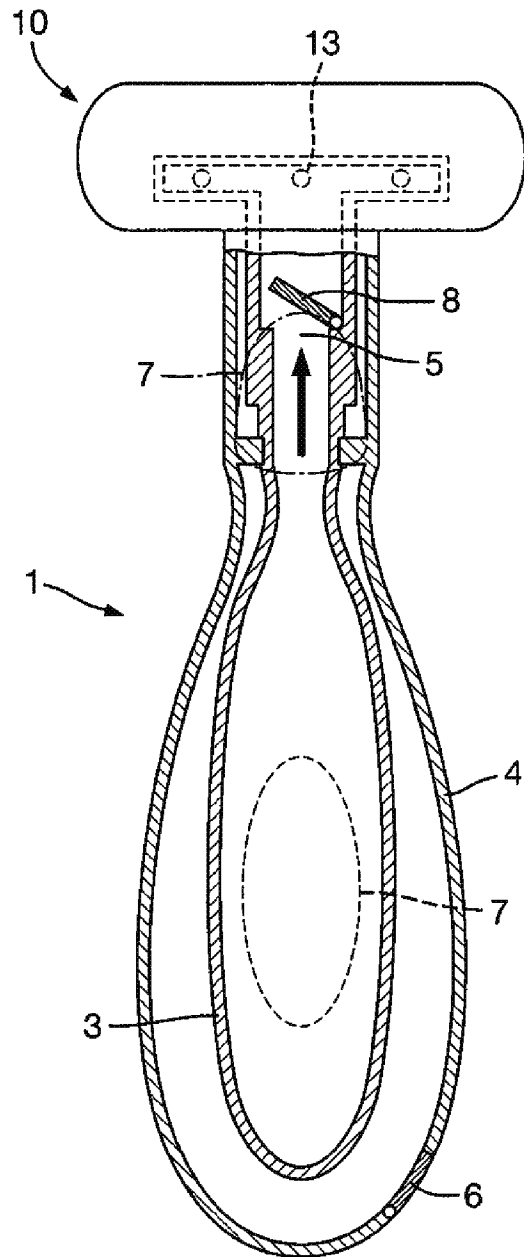


Fig.2B.

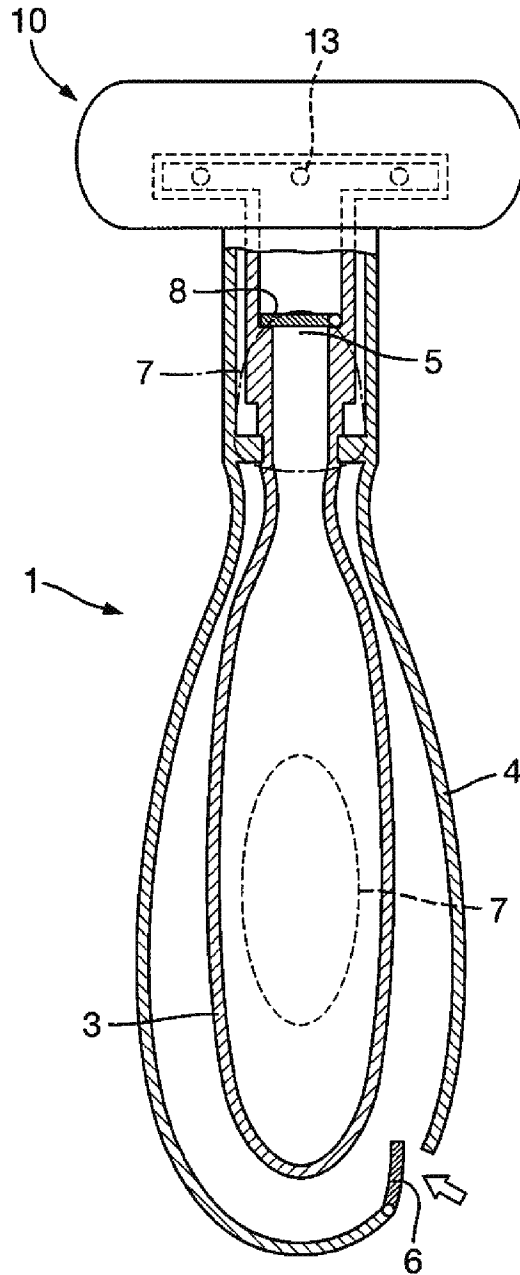


Fig.3A.


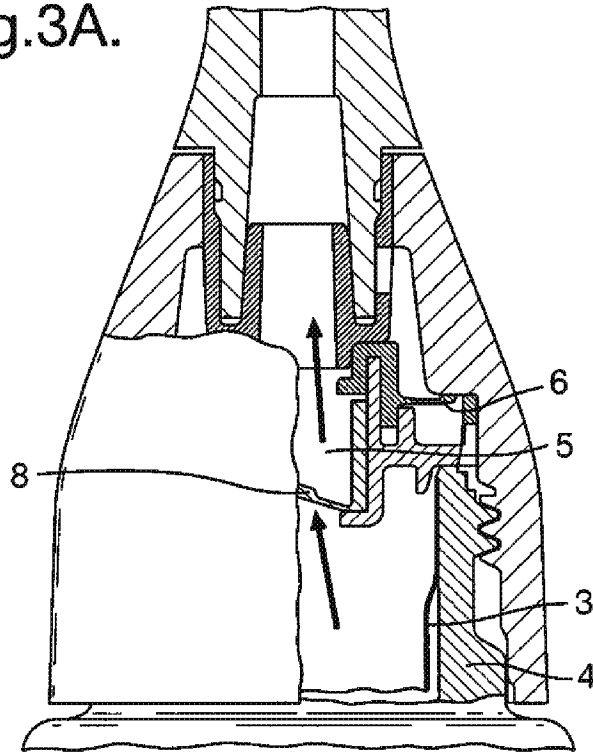


Fig.3B.

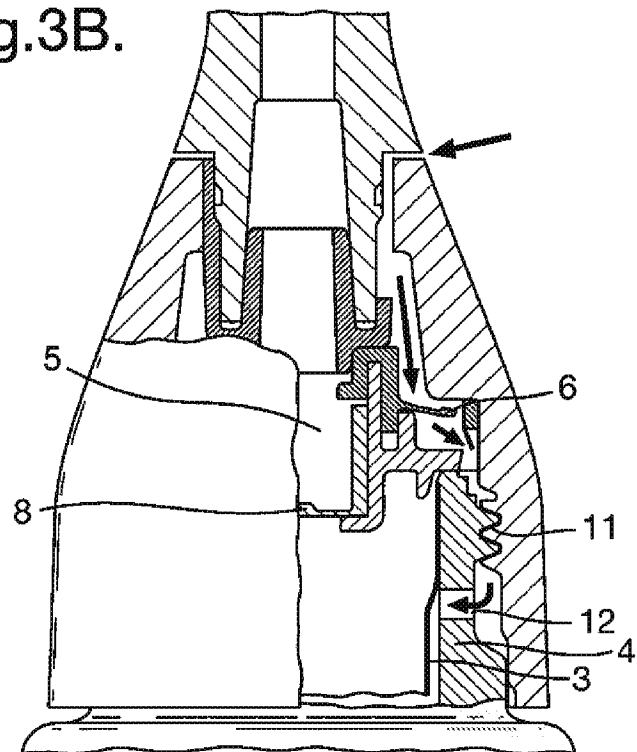

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/060771

A. CLASSIFICATION OF SUBJECT MATTER
INV. B26B19/40 B26B21/44 A45D26/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B26B A45D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 402 573 A (LANIADO SHLOMO [IL]) 4 April 1995 (1995-04-04)	1, 2, 4, 8, 11-15
Y	column 4, lines 33-55; figures 1, 4	3, 7, 9, 10
Y	US 2005/144786 A1 (BRESSLER PETER [US] ET AL) 7 July 2005 (2005-07-07) paragraph [0023]; figure 5	3
Y	US 2006/150386 A1 (WANLI MAHRAN [DE] ET AL) 13 July 2006 (2006-07-13) paragraph [0031]; figures 1, 2	7
Y	WO 98/08660 A (PHILIPS ELECTRONICS NV [NL]; PHILIPS NORDEN AB [SE]; WESTERHOF WILLEM) 5 March 1998 (1998-03-05) page 8, lines 5-25; figures 1, 11-13	9, 10
	-/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
E earlier document but published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
O document referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 26 January 2010	Date of mailing of the international search report 03/02/2010
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Rattenberger, B
--	---

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2009/060771

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/144785 A1 (BRESSLER PETER [US] ET AL) 7 July 2005 (2005-07-07) abstract; figures 1,2,4,5,8,9 -----	1
A	WO 00/47374 A (GILLETTE CO [US]; SIMMS GRAHAM JOHN [GB]) 17 August 2000 (2000-08-17) page 6, lines 1-11; figures 1,4,5 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2009/060771

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5402573	A	04-04-1995	IL 105759 A JP 7000650 A	29-12-1994 06-01-1995
US 2005144786	A1	07-07-2005	AT 442230 T AU 2004312071 A1 EP 1699603 A1 JP 2007516800 T US 2007017098 A1 WO 2005065896 A1	15-09-2009 21-07-2005 13-09-2006 28-06-2007 25-01-2007 21-07-2005
US 2006150386	A1	13-07-2006	DE 102004059517 A1 EP 1679161 A1	14-06-2006 12-07-2006
WO 9808660	A	05-03-1998	CN 1199360 A	18-11-1998
US 2005144785	A1	07-07-2005	AU 2004312048 A1 EP 1699606 A1 JP 2007516791 T WO 2005065897 A1	21-07-2005 13-09-2006 28-06-2007 21-07-2005
WO 0047374	A	17-08-2000	AU 2454600 A DE 60001055 D1 DE 60001055 T2 EP 1152872 A1 ES 2184694 T3 US 2002023351 A1	29-08-2000 30-01-2003 17-07-2003 14-11-2001 16-04-2003 28-02-2002