

(19)



(11)

EP 2 253 246 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
16.01.2013 Bulletin 2013/03

(51) Int Cl.:
A47C 1/026 ^(2006.01)

(21) Application number: **09170810.7**

(22) Date of filing: **21.09.2009**

(54) **Angle-adjustable hinge**

Scharnier mit einstellbarer Angel

Charnière à réglage d'angle

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **22.05.2009 JP 2009124333**

(43) Date of publication of application:
24.11.2010 Bulletin 2010/47

(73) Proprietor: **Koyo Giken Kabushiki Kaisha
Sakai-shi
Osaka (JP)**

(72) Inventor: **Yamashita, Tadanobu
Osaka (JP)**

(74) Representative: **HOFFMANN EITLE
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)**

(56) References cited:
**EP-A2- 1 510 150 DE-U1- 20 112 976
DE-U1-202008 004 242**

EP 2 253 246 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to an angle-adjustable hinge used for furniture with which a back is pivoted as to adjust an inclination angle of the back.

[0002] As a known prior art document, DE 20 2008 004 242 U1 discloses an angle-adjustable hinge.

[0003] The inventor of the present invention has been proposed various inventions relating to angle-adjustable hinges of this kind. For example, as shown in an assembly view of Figure 17 and an exploded view of Figure 18 (refer to Japanese patent No. 3766669), an angle-adjustable hinge 43 is constructed that a second arm 32 having an arc-shaped gear portion 34 of a first arm 31 forming a case portion 33 is provided, wedge-shaped window portions 35 are formed on plate piece portions 37, a floating wedge member 36 is inserted to the wedge-shaped window portions 35, the gear portion 34 of the second arm 32 and two parallel plate piece portions 38 are inserted between the two parallel plate piece portions 37 of the case portion 33, and a small pin 39 is inserted to small holes 40 and 41 to connect the first arm 31 and the second arm 32 as to oscillate around an axis 42.

[0004] The gear portion 34 has many fine gear teeth 48, the floating wedge member 36 also has fine gear teeth 49. If these gears are not certainly engaged with high dimensional accuracy, contact pressure on the gear teeth 48 and 49 becomes excessive, and cutting and rapid abrasion may be generated.

[0005] However, the angle-adjustable hinge shown in Figures 17 and 18 has problems described below.

(i) The gear teeth 48 of the gear portion 34 and the gear teeth 49 of the wedge member 36 engage when two independent parts (the first member 1 and the second member 2) are assembled with the small pin 39. In the assembly, dimensional errors are accumulated, contact pressure on the gear teeth 48 and 49 in use becomes high, and early abrasion and cutting of the gear teeth may be generated.

(ii) The assembly work is difficult because many small parts must be assembled as shown in Figure 18.

(iii) The first member 1 and the second member 2 respectively have a circular pipe portion 50 formed by plastic work into a short cylinder, and use of these members assembled as in Figure 17 is limited. That is to say, when these members are used for a chair, they are exclusively used for the chair. For other kinds of furniture, plate materials of various configurations are required for the circular pipe portion 50. Especially, when the pipe portion 50 is made plate-shaped, angled, and a bent arm, new design and production are required for each of the configurations.

(iv) Further, oscillation start angle and oscillation end angle of the first arm 31 and the second arm 32 are determined and unchanged to other angles.

(v) Therefore, for use in which another oscillation start angle and another oscillation end angle are required (use of different kind of furniture such as a sofa, a bed, a chair, etc. and different inclination conditions), different design and production are required.

(vi) It is difficult to keep the dimensional accuracy in assembled state and assembly defection may be generated because main functional parts which require high accuracy are separated into the first arm 31 and the second arm 32.

(vii) The entire load works on the small pin 39, and early abrasion and crush on the small pin 39 and the small hole 41 tend to be generated.

[0006] Therefore, it is an object of the present invention to provide an angle-adjustable hinge with which the problems (i) to (vii) described above are solved.

[0007] This object is solved according to the present invention by angle-adjustable hinge including features of claim 1. Furthermore detailed embodiments are described in the dependent claim 2.

[0008] The present invention will be described with reference to the accompanying drawings, in which:

Figure 1 is a whole perspective view of an embodiment of an angle-adjustable hinge of the present invention;

Figure 2 is a whole exploded perspective view of the angle-adjustable hinge;

Figure 3 is an exploded perspective view of a principal portion of the angle-adjustable hinge;

Figure 4 is an exploded perspective view of a first member;

Figure 5 is an enlarged explanatory view of a principal portion of the angle-adjustable hinge;

Figure 6A is a perspective explanatory view with cross section of a principal portion showing a used state of the angle-adjustable hinge;

Figure 6B is a perspective explanatory view with cross section of a principal portion showing the used state of the angle-adjustable hinge observed in a direction of an arrow Y;

Figure 7A is a cross-sectional view of a principal portion for functional explanation of the angle-adjustable hinge;

Figure 7B is an enlarged view of a principal portion for functional explanation of the angle-adjustable hinge;

Figure 8A is a cross-sectional view of the principal portion for functional explanation of the angle-adjustable hinge;

Figures 8B and 8C are enlarged views of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 9A is a cross-sectional view of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 9B is an enlarged view of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 10A is a cross-sectional view of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 10B is an enlarged view of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 11A is a cross-sectional view of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 11B is an enlarged view of the principal portion for functional explanation of the angle-adjustable hinge;

Figure 12 is a functional explanatory view of the angle-adjustable hinge;

Figures 13A through 13D are perspective views showing other embodiments of the first member;

Figures 14A through 14D are perspective views showing other embodiments of the second member;

Figure 15 is an explanatory view of angle adjustment of the angle-adjustable hinge;

Figure 16 is an explanatory view of angle adjustment of the angle-adjustable hinge;

Figure 17 is a perspective view showing a conventional example; and

Figure 18 is an exploded perspective view showing the conventional example.

[0009] Preferred embodiments of the present invention will now be described with reference to the accompanying drawings.

[0010] An angle-adjustable hinge relating to the present invention is used for sofas, chairs, beds, headrests, footrests, oscillating doors, etc. to hold a member which oscillates (inclines) up and down with a predetermined angle range as to adjust the inclination angle. For example, the angle-adjustable hinge is applied to a sofa S as shown in Figures 6A and 6B to pivot a backrest S_1 to a seat S_0 as to freely incline backward.

[0011] An embodiment shown in Figures 1 through 4 is provided with a first member 1 having a first attachment portion 18 of plate shape and a second member 2 having a second attachment portion 19 of plate shape. Plural attachment small holes 15 are disposed on the first attachment portion 18 and the second attachment portion 19, fixation members such as screws and rivets are inserted to the attachment small holes 15 to fix each of frames of the backrest S_1 to the seat S_0 as shown with broken lines in Figure 6B.

[0012] The first member 1 has a case portion 3 having a pair of facing plate portions 17, and an approximately disc-shaped gear member 4 is held within the case portion 3 as to freely rotate. As shown in Figure 4, the facing plate portion 17 is approximately rectangular, two fixation holes 16 are formed through the facing plate portion 17, two fixation holes 16a are formed through the first attach-

ment portion 18, a caulking member 14 is inserted to the fixation holes 16 and 16a to firmly fix the first attachment portion 18 between the parallel two facing plate portions 17, and the case portion 3 is unitedly composed of a part of the first attachment portion 18 and the facing plate portions 17. (Although three fixation holes 16 on each of the facing plate portions 17 and three fixation holes 16a are shown in Figure 4, the middle ones are for a mutual connecting rod of later-described cover K.)

[0013] And, a wedge-shaped window portion 5 and a circular holding hole 21 are formed through each of the facing plate portions 17 forming the case portion 3. A mark 6 represents a floating wedge member having a lateral dimension equal to or slightly larger than a dimension between outer faces of the facing plate portions 17. The floating wedge member 6 is inserted as to bridge the left and right wedge-shaped window portions 5, and assembled as to move within the wedge-shaped window portions 5.

[0014] In the gear member 4, a circular low protrusion 24 having a sliding peripheral face 22 is formed unitedly with (continuing from) each of side faces 4a and 4b as to protrude. The circular low protrusion 24 is fit to the circular holding hole 21 by the above-mentioned screwing (caulking) of the caulking members 14. That is to say, the sliding peripheral face 22 of the circular low protrusion 24 is fit to (held by) the circular holding hole 21 of each of the facing plate portions 17 as to be slidable with extremely low contact pressure. Therefore, the gear member 4 is held within the case portion 3 as to rotate around a first axis C_1 .

[0015] A fitting shaft portion 20, non-circular such as regular hexagonal, polygonal, asterisk, etc., is unitedly formed with an end of the second member 2 as to laterally protrude. A female screw hole 29 is formed along an axis of the fitting shaft portion 20.

[0016] Many small concavo-convex gear teeth 25 are disposed on an arc-shaped range having a central angle of the peripheral face less than 180° on the gear member 4. That is to say, the gear member 4 has an arc-shaped outer toothed face Y. And, the gear member 4 is provided with a through hole 23 having a non-circular configuration such as regular hexagonal, polygonal, asterisk, etc., corresponding to the fitting shaft portion 20. And, the fitting shaft portion 20 of the second member 2 can be inserted to the through hole 23 from both sides in the direction of the axis C_1 .

[0017] As shown in Figures 1 through 3, the second member 2 is formed as to be symmetric when inverted for 180° around a central axis in longitudinal direction, a member having this configuration can serve as both of the second member 2 and the first member 1.

[0018] As shown in Figure 4 and Figure 3, a part of the first attachment portion 18 and the gear member 4 are held between the pair of facing plate portion 17, the caulking members 14 are inserted to the holes 16 and 16a, the case portion 3 is formed by caulking and the gear member 4 is pivoted (held) as to freely rotate simultane-

ously, and a later-described elastic member 13 is also assembled simultaneously. Then, (or before the above-mentioned caulking) the wedge member 6 is inserted to the left and right wedge-shaped window portions 5.

[0019] As shown in Figure 2, the circular low protrusion 24 of the gear member 4 fit to the case portion 3 and the outer face of the facing plate portion 17 approximately form the same plane. That is to say, height dimension of the circular low protrusion 24 is set to be approximately same as thickness dimension of the facing plate portion 17. As shown in Figure 2, a cover K made of plastic or thin metal plate is attached, and the fitting shaft portion 20 is inserted to the through hole 23 with stopping by a stopping member B.

[0020] As shown in Figure 5, the gear member 4 has the concavo-convex gear teeth 25 from a push-back protrusion 10 protruding from the arc of which center is a center of axis P_1 of the through hole 23 along a range (of 100° to 120°) slightly (for 10° to 30°) over a quarter of circle (90°) on the same arc in the direction of an arrow N. A push-out protrusion 12, protruding from the arc of which center is the center of axis P_1 , is provided on the end portion of the range on which the concavo-convex gear teeth 25 are formed.

[0021] A radius R_0 of the sliding peripheral face 22 of which center is the center of axis P_1 is set to be 60 to 80% to a gear radius R_g of the concavo-convex gear teeth 25 (the outer toothed face Y) of which center is the center of axis P_1 .

[0022] When the radius R_0 is set to be smaller than 60% to the gear radius R_g , the circular low protrusion 24 as an axis to the concavo-convex gear teeth 25 becomes small, contact pressure becomes excessive, and cutting and abnormal abrasion may be generated for defects of engagement of the concavo-convex gear teeth 25.

[0023] When the radius R_0 is set to be larger than 80% to the gear radius R_g , strength of remaining ring portions of the facing plate portions 17 as bearings is reduced.

[0024] As shown in Figures 3 through 5, the wedge-shaped window portion 5, formed to be concave to the center when the first axis C_1 is on the center side, is a wedge-shaped hole expanding in the arrow N direction. The wedge-shaped window portion 5 is formed on each of the facing plate portions 17 as to have the same configuration and penetrating the case portion 3. A wedge sliding face 8 is formed on an outer side of the wedge-shaped window portion 5. The wedge sliding face 8 is formed arc-shaped of which center is a second axis C_2 eccentric to the first axis C_1 . The second axis C_2 may be an infinitely distant point and the whole or a part of the wedge sliding face 8 may be straight (not shown in Figures). That is to say, the configuration of the wedge sliding face 8 may be (i) arc-shaped, (ii) straight, (iii) combination of an arc and a straight line, (iv) a polygonal line in which plural straight short lines are serially connected, etc.

[0025] Further, the wedge-shaped window portion 5 has a retreat space 11 to store the floating wedge mem-

ber 6 as to release the engagement of the inner toothed face 7 and the gear member 4 on an end portion on the side of the arrow N direction. The wedge-shaped window portion 5 has a contact staged portion 28 on an arc face 26 on the inner side.

[0026] One face side of the floating wedge member 6 is an inner toothed face 7 having concavo-convex gear to engage with the gear member 4, and another face side of the floating wedge member 6 is a contact face 9 to contact the wedge sliding face 8 of the wedge-shaped window portion 5. On the inner toothed face 7, a guiding slope 27, which can contact the contact staged portion 28, is formed. The contact face 9 of the floating wedge member 6 is formed as an arc having approximately same configuration as the wedge sliding face 8. Although not shown in figures, the configuration of the contact face 9 may be (i) a polygonal line in which plural straight short lines are serially connected, (ii) a configuration in which straight short lines and arc-shaped short lines are serially connected.

[0027] Further, the case portion 3 is provided with an elastic member 13 to elastically push the floating wedge member 6 toward the gear member 4. The elastic member 13 is a plate spring composed of a strip of steel plate, of which both ends are attached to the first attachment portion 18, contacts a middle portion of the contact face 9 of the floating wedge member 6. The floating wedge member 6 is disposed in a space Z formed between the gear member 4 and the wedge sliding face 8, and elastically pushed toward the gear member 4.

[0028] Although one wedge-shaped window portion 5 is formed with one plate portion 17 in the construction described above, it is also possible to compose the wedge-shaped window portion 5 with two or more members (not shown in Figures). Further, it is sufficient that the wedge sliding face 8 is composed as to form the wedge-shaped space Z between the wedge sliding face 8 and the arc-shaped outer toothed face Y of the gear member 4 when observed in the axis C_1 direction. The space Z does not need to be closed like a window (not shown in Figures).

[0029] Next, use (function) of the above-described angle-adjustable hinge of the present invention is described.

[0030] Figures 7A through 12 are explanatory views of function of the angle-adjustable hinge A. The first member 1 and the second member 2 in a straight state (with oscillation start angle $\phi_0 = 0^\circ$) in Figure 7A begin oscillation around the first axis C_1 . The second member 2 oscillates against the first member 1 gradually in the arrow N direction (Figures 8A through 9B). As shown in Figure 10A, the first member 1 and the second member 2 oscillate until a mutual right angle state (with oscillation end angle $\phi_1 = 95^\circ$), and the oscillation in the arrow N direction ends. Then, as shown in figure 11A, the second member 2 oscillates in an arrow R direction to recover the straight state. The movement of the angle-adjustable hinge A is described below with this cycle.

[0031] First, as shown in Figures 7A and 7B, the fitting shaft portion 20 is fit to the through hole 23 of the first member 1 to attach the second member 2 to the first member 1 as the first member 1 and the second member 2 are in a straight line (refer to Figure 7A). In this case, the floating wedge member 6 engages with the concavo-convex gear teeth 25 on the push-out protrusion 12 side by the inner toothed face 7 and contacts the wedge sliding face 8 by the contact face 9 to restrict the rotation of the gear member 4 in the arrow R direction (refer to Figure 7B). This state is an oscillation starting state in which the angle formed by the first member 1 and the second member 2 is the oscillation start angle ϕ_0 . In the oscillation starting state, the second member 2 oscillates against the first member 1 in the arrow N direction.

[0032] Next, as shown in Figures 8A through 8C, when the second member 2 is raised in the arrow N direction, the contact face 9 of the floating wedge member 6, elastically pushed toward the gear member 4 by the elastic member 13, slightly parts from the wedge sliding face 8 to make a gap d (refer to Figure 8B). Then, as the raising movement continues, the guiding slope 27 of the floating wedge member 6 contacts the contact staged portion 28 of the wedge-shaped window portion 5 as shown in Figure 8C, the floating wedge member 6 parts from the gear member 4 for the gap d, and the inner toothed face 7 goes over the concavo-convex teeth 25 with click sound.

[0033] In this case, the floating wedge member 6 engages with the concavo-convex gear teeth 25 by the inner toothed face 7 and contacts the wedge sliding face 8 by the contact face 9 to restrict the rotation of the second member 2 in the arrow R direction. Therefore, the second member 2 is kept with a desired inclination angle. The sliding peripheral face 22 broadly slides on the circular holding hole 21 to firmly keep the posture of the second member 2 because the gear member 4 is held by the circular low protrusion 24 fit to the circular holding hole 21.

[0034] As shown in figure 9A, raising the second member 2, the floating wedge member 6 contacts the push-back protrusion 10, and the guiding slope 27 contacts the contact staged portion 28 (refer to Figure 9B).

[0035] Then, as shown in Figures 10A and 10B, when the second member 2 is oscillated in the arrow N direction further, the floating wedge member 6, pushed back by the push-back protrusion 10 against the elastic force of the elastic member 13, parts from the gear member 4, goes over the contact staged portion 28, and becomes stored within the retreat space 11. That is to say, the engagement of the inner toothed face 7 and the concavo-convex gear teeth 25 is released by the floating wedge member 6 parting from the gear member 4. And, the floating wedge member 6 hitches the gear member 4 to restrict the rotation in the arrow N direction.

[0036] This state is an oscillation ending state in which the angle formed by the first member 1 and the second member 2 is the oscillation end angle ϕ_1 . In the oscillation ending state, the second member 2 does not oscillate against the first member 1 in the arrow N direction beyond

the oscillation end angle ϕ_1 .

[0037] Therefore, the engagement of the inner toothed face 7 and the concavo-convex gear teeth 25 is released, and the second member 2 becomes free oscillation state to the first member 1 within the range from the oscillation start angle ϕ_0 to the oscillation end angle ϕ_1 . And, as shown in Figures 11A and 11B, when the second member 2 is oscillated in the arrow N direction to make the first member 1 and the second member 2 in straight state (with the oscillation start angle ϕ_0), the guiding slope 27 is pressed by the push-out protrusion 12 of the gear member 4, the floating wedge member 6 is pushed out of the retreat space 11, and the engagement of the inner toothed face 7 and the concavo-convex gear teeth 25 of the gear member 4 is recovered.

[0038] That is to say, as shown in Figure 12, the second member 2 in the oscillation starting state, stopping the oscillation in the arrow R direction, is oscillated by an oscillation unit angle α in the arrow N direction, and kept with a desired inclination angle. When the inclination angle of the second member 2 against the first member 1 reaches for the oscillation end angle ϕ_1 of the oscillation ending state, the second member 2 becomes free oscillation state within the range from the oscillation start angle ϕ_0 to the oscillation end angle ϕ_1 . Then, the engagement of the floating wedge member 6 and the gear member 4 is recovered to return to the oscillation starting state by making the first member 1 and the second member 2 in straight state (with the oscillation start angle ϕ_0).

[0039] In the present embodiment, although the oscillation start angle $\phi_0 = 0^\circ$, the oscillation end angle $\phi_1 = 95^\circ$, and the oscillation unit angle α as the oscillation angle when the inner toothed face 7 goes over one of the concavo-convex gear teeth 25 is set to be 5° , these values are examples and may be changed.

[0040] And, the first attachment portion 18 and the second attachment portion 19 may be formed into desired configurations. For example, as shown in Figures 13A through 13D, the first member 1, provided with the case portion 3 to which the covers K are attached, may have configurations of the first attachment portion 18 different from the configuration used in the above-described embodiment. Also the second member 2 may similarly have configurations of the second attachment portion 19 different from the configuration used in the above-described embodiment.

[0041] The configurations of the first member 1 shown in Figures 13A through 13D and the configurations of the second member 2 shown in Figures 14A through 14D may be freely selected and combined, and various forms can be elected corresponding to uses of the angle-adjustable hinge A and fixation method of the first attachment portion 18 and the second attachment portion 19 to sofas, etc.

[0042] And, as shown in Figures 6A and 6B, in case that the angle-adjustable hinge A is attached to both of the left and right sides of the backrest S_1 of the sofa S, the fitting shaft portion 20 of the second member 2 is

inserted from the left side to the through hole 23 on the first member 1 of the angle-adjustable hinge A on the left side, and the fitting shaft portion 20 of the second member 2 is inserted from the right side to the through hole 23 on the first member 1 of the angle-adjustable hinge A on the right side. That is to say, the fitting shaft portion 20 of the second member 2 can be inserted to the through hole 23 on the first member 1 from both of the left and right sides. Especially, when the configurations of Figures 13C and 14D, or Figures 13D and 14D are combined, the angle-adjustable hinges A can be composed of entirely common parts. And, also in combinations of Figure 13A or 13B and Figure 14A, 14B, or 14C, although it is necessary to make the first attachment portion 18 and the second attachment portion 19 symmetric corresponding to each other, functional parts assembled within the case portion 3 of the first member 1, especially difficult to make and expensive for the required working accuracy, material, and heat treatment, can be commonly used as they are.

[0043] Next, as shown in Figure 15 and Figure 16, a case, in which the second member 2 is attached to the first member 1 with inclination of a predetermined angle θ in the oscillation starting state, is described. In this case, the through hole 23 is a regular hexagonal hole and the fitting shaft portion 20 is a regular hexagonal rod, so $\theta = 60^\circ$ and the angle can be changed.

[0044] As shown in Figure 15, the oscillation start angle ϕ_0 is changed as the second member 2 with inclination of the predetermined angle θ starts the oscillation against the first member 1 in the arrow N direction. The movable area from the oscillation start angle ϕ_0 to the oscillation end angle ϕ_1 is same as in the above-described embodiment. Therefore, the oscillation end angle ϕ_1 is inclined in the arrow N direction for the predetermined angle θ . As described above, the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 of the second member 2 against the first member 1 are changed for the predetermined angle θ .

[0045] And, as shown in Figure 16, when the oscillation start angle ϕ_0 is further changed by further inclination of the second member 2 for the predetermined angle θ in the arrow N direction, the oscillation end angle ϕ_1 is further inclined for the predetermined angle θ in the arrow N direction. That is to say, the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 can be changed for every predetermined angle θ , and the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 of the second member 2 against the first member 1 can be changed corresponding to uses.

[0046] The present invention can be modified. For example, the configurations of the through hole 23 and the fitting shaft portion 20, not restricted to regular hexagon, may be preferably regular triangle, square, regular polygonal such as regular octagonal, other non-circular configurations such as cross, asterisk, etc.

[0047] As described above, the first member 1 and the second member 2 can be easily connected because the first member 1 holding the approximately disc-shaped

gear member 4 having the non-circular through hole 23 as to freely rotate around an axis C_1 of the through hole 23, and the second member 2 on which the fitting shaft portion 20 detachably inserted to the through hole 23 of the gear member 4 is protruding, are provided, the wedge sliding face 8 is disposed on the first member 1 side to form the wedge-shaped space Z between the wedge sliding face 8 and the arc-shaped outer toothed face Y of the gear member 4 when observed in the direction of the axis C_1 , the floating wedge member 6, of which one face side is an arc-shaped inner toothed face 7 engaged with the outer toothed face Y of the gear member 4 and the outer face side is the contact face 9 to contact the wedge sliding face 8, and movable within the wedge-shaped space Z, is provided, the contact face 9 of the floating wedge member 6 contacts the wedge sliding face 8, the inner toothed face 7 engages with the outer toothed face Y, and oscillation of the gear member 4 in one direction toward the first member 1 is restricted by wedge work of the floating wedge member 6 between the outer toothed face Y and the wedge sliding face 8. Further, when the design must be changed as to correspond to uses, the hinge can easily correspond to the design change with common use of the case portion 3, the production is made easy, and the quality is kept high because expensive functional parts which require the most high standards of working accuracy, material, heat treatment, etc. can be assembled within the case portion 3 of the first member 1. And, adjustment of the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 of the second member 2 against the first member 1 can be easily conducted to enlarge the uses.

[0048] And, the construction and configurations of the wedge sliding face 8 and members near the wedge sliding face 8 can be simplified to make the product light weight and compact because the first member 1 has the case portion 3, the wedge-shaped window portion 5 is formed on the case portion 3, and the wedge sliding face 8 is composed of a part of the wedge-shaped window portion 5.

[0049] And, the first member 1 and the second member 2 can be easily connected only by the insertion of the fitting shaft portion 20 of the second member 2 to the through hole 23 of the first member 1 because the present invention is provided with the first member 1 provided with the case portion 3 holding the approximately disc-shaped gear member 4 having the non-circular through hole 23 as to freely rotate, the second member 2 on which the fitting shaft portion 20, detachably inserted to the through hole 23 of the gear member 4, is protruding, the wedge-shaped window portion 5 formed on the case portion 3, and the floating wedge member 6, movably disposed within the wedge-shaped window portion 5, in which one side face is an inner toothed face 7 to engage with the gear member 4 and another side is the contact face 9 to contact the wedge sliding face 8 of the wedge-shaped window portion 5, to restrict the gear member 4 from oscillation in one direction against the case portion

3 by the engagement of the inner toothed face 7 with the gear member 4 and the contact of the contact face 9 and the wedge sliding face 8. And, when the design must be changed as to correspond to uses, the hinge can easily correspond to the design change with common use of the case portion 3, the production is made easy, and the quality is kept high because expensive functional parts which require the most high standards of working accuracy, material, heat treatment, etc. can be assembled within the case portion 3 of the first member 1. And, adjustment of the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 of the second member 2 against the first member 1 can be easily conducted to enlarge the uses.

[0050] And, the early abrasion of the small pin 39 and the small hole portion 40, described with the conventional Figure 17 and Figure 18, can be prevented, accompanying abnormal abrasion and cutting of the gear teeth can be prevented, and the hinge is excellent in durability because the circular low protrusion 24 having the sliding peripheral face 22 is protruding from the side face 4a and the side face 4b on the gear member 4, and the case portion 3 is provided with the pair of facing plate portions 17 each of which has the circular holding hole 21 to which the sliding peripheral face 22 of the circular low protrusion 24 is slidably fit.

[0051] And, when the configurations of arms on left and right sides are different, many parts can be commonly used as to correspond to uses because the fitting shaft portion 20 of the second member 2 is composed as to be inserted to both of left and right sides of the through hole 23 of the first member 1.

[0052] And, adjustment of the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 can be easily conducted only with attachment and detachment of the first member 1 and the second member 2, and the hinge can be used without restriction of use because the non-circular through hole 23 is regular polygonal, and each of the oscillation start angle ϕ_0 and the oscillation end angle ϕ_1 of the second member 2 against the first member 1 can be changed for the predetermined angle B.

[0053] And, contact pressure against the sliding peripheral face 22 is reduced, abrasion is barely generated, axial deviation of the gear member 4 is prevented, and the concavo-convex gear teeth 25 and the inner toothed face 7 can be certainly engaged because the radius R_0 of which center is the center of axis P_1 of the sliding peripheral face 22 is set to be 60 to 80% of the gear radius R_g of the concavo-convex gear teeth 25 of which center is the center of axis P_1 of the through hole 23 in the gear member 4.

Claims

1. An angle-adjustable hinge having a construction in which:

a first member (1) holding an approximately disc-shaped gear member (4) having a through hole (23) as to freely rotate around an axis (C_1) of the through hole (23), and a second member (2) on which a fitting shaft portion (20) detachably inserted to the through hole (23) of the gear member (4) is protruding, are provided;

a wedge sliding face (8) is disposed on the first member (1) side to form a wedge-shaped space (Z) between the wedge sliding face (8) and an arc-shaped outer toothed face (Y) of the gear member (4) when observed in the direction of the axis (C_1);

a floating wedge member (6) of which one face side is an arc-shaped inner toothed face (7) engaged with the outer toothed face (Y) of the gear member (4) and an outer face side is a contact face (9) to contact the wedge sliding face (8), and movable within the wedge-shaped space (Z), is provided; and

the contact face (9) of the floating wedge member (6) contacts the wedge sliding face (8), the inner toothed face (7) engages with the outer toothed face (Y), and oscillation of the gear member (4) in one direction toward the first member (1) is restricted by wedge work of the floating wedge member (6) between the outer toothed face (Y) and the wedge sliding face (8);

characterized in that:

the through hole (23) is formed non-circular; the fitting shaft portion (20) is united with the second member (2)

a case portion (3) of the first member (1) is provided with a pair of facing plate portions (17) each of which has a wedge-shaped window portion (5), a part of which forms the wedge sliding face (8), and a circular holding hole (21) to which a sliding peripheral face (22) of a circular low protrusion (24) of the gear member (4) is slidably fit;

the fitting shaft portion (20) of the second member (2) is composed so as to be inserted to both sides of the through hole (23) of the first member (1) as the angle-adjustable hinge can be applied to different kind of furniture

the non-circular through hole (23) is regular polygonal, and each of an oscillation start angle (ϕ_0) and an oscillation end angle (ϕ_1) of the second member (2) against the first member (1) can be changed for a predetermined angle (θ); and

a plate shaped first attachment portion (18) and the gear member (4) are held between the pair of facing plate portions (17),

and the pair of facing plate portions (17) hold the first attachment portion (18) to form the case portion (3), wherein the gear member (4) is held within the case portion (3) as to freely rotate when not engaged with the inner toothed face (7) of the floating wedge member (6).

2. The angle-adjustable hinge as set forth in claim 1, wherein a radius (R_0) of which center is a center of axis (P_1) of the sliding peripheral face (22) is set to be 60 to 80% of a gear radius (R_g) of concavo-convex gear teeth (25) of which center is the center of axis (P_1) of the through hole (23) in the gear member (4).

Patentansprüche

1. Winkel-verstellbares Scharnier mit einer Konstruktion, bei der:

ein erstes Element (1), das ein ungefähr scheibenförmiges Getriebeelement (4) mit einer Durchgangsbohrung (23) so aufnimmt, dass dieses um eine Achse (C_1) der Durchgangsbohrung (20) frei drehbar ist, und ein zweites Element (2), auf dem ein durch die Durchgangsbohrung (23) des Getriebeelements (4) lösbar eingesetzter Einpassenschaftabschnitt (20) hervorsteht, vorgesehen sind;

eine Keilgleitfläche (8) auf der Seite des ersten Elements (1) vorgesehen ist, um einen keilförmigen Raum (Z) zwischen der Keilgleitfläche (8) und einer bogenförmigen äußeren gezahnten Fläche (Y) des Getriebeelements (4) zu bilden, wenn in der Richtung der Achse (C_1) betrachtet; ein Schwimmkeilelement (6) vorgesehen ist, bei dem eine Stirnseite eine bogenförmige innere gezahnte Fläche (7) ist, die mit der äußeren gezahnten Fläche (Y) des Getriebeelements (4) in Eingriff steht, und eine äußere Stirnseite eine Berührungsfläche (9) zum Berühren der Keilgleitfläche (8) ist, und welches innerhalb des keilförmigen Raums (Z) beweglich ist; und die Berührungsfläche (9) des Schwimmkeilelements (6) die Keilgleitfläche (8) berührt, die innere gezahnte Fläche (7) mit der äußeren gezahnten Fläche (Y) in Eingriff steht, und eine Oszillation des Getriebeelements (4) in eine Richtung zu dem ersten Element (1) hin durch Keilarbeit des Schwimmkeilelements (6) zwischen der äußeren gezahnten Fläche (Y) und der Keilgleitfläche (8) eingeschränkt ist;

dadurch gekennzeichnet, dass:

die Durchgangsbohrung (23) nicht-kreisförmig ausgebildet ist;

der Einpassenschaftabschnitt (20) mit dem zweiten Element (2) vereint ist; ein Gehäuseabschnitt (3) des ersten Elements (1) mit einem Paar an zugewandten Plattenabschnitten (17) versehen ist, von denen jede einen keilförmigen Fensterabschnitt (5) aufweist, von dem ein Teil die Keilgleitfläche (8) und ein kreisförmiges Halterloch (21) bildet, an dem eine periphere Gleitfläche (22) eines kreisförmigen tiefen Vorsprungs (24) des Getriebeelements (4) gleitbar befestigt ist; der Einpassenschaftabschnitt (20) des zweiten Elements (2) so aufgebaut ist, dass er zu beiden Seiten der Durchgangsbohrung (23) des ersten Elements (1) eingesetzt ist, da das Winkel-verstellbare Scharnier auf Möbel unterschiedlicher Art angewendet werden kann;

die nicht-kreisförmige Durchgangsbohrung (23) regulär polygonisch ist, und sowohl ein Oszillationsstartwinkel (ϕ_0) als auch ein Oszillationsendwinkel (ϕ_1) des zweiten Elements (2) gegenüber dem zweiten Element (1) mit einem vorgegebenen Winkel (θ) veränderbar sind; und ein plattenförmiger erster Befestigungsabschnitt (18) und das Getriebeelement (4) zwischen dem Paar an zugewandten Plattenabschnitten aufgenommen sind, und das Paar an zugewandten Plattenabschnitten (17) den ersten Befestigungsabschnitt (18) zum Bilden des Gehäuseabschnitts (3) aufnimmt, wobei das Getriebeelement (4) innerhalb des Gehäuseabschnitts (3) aufgenommen ist, um frei zu drehen, wenn es nicht mit der inneren gezahnten Fläche (7) des Gleitkeilelements (6) in Eingriff steht.

2. Winkel-verstellbares Scharnier nach Anspruch 1, bei dem ein Radius (R_0), dessen Mittelpunkt ein Mittelpunkt der Achse (P_1) der peripheren Gleitfläche (23) ist, auf 60 bis 80% eines Getrieberadius (R_g) konkav-konvexer Getriebezähne (21) festgesetzt ist, dessen Mittelpunkt der Mittelpunkt der Achse (P_1) der Durchgangsbohrung (23) in dem Getriebeelement (4) ist.

Revendications

1. Charnière à angle réglable ayant une structure dans laquelle :

un premier élément (1) maintenant un élément d'engrenage approximativement en forme de

disque (4) ayant un trou traversant (23) de façon à tourner librement autour d'un axe (C_1) du trou traversant (23), et un second élément (2) sur lequel une partie formant arbre de raccord (20) inséré de façon amovible dans le trou traversant (23) de l'élément d'engrenage (4) est saillante, sont prévus ;

une face coulissante en coin (8) est disposée sur le côté premier élément (1) pour former un espace en forme de coin (Z) entre la face coulissante en coin (8) et une face dentée extérieure en forme d'arc (Y) de l'élément d'engrenage (4) quand on regarde dans la direction de l'axe (C_1) ;

un élément formant coin flottant (6) dont un côté face est une face dentée intérieure en forme d'arc (7) en prise avec la face dentée extérieure (Y) de l'élément d'engrenage (4) et un côté face extérieure est une face de contact (9) pour entrer en contact avec la face coulissante en coin (8), et mobile à l'intérieur de l'espace en forme de coin (Z), est prévu ; et

la face de contact (9) de l'élément formant coin flottant (6) entre en contact avec la face coulissante en coin (8), la face dentée intérieure (7) met en prise la face dentée extérieure (Y), et l'oscillation de l'élément d'engrenage (4) dans une direction vers le premier élément (1) est limitée par le travail de coin de l'élément formant coin flottant (6) entre la face dentée extérieure (Y) et la face coulissante en coin (8) ;

caractérisée en ce que :

le trou traversant (23) est formé de manière non circulaire ;

la partie formant arbre de raccord (20) est unie au second élément (2)

une partie formant enveloppe (3) du premier élément (1) est munie d'un couple de parties plates se faisant face (17), chacune d'elles ayant une partie formant fenêtre en forme de coin (5), dont une partie forme la face coulissante en coin (8), et un trou de maintien circulaire (21) auquel une face périphérique coulissante (22) d'une protubérance basse circulaire (24) de l'élément d'engrenage (4) est ajustée de manière coulissante ;


la partie formant arbre de raccord (20) du second élément (2) est composée de façon à être insérée dans les deux côtés du trou traversant (23) du premier élément (1) comme la charnière à angle réglable peut être appliquée à différentes sortes de meubles

le trou traversant non circulaire (23) est un polygone régulier, et chacun d'un angle de début d'oscillation ($\emptyset_0$) et d'un angle de fin d'oscillation ($\emptyset_1$) du second élément (2)

contre le premier élément (1) peut être changé pour un angle prédéterminé (θ) ; et une première partie de fixation en forme de plaque (18) et l'élément d'engrenage (4) sont maintenus entre le couple de parties plates se faisant face (17), et le couple de parties plates se faisant face (17) maintient la première partie de fixation (18) pour former la partie formant enveloppe (3), dans laquelle l'élément d'engrenage (4) est maintenu à l'intérieur de la partie formant enveloppe (3) de façon à tourner librement quand il n'est pas en prise avec la face dentée intérieure (7) de l'élément formant coin flottant (6).

2. Charnière à angle réglable selon la revendication 1, dans laquelle un rayon (R_0) dont le centre est un centre d'axe (P_1) de la face périphérique coulissante (22) est fixé pour faire 60 à 80 % d'un rayon d'engrenage (R_g) de dents d'engrenage concavo-convexes (25) dont le centre est le centre d'axe (P_1) du trou traversant (23) dans l'élément d'engrenage (4).

FIG. 1

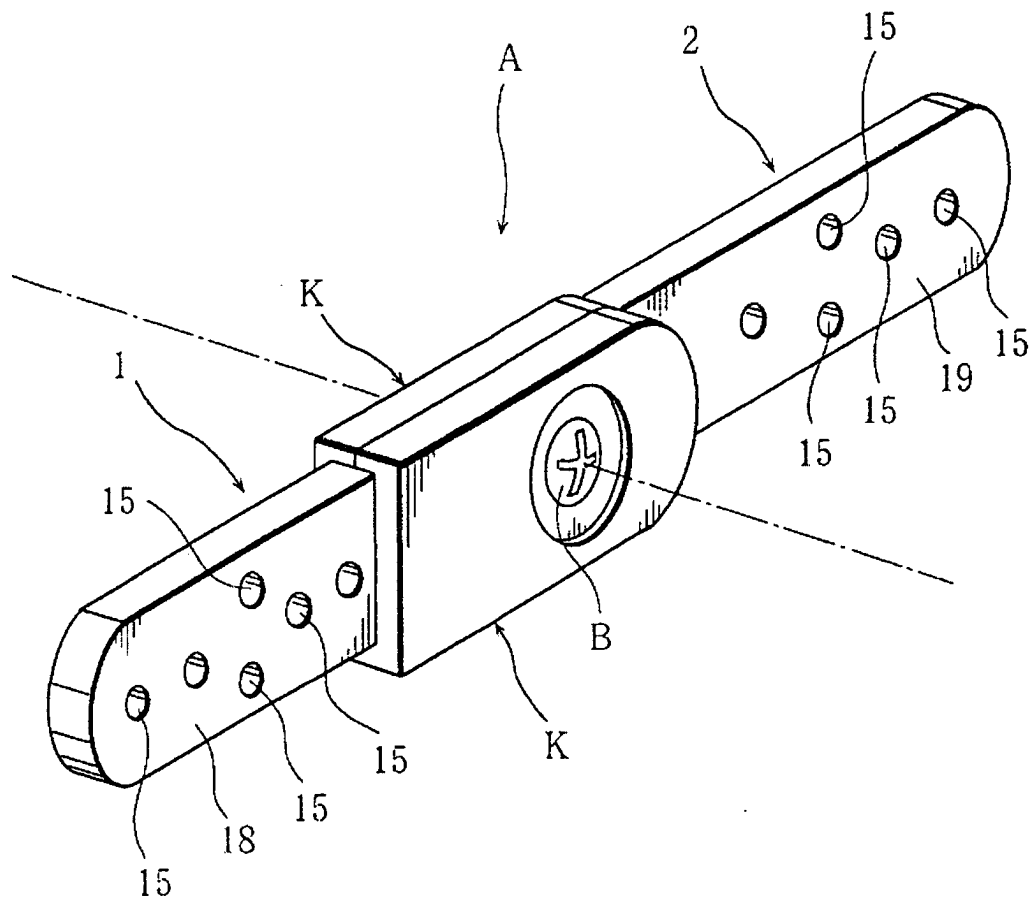

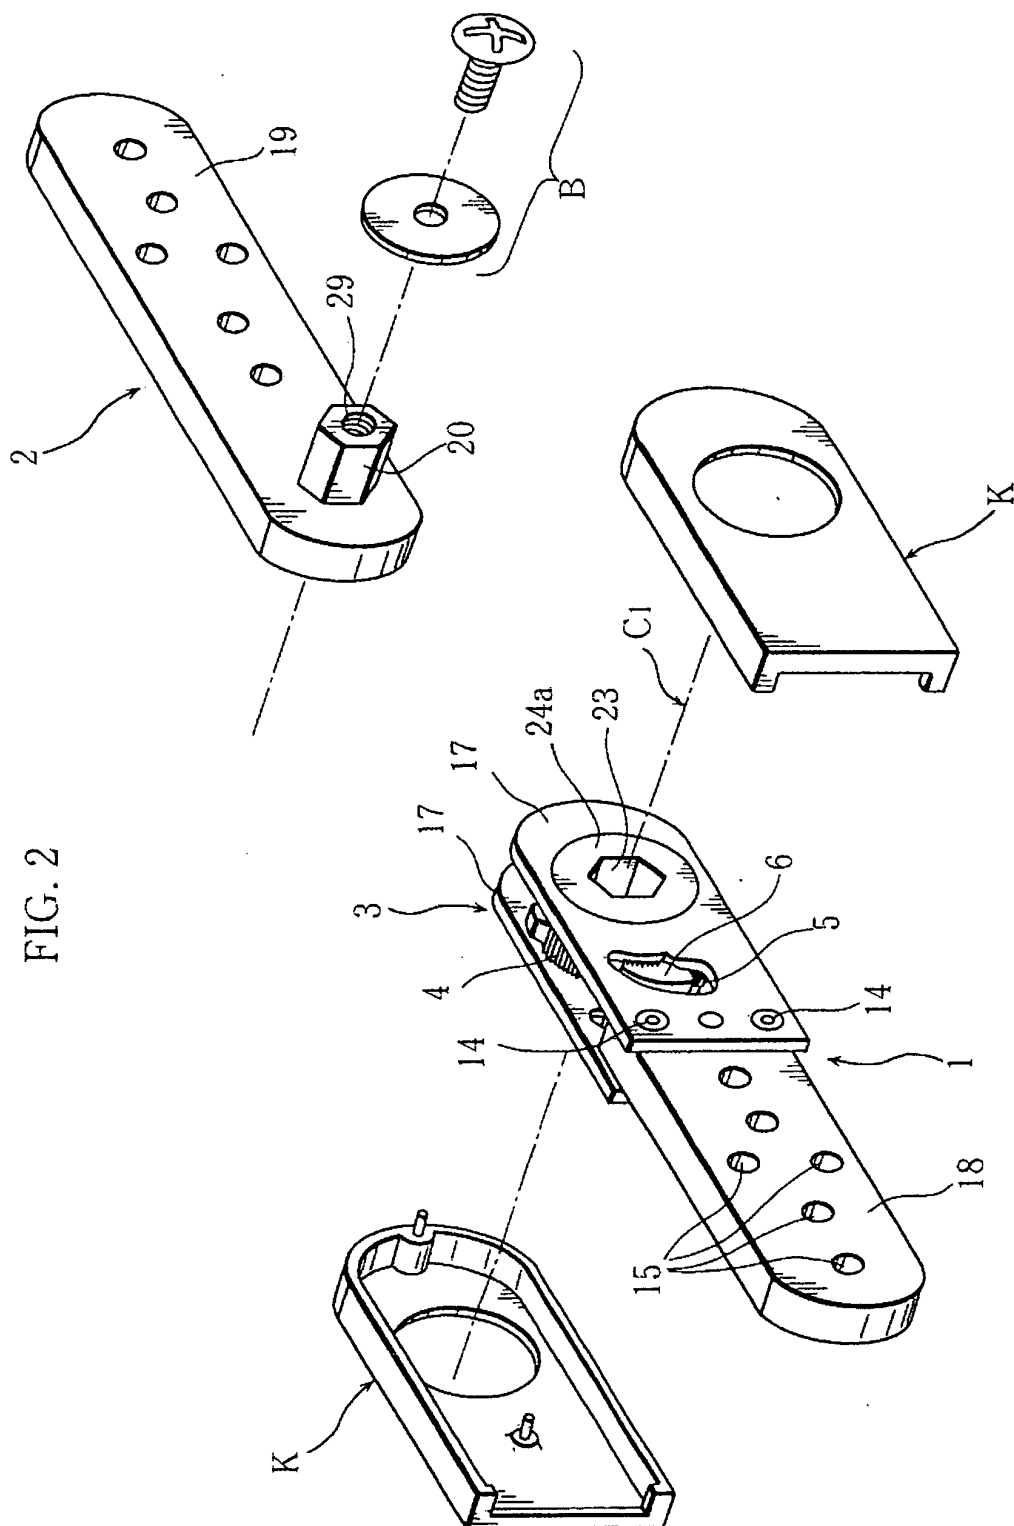


FIG. 2

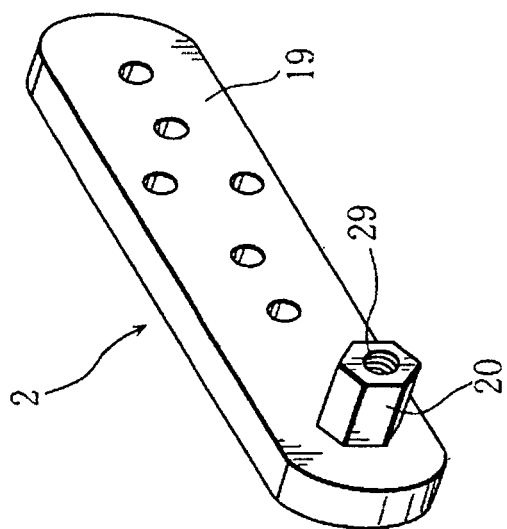


FIG. 3

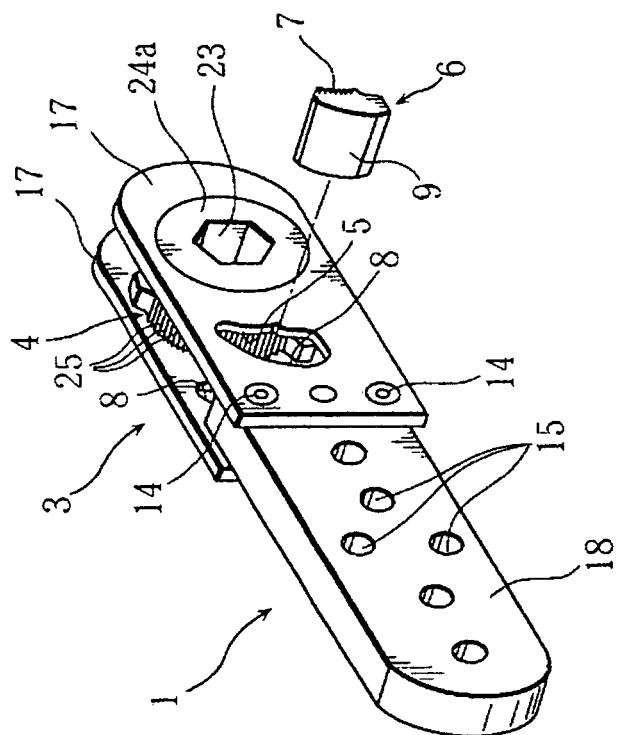


FIG. 4

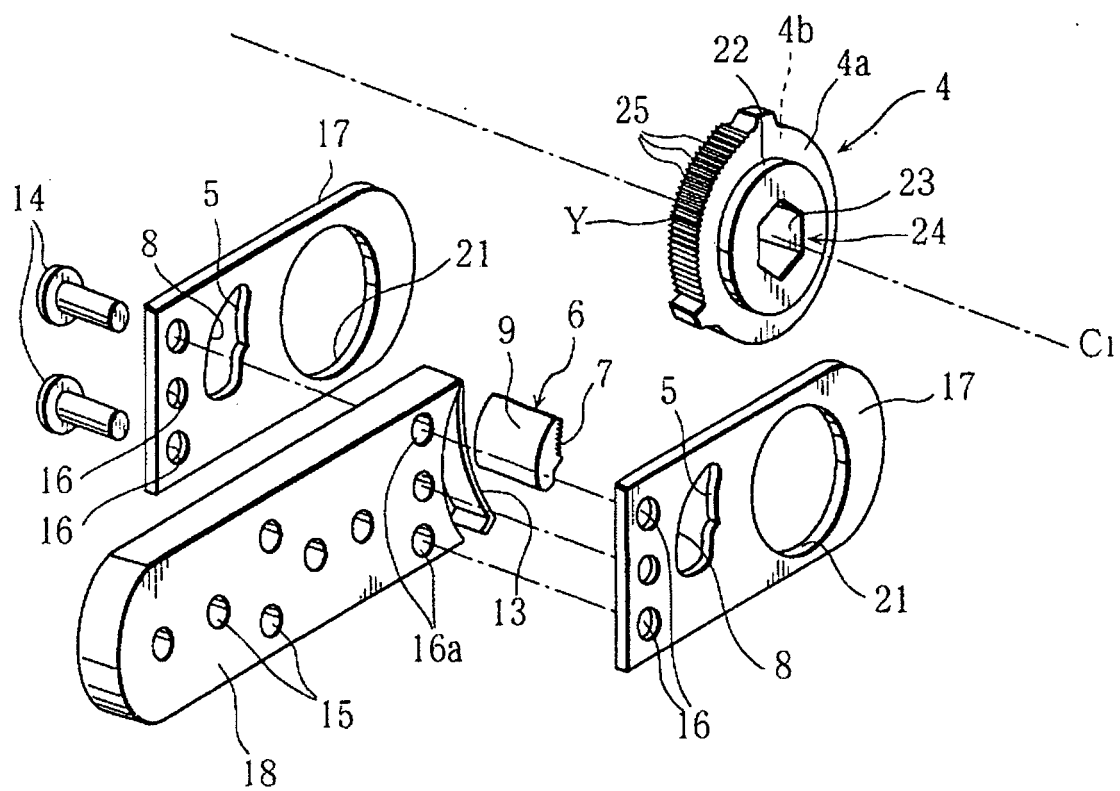


FIG. 5

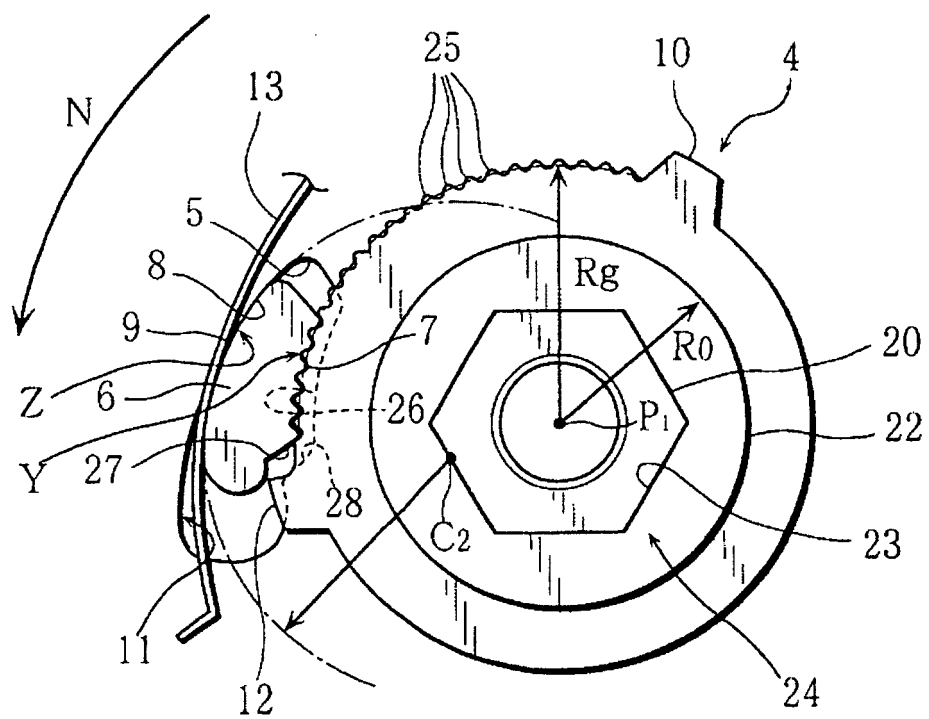


FIG. 6A

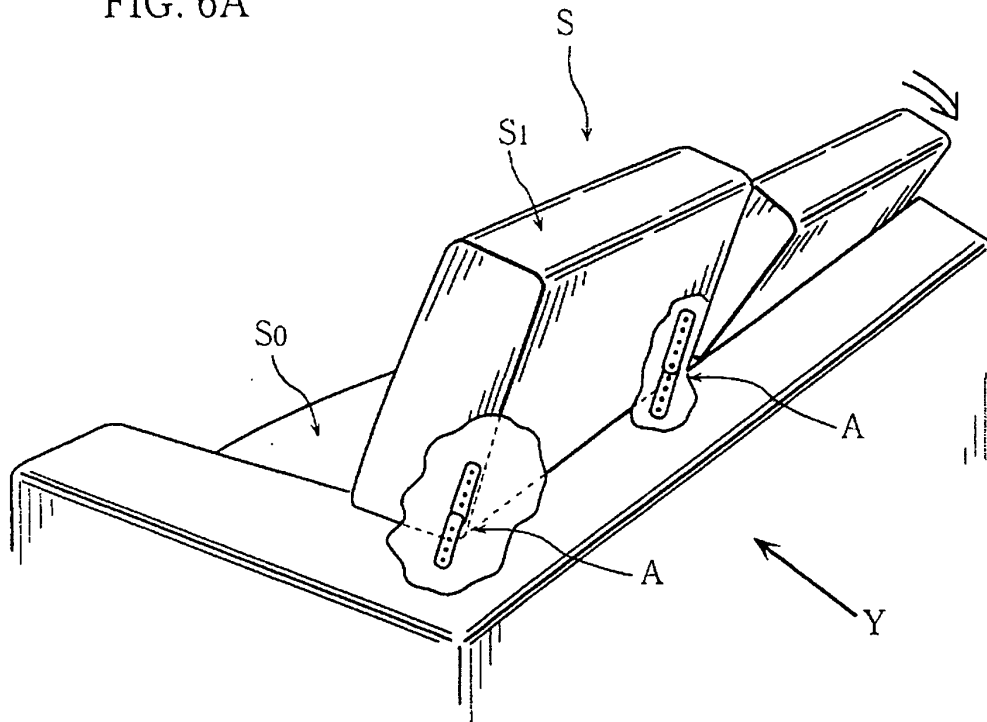


FIG. 6B

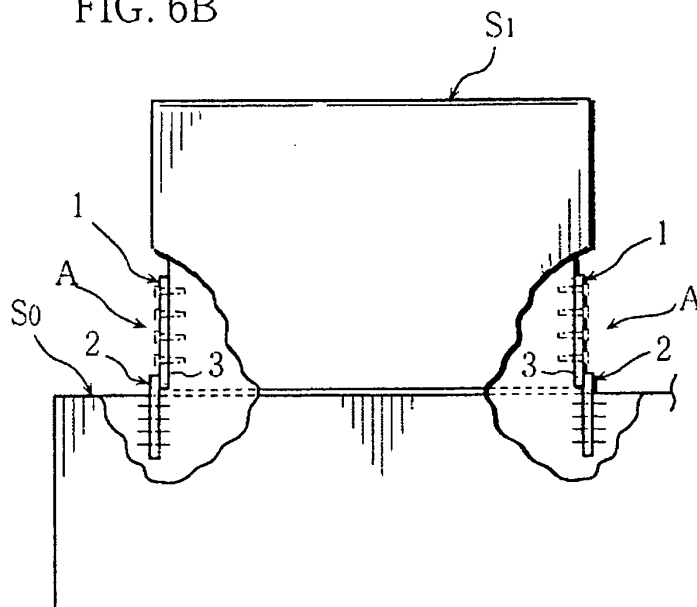


FIG. 7A

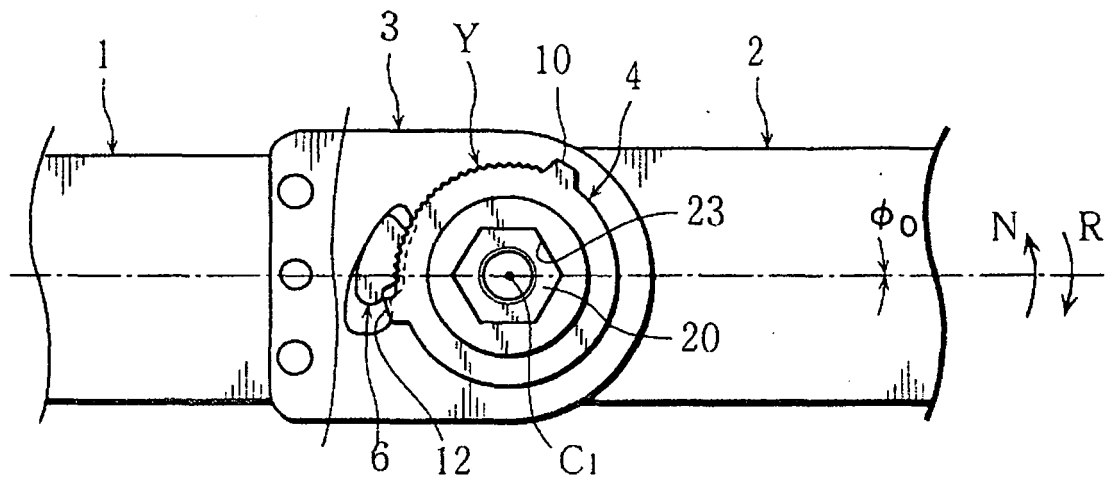


FIG. 7B

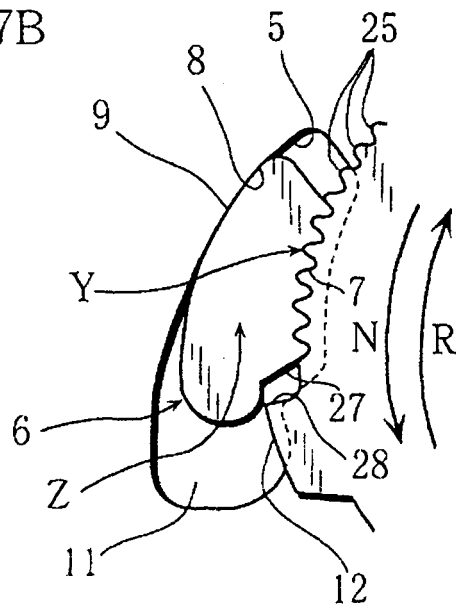


FIG. 8A

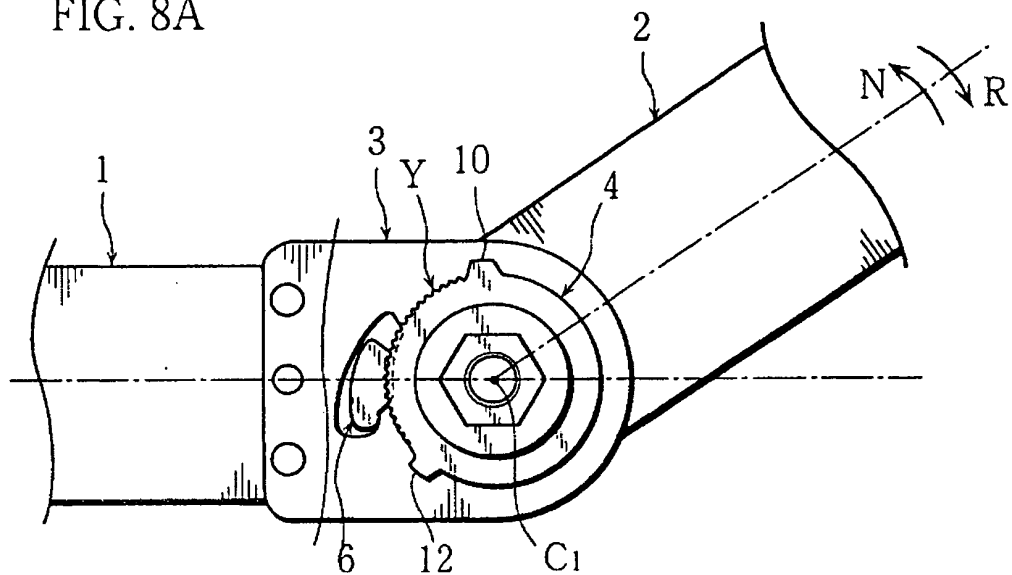


FIG. 8B

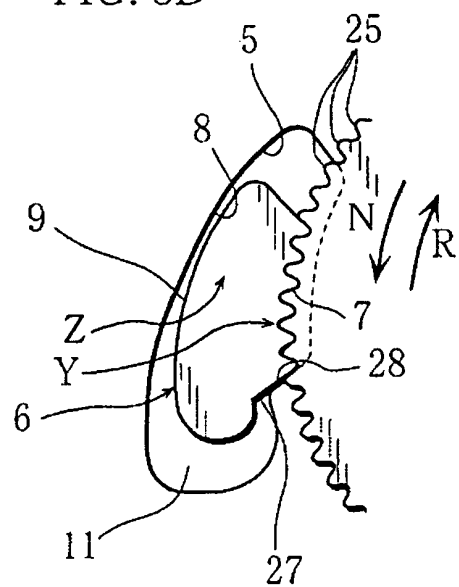


FIG. 8C

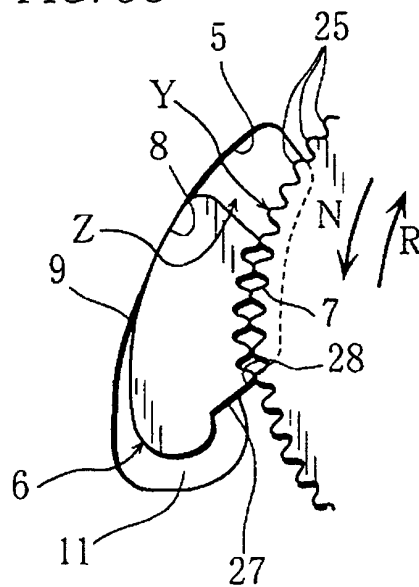


FIG. 9A

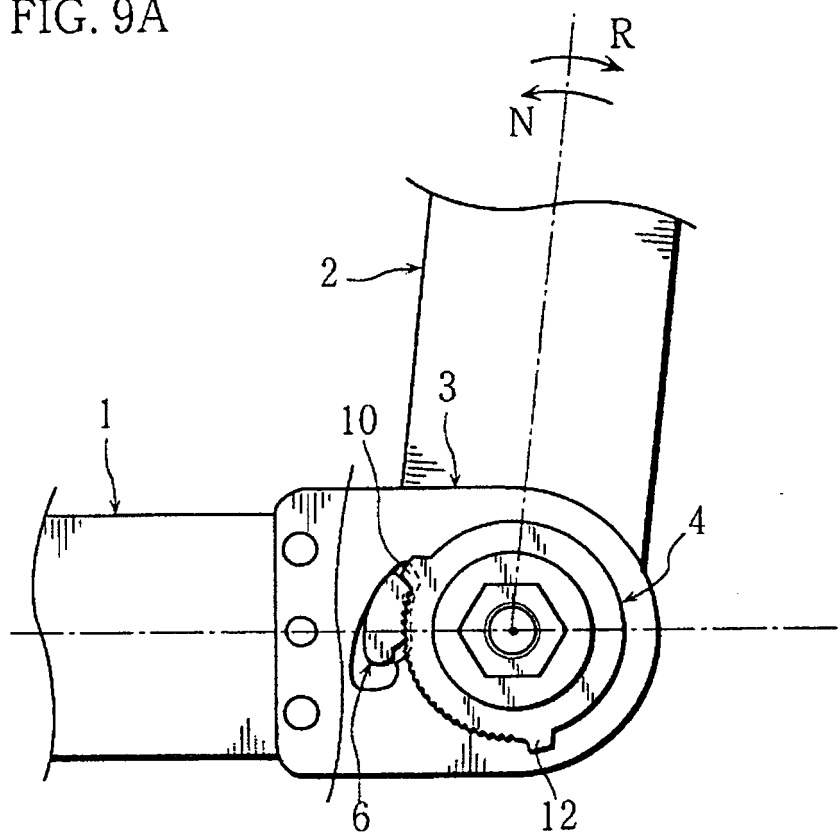


FIG. 9B

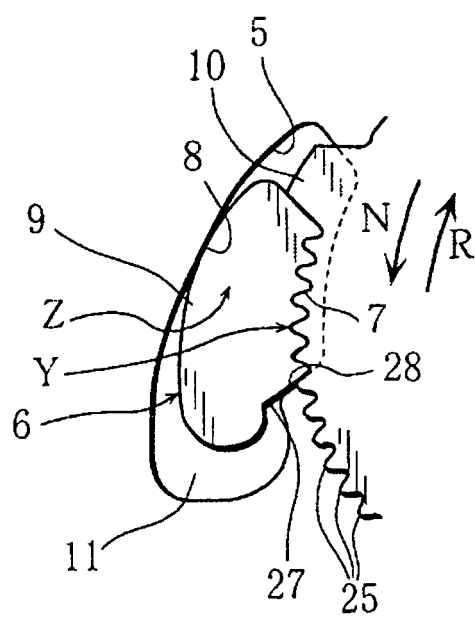


FIG. 10A

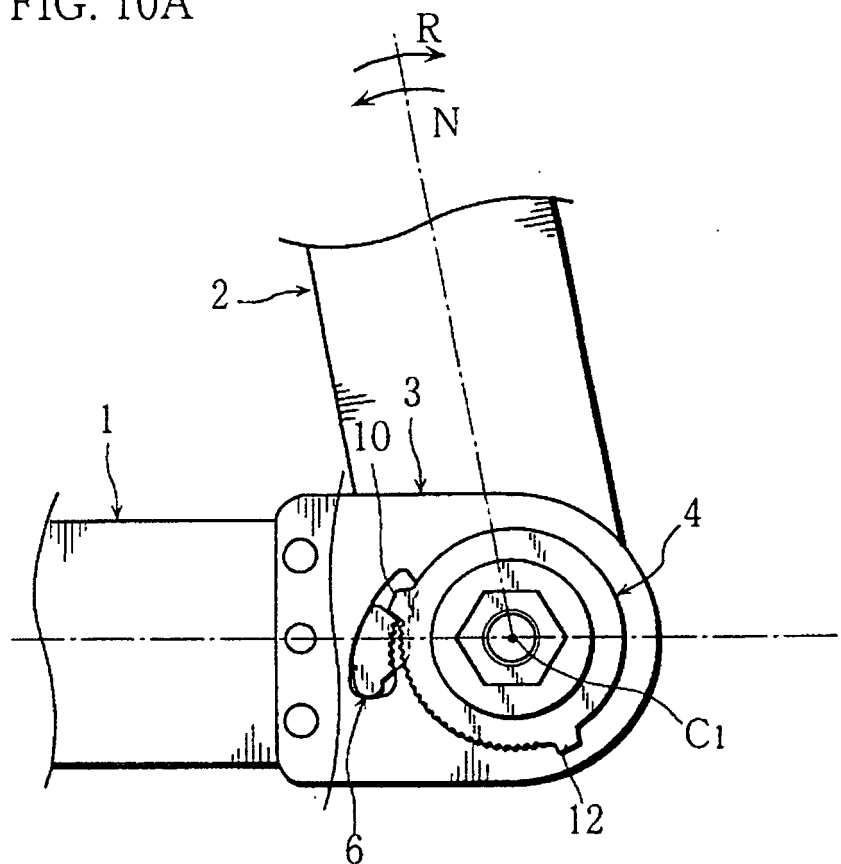


FIG. 10B

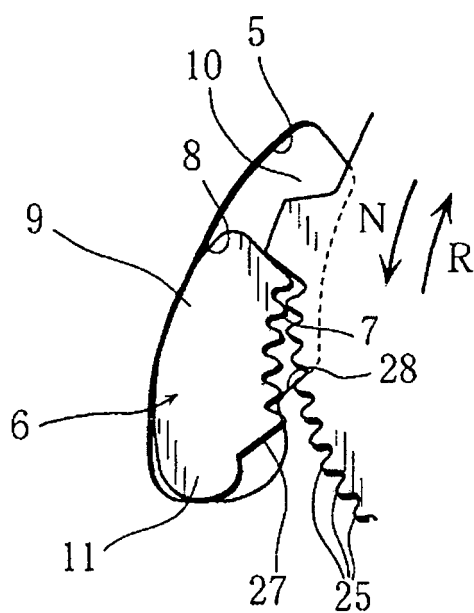


FIG. 11A

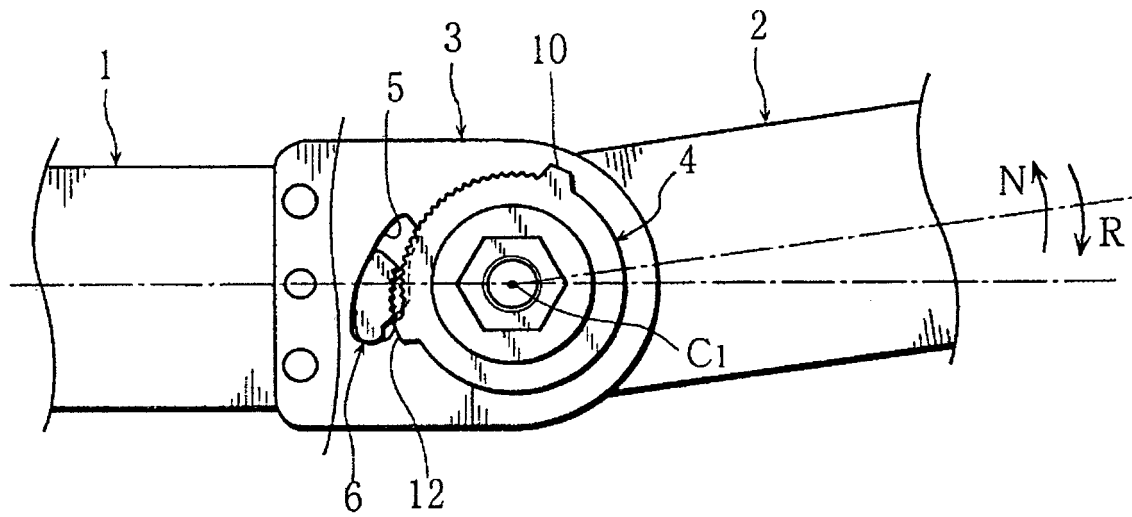
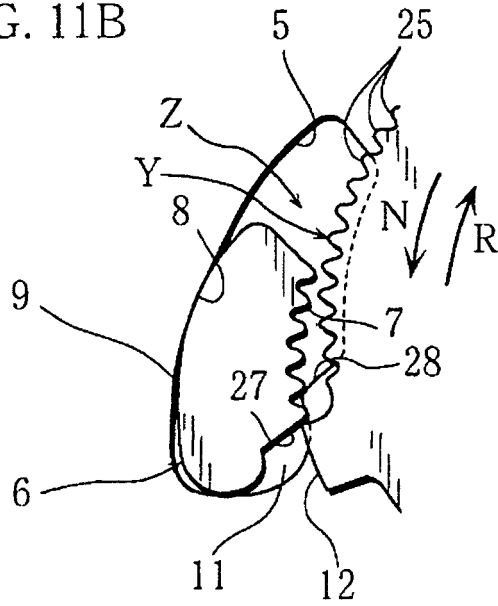


FIG. 11B



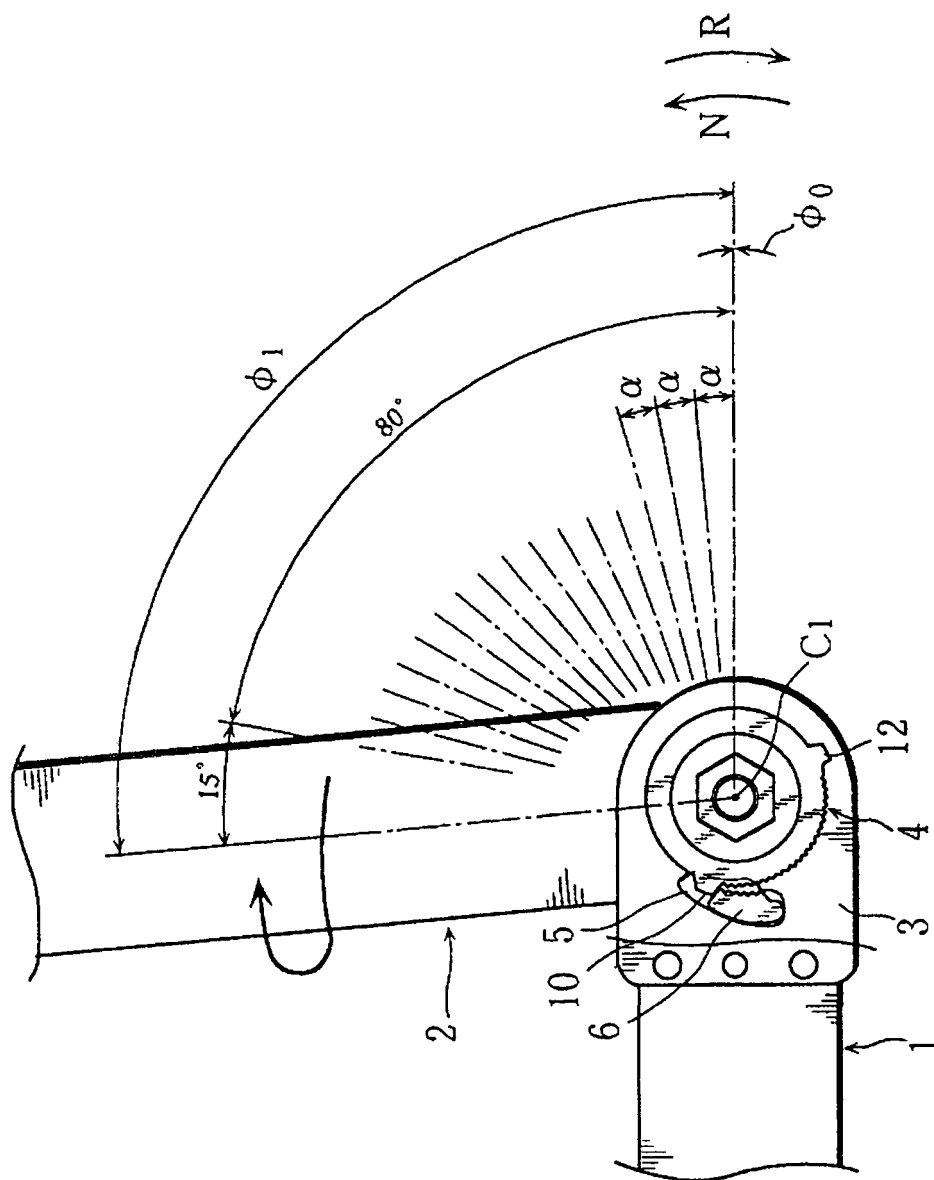


FIG. 12

FIG. 13A

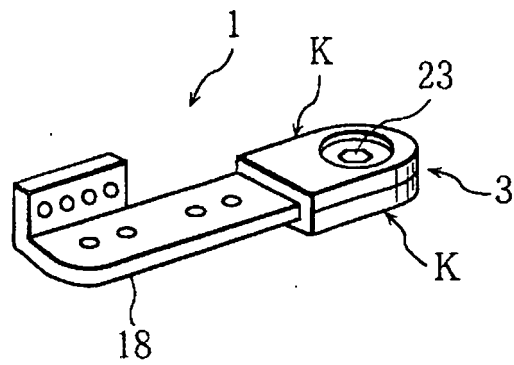


FIG. 13B

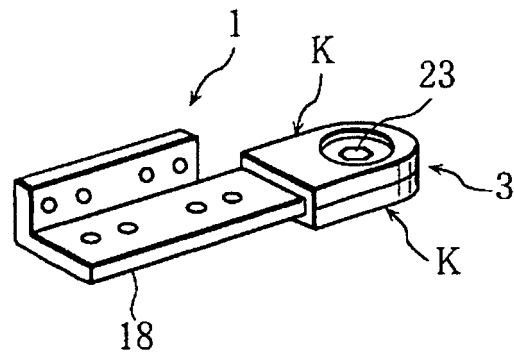


FIG. 13C

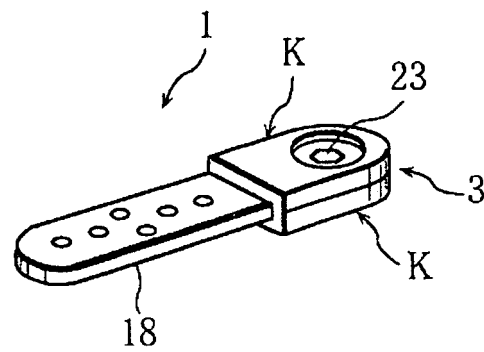


FIG. 13D

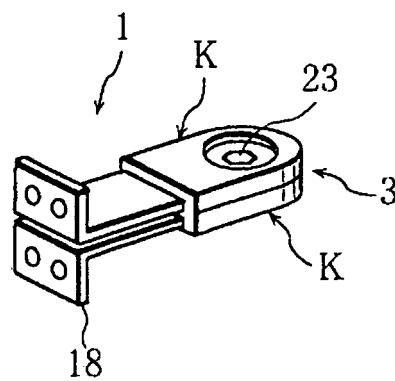


FIG. 14A

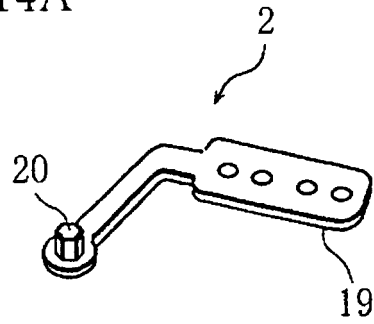


FIG. 14B




FIG. 14C

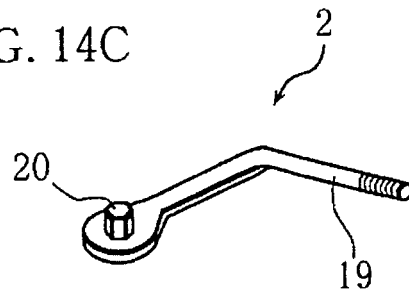


FIG. 14D




FIG. 15

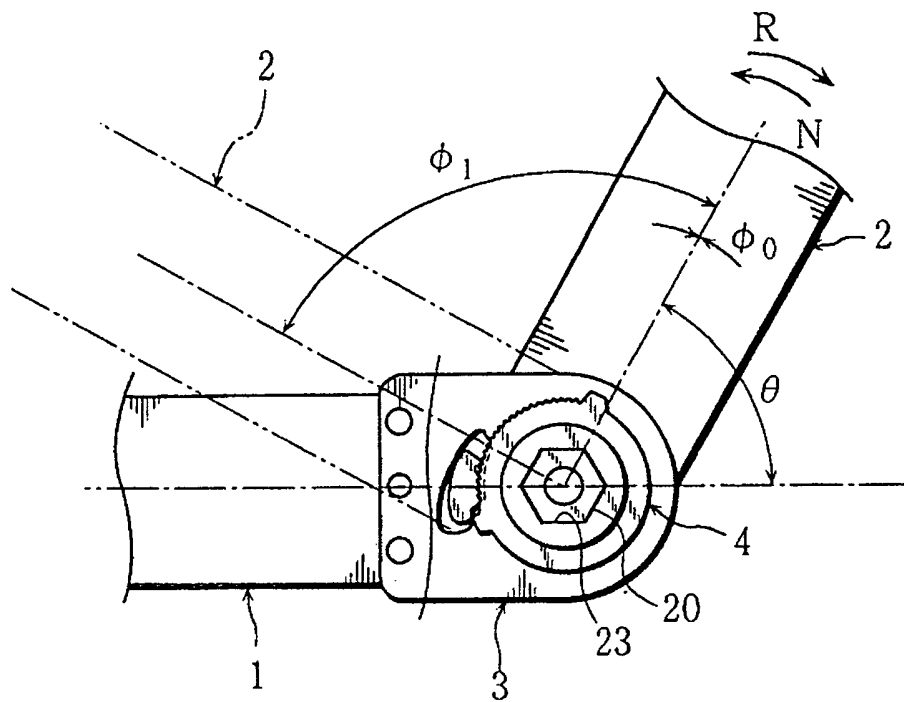


FIG. 16

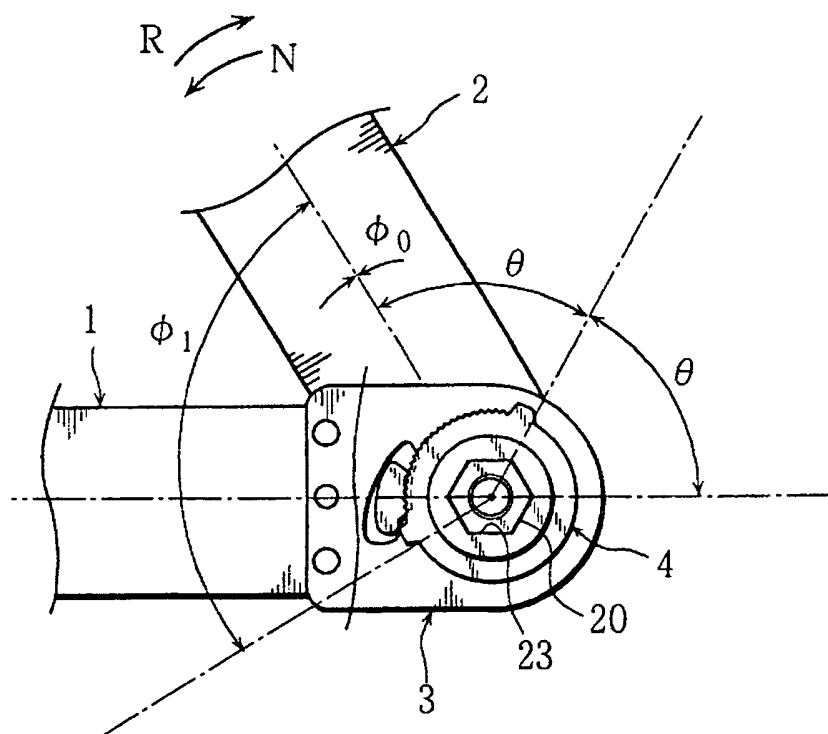


FIG. 17
PRIOR ART


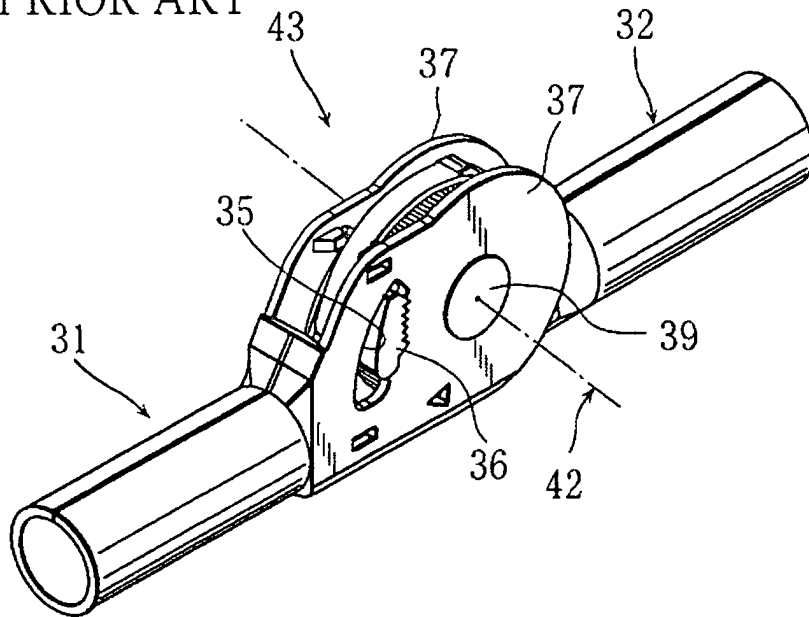


FIG. 18
PRIOR ART

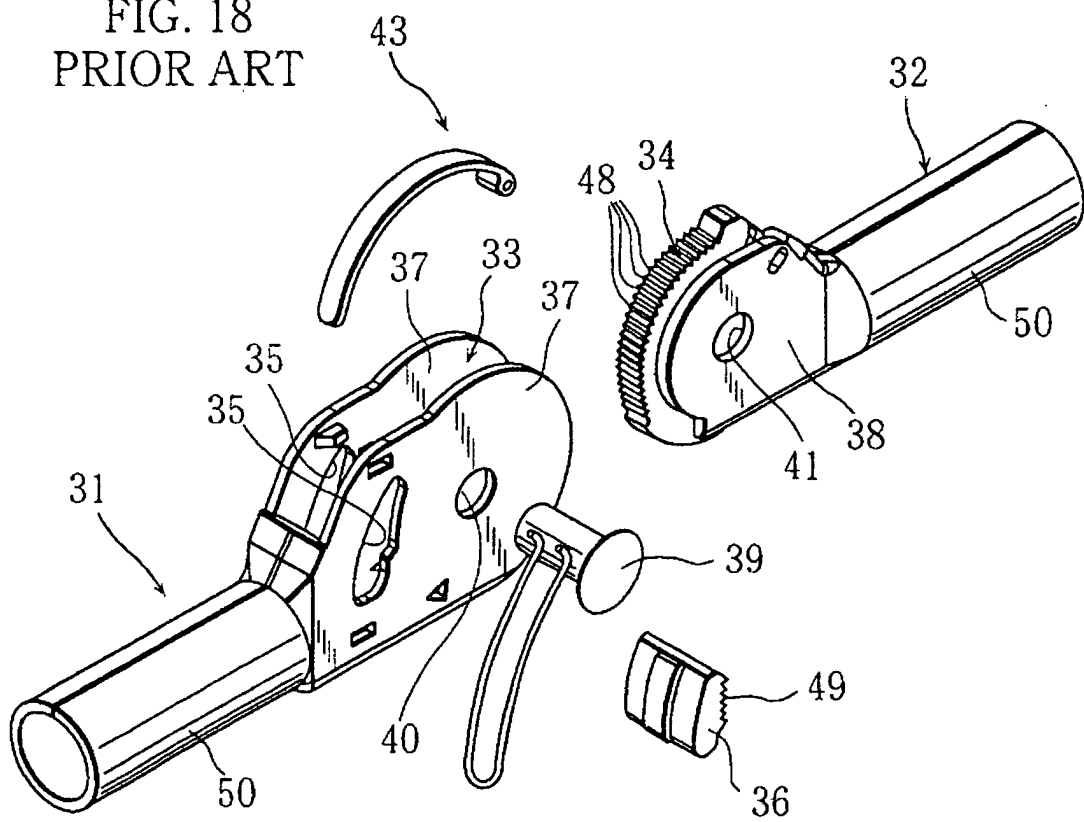

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 202008004242 U1 [0002]
- JP 3766669 B [0003]