



(22) Date de dépôt/Filing Date: 2013/08/01

(41) Mise à la disp. pub./Open to Public Insp.: 2015/02/01

(45) Date de délivrance/Issue Date: 2021/02/16

(51) Cl.Int./Int.Cl. *B60S 3/06* (2006.01)


(72) Inventeur/Inventor:
BERNARDI PIRINI, FERNANDINO, IT

(73) Propriétaire/Owner:
MORELITE S.P.A., IT

(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : STRUCTURE A BROSSES ROTATIVES CONCUE PARTICULIEREMENT POUR LES SYSTEMES DE
LAVAGE DE VEHICULES

(54) Title: ROTARY BRUSH CONSTRUCTION, PARTICULARLY FOR VEHICLE WASHING SYSTEMS

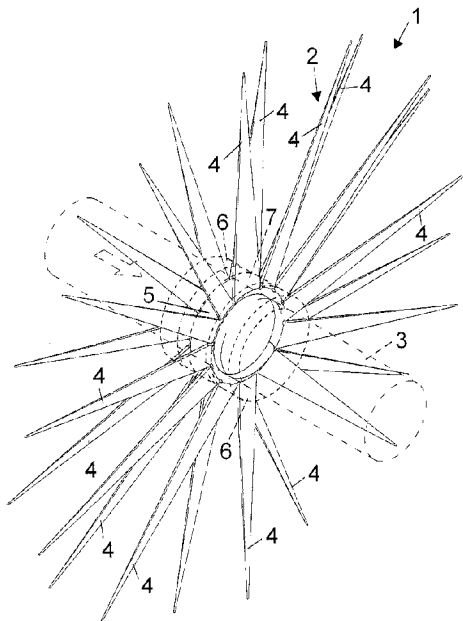

(57) **Abrégé/Abstract:**

A motor vehicle washing system washing brush construction, comprises a plurality of washing brush elements associated with a support tube, each said washing brush element comprising a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips joined by a central band element, said central band element being wound on said support tube to arrange said contoured strips on both sides of said central band element, with a pair of ring elements being threaded on said support tube, on both sides of said washing brush element, to clamp said central band element to move the support tube contoured strips away from one another and cause opposite strips to be moved to one another, by pairs, thereby arranging said opposite strips with a substantially 90° relationship with respect to a tube axis.

ABSTRACT

A motor vehicle washing system washing brush construction, comprises a plurality of washing brush elements associated with a support tube, each said
5 washing brush element comprising a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips joined by a central band element, said central band element being wound on said support tube to arrange said contoured
10 strips on both sides of said central band element, with a pair of ring elements being threaded on said support tube, on both sides of said washing brush element, to clamp said central band element to move the support tube contoured strips away from one another and cause
15 opposite strips to be moved to one another, by pairs, thereby arranging said opposite strips with a substantially 90° relationship with respect to a tube axis.

ROTARY BRUSH CONSTRUCTION, PARTICULARLY FOR VEHICLE
WASHING SYSTEMS

5

BACKGROUND OF THE INVENTION

The present invention relates to a rotary brush construction, particularly for vehicle washing systems.

As is known, automatic motor-vehicle washing systems conventionally comprise washing brush
10 assemblies.

Prior washing brush assemblies generally comprise a support tube coupled to a rotary element.

On the outer surface of the support tube are applied a plurality of flexible cleaning elements
15 adjoining one another and coupled, at a respective end portion thereof, to said support tube, perpendicularly thereto.

The automatic cleaning and washing, for example of a motor-vehicle body, are carried out by rotatively
20 driving the above disclosed washing brush assemblies, to cause the flexible elements thereof, held at a preset configuration by the centrifugal force generated by the rotary brush assemblies, to impact the vehicle body, through washing water and/or suitable washing
25 water solutions or emulsions.

The above cleaning elements are made in different configurations, generally of polyethylene, in the form of threads or strips, fringes or straps.

Washing brushes made of brush straps usually
30 comprise a plurality of strips or bands formed by partially cutting through the washing brush straps.

Said strips are arranged perpendicularly to the

axis of the shaft thereon the washing brush straps are clamped.

Said straps are usually made of foamed material and the clamping elements for clamping said straps to their support may comprise rivets, bars and so on.

A main problem of the above construction is that of properly clamping the straps to their support to cause said straps to be arranged neither excessively spaced away from one another nor excessively near one another.

Another problem of prior strap clamping systems is that the strap assembling time is a comparatively long one.

Document US-A 2007/041782 substantially discloses a vehicle system washing brush having a number of washing brush elements associated with a support tube.

SUMMARY OF THE INVENTION

The aim of the present invention is to provide such a rotary washing brush construction, for vehicle washing systems, adapted to overcome the above mentioned prior art drawbacks.

Within the scope of the above mentioned aim, a main object of the invention is to provide such a washing brush construction adapted to provide an optimum distribution of the washing brush straps through the support tube surface.

Yet another main object of the present invention is to provide such a washing brush construction which is very advantageous from an economic and ecologic standpoint.

Yet another object of the present invention is to provide such a washing brush construction which,

differently from prior washing brush assemblies including a support element for the washing straps, using material such as plastics, aluminium or the like materials, it does not include support elements.

5 Yet another object of the present invention is to provide such a washing brush construction allowing a great saving in spare part shipment.

Yet another object of the present invention is to provide such a washing brush construction which may
10 be assembled in a very quick and easy manner.

Yet another object of the present invention is to provide such a washing brush construction which washing straps may be reliably clamped thereby preventing them from deteriorating or breaking, thereby
15 providing a long duration washing brush strap assembly.

Yet another object of the present invention is to provide such a washing brush construction which, owing to its specifically designed structural features it is very reliable and safe in operation.

20 According to one aspect of the present invention, the above mentioned aim and objects, as well as yet other objects, which will become more apparent hereinafter, are achieved by a motor vehicle washing brush construction, characterized in that said washing
25 brush construction comprises a plurality of brush elements coupled to a brush element support tube.

Each said brush element comprises a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips
30 joined to a central band element.

Said central band element is wound on the support tube thereby the contoured strips are arranged

on both sides of said central band element.

A pair of ring elements, threaded on the support tube, on both sides of the brush element, clamp said central band element so as to space the contoured strips from the support tube and cause opposite strips to be moved to one another by pairs, with a substantially 90° arrangement with respect to the support tube axis.

Preferably, a central ring element encompasses the outer surface of the central band element.

Accordingly, in one aspect, the present invention resides in a motor vehicle washing system washing brush construction, comprising a plurality of washing brush elements associated with a support tube, each said washing brush element comprising a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips joined by a central band element, wherein said central band element is wound on said support tube as to arrange said contoured strips on both sides of said central band element, with a pair of ring elements being threaded on said support tube, on both sides of said washing brush element to clamp said central band element so as to move the support tube contoured strips away from one another and cause opposite strips to move to one another, by pairs, thereby arranging said opposite strips with a substantially 90° relationship with respect to a tube axis.

In another aspect, the present invention resides in a motor vehicle washing system washing brush construction, comprising a plurality of washing brush elements associated with a support tube, each said

washing brush element comprising a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips joined by a central band element, wherein said central band element is wound on said support tube as to arrange said contoured strips on both sides of said central band element, a central ring element to hold said central band element firmly coupled to said support tube, and two side ring elements, one said side ring element disposed respectively on each side of said washing brush element to clamp said central band element so as to move the support tube contoured strips away from one another and cause opposite strips to move to one another, by pairs, thereby arranging said opposite strips with a substantially 90° relationship with respect to a tube axis, the side ring elements opening said washing brush an umbrella from above and under said central band element, said two side ring elements operating as spacer elements to selectively position the contoured strips laterally relative to side edges of the central band element.

BRIEF DESCRIPTION OF THE DRAWINGS

Further characteristics and advantages of the present invention will become more apparent hereinafter from the following disclosure of a preferred, though not exclusive, embodiment of the invention, which is illustrated, by way of an indicative, but not limitative, example in the accompanying drawings, where:

Figure 1 is a perspective view of a component element of the vehicle washing system rotary washing brush according to the present invention;

Figure 2 is a cross-sectioned view of a washing brush element of Figure 1;

Figure 3 is a perspective view of a support tube and a washing brush element, before assembling the latter;

Figure 4 is a side elevation view showing an operating step for winding the brush element on the support tube therefor;

Figure 5 is a further side elevation view showing an operating step for compacting or pressing

the brush element wound on its support tube;

Figure 6 is yet another side elevation view showing the brush element mounted on its support tube at a ready for use position; and

5 Figure 7 is yet another elevation view showing the washing brush construction in a use condition thereof with a plurality of washing brush elements mounted on the support tube.

10 **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

With reference to the number references of the above mentioned figures, the vehicle washing system washing brush construction according to the present invention, which has been generally indicated with
15 reference number 1, comprises a plurality of washing brush elements 2 associated with a support tube 3 which, in turn, is mounted on suitable rotary support elements, not shown in the figures.

Each said washing brush element 2 comprises a
20 plate-like body which may be advantageously made of a closed cell foamed plastic or a felt material.

Said plate-like body is so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips 4 joined to a central
25 band element 5.

Said contoured strips 4 have preferably a triangular configuration.

The cut of said strips is, preferably though not necessarily, a tipped cut.

30 Said central band element 5 is wound on the tube 3 as to cause said contoured strips to be arranged on both sides of the central band element 5, as shown

in Figure 4.

In assembling the washing brush, a pair of clamping ring elements 6 are applied on the support tube 3, on both sides of the brush element, thereby
5 clamping or pinching said central band element 5, so as to move away the contoured strips 4 from the support tube and cause opposite strips 4 to move to one another, by pairs, thereby arranging the latter with a substantially 90° arrangement with respect to the axis
10 of the tube 3, as shown in Figure 6.

Then, by assembling further brush elements 2, the washing brush construction 1 is completed, said washing brush construction comprising a plurality of washing brush elements applied to the support tube 3
15 and spaced as desired from one another.

Figure 7 shows an embodiment of the rotary washing brush construction 1, wherein the washing brush elements are spaced from one another by an amount corresponding to a distance "d" between two adjacent
20 ring element 6.

In this connection it should be apparent that the spacing of the washing brush elements 2 may be easily changed by merely arranging the ring elements 6 at a different spacing from one another.

25 As above disclosed, the strips are advantageously cut by an asymmetrical type of cut.

Accordingly, upon assembling the brush element 2 on the support tube, said strips 4 will open with a spoke-wheel arrangement, because of the provision of
30 ring elements 6 sliding thereunder.

The "spokes" of the top portion will precisely fall in the space between the bottom spokes, thereby

providing a strategically quilted side surface to improve the contact tip distribution, without empty spaces therebetween.

In such a construction, three ring elements are preferably used, which are: a central ring element 7, for holding the spoke band element clamped to the tube, and two other side ring elements 6, to open said spoke band element as an umbrella, from the top and bottom portions thereof.

Said two side ring elements 6 also operate as spacer elements to set amount of material to the edge of the washing brush.

Thus, it is possible to properly control the washing brush density, by including more or less washing spokes in different operating areas.

The spacing between two adjoining ring elements, of two adjoining washing brush elements, may be changed to differently compact with one another the washing brush elements.

It has been found that the invention fully achieves the intended aim and objects.

In fact, the invention has provided a rotary washing brush construction providing an optimum distribution of the strap elements through the support tube surface, while facilitating the washing brush assembling operation.

Moreover, the inventive washing brush construction provides a firm and reliable clamping of the washing straps, of high duration, while preventing said straps from being deteriorated or prematurely broken.

Moreover, the invention also provides very

important economic and ecologic advantages.

In fact, conventional washing brush assemblies include a support for the washing straps, thereby several different materials, such as plastic, aluminium
5 or the like must be used, whereas, in the inventive washing brush, the straps are mounted on their support tube without requiring additional supports.

Furthermore, the inventive washing brush components may be replaced in the same manner thereby,
10 by merely causing the original ring elements to slip, arranging new straps in replacement of the worn ones and reassembling the just removed ring elements.

Moreover, the present washing brush construction has small costs, both with respect to its
15 assembling and operation.

Yet another great saving is achieved in the spare part shipment, since the spare parts comprise only the washing straps, arranged in a stacked relationship, thereby occupying a third of the volume
20 occupied by prior preassembled bristle prior elements.

In practicing the invention, the used materials, as well as the contingent size and shapes, can be any, according to requirements.

We Claim:

1. A motor vehicle washing system washing brush construction, comprising a plurality of washing brush elements associated with a support tube, each said washing brush element comprising a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips joined by a central band element, wherein said central band element is wound on said support tube as to arrange said contoured strips on both sides of said central band element, with a pair of ring elements being threaded on said support tube, on both sides of said washing brush element to clamp said central band element so as to move the support tube contoured strips away from one another and cause opposite strips to move to one another, by pairs, thereby arranging said opposite strips with a substantially 90° relationship with respect to a tube axis.

2. A washing brush construction, according to claim 1, characterized in that said rotary brush construction comprises a central ring element encompassing an outer surface of said central band element.

3. A washing brush construction, according to claim 1, characterized in that said plate body is made of a closed cell foamed plastic or felt material.

4. A washing brush construction, according to claim 1, characterized in that said rotary brush construction comprises a plurality of brush elements applied to said support tube and spaced at different spacings from one another.

5. A washing brush construction, according to claim 1, characterized in that said strips have a triangular shape.

6. A washing brush construction, according to claim 1, characterized in that said strip cuts are tipped cuts.

7. A washing brush construction, according to claim 1, characterized in that said washing brush construction comprises a plurality of washing brush elements applied to said support tube and spaced from one another at a set spacing.

8. A washing brush construction, according to claim 1, characterized in that said washing brush elements are spaced from one another by a spacing depending on a distance "d" between two adjoining ring elements.

9. A washing brush construction, according to claim 8, characterized in that the spacing of said washing brush elements is changed by arranging said ring elements at a different spacing from one another.

10. A washing brush construction, according to claim 1, characterized in that, when said washing brush element is mounted on said support tube, said strips open in a spoke width arrangement by a ring element sliding thereunder.

11. A washing brush construction, according to claim 10, characterized in that contact tips of the

contoured strips on a top portion of the washing brush element fall in a space between contact tips of the contoured strips on a bottom portion, thereby providing a quilted side surface to optimally distribute the contact tips substantially without empty spaces therebetween.

12. A motor vehicle washing system washing brush construction, comprising a plurality of washing brush elements associated with a support tube, each said washing brush element comprising a plate body so die-cut as to form thereon a plurality of cuts providing a corresponding plurality of contoured strips joined by a central band element, wherein said central band element is wound on said support tube as to arrange said contoured strips on both sides of said central band element, a central ring element to hold said central band element firmly coupled to said support tube, and two side ring elements, one said side ring element disposed respectively on each side of said washing brush element to clamp said central band element so as to move the support tube contoured strips away from one another and cause opposite strips to move to one another, by pairs, thereby arranging said opposite strips with a substantially 90° relationship with respect to a tube axis, the side ring elements opening said washing brush an umbrella from above and under said central band element, said two side ring elements operating as spacer elements to selectively position the contoured strips laterally relative to side edges of the central band element.

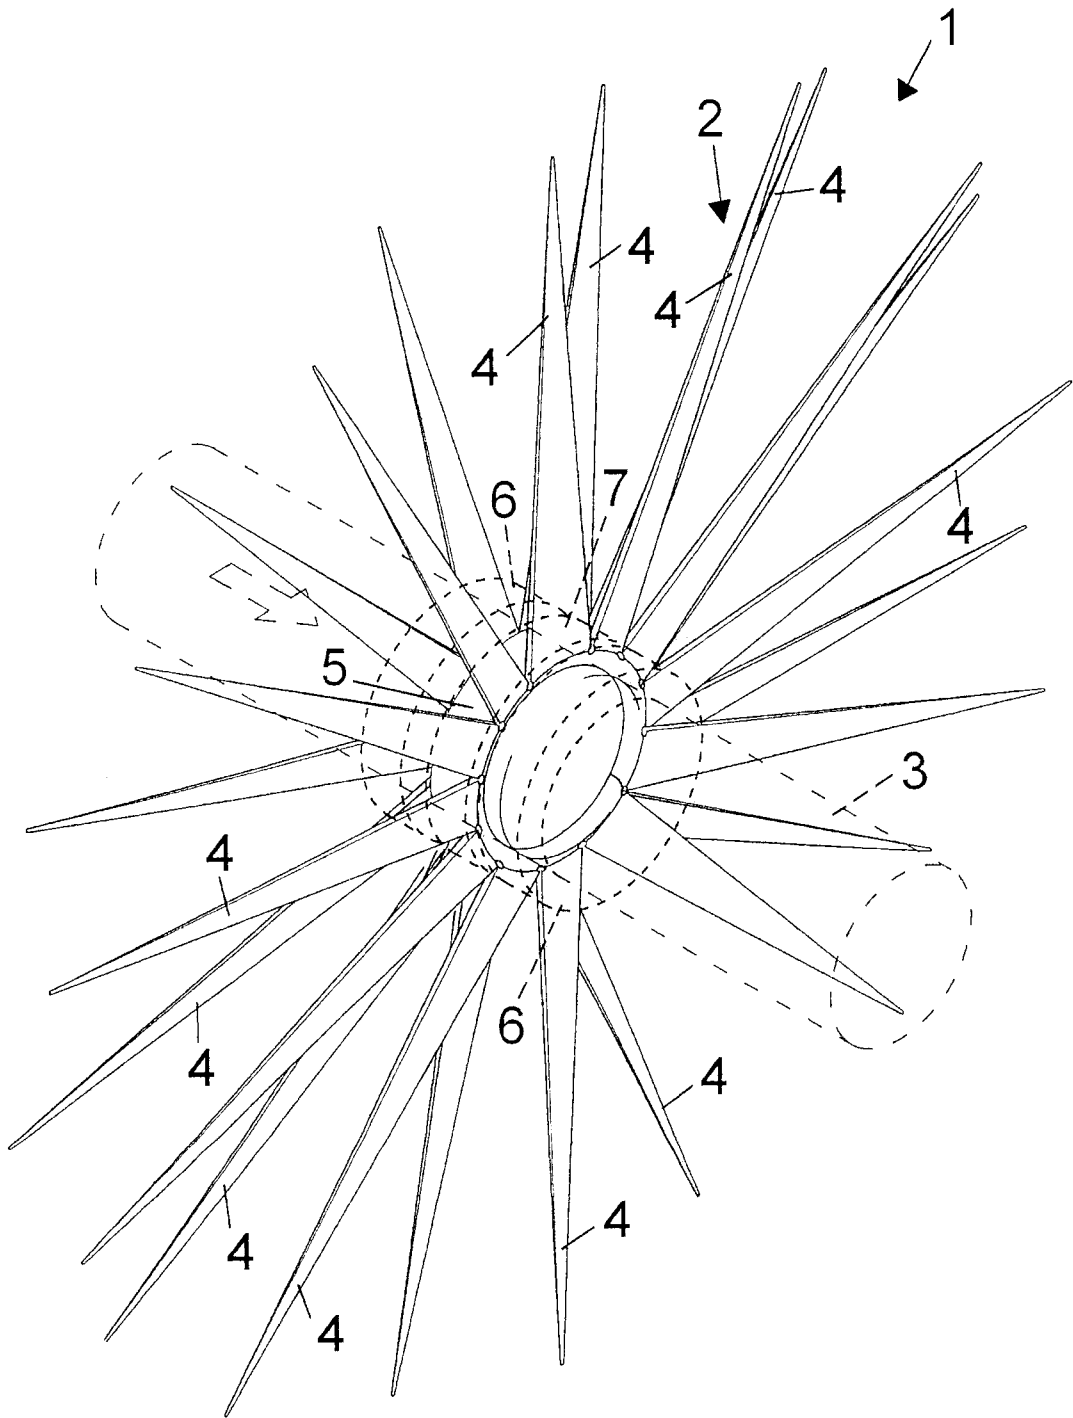


FIG. 1

2 / 5

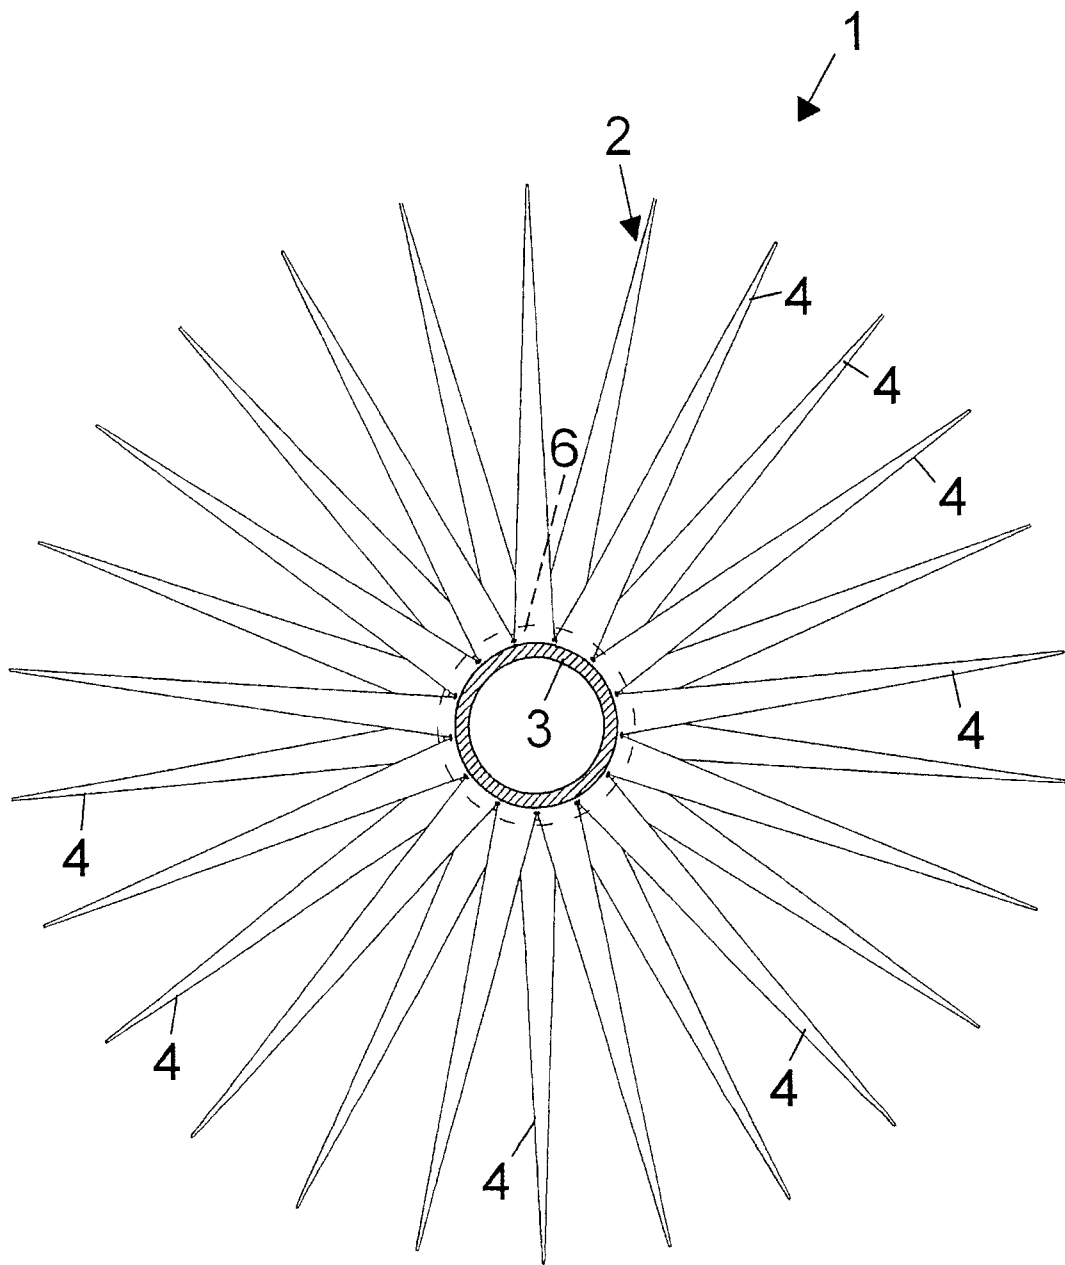


FIG. 2



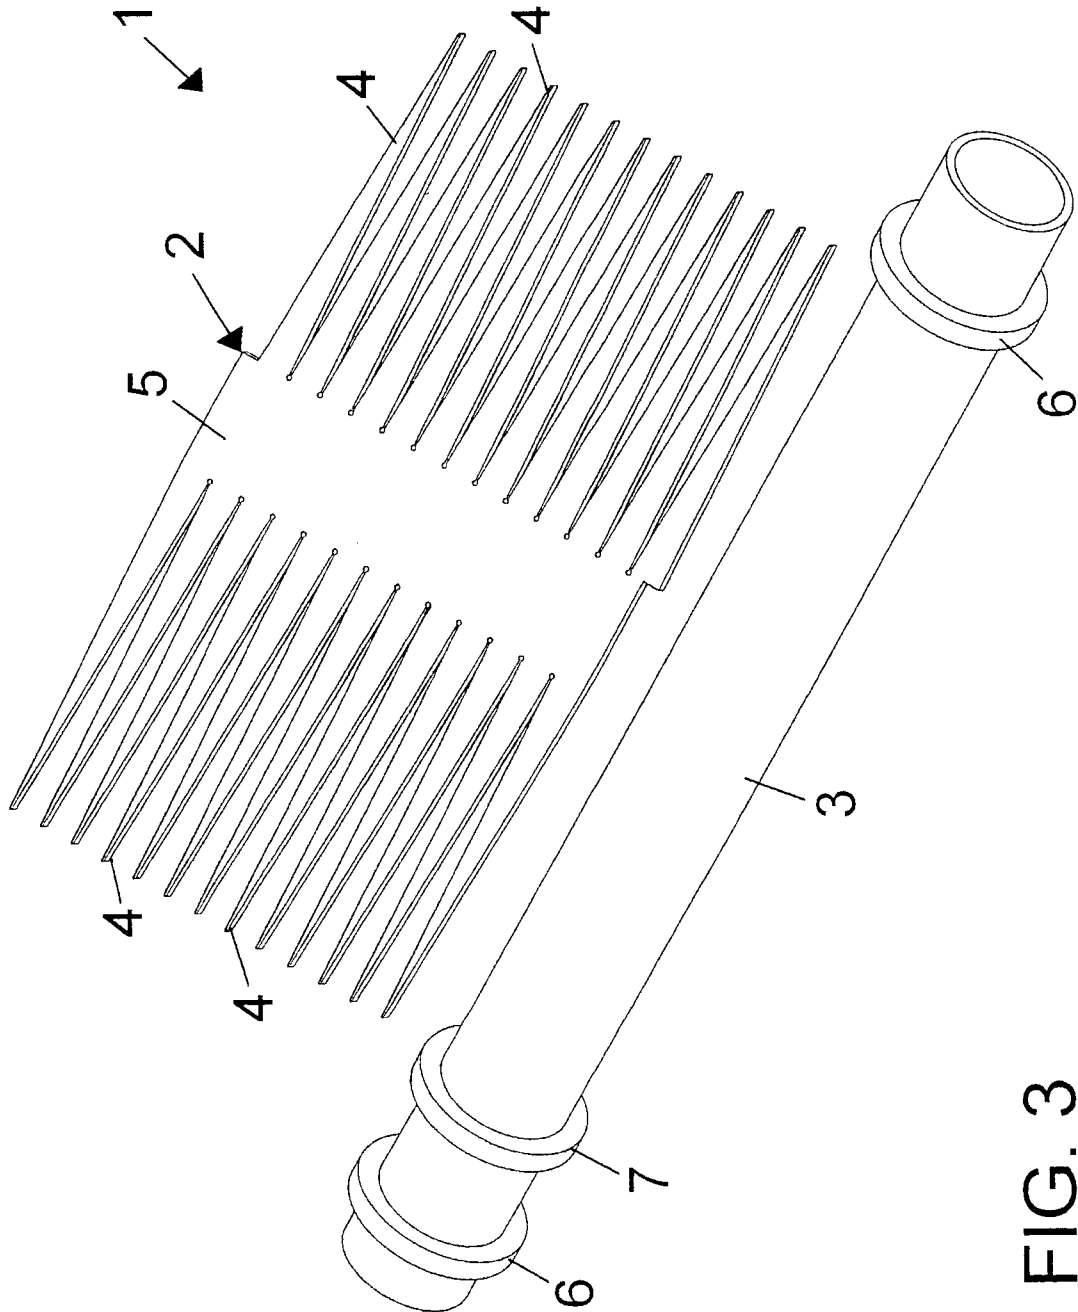


FIG. 3

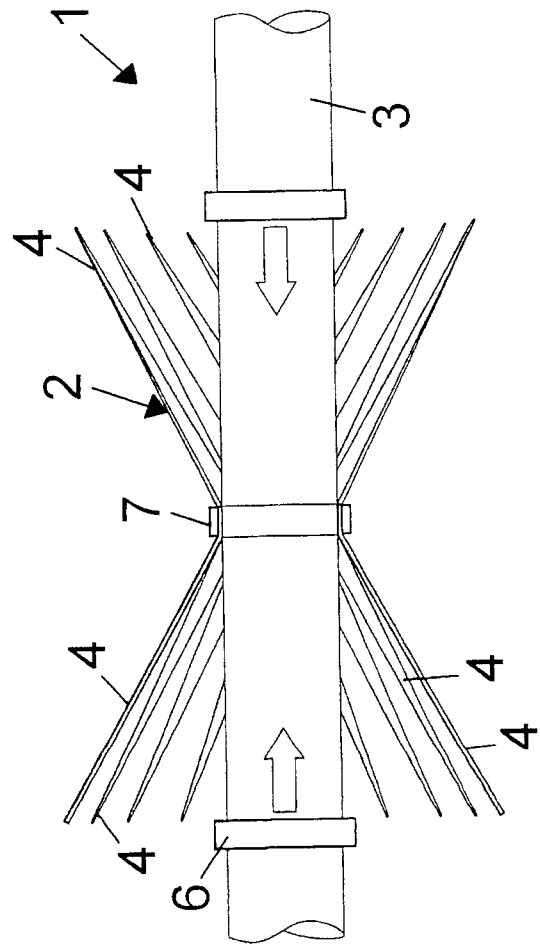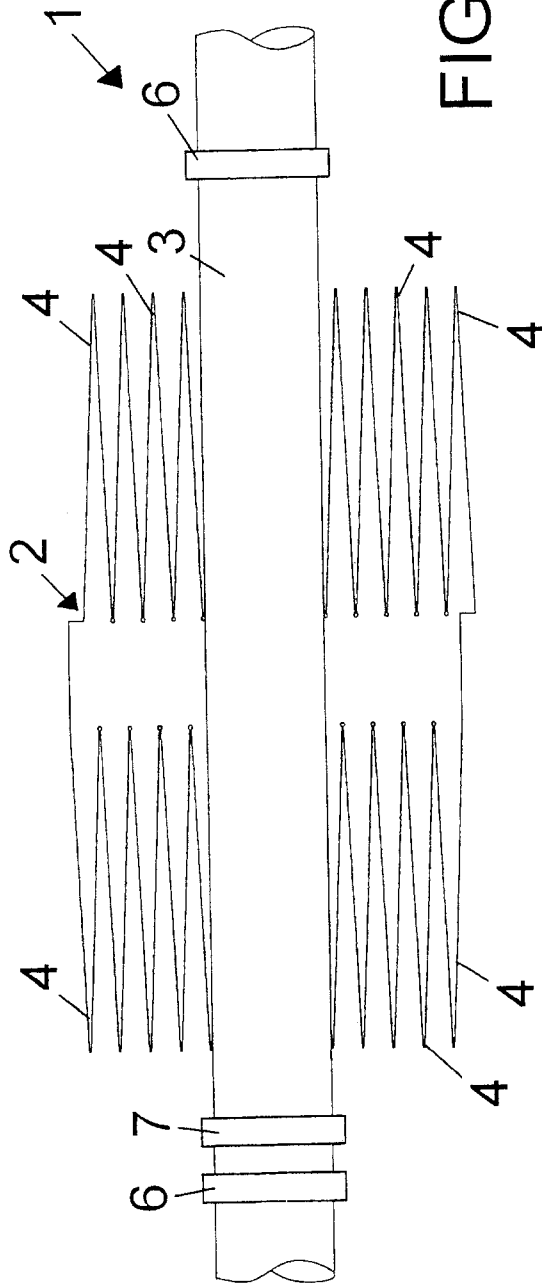

5 / 5

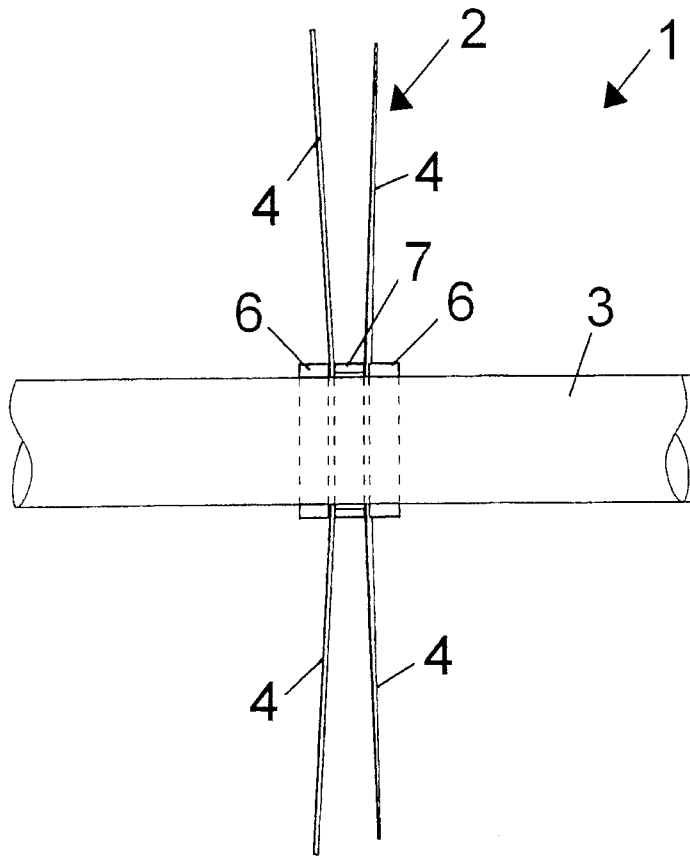


FIG. 6

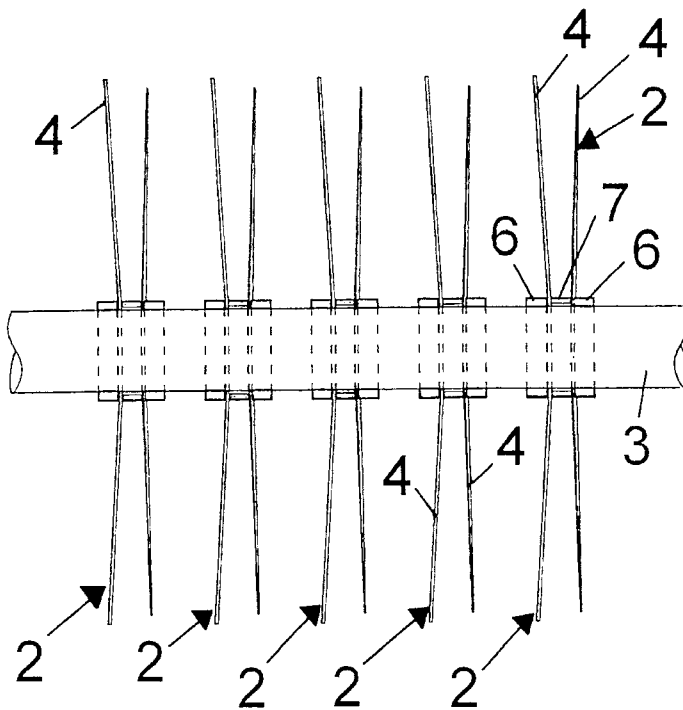


FIG. 7

