



⑫ **EUROPEAN PATENT SPECIFICATION**

④⑤ Date of publication of patent specification :  
**02.02.94 Bulletin 94/05**

⑤① Int. Cl.<sup>5</sup> : **E04H 15/32, E04B 1/32**

②① Application number : **91101917.2**

②② Date of filing : **12.02.91**

⑤④ **Reversibly expandable structures.**

③⑩ Priority : **20.02.90 US 482369**

⑦③ Proprietor : **Hoberman, Charles**  
**472 Greenwich Street**  
**New York, N.Y. 10013 (US)**

④③ Date of publication of application :  
**28.08.91 Bulletin 91/35**

⑦② Inventor : **Hoberman, Charles**  
**472 Greenwich Street**  
**New York, N.Y. 10013 (US)**

④⑤ Publication of the grant of the patent :  
**02.02.94 Bulletin 94/05**

⑧④ Designated Contracting States :  
**DE ES FR GB IT**

⑦④ Representative : **Klöpsch, Gerald, Dr.-Ing.**  
**Patentanwalt et al**  
**An Gross St. Martin 6**  
**D-50667 Köln (DE)**

⑤⑥ References cited :  
**US-A- 3 186 524**  
**US-A- 4 354 842**

**EP 0 443 408 B1**

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

### BACKGROUND OF THE INVENTION

The present invention relates to the provision of units for firm stable three-dimensional expanded structures, that are capable of being collapsed down to compact bundles and to the structures made from these units.

There are many times when one wishes to have an enclosure at a remote site and, rather than transport it to such site, one transports it in some collapsed form. Thus, a tent is folded up, transported and erected where needed. A fabric tent, however, has no rigidity and it is therefore necessary to utilize tent poles, pegs and rope to give the tent some degree of rigidity. Further, it must be set on a reasonably firm sub-surface.

Pneumatically inflatable enclosures are another option for such a portable enclosure, but again substantial preparation is required.

US-A-4,359,842 (Hooker), which corresponds to the preamble of claims 1 and 7, discloses architectural structures consisting of a set of trapezoids arranged in pleated relationship, interfitted with another interfitted, transverse set of polygons also arranged in pleated relationship. Said structures flatten out, but do not package down further. For the structures of US-A-4,359,842, thick materials will interfere with smooth folding.

The present invention is characterised by the characterising parts of the claims 1 and 7 and provides reasonably rigid three dimensional enclosures that may be readily collapsed and expanded. These structures are made up of units which comprise facets that are connected by pleats or hinges, this invention has many desirable characteristics.

First they fold down to a very compact bundle. Given the size of the structure's basic facet, the collapsed structure will essentially consist of a stack whose area is the size of that facet and whose height is the sum of the thicknesses of all the facets in the structure.

Second, it is possible to construct a wide variety of shapes and forms utilizing this method. Illustrated herein are such shapes as planes, cylindrical sections, cones, tent shapes, and doubly curved surfaces. This variety of forms allows for many different uses.

Third, many of the forms and shapes that can be made may be constructed from a single flat sheet of material that is scored or pleated. Because only a single flat sheet is required, many low cost manufacturing techniques may be employed, such as stamping, simple molds, etc.

Fourth, this method allows for utilizing materials of finite thickness. Plastics, wood, metal and other rigid materials may be employed for making struc-

tures that require more permanence and rigidity.

### BRIEF SUMMARY OF THE INVENTION

Self-supporting structures of diverse shapes are disclosed that may be collapsed down to a compact bundle. Structures of this kind are constituted by units which comprise of central tapered strips that are bordered by elongated strips. By pleating these strips according to a special pattern, the structure may collapse down and expand out in a smooth manner.

### BRIEF DESCRIPTION OF THE DRAWING FIGURES

The invention will be further described with reference to the accompanying drawings, wherein:

Fig. 1 is a plan view showing the basic unit of the invention;

Figs. 2-4 are perspective views of the unit shown in Fig. 1, as it is folded down to its fully collapsed state;

Fig. 5 is a plan view showing an alternate embodiment of the basic unit of the invention;

Figs. 6-8 are perspective views of the unit shown in Fig. 5, as it is folded down to its fully collapsed state;

Fig. 9 is a plan view of a planar structure that is an embodiment of the invention;

Figs. 10-12 are perspective views of the structure shown in Fig. 9 as it is folded down to its fully collapsed state;

Fig. 13 is a plan view of a cylindrical structure that is an embodiment of the invention;

Figs. 14-16 are perspective views of the structure shown in Fig. 13 as it is folded down to its fully collapsed state;

Fig. 17 is a plan view of a tent-shaped structure that is an embodiment of the invention;

Figs. 18-20 are perspective views of the structure shown in Fig. 17 as it is folded down to its fully collapsed state;

Fig. 21 is a plan view of a structure having an S-type curvature that is an embodiment of the invention;

Figs. 22-24 are perspective views of the structure shown in Fig. 21 as it is folded down to its fully collapsed state;

Fig. 25 is a plan view of a conical structure that is an embodiment of the invention;

Figs. 26-28 are perspective views of the structure shown in Fig. 25 as it is folded down to its fully collapsed state;

Figs. 29-32 are perspective views of the structure having double curvature as it is folded from its fully developed state to its fully collapsed state;

Fig. 33-35 are perspective views showing an alternate construction of the basic unit of the inven-

tion, utilizing hinged rigid plates;

Fig. 36-38 are views showing an alternate construction of the basic structural unit of the invention and that utilizes a flexible sheet with stiffening framing members;

Fig. 39 shows an alternate pattern for the basic unit where the central strip is tapered in a step-like fashion.

## DETAILED DESCRIPTION

Referring now more particularly to the drawings, in Fig. 1 there is shown a unit 100 comprised of a central tapered strip 110 which is bordered by two elongated strips 130 and 150. Tapered strip 110 is pleated along a series of crossing lines 111-121 that cross it widthwise. The fold directions of adjacent crossing lines alternate.

Elongated strip 130 is pleated along a series of crossing lines 131-141 that cross it widthwise. The fold direction of adjacent crossing lines alternate. Crossing line 131 is essentially a continuation of crossing line 111. Similarly, crossing lines 132-141 are essentially continuations of crossing lines 112-121 respectively.

Elongated strip 150 is pleated along a series of crossing lines 151-161 that cross it widthwise. The fold direction of adjacent crossing lines alternate. Crossing line 151 is essentially a continuation of crossing line 111. Similarly, crossing lines 152-161 are essentially continuations of crossing lines 112-121 respectively.

Central tapered strip 110 is connected to elongated strip 130 along a series of connecting pleat lines 170-181 that are connected end to end. The fold direction of adjacent connecting lines 170-181 alternate. Similarly, central tapered strip 110 is connected to elongated strip 150 along a series of connecting pleat lines 190-201 that are connected end to end. The fold direction of adjacent connecting lines 190-201 alternate.

In Fig. 2, unit 100 is shown partially folded. Central tapered strip 110 and elongated strips 130 and 150 fold in a zig-zag fashion.

In Fig. 3, unit 100 is shown folded to a further degree than Fig. 2. Elongated strips 130 and 150 may be seen to fold towards each other.

In Fig. 4 unit 100 is shown to be essentially completely folded. Elongated strips 130 and 150 have each folded into a stack. The central tapered strip 110 has folded in a zig-zag fashion, such that the planes of the tapered strip lie essentially orthogonal to the planes of the stacked elongated strips 130 and 150. Stacked elongated strips 130 and 150, have folded towards each other such that the stacks lie essentially in line with one another.

In Fig. 5 there is shown a unit 300 which is an alternate embodiment of the invention. It is comprising

a central tapered strip 310, which is bordered by two elongated strips 330 and 360. Tapered strip 310 is pleated along a series of crossing lines 311-321 that cross it widthwise. The fold directions of adjacent crossing lines alternate.

Elongated strip 330 is pleated along a series of crossing lines 331-353 that cross it widthwise. The fold directions of adjacent crossing lines alternate. Crossing line 331 is essentially a continuation of crossing line 311. Similarly, crossing lines 332-353 are essentially continuations of crossing lines 311-321.

Elongated strip 360 is pleated along a series of crossing lines 361-383 that cross it widthwise. The fold directions of adjacent crossing lines alternate. Crossing line 361 is essentially a continuation of crossing line 311. Similarly, crossing lines 362-383 are essentially continuations of crossing lines 311-321.

Central tapered strip 310 is connected to elongated strip 330 along a series of connecting pleat lines 400-411 that are connected end to end. The fold directions of adjacent connecting lines 400-411 alternate. Similarly, central tapered strip 310 is connected to elongated strip 360 along a series of connecting pleat lines 420-431 that are connected end to end. The fold directions of adjacent connecting lines 420-431 alternate.

In Fig. 6, unit 300 is shown partially folded. Central tapered strip 310 folds in a zig-zag fashion.

In Fig. 7, unit 300 is shown folded to a further degree than Fig. 6. Elongated strips 330 and 360 may be seen to fold towards each other.

In Fig. 8 unit 300 is shown to be essentially completely folded. Elongated strips 330 and 360 have each folded into a stack. The central tapered strip 310 has folded in a zig-zag fashion such that the planes of the central tapered strip lie essentially orthogonal to the planes of the stacked elongated strips 330 and 360. In Fig. 8 stacked elongated strips 330 and 360 have folded towards each other such that the stacks lie essentially in line with one another.

In Fig. 9 structure 500 is comprising units 510,520 and 530. Unit 510 is comprising central tapered strip 512 and elongated strips 514 and 516. Similarly, unit 520 is comprising central tapered strip 522 and elongated strips 524 and 526, while unit 530 is comprising central tapered strip 532 and elongated strips 534 and 536. Unit 510 is connected to adjacent unit 520 by tapered strip 540 which joins elongated strip 516 to elongated strip 524. Similarly, unit 520 is connected to adjacent unit 530 by tapered strip 550 which joins elongated strip 526 to elongated strip 534.

In Figs. 10 and 11 the structure 500 is shown in two partial degrees of folding. The elongated strips 514,516,524,526,534 and 536 may be seen to fold towards each other. Tapered strips 512,522,532,540 and 550 fold in a zig-zag fashion.

In Fig. 12 the structure 500 is shown completely folded. Elongated strips 514,516,524,526,534 and 536 are folded into stacks which are connected by their adjacent tapered strips. The tapered strips 512,522,532,540 and 550 are folded in a zig-zag fashion. The planes of the tapered strips lie essentially orthogonal to the planes of the stacked elongated strips. The stacks formed by the elongated strips lie essentially in line with one another.

In Fig. 13 is shown a plan view of a structure 600. It is comprising units 610,620 and 630. Unit 610 is comprising central tapered strip 612 and elongated strips 614 and 616. Similarly, unit 620 is comprising central tapered strip 622 and elongated strips 624 and 626, while unit 630 is comprising central tapered strip 632 and elongated strips 634 and 636. Unit 610 is connected to adjacent unit 620 by tapered strip 640, which joins elongated strip 616 to elongated strip 624. Similarly, unit 620 is connected to adjacent unit 630 by tapered strip 650 which joins elongated strip 626 to elongated strip 634.

In Figs. 14 and 15 the structure 600 is shown in two partial degrees of folding, forming a structure whose shape is a cylindrical section. The elongated strips 614,616,624,626,634 and 636 may be seen to fold towards each other. Tapered strips 612,622,632, 640 and 650 fold in a zig-zag fashion.

In Fig. 16 the structure 600 is shown essentially completely folded. Elongated strips 614,616,624,626, 634 and 636 are folded into stacks which are connected by their adjacent tapered strips. The tapered strips 612,622,632,640 and 650 are folded in a zig-zag fashion. The planes of the tapered strips lie essentially orthogonal to the planes of the stacked elongated strips. The stacks formed by the elongated strips lie essentially in line with one another.

Fig. 17 shows a structure 700 comprises two units 710 and 720, each comprising a central tapered strip and two elongated strips. Units 710 and 720 are connected to each other by a region 730 with an alternate folding pattern. In Fig. 18, the structure 700 is shown in a partially folded condition, forming a tent-shaped structure. Fig. 19 shows the structure 700 folded to a further degree than Fig. 18. In Fig. 20 the structure 700 is shown essentially completely folded.

Fig. 21 shows a structure 800 comprising five units 810,820,830, 840 and 850, each comprising a central tapered strip and two elongated strips. Units 810,820,830,840 and 850 are connected to each other by tapered strips 815,825,835 and 845. In Fig. 22, the structure 800 is shown in a partially folded condition, forming a structure with an S-type curvature. Fig. 23 shows the structure 800 folded to a further degree than Fig. 22. In Fig. 24 the structure 800 is shown essentially completely folded.

Fig. 25 shows a structure 900 comprising five units 910,920,930, 940 and 950, each comprising a central tapered strip and two elongated strips. Units

910,920,930,940 and 950 are connected to each other by tapered strips 915,925,935 and 945. In Fig. 26 the structure 900 is shown in a partially folded condition, forming a conical structure. Fig. 27 shows the structure 900 folded to a further degree than Fig. 26. In Fig. 28 the structure 900 is shown essentially completely folded.

Fig. 29 shows a structure 1000 having the form of a doubly curved surface. It is comprising three units 1010,1020 and 1030, each comprising a central tapered strip and two elongated strips. Units 1010,1020 and 1030 are connected to each other by tapered strips 1015 and 1025. In Fig. 30, the structure 1000 is shown in a partially folded condition. Fig. 31 shows the structure 1000 folded to a further degree than Fig. 30. In Fig. 32 the structure 1000 is shown essentially completely folded.

Fig. 33 shows the unit 1100 which illustrates an alternate construction of the invention. It is constituted by a central tapered strip 1120 which is bordered by two elongated strips 1130 and 1140. In this embodiment of the invention, the central strip 1120 is comprising rigid plates which are hingedly attached to each other. Similarly elongated strips 1130 and 1140 are comprising rigid plates which are hingedly attached to each other. Central strip 1120 is hingedly joined to elongated strips 1130 and 1140. Fig. 34 shows the unit 1100 in a partially folded state. Fig. 35 shows the unit 1100 in its fully collapsed state.

Fig. 36 shows the unit 1200 which illustrates an alternate construction of the invention. It is constituted by a central tapered strip 1220 which is bordered by two elongated strips 1230 and 1240. In this embodiment of the invention the strips 1220,1230 and 1240 comprise flexible sheets of material where the areas between pleat lines are stiffened by rigid framing members. Fig. 37 shows the unit 1200 in a partially folded state. Fig. 38 shows the unit 1200 in its fully collapsed state.

Fig. 39 shows the unit 1300 which is constituted by a central tapered strip 1320 which is bordered by two elongated strips 1330 and 1340. In this embodiment of the invention the central strip 1320 is tapered in a step-like fashion such that the connecting lines that join the central strip 1320 to the two elongated strips 1330 and 1340 are slightly offset from one another.

## Claims

1. A unit (100); (300); (510, 520, 530); (610, 620, 630);(710,720); (810, 820, 830, 840, 850); (910, 920, 930, 940, 950); (1010, 1020, 1030); (1100); (1200); comprising  
a central strip (110);(310);(512, 522, 532, 540, 550); (612, 622, 632, 640, 650); (815, 825, 835, 845); (915, 925, 935, 945); (1015, 1025);

(1120), (1220); bordered by two elongated strips (130, 150); (330, 360); (514, 516, 524, 526, 534, 536); (614, 616, 624, 626, 634, 636); (1130, 1140); (1230, 1240);

the strip being pleated along a series of lines that cross it widthwise (111-121); (311-321); the fold directions of said adjacent crossing lines alternating,

each elongated strip being pleated along a series of crossing lines that cross the strip widthwise (131-141), (151-161); (331-353, 361-383) the fold directions of said adjacent crossing lines alternating, these crossing lines being continuations of the lines crossing the central strip,

the central strip being joined to each of the two elongated strips by a series of pleat lines that are connected end-to-end (170-181, 190-201); (400-411, 420-431); and the fold directions of said adjacent connecting lines alternating,

such that when the unit is folded, each of the two elongated strips fold into a stack, and the central strip folds in a zig-zag fashion, the two stacked elongated strips folding towards each other such that the stacks lie in line with one another, characterized by that the central strip (110);(310);(512, 522, 540, 550); (612, 622, 632, 640, 650); (815, 825, 835, 845); (915, 925, 935, 945); (1015, 1025); (1120), (1220); is tapered and, when the central tapered strip folds in a zig-zag fashion, the planes of the tapered strip lie orthogonal to the planes of the stacked elongated strips (130, 150); (330, 360); (514, 516, 524, 526, 534, 536); (614, 616, 624, 626, 634, 636); (1130, 1140); (1230, 1240);

2. A reversibly expandable structure (500); (600); (700); (800); (900); (1000) at least in part comprises units according to claim 1.

3. A unit (1100) according to claim 1, where the central tapered strip (1120) is comprising rigid plates hingedly joined to one another, the two elongated strips (1130, 1140) are comprised of rigid plates hingedly joined to one another, and the central strip is hingedly joined to the two elongated strips.

4. A reversibly expandable structure at least in part comprises units (1100) according to claim 3.

5. A unit (1200) according to claim 1, where the central tapered strip (1220) is comprising a flexible sheet with rigid framing members to stiffen those areas that are between pleat lines and the two elongated strips (1230, 1240) are comprising flexible sheets with rigid framing members to stiffen those areas that are between pleat lines.

6. A reversibly expandable structure at least in part comprised of units (1200) according to claim 5.

7. A unit (1300) comprising

a central strip (1320) bordered by two elongated strips (1330, 1340), the strip (1320) being pleated along a series of lines that cross it widthwise, the fold directions of said adjacent crossing lines alternating,

each elongated strip (1330, 1340) being pleated along a series of crossing lines that cross the strip widthwise, the fold directions of said adjacent crossing lines alternating, these crossing lines being continuations of the lines crossing the central strip (1320),

the central strip (1320) being joined to each of the two elongated strips (1330, 1340) by a series of pleat lines and the fold directions of said adjacent connecting lines alternating,

such that when the unit (1300) is folded, each of the two elongated strips (1330, 1340) fold into a stack, and the central strip (1320) folds in a zig-zag fashion, the two stacked elongated strips (1330, 1340) folding towards each other such that the stacks lie in line with one another, characterized in that the central strip (1320) is tapered in a step-like fashion such that the connecting lines that join the central strip (1320) to the two elongated strips (1330, 1340) are slightly offset from one another.

8. A reversibly expandable structure at least in part comprising units (1300) according to claim 7.

## Patentansprüche


1. Einheit (100), (300), (510, 520, 530), (610, 620, 630), (710, 720), (810, 820, 830, 840, 850), (910, 920, 930, 940, 950), (1010, 1020, 1030), (1100), (1200), enthaltend einen Mittelstreifen (110), (310), (512, 522, 532, 540, 550), (612, 622, 632, 640, 650), (815, 825, 835, 845), (915, 925, 935, 945), (1015, 1025), (1120), (1220), der von zwei langgestreckten Streifen (130, 150), (330, 360), (514, 516, 524, 526, 534, 536), (614, 616, 624, 626, 634, 636), (1130, 1140), (1230, 1240) begrenzt ist, wobei der Streifen entlang einer Anzahl von Linien (111-121), (311-321), die den Streifen der Breite nach kreuzen, gefaltet ist und die Faltrichtungen dieser benachbarten Kreuzungslinien wechseln, jeder langgestreckte Streifen entlang einer Anzahl von Schnittlinien (131-141), (151-161), (331-353, 361-383), die den Streifen in der Breite kreuzen, gefaltet ist, die Faltrichtungen dieser benachbarten Schnittlinien wechseln und diese

- Schnittlinien Fortsetzungen der Linien darstellen, die den Mittelstreifen kreuzen, der Mittelstreifen mit jedem der beiden langgestreckten Streifen durch eine Anzahl von endweise verbundenen Faltlinien (170-181, 190-201), (400-411, 420-431) verbunden ist und die Faltrichtungen dieser benachbarten Verbindungslinien derartig wechseln, daß bei gefalteter Einheit jeder der beiden langgestreckten Streifen stapelförmig und der Mittelstreifen zickzackartig gefaltet ist, wobei die beiden gestapelten, langgestreckten Streifen so zueinander hin gefaltet sind, daß die Stapel zueinander in einer Linie liegen, dadurch gekennzeichnet, daß der Mittelstreifen (110), (310), (512, 522, 540, 550), (612, 622, 632, 640, 650), (815, 825, 835, 845), (915, 925, 935, 945), (1015, 1025), (1120), (1220) sich verjüngt und bei zickzackförmig gefaltetem verjüngtem Mittelstreifen die Ebenen des sich verjüngenden Streifens senkrecht zu den Ebenen der übereinander angeordneten, langgestreckten Streifen (130, 150), (330, 360), (514, 516, 524, 526, 534, 536), (614, 616, 624, 626, 634, 636), (1130, 1140), (1230, 1240) liegen.
2. Umkehrbar entfaltbare Struktur (500), (600), (700), (800), (900), (1000), die wenigstens teilweise Einheiten gemäß Anspruch 1 enthält.
3. Einheit (1100) nach Anspruch 1, bei der der mittlere, sich verjüngende Streifen (1120) starre, gelenkig miteinander verbundene Platten enthält, die zwei langgestreckten Streifen (1130, 1140) starre, gelenkig miteinander verbundene Platten enthalten und der Mittelstreifen gelenkig mit den beiden langgestreckten Streifen verbunden ist.
4. Umkehrbar entfaltbare Struktur, die wenigstens teilweise Einheiten (1100) gemäß Anspruch 3 enthält.
5. Einheit (1200) nach Anspruch 1, bei der der mittlere, sich verjüngende Streifen (1220) eine flexible dünne Platte mit starren Rahmenteilern zur Aussteifung der zwischen Faltlinien liegenden Bereiche enthält und die zwei langgestreckten Streifen (1230, 1240) flexible dünne Platten mit starren Rahmenteilern zur Absteifung der Bereiche zwischen Faltlinien enthalten.
6. Umkehrbar entfaltbare Struktur, die wenigstens teilweise aus Einheiten (1200) gemäß Anspruch 5 besteht.
7. Einheit (1300), enthaltend einen Mittelstreifen (1320), an den zwei langgestreckte Streifen (1330, 1340) angrenzen, wobei der Streifen (1320) entlang einer Reihe sich über seine Breite erstreckende Linien gefaltet ist und die Faltrichtungen dieser benachbarten Kreuzungslinien alternieren, jeder langgestreckte Streifen (1330, 1340) entlang einer Anzahl von Kreuzungslinien, die den Streifen in der Breite schneiden, gefaltet ist, die Faltrichtungen dieser benachbarten Kreuzungslinien wechseln und diese Schnittlinien Fortsetzungen der den Mittelstreifen (1320) kreuzenden Linien darstellen, der Mittelstreifen (1320) über eine Anzahl von Faltlinien mit jedem der beiden langgestreckten Streifen (1330, 1340) verbunden ist und die Faltrichtungen dieser benachbarten Verbindungslinien derart alternieren, daß bei zusammengefalteter Einheit (1300) jeder der beiden langgestreckten Streifen (1330, 1340) stapelartig und der Mittelstreifen (1320) zickzackartig gefaltet ist, wobei die beiden übereinander gestapelten, langgestreckten Streifen (1330, 1340) derartig aufeinander zu gefaltet sind, daß die Stapel zueinander in einer Linie liegen, dadurch gekennzeichnet, daß der Mittelstreifen (1320) sich stufenweise derartig verjüngt, daß die den Mittelstreifen (1320) mit den beiden langgestreckten Streifen (1330, 1340) verbindenden Verbindungslinien leicht gegeneinander versetzt sind.
8. Umkehrbar entfaltbare Struktur, die wenigstens teilweise Einheiten (1300) nach Anspruch 7 enthält.

### Revendications

1. Unité (100); (300); (510, 520, 530); (610, 620, 630); (710, 720); (810, 820, 830, 840, 850); (910, 920, 930, 940, 950); (1010, 1020, 1030); (1100); (1200), comprenant :
- une bande centrale (110); (310); (512, 522, 532, 540, 550); (612, 622, 632, 640, 650); (815, 825, 835, 845); (915, 925, 935, 945); (1015, 1025); (1120), (1220), bordée par deux bandes allongées (130, 150); (330, 360); (514, 516, 524, 526, 534, 536); (614, 616, 624, 626, 634, 636); (1130, 1140); (1230, 1240),
- la bande étant plissée le long d'une série de lignes qui la traversent suivant la largeur (111-121); (311-321), les sens de pliage desdites lignes transversales adjacentes étant alternés,
- chaque bande allongée étant plissée le long d'une série de lignes transversales qui traversent la bande suivant sa largeur (131-141); (151-161); (331-353, 361-383), les sens de pliage desdites lignes transversales adjacentes étant alternés, ces lignes transversales étant le prolongement des lignes traversant la bande centrale,

- la bande centrale étant reliée à chacune des bandes allongées par une série de lignes de plissage qui sont reliées bout à bout (170-181, 190-201); (400-411, 420-431), et les sens de pliage desdites lignes adjacentes de liaison étant alternés,
- de telle sorte que lorsque l'unité est pliée, chacune des deux bandes allongées se replie en une pile, et la bande centrale se replie en zigzag, les deux bandes allongées empilées se repliant l'une vers l'autre de telle sorte que les piles soient alignées mutuellement l'une sur l'autre, caractérisée en ce que la bande centrale (110); (310); (512, 522, 540, 550); (612, 622, 632, 640, 650); (815, 825, 835, 845); (915, 925, 935, 945); (1015, 1025); (1020), (1220), se réduit en largeur et en ce que, lorsque la bande centrale qui se réduit en largeur se replie en zigzag, les plans de la bande dont la largeur se réduit sont situés perpendiculairement aux plans des bandes allongées empilées (130, 150); (330, 360); (514, 516, 524, 526, 534, 536); (614, 616, 624, 626, 634, 636); (1130, 1140); (1230, 1240).
- 5
- 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
- 7
- deux bandes allongées (1330, 1340), la bande (1320) étant plissée le long d'une série de lignes qui la traversent suivant la largeur, les sens de pliage desdites lignes transversales adjacentes étant alternés,
- chaque bande allongée (1330, 1340) étant plissée le long d'une série de lignes transversales qui traversent la bande suivant sa largeur, les sens de pliage desdites lignes transversales adjacentes étant alternés, ces lignes transversales étant les prolongements des lignes traversant la bande centrale (1320);
- la bande centrale (1320) étant reliée à chacune des deux bandes allongées (1330, 1340) par une série de lignes de plissage, et les sens de pliage desdites lignes adjacentes de liaison étant alternés,
- de telle sorte que l'unité (1300) est repliée, chacune des deux bandes allongées (1330, 1340) se replie en une pile, la bande centrale (1320) se repliant en zigzag, les deux bandes allongées empilées (1330, 1340) se repliant l'une vers l'autre de telle sorte que les piles soient alignées mutuellement l'une sur l'autre, caractérisée en ce que la bande centrale (1320) se réduit en largeur en escalier de telle sorte que les lignes de liaison qui relient la bande centrale (1320) aux deux bandes allongées (1330, 1340) soient légèrement décalées mutuellement l'une de l'autre.
8. Structure expansible réversible, constituée au moins en partie d'unités (1300) selon la revendication 7.

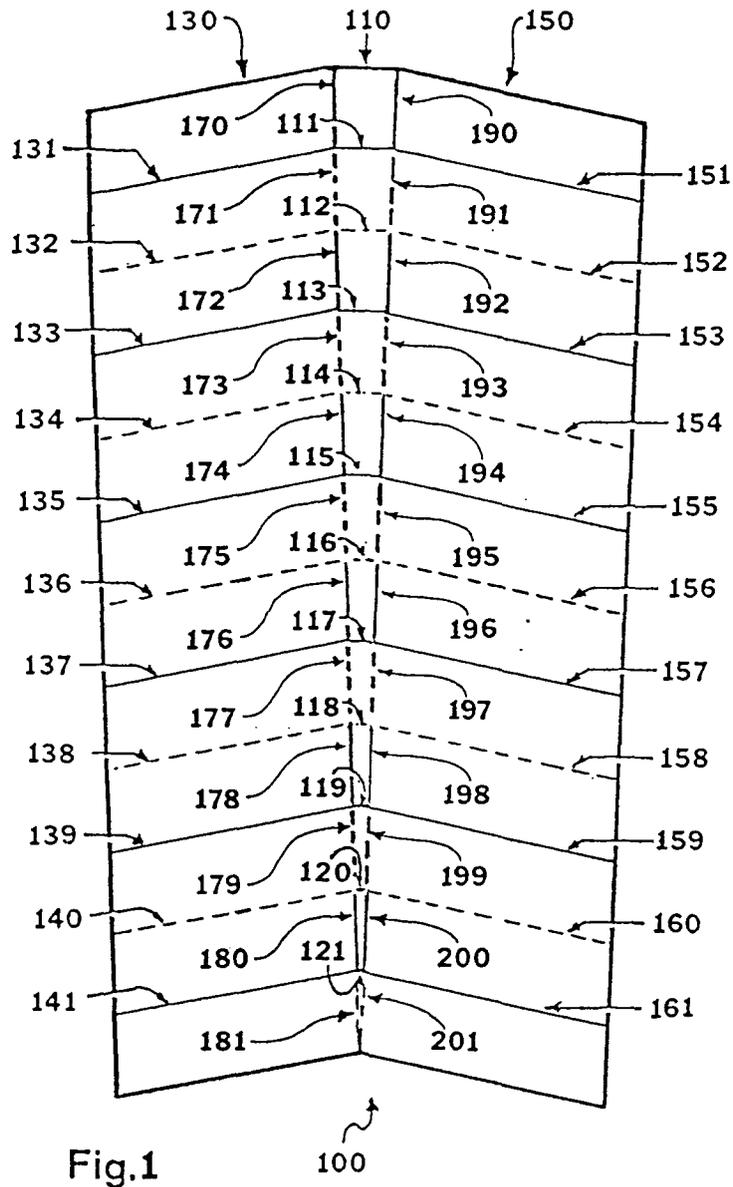

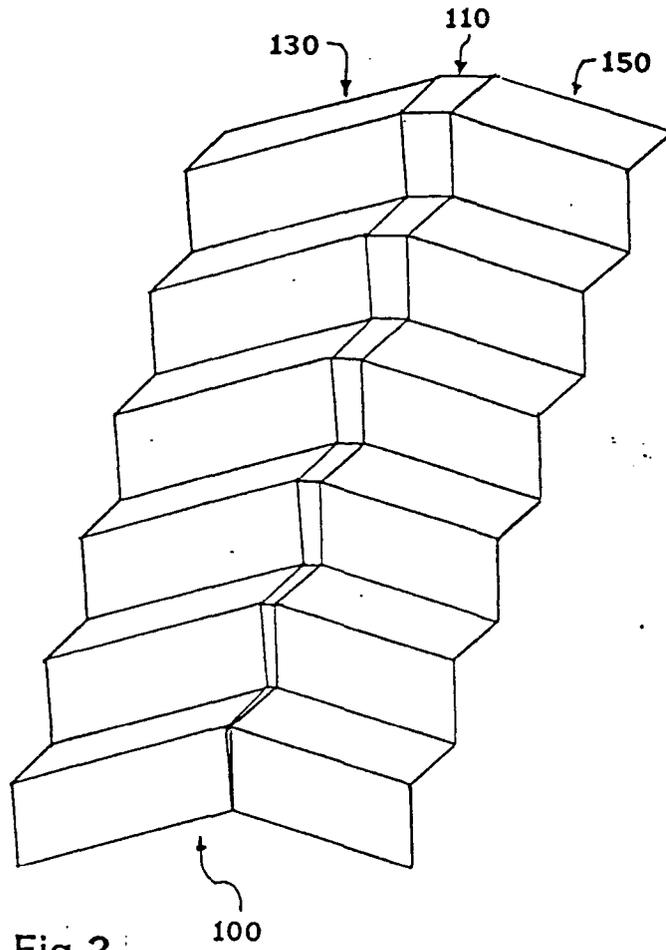


Fig. 2

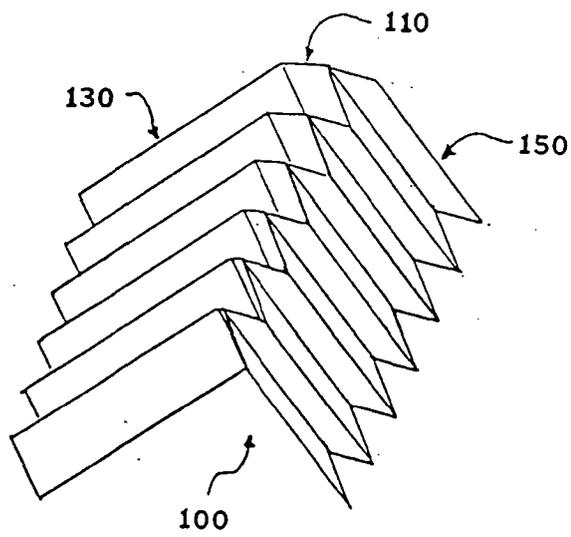


Fig. 3

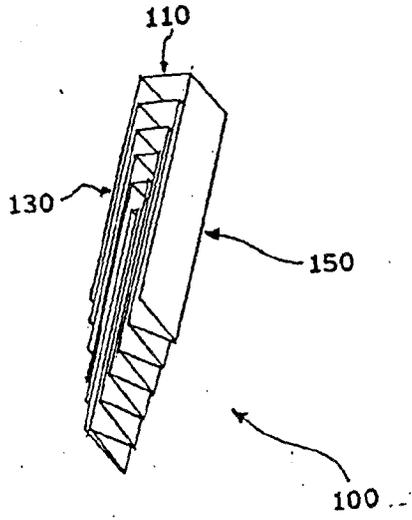


Fig. 4

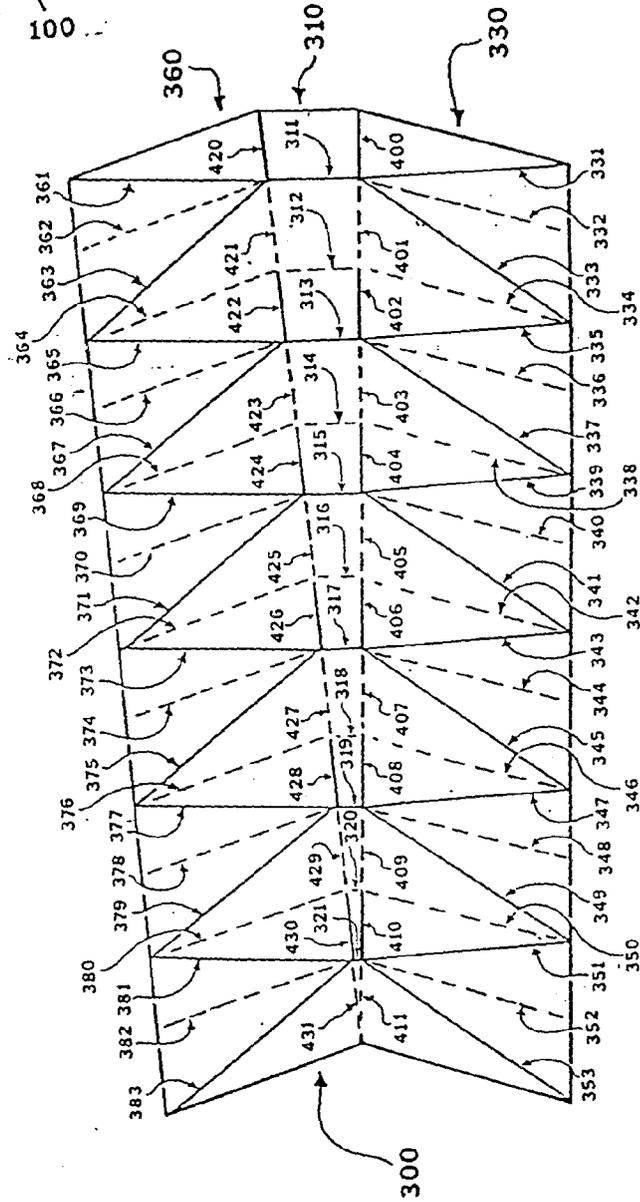


Fig. 5

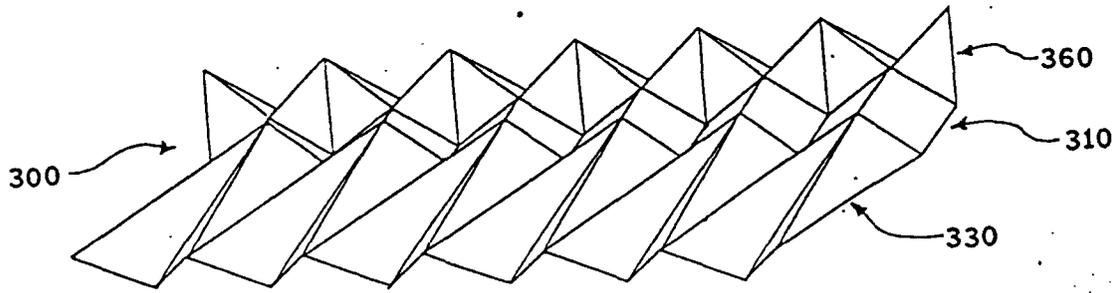


Fig. 6

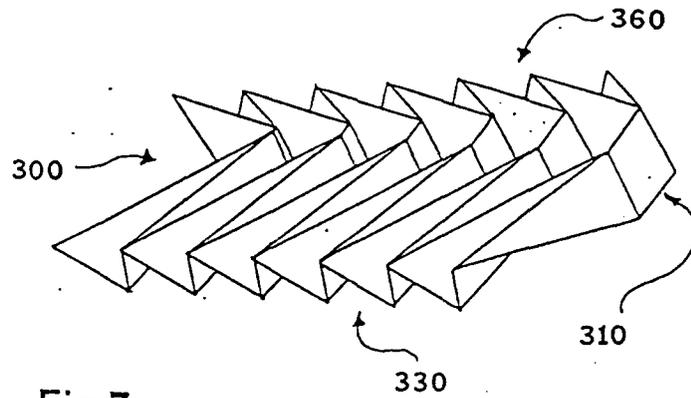


Fig. 7

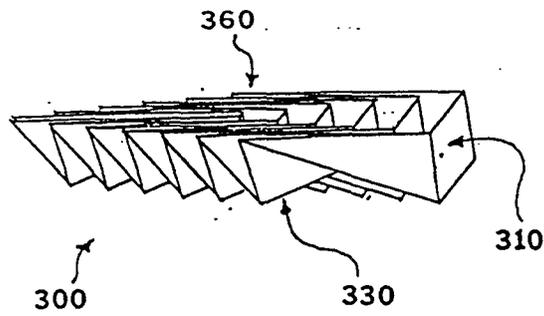


Fig. 8

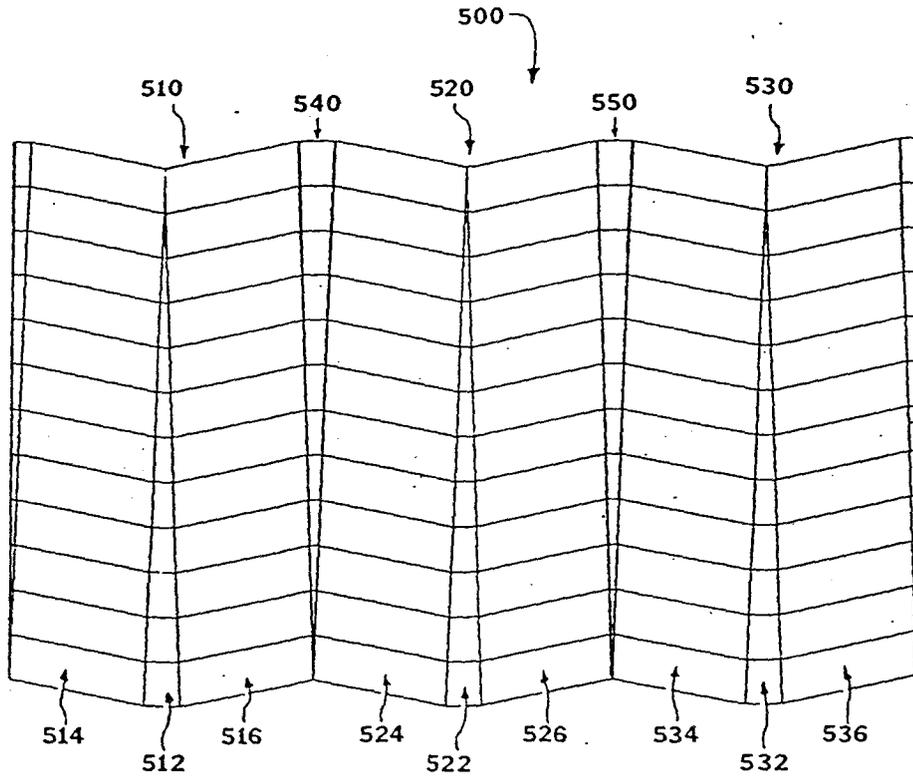


Fig. 9

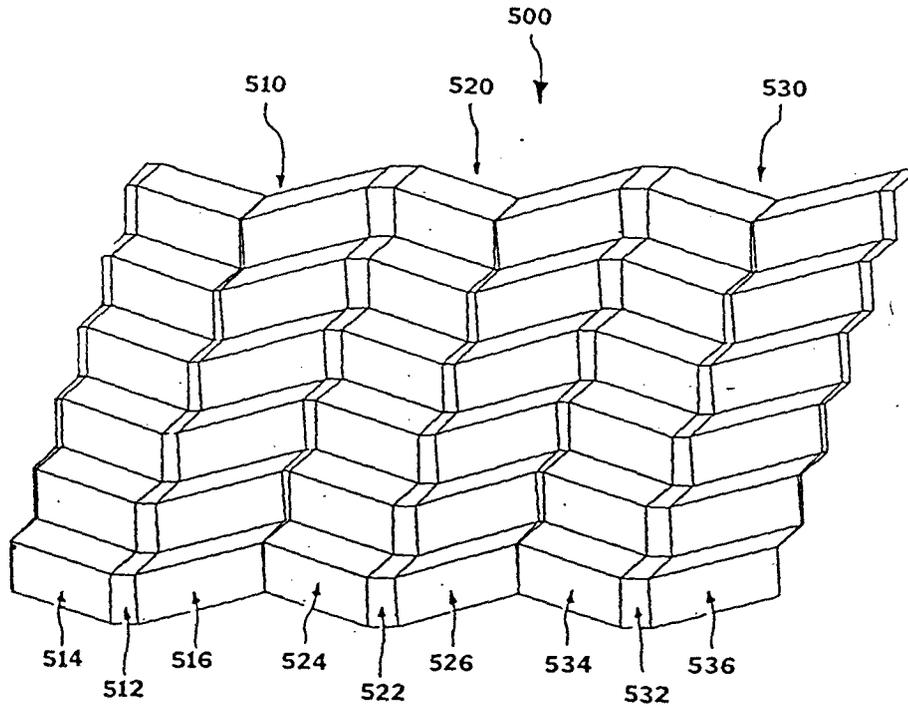


Fig. 10

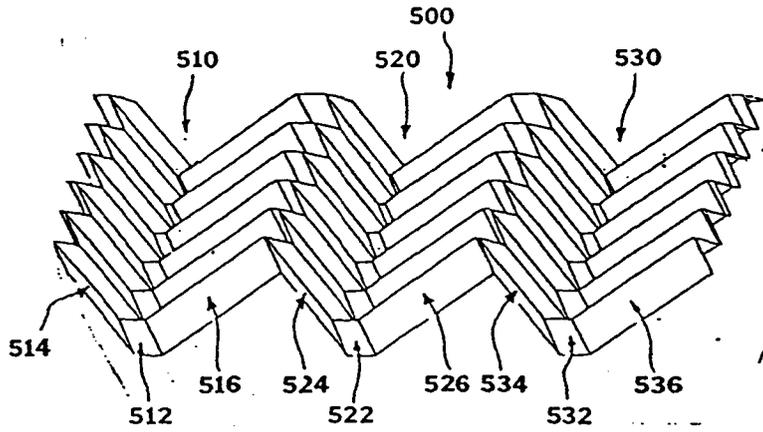


Fig. 11

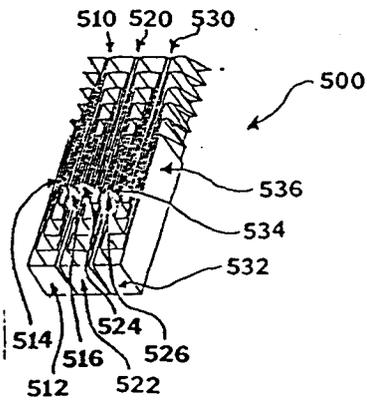


Fig. 12

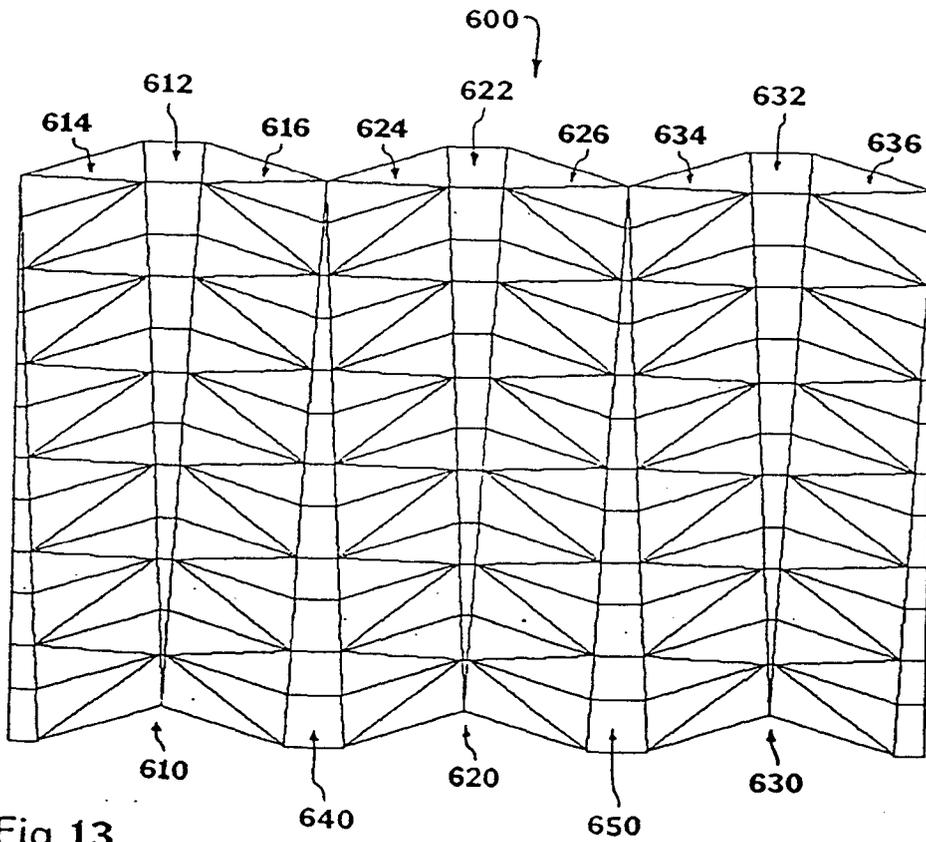


Fig. 13

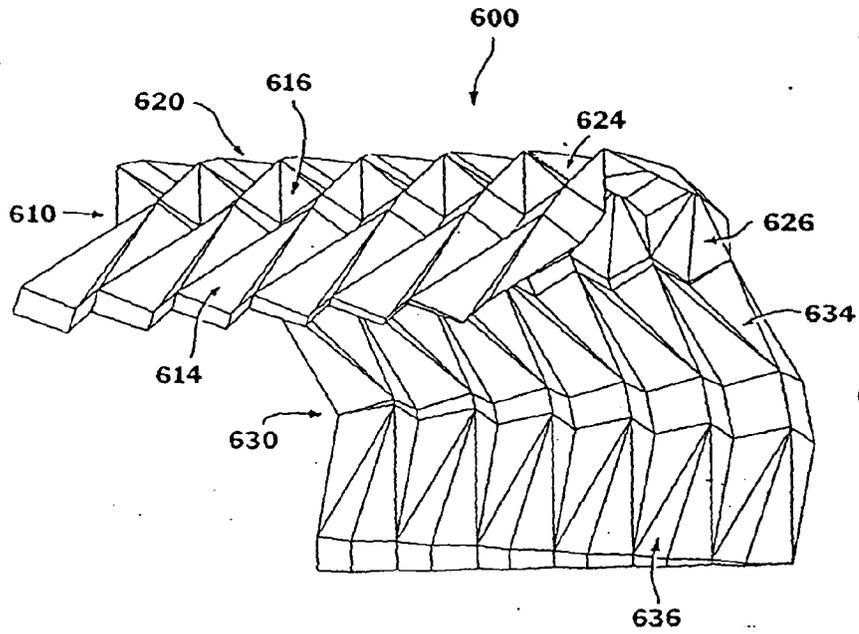


Fig.14

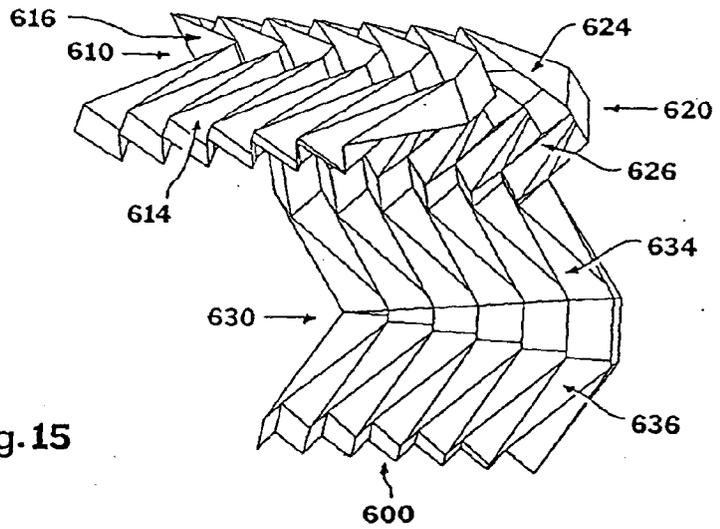


Fig.15

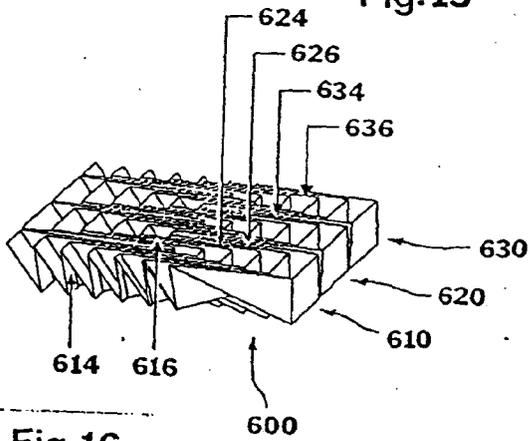


Fig.16

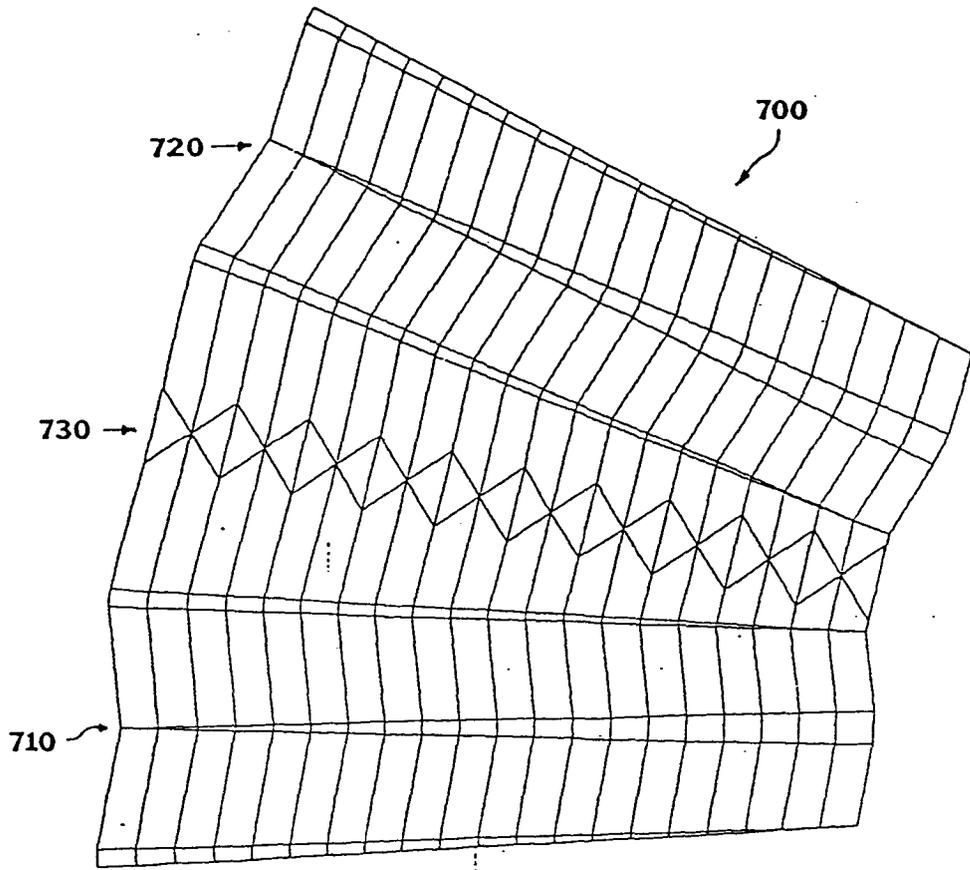


Fig.17

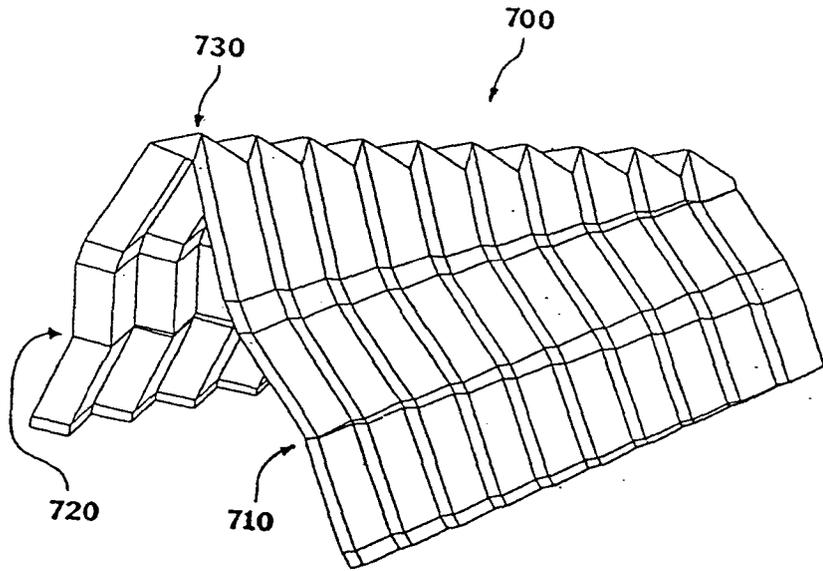
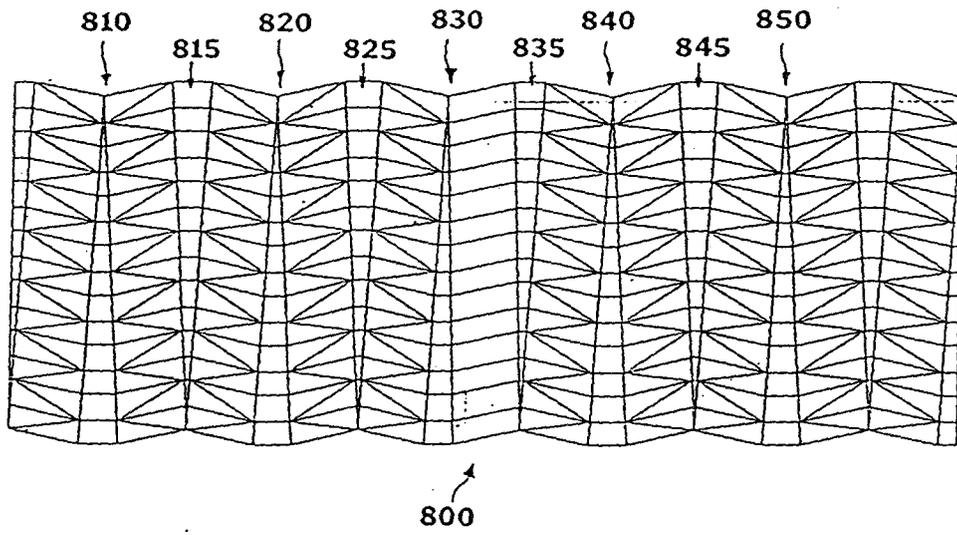
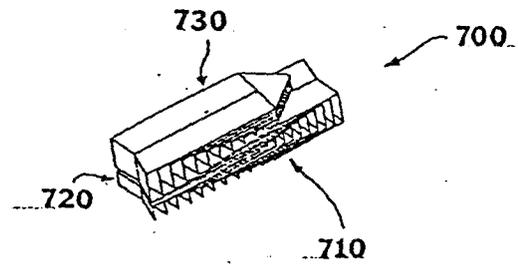
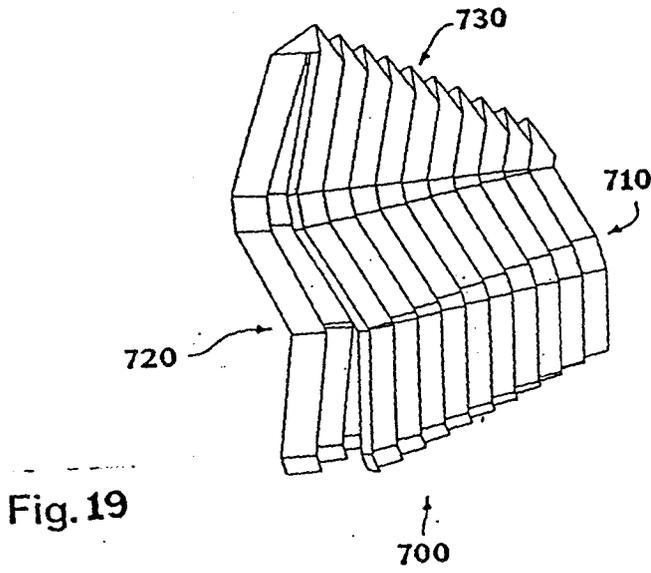


Fig.18



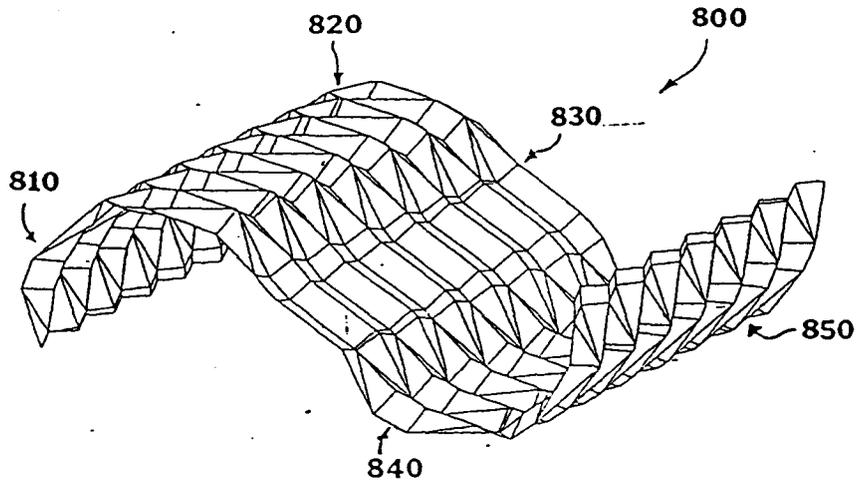


Fig. 22

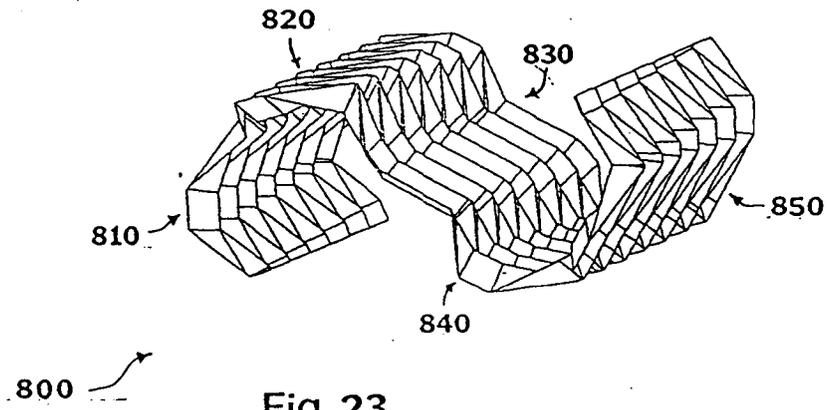


Fig. 23

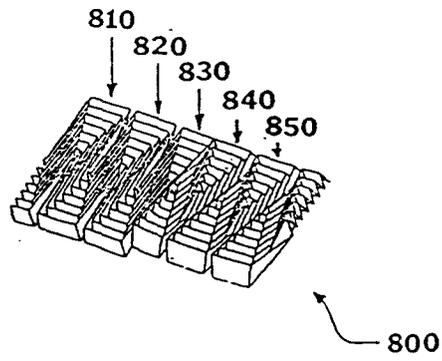


Fig. 24

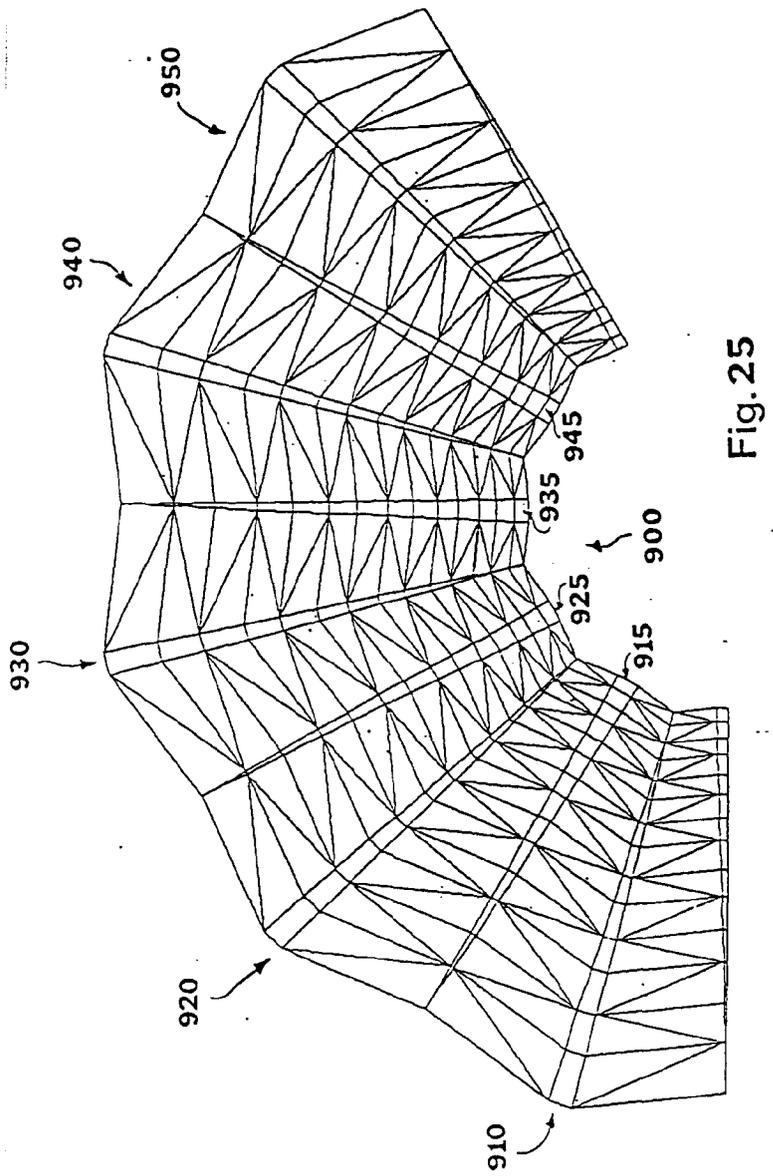


Fig. 25

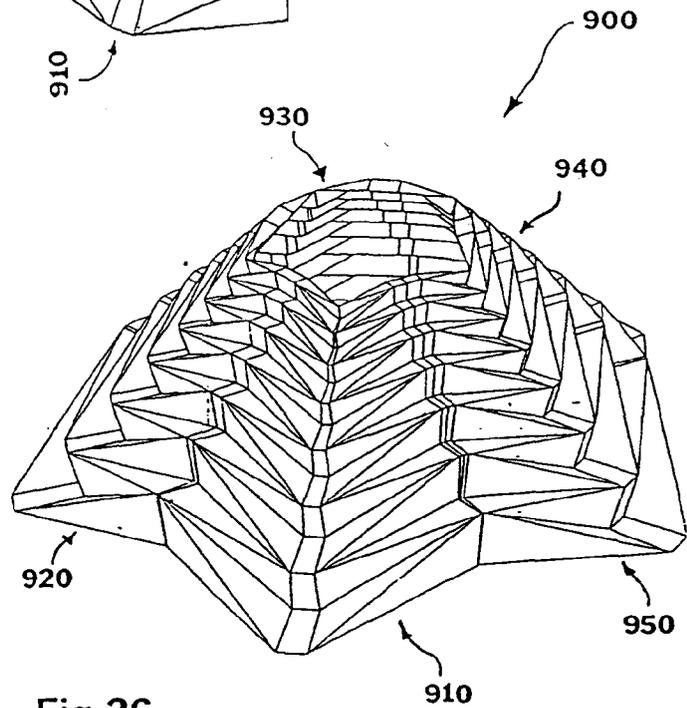
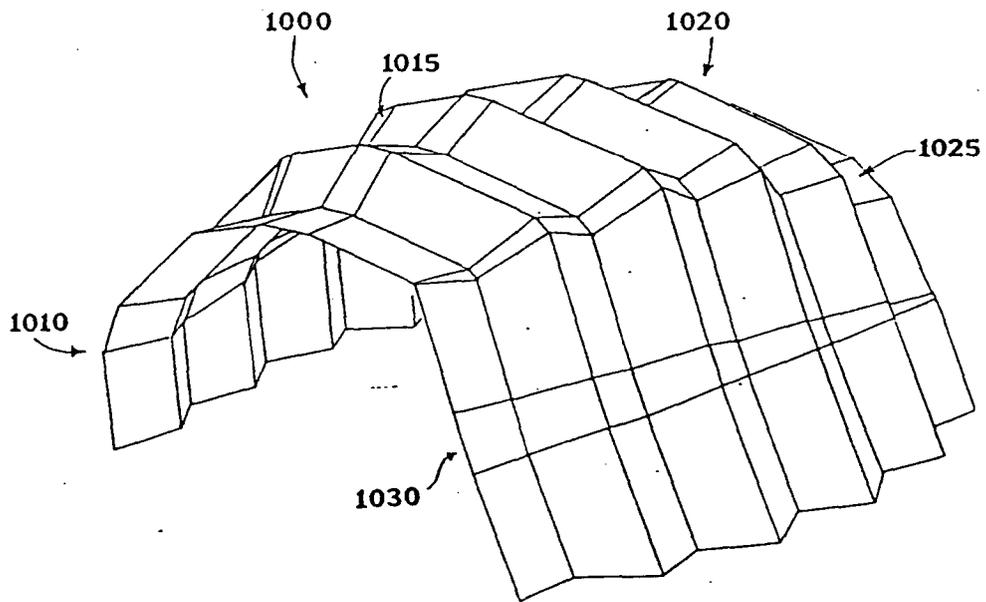
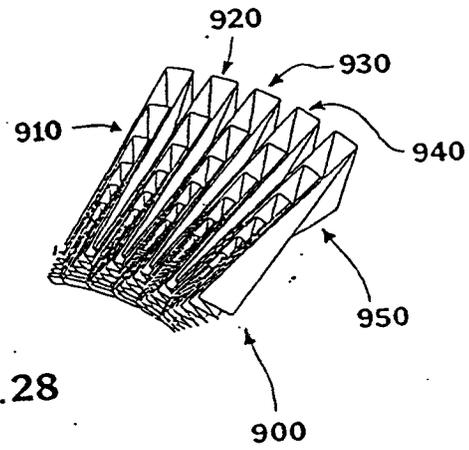
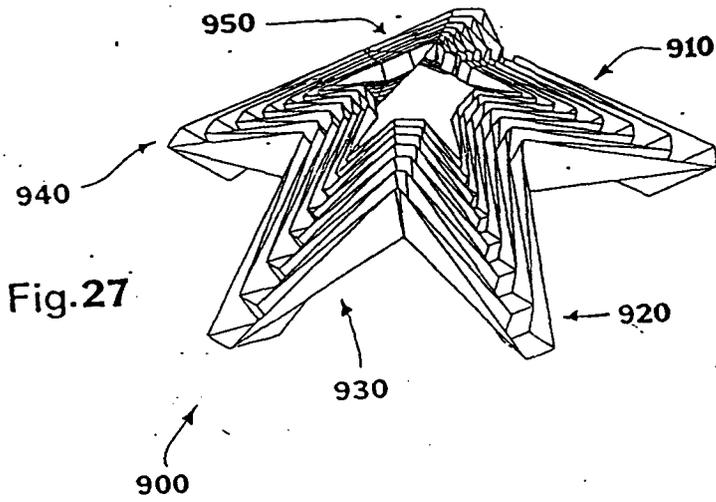


Fig. 26



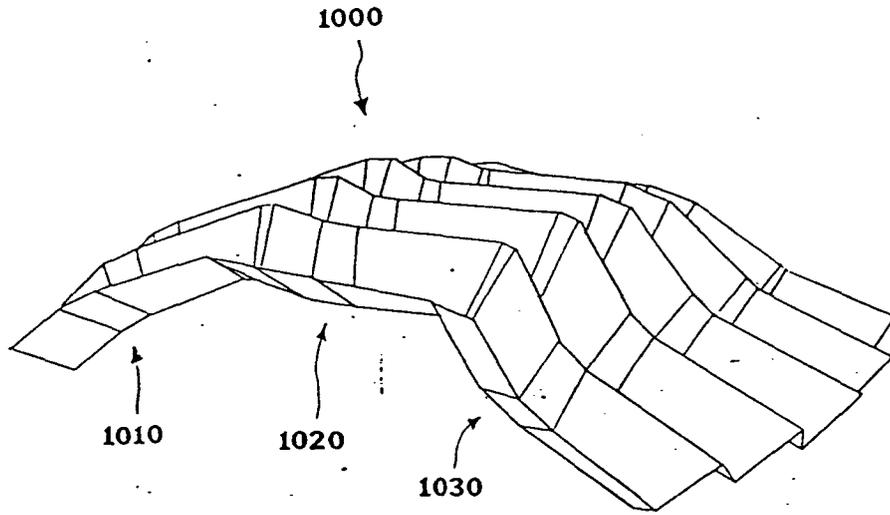


Fig. 30

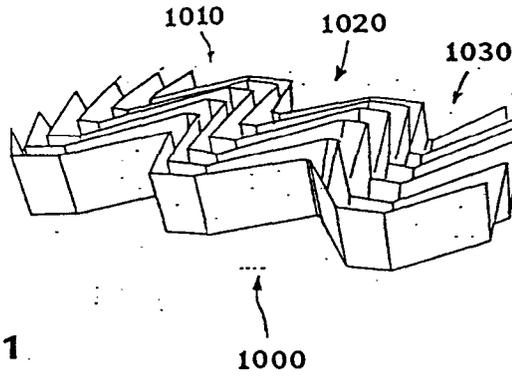


Fig. 31

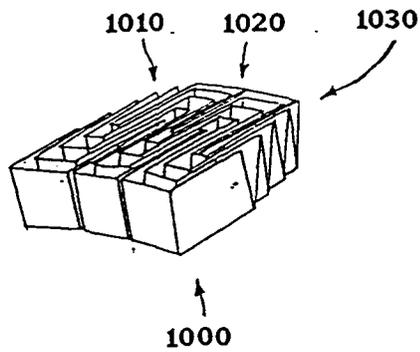


Fig. 32

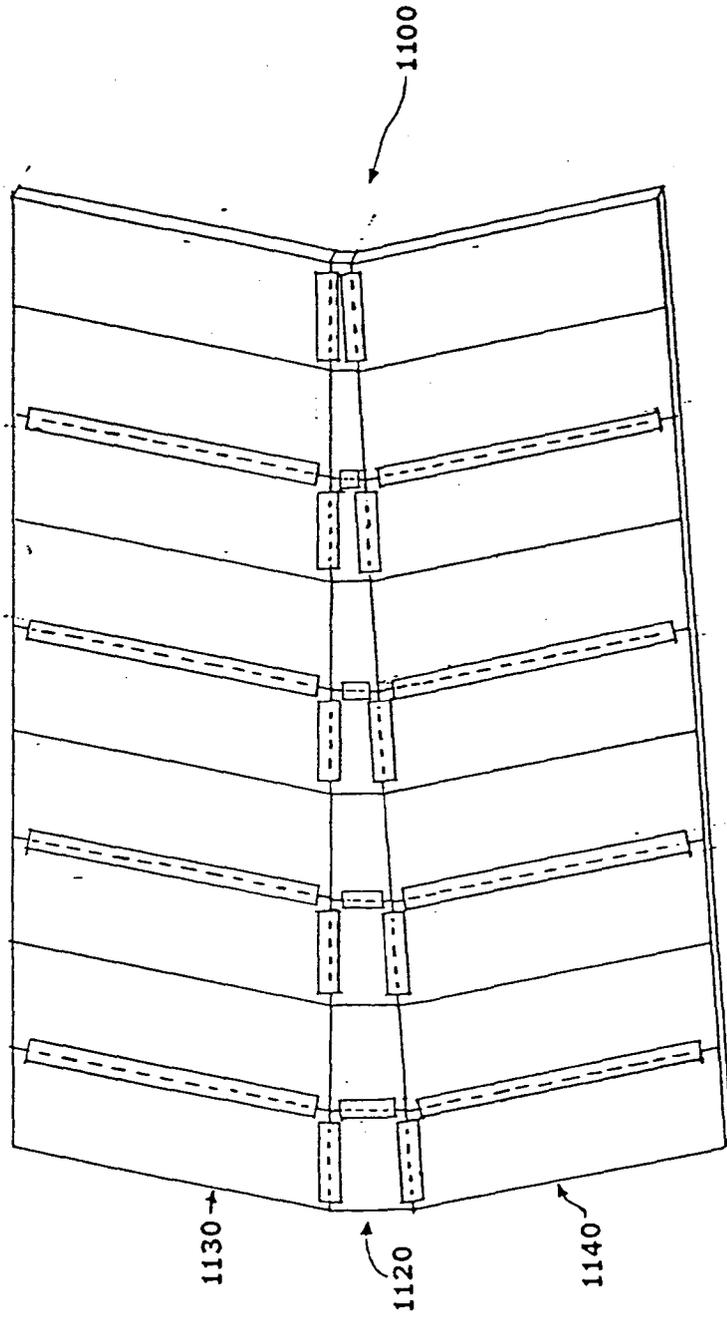


Fig. 33

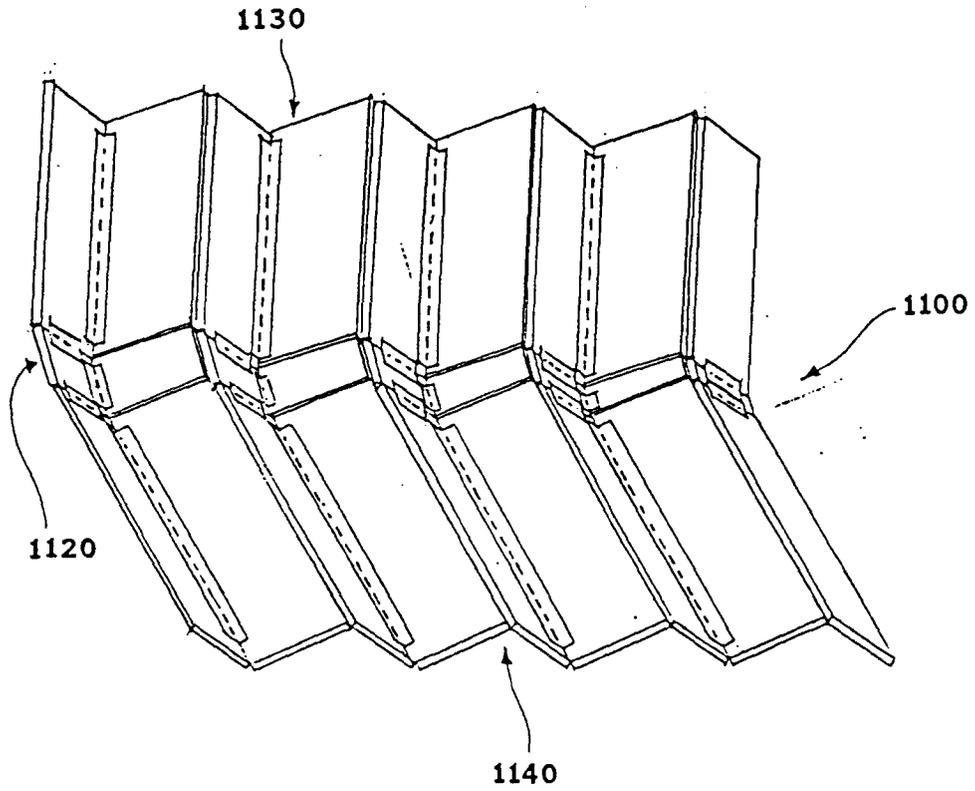


Fig. 34

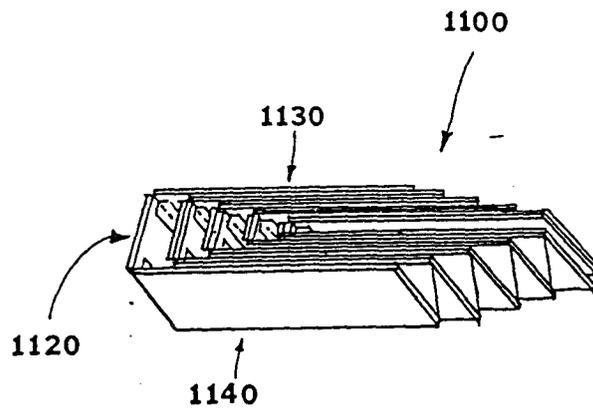


Fig. 35

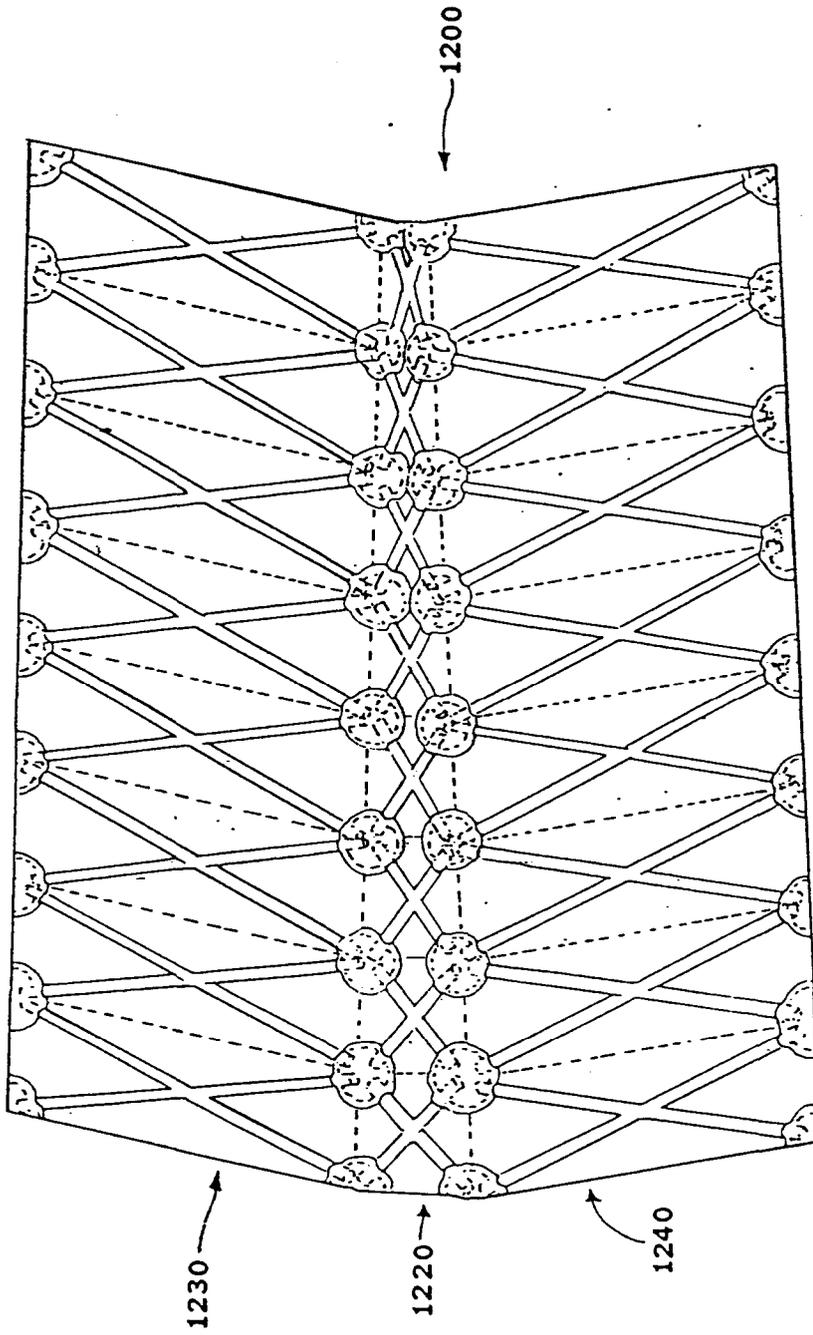


Fig. 36

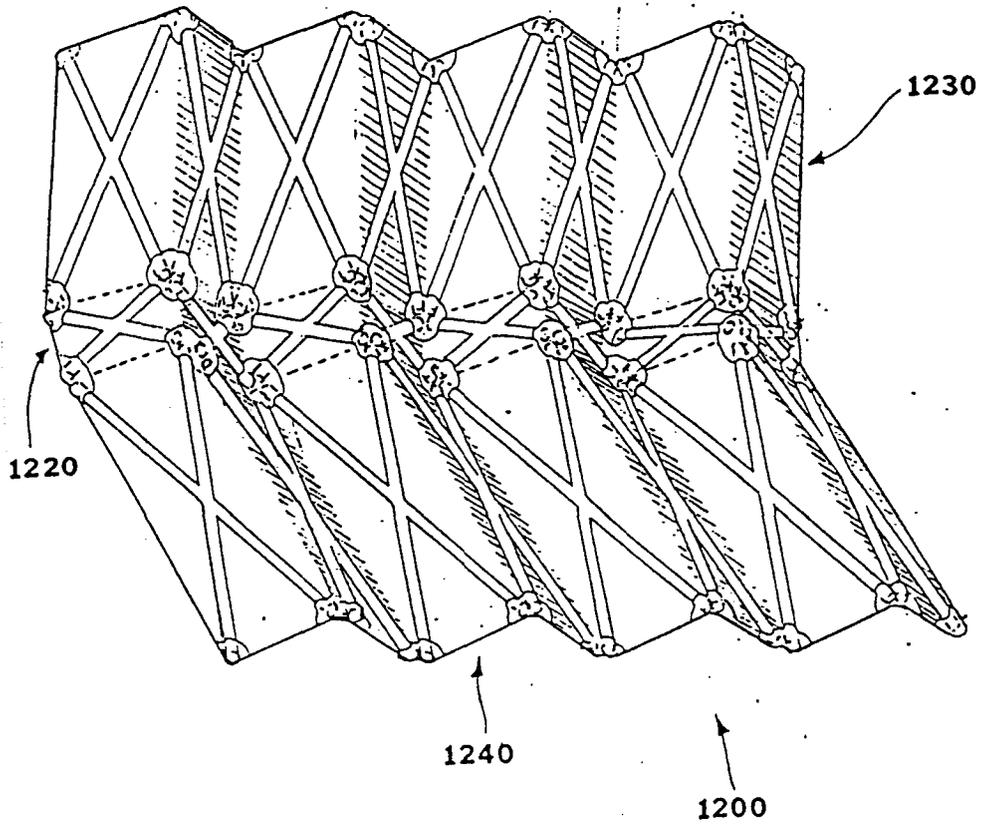


Fig. 37

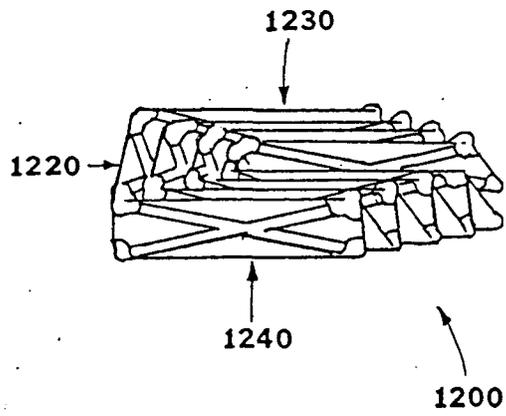


Fig. 38

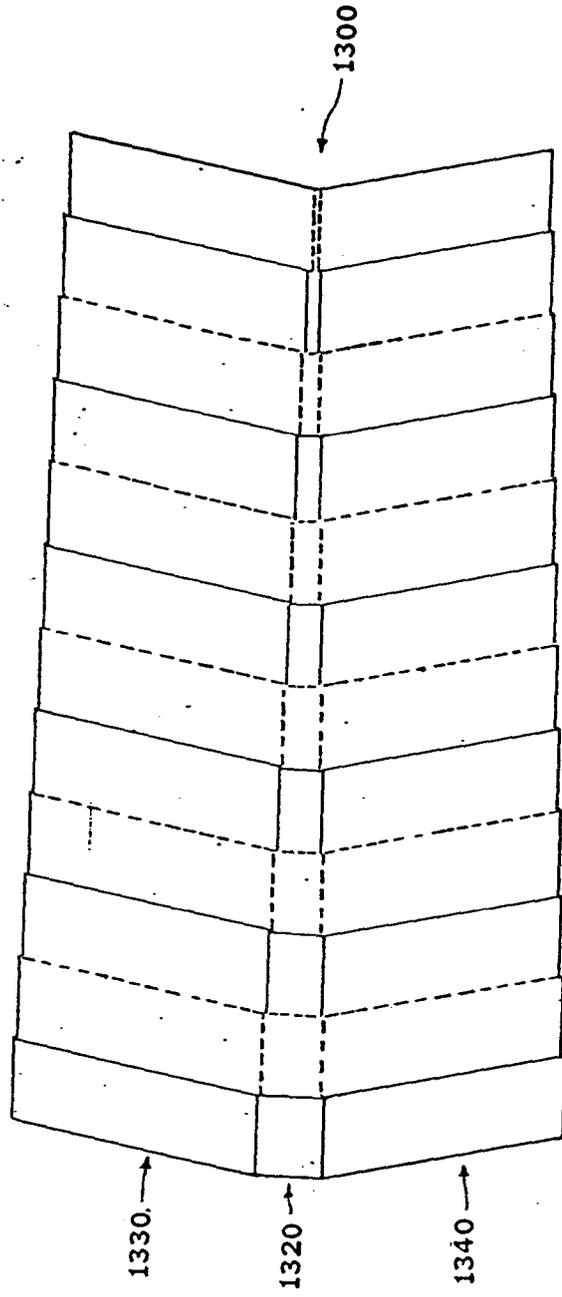


Fig. 39