



(51) International Patent Classification:
F42B 10/20 (2006.01) *F42B 10/16* (2006.01)

(21) International Application Number:
PCT/SE2012/000053

(22) International Filing Date:
12 April 2012 (12.04.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1130029-0 14 April 2011 (14.04.2011) SE

(71) Applicant (for all designated States except US): **BAE SYSTEM BOFORS AB** [SE/SE]; S-691 80 KARLSKOGA (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STRÖMBERG, Sven** [SE/SE]; Malmhagsvägen 13B, S-691 36 Karlskoga (SE). **LIDGREN, Johan** [SE/SE]; Snövägen 7, S-691 52 Karlskoga (SE). **ENGMAN, Peter** [SE/SE]; Stolpetorpsvägen 117, S-691 54 Karlskoga (SE). **SVANBERG, Lars-**

Peter [SE/SE]; Hannebergsgatan 24, S-171 68 Solna (SE). **CARLQVIST, Lars-Ake** [SE/SE]; Hjortronvägen 7, S-691 47 Karlskoga (SE).

(74) Agent: **OLSSON, Fredrik**; Saab Bofors Support AB, Patents and Trademarks, S-691 80 Karlskoga (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: FIN DEPLOYMENT MECHANISM AND PROJECTILE WITH SUCH A MECHANISM

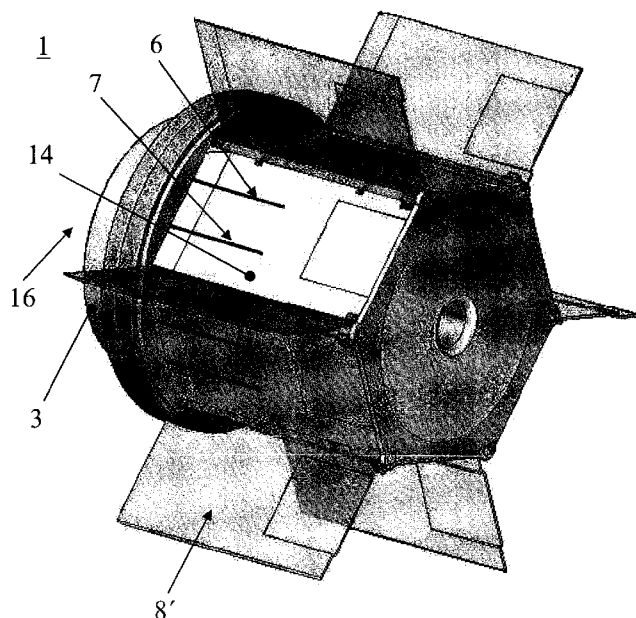


Fig. 4

(57) Abstract: The invention relates to a fin deployment mechanism (1) comprising a base unit (3), deployable fins (8) movably arranged on the base unit (3) and, in the retracted position, bearing against the base unit (3), as well as a gas-generating device, in which the fins in the retracted position are fixed to the base unit, and in which at least one gas duct (6, 7) is arranged in the base unit (3) so as to conduct pressurized gas generated by the gas-generating device to the bottom side of the fins (8), which in the retracted position bear against the base unit (3), in order to create a force which acts on the fins (8) for deployment of the same (8'). The invention further relates to an artillery projectile comprising a fin deployment mechanism.

WO 2012/141641 A1



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, ML, MR, NE, SN, TD, TG).

Fin deployment mechanism and projectile with such a mechanism

TECHNICAL FIELD

5 The present invention relates to a fin deployment mechanism for projectiles in which fin deployment takes place along the path of the projectile, and further relates to an artillery projectile constructed with a fin deployment mechanism in which fin deployment takes
10 place along the path of the projectile.

BACKGROUND TO THE INVENTION, PROBLEM DEFINITION AND PRIOR ART

In order to achieve stability in the path between
15 launcher and target, stabilization of a projectile can be realized by, preferably, rotation stabilization and/or fin stabilization. For a fin-stabilized barrel-launched projectile, fin deployment must take place after the projectile has left the barrel, since the
20 fins cannot be deployed in the barrel. In order to achieve good manoeuvrability, modern projectiles for artillery purposes often have guide fins or so-called canard fins arranged for guidance of the projectile, which projectiles can at the same time have a finned
25 and rotating tail section or base in order to acquire advantages associated with fin stabilization. Projectiles of this type consequently consist of a fin-stabilizing tail section and a roll-stable front part, the shell body, with guide fins. For such projectiles,
30 the tail section and the shell body are freely movable with respect to each other and the shell body preferably assumes a rotationless state in order to extend deployable guide fins or canard fins which guide the shell. From a communications viewpoint, a non-
35 rotating shell body is suitable for visual or radio communication, for example, since the sensor or antenna on the shell body essentially assumes a rotationless state. Irrespective of the type of projectile, the fin

- 2 -

deployment method, as well as the fin deployment mechanism, is of great importance.

Previously known inventions include, for example, US-
5 7,226,016 B2, which describes a method and a device for
pressurizing a pressure chamber in the shell body with
gas pressure created by the propelling charge during
the launch process. The pressure which is created in
the pressure chamber is sufficient to displace an
10 external element on the shell body, such as, for
example, a protective cap for the fins.

An example of another previously known invention is US-
7,083,141 B2, which describes a projectile having
15 radially deployable fins using an accompanying
pressurized gas cartridge, which is also used to propel
the projectile.

OBJECT OF THE INVENTION AND ITS DISTINGUISHING FEATURES
20 In an existing solution according to the above-stated
document US-7,226,016 B2, fin deployment is realized by
virtue of the fact that a cap encloses the fins, which
fins are mechanically deformed around the shell body.
At a predetermined position, generally directly after
25 the projectile has left the barrel, the cap is cast off
from the shell and the fins, due to the spring force in
the deformation, are extended into a fully deployed
position. In the fully deployed position, the fins are
locked with a locking mechanism. The whole of the
30 projectile, and thus the finned base, as well as the
shell body, rotate. When guide fins/canard fins are
deployed, the shell body will be roll-stabilized, at
the same time as the rotation of the tail section
continues. With guide fins deployed, the guidance of
35 the projectile towards the target can be commenced.

The present invention is constituted by a fin
deployment mechanism comprising a base unit, deployable

- 3 -

fins movably arranged on the base unit and, in the retracted position, bearing against the base unit, as well as a gas-generating device, in which the fins in the retracted position are fixed to the base unit, and
5 in which at least one gas duct is arranged in the base unit so as to conduct pressurized gas generated by the gas-generating device to the bottom side of the fins bearing in the retracted position against the base unit, in order to create a force which acts on the fins
10 for deployment of the same.

According to further aspects of the improved fin deployment mechanism according to the invention:

15 the fins are fixed to the base unit with chemical binding agent;

the chemical binding agent is a thermosetting plastic;

20 a ring formed of combustible material is arranged to hold the fins, in the retracted position, fixed to the base unit;

the ring is made of propellant;

25

the fins are fixed to the base unit with a shear stud mounted between the fins and the base unit;

the fins are fixed to the base unit with a soldered
30 joint;

at least one groove is made in the fins in order in the retracted position to conduct gas created by the gas-generating device to the gas ducts;

35

the number of gas ducts is two per fin;

the number of fins is two or more in number;

- 4 -

the number of fins is six in number;

the depth of the gas ducts in the radial direction from
5 the outer radius of the base unit in towards the centre
is 2 to 50 times the width of the gas ducts;

the length of the gas ducts in the longitudinal
direction of the base unit is 2 to 80 times the width
10 of the gas ducts.

The invention further relates to an artillery
projectile comprising a fin deployment mechanism
comprising a base unit, deployable fins movably
15 arranged on the base unit and bearing in the retracted
position against the base unit, and also a gas-
generating device, in which the fins in the retracted
position are fixed to the base unit and in which at
least one gas duct is arranged in the base unit so as
20 to conduct pressurized gas generated by the gas-
generating device to the bottom side of the fins
bearing in the retracted position against the base
unit, in order to create a force which acts on the fins
for deployment of the same.

25

ADVANTAGES AND EFFECTS OF THE INVENTION

In an existing solution for fin deployment, a cap
mounted on the tail section of the projectile is used
as protection around the fins. When a projectile of
30 this type leaves the barrel, the cap is pushed away
from the fins, and thus the projectile, by a mechanism
built into the projectile. Once the cap cast off from
the projectile has been accelerated to the same speed
as the projectile and is acted on by wind forces, then
35 the cap per se will also become a projectile and give
rise to an increased risk for persons and equipment in
the environment of the launcher. By eliminating the
cap, the risks of unwanted injuries or damage is

- 5 -

reduced. A capless solution also means a simpler design with fewer integral components.

LIST OF FIGURES

5 The invention will be described in greater detail below with reference to the appended figures, in which:

Fig. 1 shows the base without fins according to the invention;

10

Fig. 2 shows the base with the fins retracted against the base according to the invention;

Fig. 3 shows the base with the fins retracted against the base, with an enclosing ring according to the invention;

15

Fig. 4 shows the base with the fins in the retracted and locked position according to the invention;

20

Fig. 5 shows an artillery projectile having a fin deployment mechanism according to the invention.

DETAILED DESCRIPTION OF EMBODIMENTS

25 In Fig. 1, the base unit 3, also referred to as the base 3, is shown without fins 8. The fins 8 are mounted on an axle which is positioned in an axle trench 5 and mounted in mounting holes 4. The base 3 is mounted with a coupling device 16 in the form of a fixed joint which
30 rigidly connects the base 3 to the shell body 13 or to a rotary bearing, such as, for example, a ball bearing or other bearing with low friction, which allows rotation with respect to the shell body 13. In the base 3 is found an empty space 2 for mounting of the base
35 flow unit (not shown in the figure), which often consists of a powder charge. In the base 3 are found one or more gas ducts 6 and 7 for holding pressurized gas intended to open the fins 8 after the projectile

- 6 -

has left the barrel. If two gas ducts are used, then the first gas duct, the fin top duct 7, gives a gas pressure in the upper portion of the fin 8 for the creation of an increased force through a leverage on the fin, and the second gas duct, the fin base duct 6, gives a gas pressure on the lower part of the surface of the fin 8 in order to allow, together with rotation forces and acceleration forces acting on the projectile, full fin deployment into the locked outer position. The locking mechanism is not shown in the figure, the locking mechanism locks the fin in the fully deployed position. The two gas ducts are preferably configured to have a small outlet area relative to their volume. The length of the gas duct is large compared with the width of the gas duct. The gas duct is preferably realized in the form of a groove or recess in the base, and filling of gas into the gas duct is effected by gas flowing in beneath the fin 8 in the retracted position to the gas duct and emptying or evacuation of the gas duct is effected through the outlet area of the gas duct when the fin 8, depending on the gas pressure in the gas duct, is deployed from the base 3 and thus empties the gas duct. Alternative methods for filling gas into the gas duct can also be purpose-built ducts or holes which conduct gas to the gas duct.

In Fig. 2, the fin deployment mechanism 1 comprising the base 3 is shown with the fins 8 in the retracted position. Each fin is fitted to or constructed in a unit with a fin axle 11, which is mounted in a mounting hole 4 on the base 3 and a mounting hole 10 on the base plate 9. The fins bear against the outer radius of the base, which is bevelled to obtain good surface contact between the surface of the fin and the surface of the base unit. The fins 8 are chemically or mechanically fixed to the base unit 3. The gas ducts 6 and 7 connect to the fin 8 in a seal-tight manner, for the gas of the

- 7 -

gas duct, in order to ensure that the gas in the gas ducts 6 and 7 pressurizes the fin. However, the sealing tightness is not greater than to allow the gas ducts to be pressurized by gas which is generated from the propelling charge and which flows beneath the fins in the retracted position during the launch process.

In Fig. 3, the fin deployment mechanism 1 comprising the base 3 is shown with the fins 8 in the retracted position and enclosed by a ring 15 made of combustible material. The ring can be made of a suitable combustible material having a suitable ignition temperature or ignition point tailored to the particular embodiment of the projectile and the propelling charge.

In Fig. 4, the base is shown with the fins 8' in the deployed and locked position indicated with a glue point 14. In the top part of the fin 8, for example in the glue point 14, is applied a chemical binding agent, which binds the fin 8 to the base 3, so that the fin 8 is held against the base 3. The locking mechanism (not shown in detail in the figure) ensures that the fin is fixed in the deployed position.

In Fig. 5, an artillery shell 12 is shown in the path between launcher and target with a fin deployment mechanism 1 comprising deployed fins 8' mounted on the fixed or rotatable base unit 3, which is fixedly mounted or freely rotatable with respect to and fitted to the shell body 13 by the coupling device 16.

FUNCTIONAL DESCRIPTION

The functioning and the use of the fin deployment mechanism 1 according to the invention is as follows. When the fins 8, 8', which can be flat, overlapping or retracted against the base 3, are to be deployed from the position retracted against the base 3, then that

- 8 -

surface of the fin which bears against the base 3 is pressurized by a gas pressure built up in the gas ducts 6 and 7. When the pressure difference between the pressure generated in the gas duct 6 and 7 against the fins 8 and the ambient atmospheric pressure exceeds a certain limit value, which is determined by how the fin 8 is fitted or fixed to the base, the fins will start to be deployed from the base. The fins 8 are held against the base with, for example, a glue, adhesive, thermosetting plastic or other chemical binding agent applied at a glue point 14 preferably to the upper part of the fin 8 between the fin 8 and the base 3, but other embodiments and placement points, such as, for example, along the whole of the outer contour of the fin or the whole or parts of that surface of the fin 8 which bears against the base 3, are also possible. The fins 8 can also be held against the base 3 by a mechanical structure, such as a shear pin, shear stud, welded or soldered joint, which is broken at a certain pressure. Further devices for holding the fins 8 can be a ring 15 of combustible material fitted around the fins 8, which ring is wholly or almost wholly burnt in connection with the projectile leaving the mouth of barrel. Suitable materials for the ring 15 can be the same propellant which is used as the main propellant in the launch of the projectile, black powder or other ignitable and combustible material. The fins 8 open and are deployed almost instantaneously from the base 3, and thus the gas ducts 6 and 7 are emptied or ventilated almost instantaneously. When the fins are opened, aerodynamic forces come to act on the fin and open the fin into the fully deployed and locked position. Opening of the fins 8 cannot be started until the projectile has left the barrel, when a pressure difference arises between the pressure generated in the gas duct against the fins 8 and the ambient atmospheric pressure. At launch, when the projectile is in the barrel and the gas ducts are pressurized and filled

- 9 -

with gas, the pressure difference on each side of the retracted fin 8 is negligible or, in the ideal case, zero. The gas ducts 6, 7 are configured to contain a certain quantity of pressurized gas which has been
5 generated by the propelling charge of the projectile during the launch process or by the base flow unit or other gas-generating device provided in the launch mechanism, the barrel, on the propelling charge or the projectile. The gas ducts 6, 7 advantageously have a
10 small opening area with respect to the fins 8, at the same time as the volume of the gas ducts 6, 7 is large relative to the opening area.

At launch, the gas ducts 6, 7 are gas-filled with gas
15 generated by a gas-generating device, mainly a propelling charge, by leakage in beneath the fins 8, at the same time as the projectile moves in the barrel. Specific grooves, slots or hole formations can possibly be made on the fins in order to facilitate the filling
20 of the cavity beneath the fin. The cavity which is constituted by the gas ducts 6, 7 will be filled when an overpressure is built up during the launch process. Upon ignition of the propelling charge of the launcher, the pressure in the barrel starts to build and the
25 generated gas fills the empty space behind the projectile, and thus also the cavity which is formed in the gas ducts 6, 7, the configuration or glue point 14 of the fin 8 not being affected when the gas fills the gas ducts 6, 7. When the projectile leaves the barrel,
30 a rapid fall in pressure to atmospheric pressure instantaneously occurs around the projectile, which results in a pressure difference between the pressurized gas ducts 6, 7 and the outer side of the fins 8. The pressurized ducts will then create such
35 force upon the fins 8 that they come loose from their fixing and opening and deployment of the fins 8 commences. When the fins 8 are deployed, the aerodynamic forces from both the speed and rotation of

- 10 -

the projectile will act on the deployment and help to fully deploy and lock the fins 8' in the end position.

ILLUSTRATIVE EMBODIMENTS

5 Examples of a projectile with fin deployment mechanism are a 155 mm artillery shell with the fins cemented with glue, for example resin adhesive, and constructed with six fins, in which fin deployment starts directly after the projectile leaves the barrel and in which the
10 number of gas ducts is 12 with two per fin and pressurized with propellant gases generated during the launch process.

ALTERNATIVE EMBODIMENTS

15 The invention is not limited to the embodiments specifically shown, but can be varied in different ways within the scope of the patent claims.

It will be appreciated, for example, that the number,
20 size, material and shape of the elements and parts included in the fin deployment mechanism are adapted to the weapon system(s) and other design features which pertain at that time.

25 It will be appreciated that the above-described projectile embodiments having a fin deployment mechanism can comprise many different dimensions and projectile types, depending on the field of application and the barrel width, such as artillery shells and
30 bazookas, as well as missiles. In the above, however, reference is made to at least the currently most common shell types of between 25 mm and 200 mm.

PATENT CLAIMS

1. Fin deployment mechanism (1) comprising a base unit (3), deployable fins (8) movably arranged on the base unit (3) and, in the retracted position, bearing against the base unit (3), as well as a gas-generating device, **characterized in that** the fins in the retracted position are fixed to the base unit, and in that at least one gas duct (6, 7) is arranged in the base unit (3) so as to conduct pressurized gas generated by the gas-generating device to the bottom side of the fins (8) bearing in the retracted position against the base unit (3), in order to create a force which acts on the fins (8) for deployment of the same (8').
2. Fin deployment mechanism (1) according to Claim 1, **characterized in that** the fins (8) are fixed to the base unit (3) with chemical binding agent.
3. Fin deployment mechanism (1) according to Claim 2, **characterized in that** the chemical binding agent is a thermosetting plastic.
4. Fin deployment mechanism (1) according to Claim 1, **characterized in that** a ring formed of combustible material is arranged to hold the fins (8), in the retracted position, fixed to the base unit (3).
5. Fin deployment mechanism (1) according to Claim 4, **characterized in that** the ring is made of propellant.
6. Fin deployment mechanism (1) according to Claim 1, **characterized in that** the fins (8) are fixed to the base unit (3) with a shear stud mounted between the fins (8) and the base unit (3).

7. Fin deployment mechanism (1) according to Claim 1,
characterized in that the fins (8) are fixed to
the base unit (3) with a soldered joint.
- 5
8. Fin deployment mechanism (1) according to any one
of the preceding claims, **characterized in that**
at least one groove is made in the fins (8) in
order in the retracted position to conduct gas
10 created by the gas-generating device to the gas
ducts (6, 7).
9. Fin deployment mechanism (1) according to any one
of the preceding claims, **characterized in that** the
15 number of gas ducts (6, 7) is two per fin (8).
10. Fin deployment mechanism (1) according to any one
of the preceding claims, **characterized in that** the
number of fins (8, 8') is two or more in number.
- 20
11. Fin deployment mechanism (1) according to any one
of the preceding claims, **characterized in that** the
number of fins (8, 8') is six in number.
- 25 12. Fin deployment mechanism (1) according to any one
of the preceding claims, **characterized in that** the
depth of the gas ducts (6, 7) in the radial
direction from the outer radius of the base unit
in towards the centre is 2 to 50 times the width
30 of the gas ducts (6, 7).
13. Fin deployment mechanism (1) according to any one
of the preceding claims, **characterized in that** the
length of the gas ducts (6, 7) in the longitudinal
35 direction of the base unit (3) is 2 to 80 times
the width of the gas ducts (6, 7).

- 13 -

14. Artillery projectile comprising a fin deployment mechanism (1) according to any of the preceding patent claims.

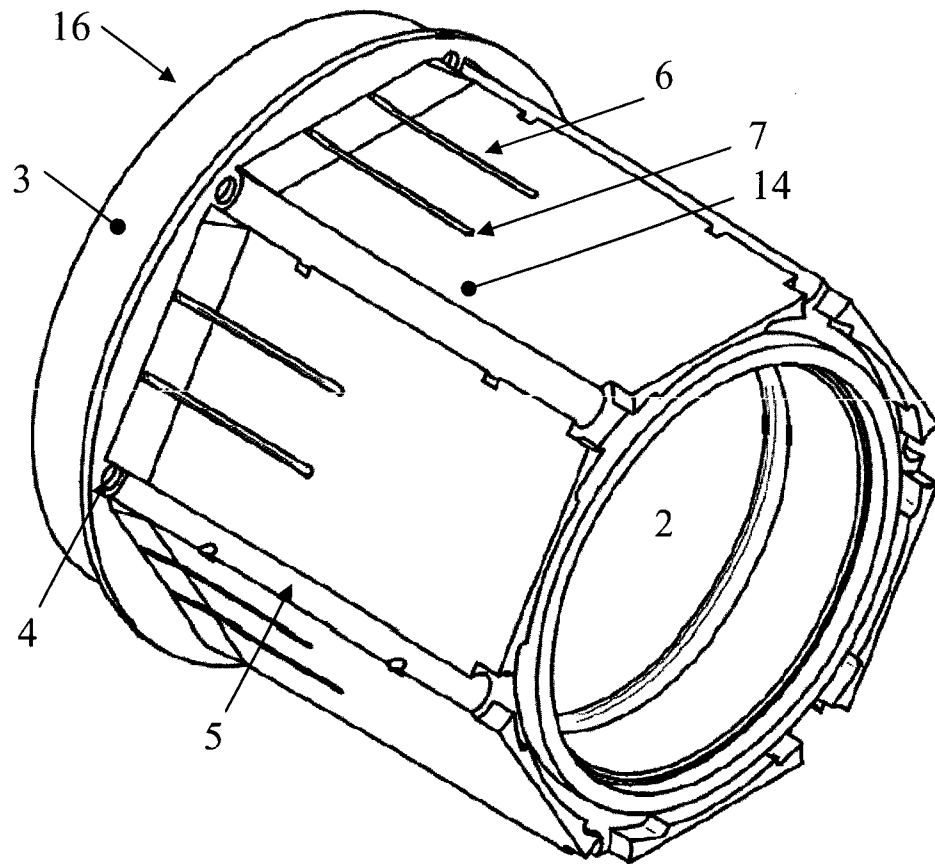


Fig. 1

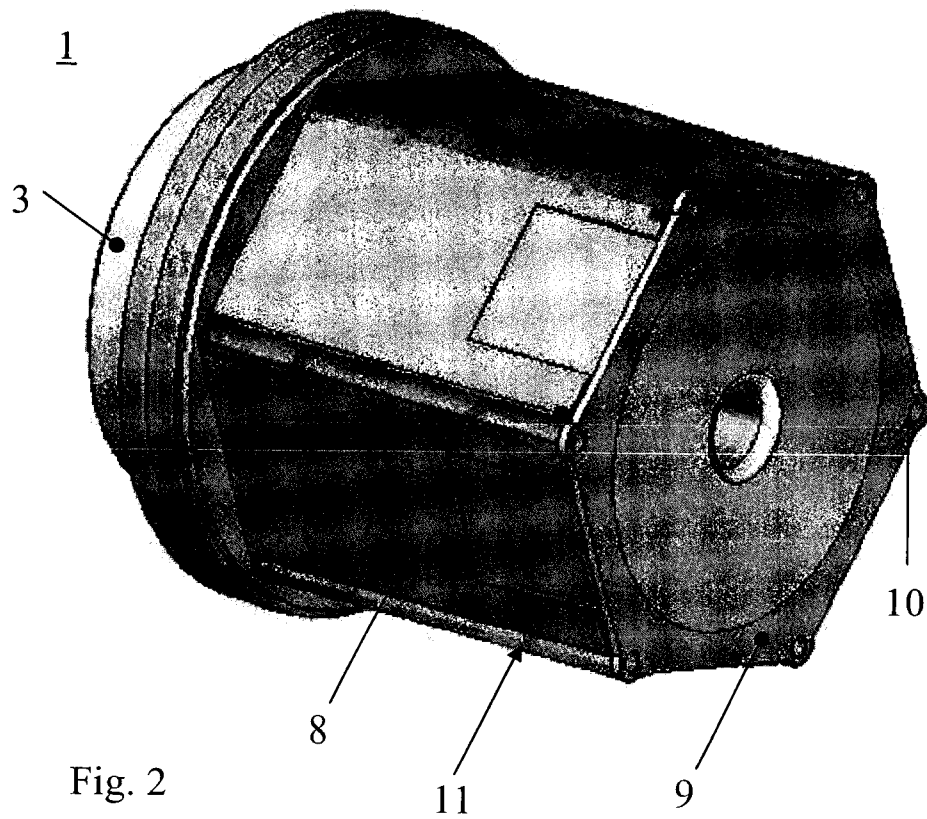


Fig. 2

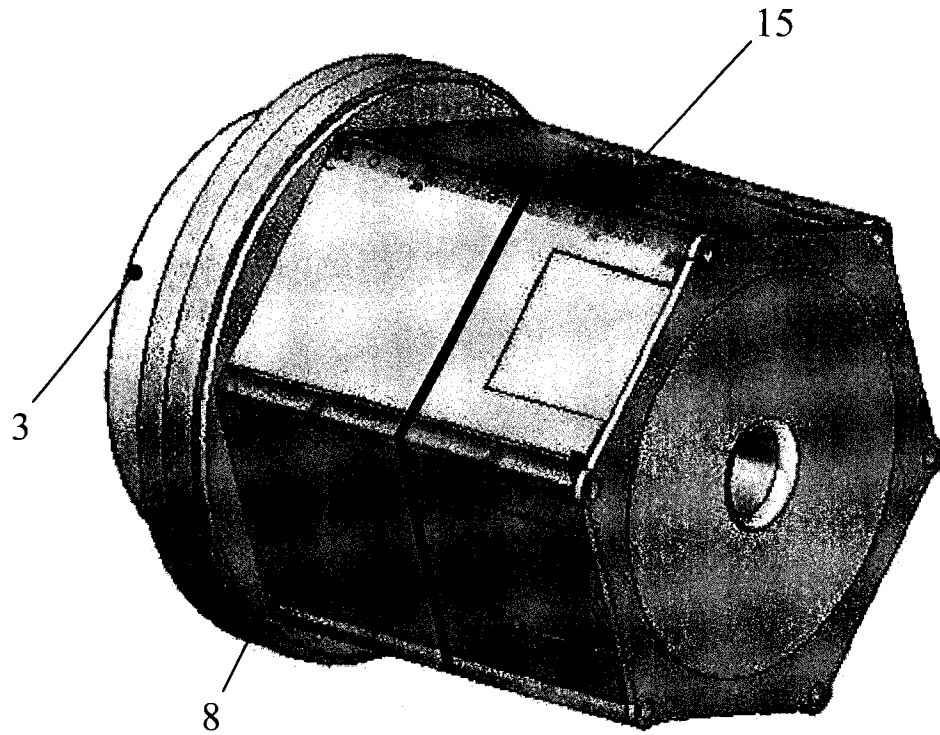


Fig. 3

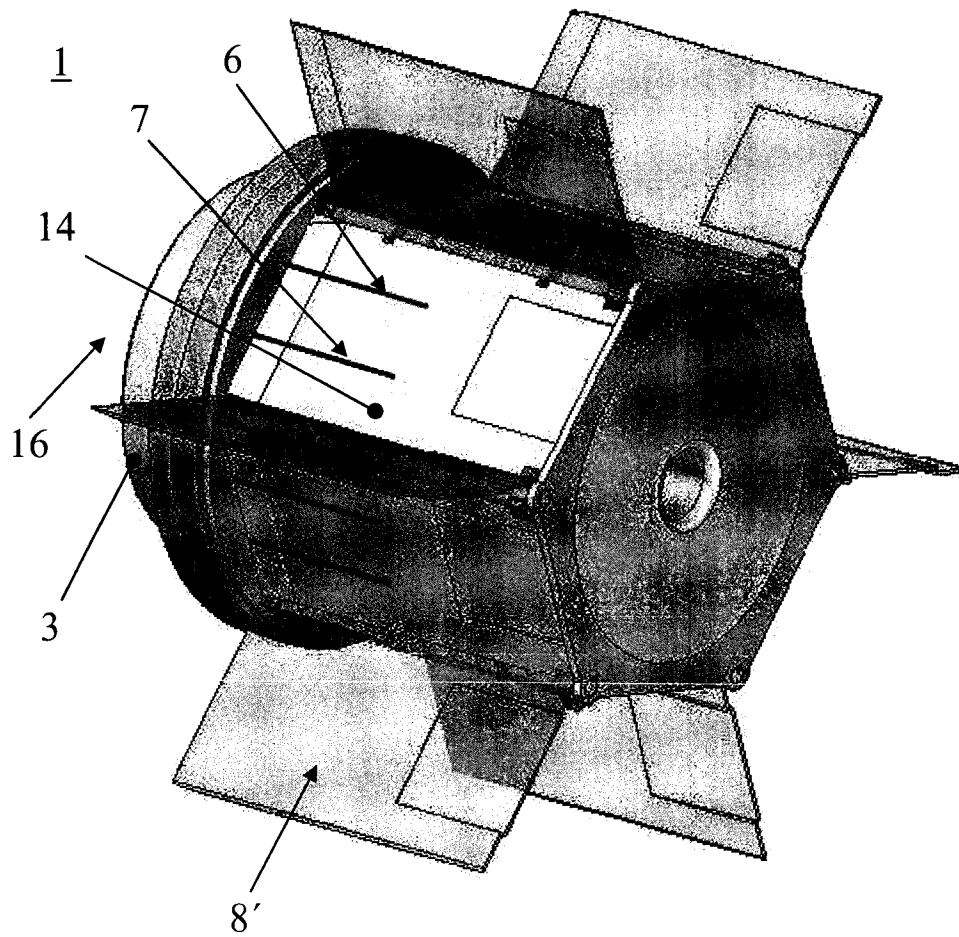


Fig. 4

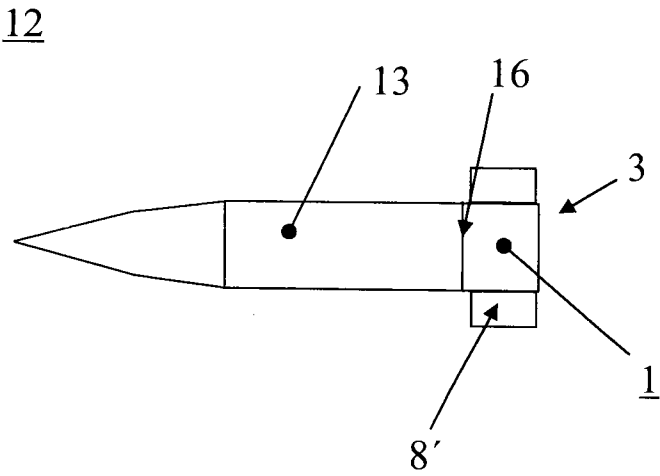


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2012/000053

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F42B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 20030146342 A1 (HELLMAN ULF), 7 August 2003 (2003-08-07); abstract; paragraphs [0011], [0019]; figures 2,3,5 --	1, 8-14
A	GB 976483 A (ZEEBRUGGE FORGES SA), 25 November 1964 (1964-11-25); page 2, line 22 - line 54; figures 1,3 --	1-14
A	GB 977111 A (ZEEBRUGGE FORGES SA), 2 December 1964 (1964-12-02); column 2, line 50 - line 69; figures 1,3 --	1-14
A	US 4607810 A (FRAZER ALSON C), 26 August 1986 (1986-08-26); abstract; column 5, line 32 - line 43; figures 3a-3c --	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27-06-2012

Date of mailing of the international search report

04-07-2012

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Erik Dahlblom

Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2012/000053

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5211358 A (BAGLEY CLOY J), 18 May 1993 (1993-05-18); abstract; column 2, line 44 - column 3, line 15; figures 1-6 --	1-14
A	US 3633846 A (BIGGS LAWRENCE M JR), 11 January 1972 (1972-01-11); abstract; column 1, line 46 - column 2, line 10; figures --	1-14
A	US 7083141 B2 (NITENSON EDWARD ET AL), 2 June 2005 (2005-06-02); whole document --	1-14
A	US 7226016 B2 (JOHNSSON STIG ET AL), 19 April 2007 (2007-04-19); whole document -- -----	1-14

Continuation of: second sheet

International Patent Classification (IPC)

F42B 10/20 (2006.01)

F42B 10/16 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is **QGHSRGLYMT**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2012/000053

US	20030146342 A1	07/08/2003	AT	370383 T	15/09/2007
			DE	60129935 T2	30/04/2008
			EP	1266184 A1	18/12/2002
			ES	2290118 T3	16/02/2008
			SE	0000922 A	22/09/2001
			SE	518665 C2	05/11/2002
			US	6779754 B2	24/08/2004
			WO	0179779 A1	25/10/2001
GB	976483 A	25/11/1964	DE	1249729 B	-
			DK	128463 B	06/05/1974
			NL	261692 A	-
GB	977111 A	02/12/1964	DE	1250306 B	-
			NL	264231 A	-
			NL	124086 C	-
US	4607810 A	26/08/1986	NONE		
US	5211358 A	18/05/1993	NONE		
US	3633846 A	11/01/1972	NONE		
US	7083141 B2	02/06/2005	US	20050116084 A1	02/06/2005
US	7226016 B2	19/04/2007	AU	7473201 A	30/01/2002
			CA	2415089 A1	24/01/2002
			DE	60141965 D1	10/06/2010
			EP	1297292 B1	28/04/2010
			ES	2340839 T3	10/06/2010
			IL	153627 A	20/09/2007
			NO	20030003 A	19/02/2003
			NO	327538 B1	03/08/2009
			SE	518654 C2	05/11/2002
			SE	0002479 L	04/01/2002
			US	20070084961 A1	19/04/2007
			US	20040094661 A1	20/05/2004
			WO	0206759 A1	24/01/2002
			ZA	200210382 A	13/02/2004