



US00D341105S

United States Patent [19]

[11] Patent Number: Des. 341,105

Lovato

[45] Date of Patent: ** Nov. 9, 1993

- [54] BUCKLE
- [75] Inventor: Attilio Lovato, Pino Torinese, Italy
- [73] Assignee: ITW Fastex Italia, S.p.A., Turin, Italy
- [**] Term: 14 Years
- [21] Appl. No.: 792,067
- [22] Filed: Nov. 14, 1991
- [30] Foreign Application Priority Data
 - May 17, 1991 [IT] Italy T091 o 000120
- [52] U.S. Cl. D11/216; D11/218
- [58] Field of Search D11/200, 215-218, D11/212; 24/633 A, 631, 616, 200, 197, 163 R, 196, 68 F; 297/467

[56] References Cited

U.S. PATENT DOCUMENTS

- D. 300,614 4/1989 Geldwerth D11/216
- D. 303,233 8/1989 Jang D11/216
- D. 312,430 11/1990 Crowle D11/216

Primary Examiner—A. Hugo Word
 Assistant Examiner—R. Seifert
 Attorney, Agent, or Firm—Schwartz & Weinrieb


[57] CLAIM

The ornamental design for a buckle, as shown and described.

DESCRIPTION

FIG. 1 is a top plan view of a first element or component of a buckle showing my new design;
 FIG. 2 is a front elevational view thereof;
 FIG. 3 is a right side elevational view thereof;
 FIG. 4 is a left side elevational view thereof;
 FIG. 5 is a bottom plan view thereof;

FIG. 6 is a rear elevational view thereof;
 FIG. 7 is a bottom plan view of a second element or component of the two-piece snap-engagement type buckle clasp mechanism showing my new design;
 FIG. 8 is a front elevational view of the second element or component of FIG. 7;
 FIG. 9 is a left side elevational view of the second element or component of FIG. 7;
 FIG. 10 is a right side elevational view of the second element or component of FIG. 7;
 FIG. 11 is a top plan view of the second element or component of FIG. 7;
 FIG. 12 is a rear elevational view of the second element or component of FIG. 7;
 FIG. 13 is a left side elevational view of the two-piece snap-engagement type buckle clasp mechanism with the first and second elements or components thereof connected together;
 FIG. 14 is a front elevational view of the two-piece snap-engagement type buckle clasp mechanism with the first and second elements or components thereof connected together as shown in FIG. 13;
 FIG. 15 is a top plan view of the two-piece snap-engagement type buckle clasp mechanism with the first and second elements or components thereof connected together as shown in FIG. 13;
 FIG. 16 is a rear elevational view of the two-piece snap-engagement type buckle clasp mechanism with the first and second elements or components thereof connected together as shown in FIG. 13;
 FIG. 17 is a bottom plan view of the two-piece snap-engagement type buckle clasp mechanism with the first and second elements or components thereof connected together as shown in FIG. 13; and,
 FIG. 18 is a right side elevational view of the two-piece snap-engagement type buckle clasp mechanism with the first and second elements or components thereof connected together as shown in FIG. 13.

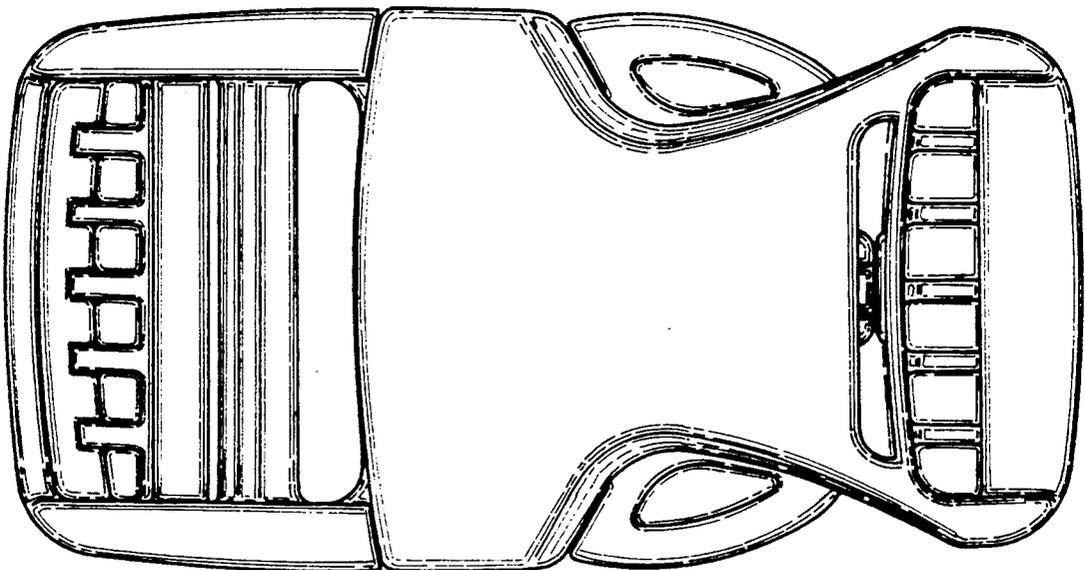

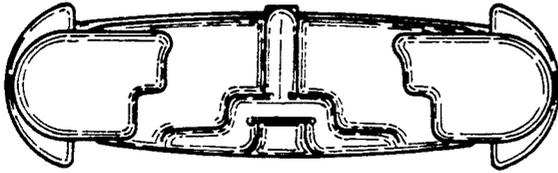


Fig. 2

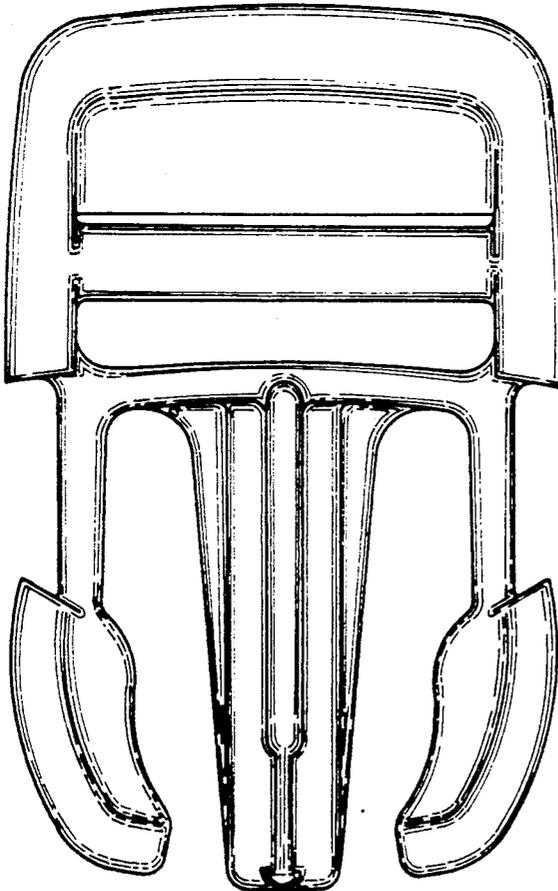


Fig. 1

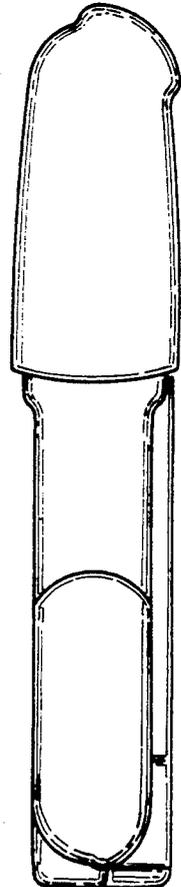


Fig. 3

Fig. 4

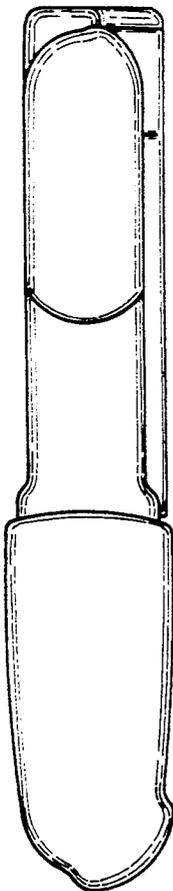


Fig. 6

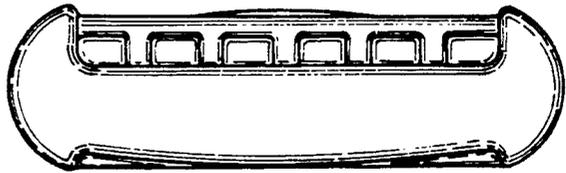
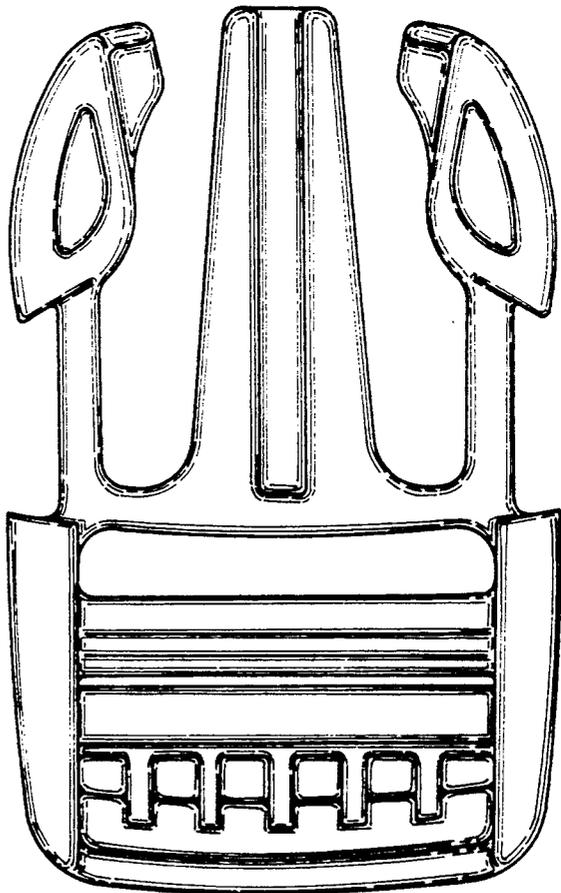


Fig. 5



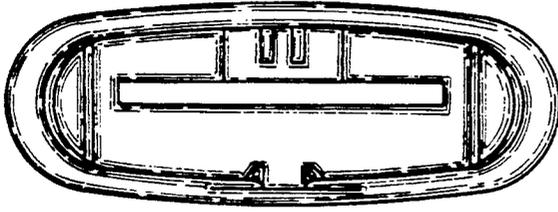


Fig. 8

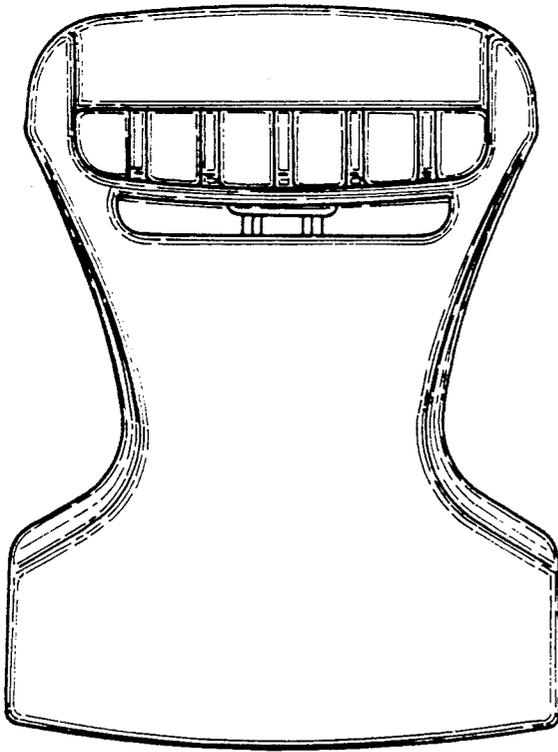


Fig. 7

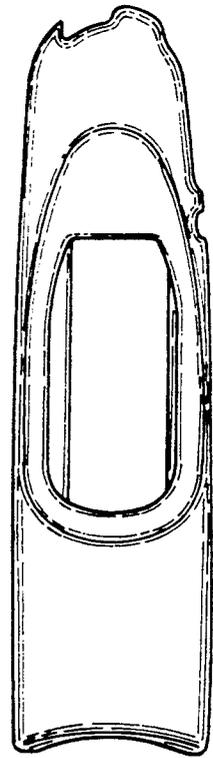


Fig. 9

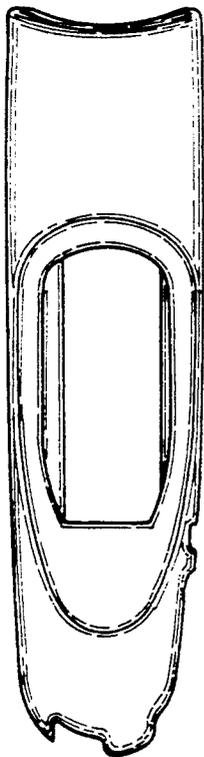


Fig. 10

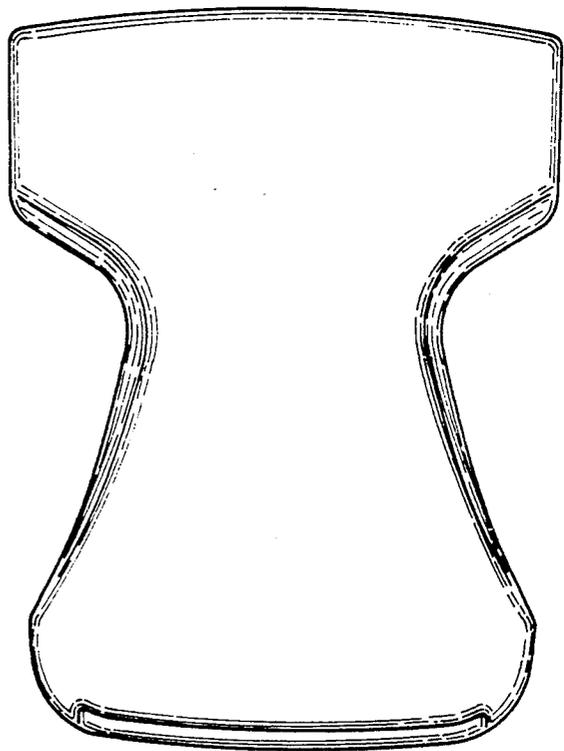


Fig. 11

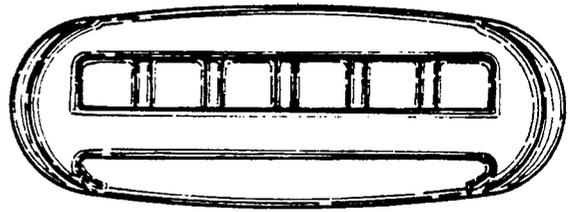


Fig. 12

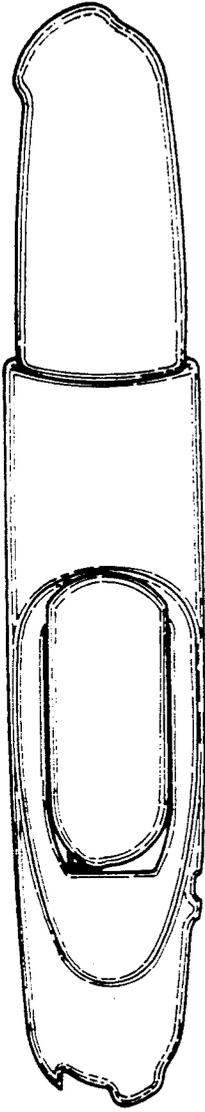


Fig. 13

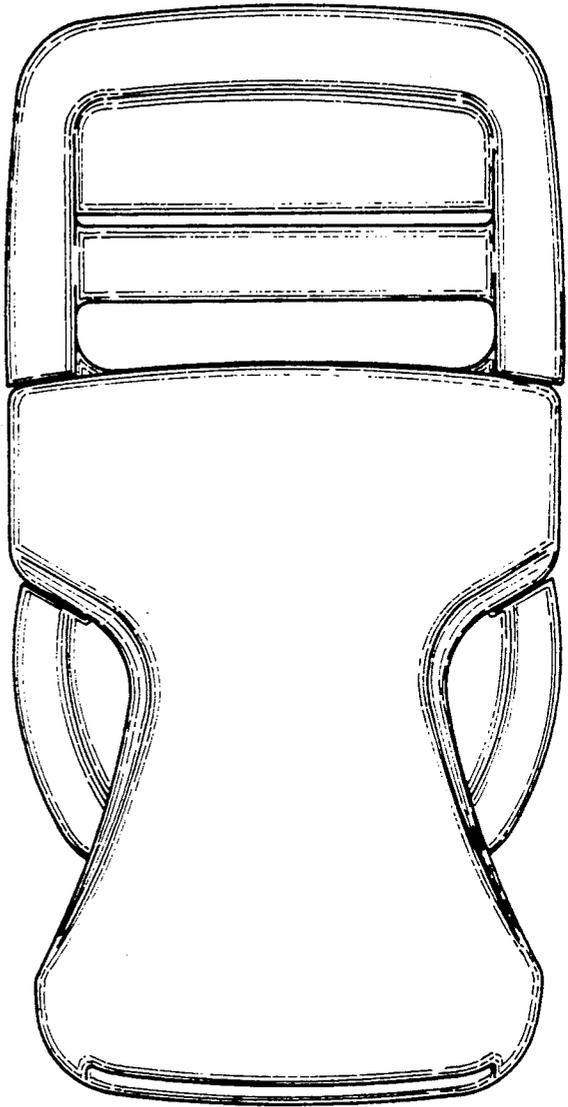


Fig. 14

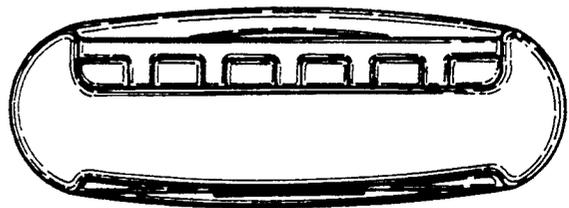


Fig. 15

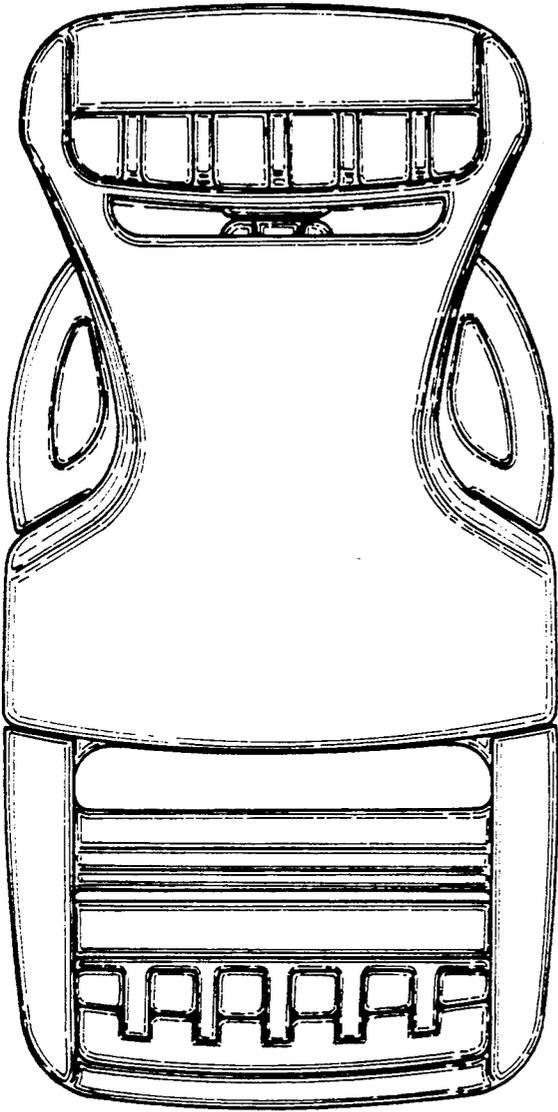


Fig. 17

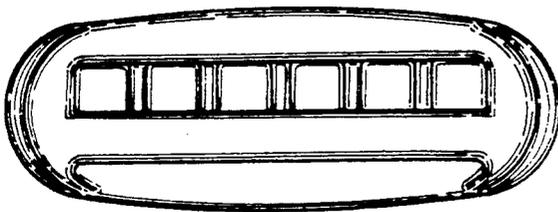


Fig. 16

Fig. 18

