



(22) Date de dépôt/Filing Date: 1995/04/10

(41) Mise à la disp. pub./Open to Public Insp.: 1995/10/14

(45) Date de délivrance/Issue Date: 2006/11/21

(62) Demande originale/Original Application: 2 146 743

(30) Priorité/Priority: 1994/04/13 (US08/226,987)

(51) Cl.Int./Int.Cl. *E21B 43/38* (2006.01),
B04C 5/28 (2006.01), *B01D 17/038* (2006.01),
E21B 43/34 (2006.01)


(72) Inventeur/Inventor:
PEACHEY, BRUCE R., CA

(73) Propriétaire/Owner:
C-FER TECHNOLOGIES (1999) INC., CA

(74) Agent: THOMPSON LAMBERT LLP

(54) Titre : METHODE DE SEPARATION CENTRIFUGE D'EAU ET DE PETROLE EN FOND DE TROU, ET APPAREIL
CONNEXE

(54) Title: METHOD OF DOWNHOLE CYCLONE OIL/WATER SEPARATION AND APPARATUS FOR THE SAME

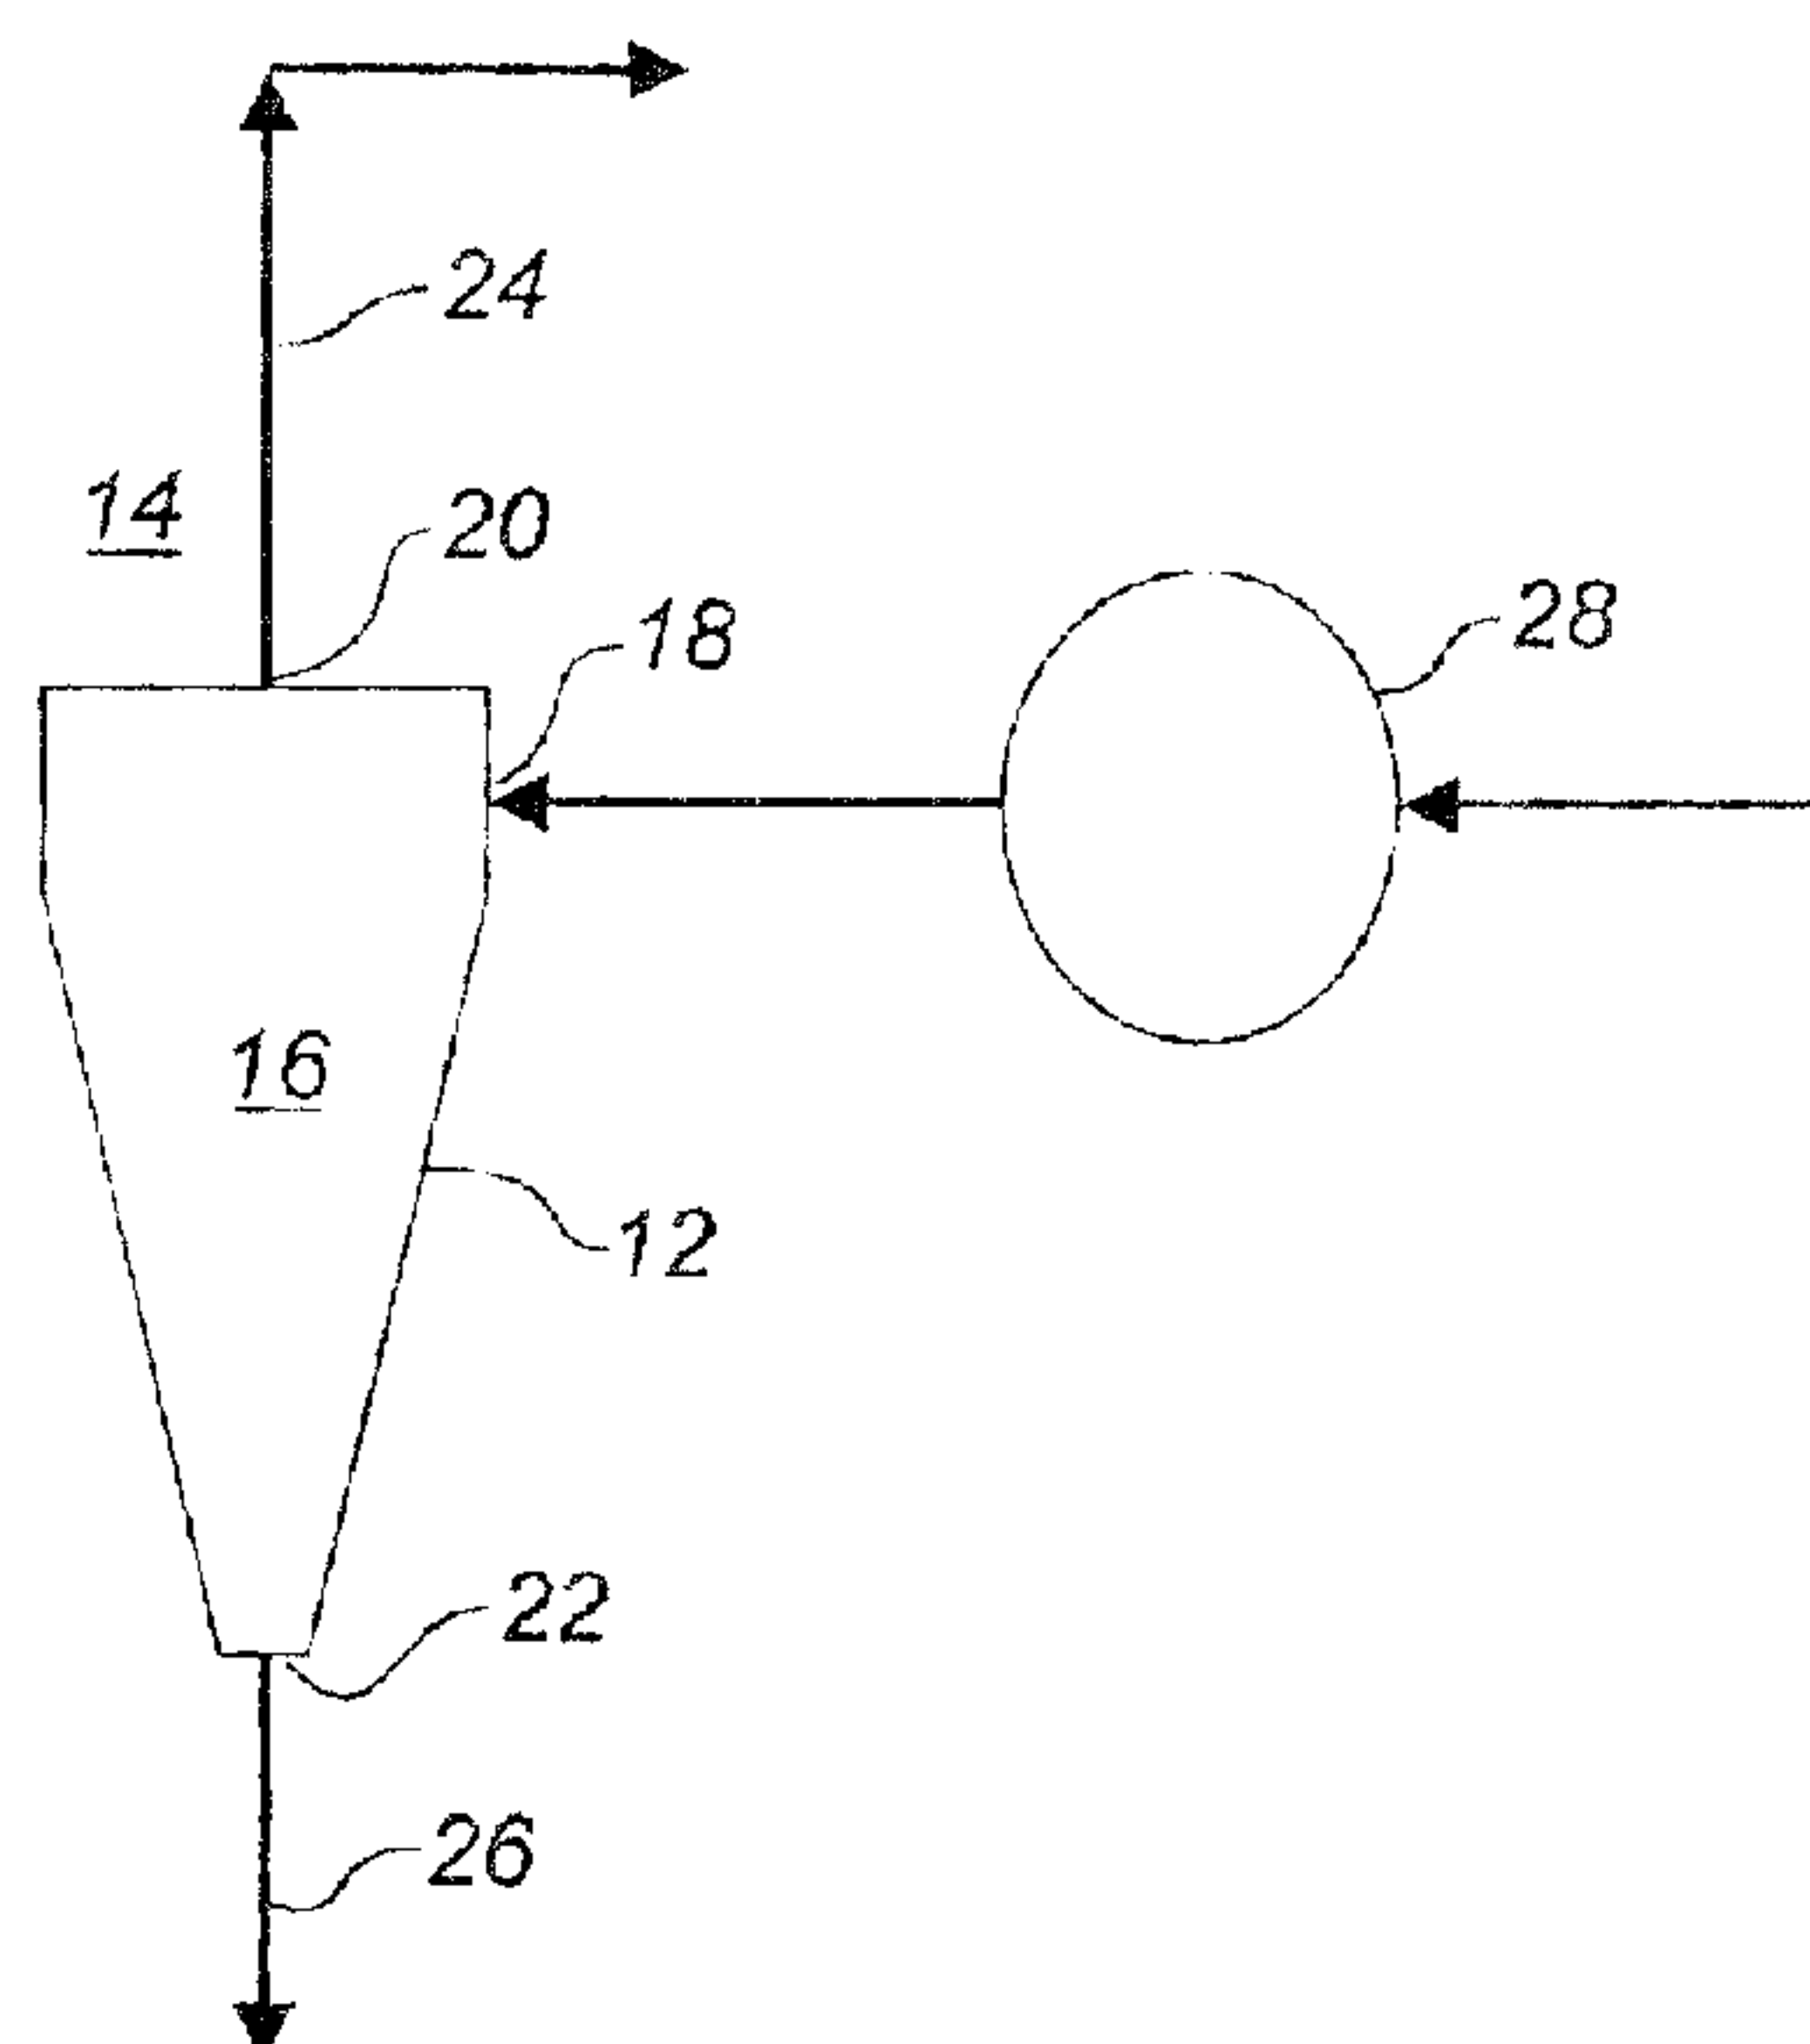

(57) Abrégé/Abstract:

A method of downhole cyclone oil/water separation is described. Firstly, place a cyclone separator downhole in an oil well producing a mixed stream of oil, water and gas. The cyclone separator includes a separation chamber wherein liquids of differing densities are separated, at least one mixed liquids inlet through which liquids pass into the separation chamber, a first outlet for liquids of a first density range to pass from the separation chamber and a second outlet for liquids of a second density range to pass from the separation chamber. Secondly, connect the first outlet to a recovery conduit extending to surface. Thirdly, connect the second outlet to a disposal conduit extending to a selected disposal site. Fourthly, connect the mixed liquids inlet to pumping means and pump a mixed stream of oil, water and gas into the separation chamber of the cyclone separator. The mixed stream is separated in the separation chamber into a recovery stream of oil with a reduced water content which flows out of the first outlet and along the recovery conduit to the surface and a disposal stream of mainly water which flows out of the second outlet and along the disposal conduit to the selected disposal site. The described method is particularly for oil wells in which the fluids being separated contain gas.



ABSTRACT OF THE DISCLOSURE

A method of downhole cyclone oil/water separation is described. Firstly, place a cyclone separator downhole in an oil well producing a mixed stream of oil, water and gas. The cyclone separator includes a separation chamber wherein liquids of differing densities are separated, at least one mixed liquids inlet through which liquids pass into the separation chamber, a first outlet for liquids of a first density range to pass from the separation chamber and a second outlet for liquids of a second density range to pass from the separation chamber. Secondly, connect the first outlet to a recovery conduit extending to surface. Thirdly, connect the second outlet to a disposal conduit extending to a selected disposal site. Fourthly, connect the mixed liquids inlet to pumping means and pump a mixed stream of oil, water and gas into the separation chamber of the cyclone separator. The mixed stream is separated in the separation chamber into a recovery stream of oil with a reduced water content which flows out of the first outlet and along the recovery conduit to the surface and a disposal stream of mainly water which flows out of the second outlet and along the disposal conduit to the selected disposal site. The described method is particularly for oil wells in which the fluids being separated contain gas.

TITLE OF THE INVENTION:

Method of Downhole Cyclone Oil/Water Separation and
Apparatus for the Same

5

10

FIELD OF THE INVENTION

The present invention relates to a method of downhole
cyclone oil/water separation and apparatus for the same.

15

BACKGROUND OF THE INVENTION

United States Patent number 5,296,153 teaches a method of
reducing the amount of formation water in oil recovered from
an oil well through the insertion of a cyclone separator
downhole in an oil well producing a stream of mixed oil and
water. In accordance with the described method, a first
outlet of the cyclone separator is connected to a recovery
conduit extending to surface. The recovery conduit conveys a
recovery stream of oil with a reduced water content to
surface. A second outlet of the cyclone separator is
connected to a disposal conduit. The disposal conduit conveys
a disposal stream of mainly water to a disposal site, which is
usually a downhole formation chosen to be a disposal zone.
The reference goes on to describe various pumping
configurations which, when used in combination with the
cyclone separator, can further enhance recovery.

20

25

30

35

When the production stream from the oil well has a high
gas content, great care must be taken in the selection of the

pumping configuration. During downhole processing through the cyclone separator and the pump, "gas breakout" inevitably occurs. Gas breakout involves the release of entrained gases from the liquid being pumped. This gas breakout can adversely
5 affect the efficiency of the pumping configuration and may also impact the operation and efficiency of the cyclone separator.

10 SUMMARY OF THE INVENTION

What is required is a method of downhole cyclone separation that minimizes the adverse effects of gas breakout.

15 According to the present invention there is provided a method of downhole cyclone oil/water separation which includes the following steps. Firstly, place a cyclone separator downhole in an oil well producing a mixed stream of oil, water and gas. The cyclone separator includes a separation chamber
20 wherein liquids of differing densities are separated, at least one mixed liquids inlet through which liquids pass into the separation chamber, a first outlet for liquids of a first density range to pass from the separation chamber and a second outlet for liquids of a second density range to pass from the
25 separation chamber. Secondly, connect the first outlet to a recovery conduit extending to surface. Thirdly, connect the second outlet to a disposal conduit extending to a selected disposal site. Fourthly, connect the at least one mixed liquids inlet to pumping means and pump a mixed stream of oil,
30 water and gas into the separation chamber of the cyclone separator. The mixed stream is separated in the separation chamber into a recovery stream of oil with a reduced water content which flows out of the first outlet and along the recovery conduit to the surface and a disposal stream of
35 mainly water which flows out of the second outlet and along the disposal conduit to the selected disposal site.

Gas breakout adversely affecting pumping operation occurs due to pressure drop and agitation as the mixed stream passes through the separation chamber of the cyclone separator. Placing pumping means upstream of the cyclone separator, as
5 described above, is a more effective pumping configuration. The pump, being upstream, is isolated from whatever gas breakout may occur as the mixed stream passes through the separation chamber and is separated into the recovery stream and the disposal stream. Pumping fluids through the separator
10 reduces gas breakout, as it increases the pressure of fluids within the separator and forces the gas to remain in solution.

Although beneficial results may be obtained through the method, as described above, when the disposal site is a
15 selected underground formation it is important that enough pressure be maintained in the pumping configuration to get the disposal stream into the disposal formation. It is also important to be able to accurately determine the amount of fluid that is being disposed of into the disposal formation.
20 Even more beneficial results may, therefore, be obtained when backpressure control means are positioned on one of the second outlet and the disposal conduit. As the backpressure control means has a known backpressure or flow limit, the injection flow rate may be determined from information on pump
25 characteristics. The backpressure control means can take various forms, such as a backpressure valve or a flow restriction orifice. The backpressure control means may also incorporate a check valve or other means to prevent flow from reversing from the disposal zone when the pump stops.

30

Although beneficial results may be obtained through the use of the method, as described above, with deep wells a high pressure pump is required to both pump water through the cyclone separator to a disposal zone and to pump the recovery
35 stream to surface. Even more beneficial results may, therefore, be obtained when secondary pump means communicates with the recovery conduit to assist in pumping the recovery

stream to the surface. When two pumps are used the total power requirements for producing a given amount of fluid from a well are reduced. The first pump provides the energy to pass the liquids through the cyclone separator and into the
5 injection zone, while the secondary pump provides any additional energy that may be required to lift the recovery stream to surface.

It will be appreciated by one skilled in the art that the
10 working environment in which the described method is to be employed can involve well casings as small as four or five inches in diameter. This limits the diameter of cyclone separator which can be used, and thus the capacity of the cyclone separator. The key to improving the economics of
15 recovery using the described method is to increase flow rates that can be separated in the given diameter, reduce power requirements, or both. For this reason an apparatus has been developed for use with the described method that improves the economics of recovery. According to this aspect of the
20 invention there is provided an apparatus for downhole cyclone separation which includes a multiple cyclone separator housing having an interior cavity, at least one inlet, at least one disposal stream outlet and at least one recovery stream outlet. A plurality of cyclone separators are disposed in the
25 interior cavity of the cyclone separator housing. Each of the cyclone separators has a separation chamber wherein liquids of differing densities are separated; at least one mixed liquids inlet through which liquids pass into the separation chamber; a first outlet for liquids of a first density range
30 to pass from the separation chamber; and a second outlet for liquids of a second density range to pass from the separation chamber. Means are provided for channelling a mixed liquids flow stream flowing through the at least one mixed liquids inlet of the multiple cyclone separator housing to the at
35 least one mixed liquids inlet of each of the cyclone separators. Means are provided for channelling a recovery flow stream from the first outlet of each of the cyclone

separators to the at least one recovery stream outlet of the multiple cyclone separator housing. Means for channelling a disposal flow stream from the second outlet of each of the cyclone separators to the at least one disposal stream outlet
5 of the multiple cyclone separator housing. Mixed liquids passing through the at least one mixed liquid inlet of the multiple cyclone separator housing are channelled by the channelling means to the at least one mixed liquid inlet of each of the cyclone separators. The liquids are separated in
10 the separation chamber of the cyclone separators with a recovery stream passing through the first outlet of each of the cyclone separators to the outlet conduit for channelling by the channelling means through the at least one recovery stream outlet in the multiple cyclone separator housing. A
15 disposal stream is discharged from the second outlet of each of the cyclone separators for channelling by the channelling means through the at least one disposal stream outlet in the multiple cyclone separator housing.

20 With the apparatus, as described above, multiple cyclone separators work simultaneously in the multiple cyclone separator housing. The preferred channelling means is by way of conduit. Only two conduit are required as the interior cavity of the housing can serve as one of the channelling
25 means. In accordance with the described method a mixed stream of oil, water and gas is pumped into the at least one mixed liquids inlet of the multiple cyclone separator housing.

30 BRIEF DESCRIPTION OF THE DRAWINGS

These and other features of the invention will become more apparent from the following description in which reference is made to the appended drawings, wherein:

35 **FIGURE 1** is a schematic diagram of a first form of pumping configuration in accordance with the described method.

FIGURE 2 is a schematic diagram of an enhanced form of

pumping configuration in accordance with the described method.

FIGURE 3 is a side elevation view in longitudinal section of an apparatus developed for use with the described method.

FIGURE 4 is a schematic diagram of a pumping
5 configuration involving the apparatus illustrated in FIGURE 3.

FIGURE 5 is a side elevation view in longitudinal section of a plurality of the apparatus illustrated in FIGURE 3 connected in series.

10

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A method of downhole cyclone oil/water separation will now be described with reference to FIGURES 1 through 5.

15

Referring to FIGURE 1, the preferred method includes the following steps. Firstly, place a cyclone separator 12 downhole in an oil well 14 producing a mixed stream of oil, water and gas. Cyclone separator 12 includes a separation
20 chamber 16 wherein liquids of differing densities are separated, a mixed liquids inlet 18 through which liquids pass into separation chamber 16, a first outlet 20 for liquids of a first density range to pass from separation chamber 16 and a second outlet 22 for liquids of a second density range to
25 pass from separation chamber 16. Secondly, connect first outlet 20 to a recovery conduit 24 extending to surface (not shown). Thirdly, connect second outlet 22 to a disposal conduit 26 extending to a selected disposal site (not shown). Fourthly, connect mixed liquids inlet 18 to a pump 28 and pump
30 a mixed stream of oil, water and gas into separation chamber 16 of cyclone separator 12. The mixed stream is separated in separation chamber 16 into a recovery stream of oil with a reduced water content which flows out of first outlet 20 and along recovery conduit 24 to the surface and a disposal stream
35 of mainly water which flows out of second outlet 22 and along disposal conduit 26 to the selected disposal site.

Referring to **FIGURE 2**, an enhanced pumping configuration is disclosed in which a backpressure valve 30 is positioned on disposal conduit 26. The use of backpressure valve 30 ensures that there is sufficient pressure maintained to get the disposal stream into an underground disposal formation selected as a disposal site, while at the same time ensuring that the pump and cyclone separator are both operating within their most efficient operating ranges. It also enables a more accurate assessment to be made as to the amount of fluid being pumped into the disposal site. There are other backpressure control means that can be used such as a flow restriction orifice. Backpressure valve 30 is preferred as it prevents a reversal of flow when pump 28 is turned off. In field installations which include pumps adversely affected by a reverse flow when stopped, the flow reversing the pump motor turns backward preventing the pump from being restarted. Referring to **FIGURE 2**, there is also provided a secondary pump 32 is positioned on the recovery conduit 24. Secondary pump 32 is intended to assist in conveying the recovery stream to the surface. The problem of gas breakout, previously described, does not adversely affect the operation of secondary pump 32 due to the fact that pump 28 provides sufficient pressure to maintain the majority of the gas in solution.

25

An apparatus for downhole cyclone separation, generally identified by reference numeral 40, been especially developed for use with the described method. When apparatus 40 is used with the described method separation capacity and production flow rates can be greatly increased. This apparatus will now be described with reference to **FIGURE 3**. Apparatus 40 includes a multiple cyclone separator housing 42 having an interior cavity 44, an mixed liquids inlet 46, a disposal stream outlet 48 and a recovery stream outlet 50. Although single inlets and outlets are illustrated, it will be appreciated that multiple inlets or outlets into housing 42 could be utilized depending upon the installation environment.

A plurality of cyclone separators 12 are disposed in interior cavity 44 of multiple cyclone separator housing 42. As previously described, each of cyclone separators 12 has a separation chamber 16 wherein liquids of differing densities are separated, a mixed liquids inlet 18 through which liquids pass into separation chamber 16, a first outlet 20 for liquids of a first density range to pass from separation chamber 16, and a second outlet 22 for liquids of a second density range to pass from separation chamber 16. Some means must be used for channelling the various flow streams flowing into mixed liquids inlet 18 and out of first outlet 20 and second outlet 22. The channelling means illustrated in **FIGURE 3** is by way of conduits 52 and 54. It should be noted that only two conduit are required as in the illustrated embodiment interior cavity 44 of multiple cyclone separator housing 42 can serve as one of the channelling means. Conduit 52 has been connected as an inlet conduit allowing liquids to pass from mixed liquids inlet 46 in multiple cyclone separator housing 42 to mixed liquids inlets 18 of each of cyclone separators 12. Conduit 54 has been connected as an outlet conduit allowing liquids to pass from first outlet 20 of each of cyclone separators 12 to recovery stream outlet 50 of multiple cyclone separator housing 42. Second outlet 22 of each of cyclone separators 12 discharges directly into interior cavity 44, so that interior cavity 44 serves to connect second outlet 22 of each of cyclone separators 12 with disposal stream outlet 48.

When apparatus 40 is used with the described method the following steps are taken, as illustrated in **FIGURE 4**. Firstly, multiple cyclone separator housing 42 is placed downhole in an oil well producing a mixed stream of oil, water and gas. Secondly, recovery stream outlet 50 of multiple cyclone separator housing 42 is connected to recovery conduit 24 extending to surface. Thirdly, disposal stream outlet 48 of multiple cyclone separator housing 42 is connected to disposal conduit 26 extending to a selected disposal site.

Fourthly, a mixed stream of oil, water and gas is pumped by means of pump 28 into mixed liquids inlet 46 of multiple cyclone separator housing 42. The mixed stream of oil, water and gas is channelled by inlet conduit 50 to mixed liquid inlets 18 of each of cyclone separators 12, whereupon the oil and water is separated in separation chamber 16 of cyclone separators 12. A recovery stream of oil with a reduced water content passes through first outlet 20 of each of cyclone separators 12 for channelling by outlet conduit 54 to recovery stream outlet 50 in multiple cyclone separator housing 42 for conveyance through recovery conduit 24 to the surface. A disposal stream of water is discharged from second outlet 22 of each of cyclone separators 12 into interior cavity 44 for channelling to disposal stream outlet 48 of multiple cyclone separator housing 42 for disposal through disposal conduit 26 to the selected disposal site.

The use of apparatus 40 provides numerous advantages. The flow rate is increased. The pressure drop across each of separators 12 is reduced, which reduces the power requirements and reduces the chance of gas breakout downstream. Multiple cyclone separators 12 provide a redundancy, if any one cyclone separator ceases to function, the remaining cyclone separators can continue to function.

25

A cyclone separator has a separation ratio that the percentage of the fluids flowing through first outlet 20 bears to the entire volume of fluids flowing through separation chamber 16. There is no minimum percentage. This means that in wells with an extremely high water content, the majority of the fluids (ie. the water) can be left downhole. There is however a maximum percentage of approximately 25 percent of the total volume leaving via first outlet 20. At this maximum percentage approximately 75 percent of the fluids are leaving via second outlet 22. This creates a problem with oil wells having a low water content. There is a danger that a portion of the oil can be pumped into the disposal zone along with the

water. Referring to **FIGURE 5**, in oil wells with a low water content, a plurality of apparatus 40 containing multiple cyclone separators can be connected in series. In this way a sequential reduction in the oil content can occur prior to
5 pumping the disposal stream to the selected disposal site.

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention
10 as defined by the Claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE AS FOLLOWS:**

1. A method of downhole cyclone separation, comprising
5 the steps of:

a. firstly, placing at least one multiple cyclone
separator housing downhole in an oil well producing a
mixed stream of oil, water and gas the multiple cyclone
separator housing having an interior cavity, at least one
10 inlet, at least one disposal stream outlet and at least
one recovery stream outlet, and a plurality of cyclone
separators disposed in each of the at least one multiple
cyclone separator housings, each of the cyclone
separators having:

15 a separation chamber wherein liquids of differing
densities are separated;

at least one mixed liquids inlet through which
liquids pass into the separation chamber;

a first outlet for liquids of a first density range
20 to pass from the separation chamber;

a second outlet for liquids of a second density range
to pass from the separation chamber;

the multiple cyclone separator housing having

means for channelling a mixed liquids flow stream
25 flowing through the at least one mixed liquids inlet of
the multiple cyclone separator housing to the at least
one mixed liquids inlet of each of the cyclone
separators;

means for channelling a recovery flow stream from the
30 first outlet of each of the cyclone separators to the at
least one recovery stream outlet of the at least one
multiple cyclone separator housing; and

means for channelling a disposal flow stream from
the second outlet of each of the cyclone separators to
35 the at least one disposal stream outlet of the at least
one multiple cyclone separator housing;

b. secondly, connecting the at least one recovery
stream outlet of the at least one multiple cyclone

separator housing to a recovery conduit extending to surface;

5 c. thirdly, connecting the at least one disposal stream outlet of the at least one multiple cyclone separator housing to a disposal conduit extending to a selected disposal site; and

10 d. fourthly, connecting the at least one mixed liquids inlet of the at least one multiple cyclone separator housing to pumping means and pumping a mixed stream of oil, water and gas into the at least one mixed liquid inlet of the at least one multiple cyclone separator housing such that the mixed stream of oil, water and gas is channelled by channelling means to the at least one mixed liquid inlet of each of the cyclone separators, whereupon the oil and water is separated in the separation chamber of the cyclone separators with a recovery stream of oil with a reduced water content passing through the first outlet of each of the cyclone separators for channelling by the channelling means to the at least one recovery stream outlet in the at least one multiple cyclone separator housing for conveyance through the recovery conduit to the surface and a disposal stream being discharged from the second outlet of each of the cyclone separators for channelling by the channelling means to the at least one disposal stream outlet in the at least one multiple cyclone separator housing for disposal through the disposal conduit extending to the selected disposal site.

30 2. The method of downhole cyclone separation as defined in Claim 1, wherein a plurality of multiple cyclone separator housings are connected in series thereby effecting a sequential reduction in the oil content in the disposal stream.

3. An apparatus for downhole cyclone separation, comprising:

5 a. a multiple cyclone separator housing having an interior cavity, at least one mixed liquids inlet, at least one disposal stream outlet and at least one recovery stream outlet, said at least one disposal stream outlet and said at least one recovery stream outlet being at opposite vertical housing ends;

10 b. a plurality of cyclone separators disposed in the interior cavity of the cyclone separator housing, said cyclone separators being vertically oriented and vertically aligned with each other, each of the cyclone separators having:

15 a separation chamber wherein liquids of differing densities are separated;

at least one mixed liquids inlet through which liquids pass into the separation chamber;

a first outlet for liquids of a first density range to pass from the separation chamber;

20 a second outlet for liquids of a second density range to pass from the separation chamber;

at least one of said at least one mixed liquids inlet, said first outlet and said second outlet being vertically oriented;

25 c. means for channelling a mixed liquids flow stream flowing through the at least one mixed liquids inlet of the multiple cyclone separator housing to the at least one mixed liquids inlet of each of the cyclone separators;

30 d. means for channelling a recovery flow stream from the first outlet of each of the cyclone separators to the at least one recovery stream outlet of the multiple cyclone separator housing; and

35 e. means for channelling a disposal flow stream from the second outlet of each of the cyclone separators to the at least one disposal stream outlet of the multiple cyclone separator housing, such that mixed liquids

passing through the at least one mixed liquids inlet of the multiple cyclone separator housing are channelled by the means for channelling a stream to the at least one mixed liquid inlet of each of the cyclone separators, whereupon the liquids are separated in the separation chamber of the cyclone separators with a recovery stream passing through the first outlet of each of the cyclone separators to the outlet conduit for channelling by the means for channelling a stream to the at least one recovery stream outlet in the multiple cyclone separator housing and a disposal stream being discharged from the second outlet of each of the cyclone separators for channelling by the means for channelling a stream to the at least one disposal stream outlet in the multiple cyclone separator housing.

4. The apparatus for downhole cyclone separation as defined in Claim 3, in which each of the channelling means together comprise a total of at least two conduit extending between two of the at least one mixed liquids inlet of the multiple cyclone separator housing and the at least one mixed liquids inlet of each of the cyclone separators, the first outlet of each of the cyclone separators and the at least one recovery stream outlet of the multiple cyclone separator housing, and the second outlet of each of the cyclone separators and the at least one disposal stream outlet of the multiple cyclone separator housing.

5. An apparatus for downhole cyclone separation, comprising:

5 a. a multiple cyclone separator housing having an interior cavity, at least one mixed liquids inlet, at least one disposal stream outlet and at least one recovery stream outlet said at least one disposal stream outlet and said at least one recovery stream outlet being at opposite vertical housing ends;

10 b. a plurality of cyclone separators disposed in the interior cavity of the multiple cyclone separator housing, said cyclone separators being vertically oriented and vertically aligned with each other, each of the cyclone separators having:

15 a separation chamber wherein liquids of differing densities are separated;

at least one mixed liquids inlet through which liquids pass into the separation chamber;

20 a first outlet for liquids of a first density range to pass from the separation chamber;

a second outlet for liquids of a second density range to pass from the separation chamber;

25 at least one of said at least one mixed liquids inlet, said first outlet and said second outlet being vertically oriented;

c. an inlet conduit communicating with the at least one inlet in the multiple cyclone separator housing and connected to the at least one mixed liquids inlet of each of the cyclone separators; and

30 d. an outlet conduit communicating with the at least one recovery stream outlet in the multiple cyclone separator housing and connected to the first outlet of each of the cyclone separators, such that mixed liquids passing through the at least one mixed liquid inlet of the multiple cyclone separator housing are conveyed by
35 the inlet conduit to the at least one mixed liquid inlet of each of the cyclone separators, whereupon the liquids

are separated in the separation chamber of the cyclone separators with a recovery stream passing through the first outlet of each of the cyclone separators to the outlet conduit for conveyance through the at least one recovery stream outlet in the multiple cyclone separator housing and a disposal stream being discharged from the second outlet of each of the cyclone separators into the interior cavity and passing through the at least one disposal stream outlet in the multiple cyclone separator housing.

6. An apparatus for downhole cyclone separation, including a multiple cyclone separator housing having an interior cavity, at least one mixed liquids inlet, at least one disposal stream outlet and at least one recovery stream outlet, a plurality of cyclone separators disposed in the interior cavity of the cyclone separator housing, each of the cyclone separators having: a separation chamber wherein liquids of differing densities are separated, at least one mixed liquids inlet through which liquids pass into the separation chamber, a first outlet for liquids of a first density range to pass from the separation chamber, a second outlet for liquids of a second density range to pass from the separation chamber, means for channelling a mixed liquids flow stream flowing through the at least one mixed liquids inlet of the multiple cyclone separator housing to the at least one mixed liquids inlet of each of the cyclone separators, means for channelling a recovery flow stream from the first outlet of each of the cyclone separators to the at least one recovery stream outlet of the multiple cyclone separator housing, means for channelling a disposal flow stream from the second outlet of each of the cyclone separators to the at least one disposal stream outlet of the multiple cyclone separator housing, such that mixed liquids passing through the at least one mixed liquids inlet of the multiple cyclone separator housing are

channelled by the means for channelling a stream to the at least one mixed liquid inlet of each of the cyclone separators, whereupon the liquids are separated in the separation chamber of the cyclone separators with a recovery stream passing through the first outlet of each of the cyclone separators for channelling by the means for channelling a stream to the at least one recovery stream outlet in the multiple cyclone separator housing and a disposal stream being discharged from the second outlet of each of the cyclone separators for channelling by the means for channelling a stream to the at least one disposal stream outlet in the multiple cyclone separator housing, characterized by:

cyclone separators being vertically oriented and vertically aligned with each other and disposed within an interior cavity of the multiple cyclone separator housing;

at least one of said at least one mixed liquids inlet, said first outlet and said second outlet of each of the cyclone separators being vertically oriented;

the inner cavity of the multiple cyclone separator housing serving as means for channelling one of the mixed liquids flow stream, the disposal flow stream, and the recovery flow stream relative to each of the cyclone separators; and

said at least one disposal stream outlet and said at least one recovery stream outlet being at opposite vertical housing ends of the multiple cyclone separator housing.

30

7. The apparatus for downhole cyclone separation as defined in Claim 6, in which each of the channelling means together comprise a total of at least two conduits, extending between two of the at least one mixed liquids inlet of the multiple cyclone separator housing and the at least one mixed liquids inlet of each of the cyclone separators, the first outlet of each of the cyclone

35

separators and the at least one recovery stream outlet of the multiple cyclone separator housing, and the second outlet of each of the cyclone separators and the at least one disposal stream outlet of the multiple cyclone separator housing, the conduits being secured to the multiple cyclone separator housing.

8. The apparatus according to claim 6 or 7 in which the inner cavity serves as means for channelling the disposal flow stream.

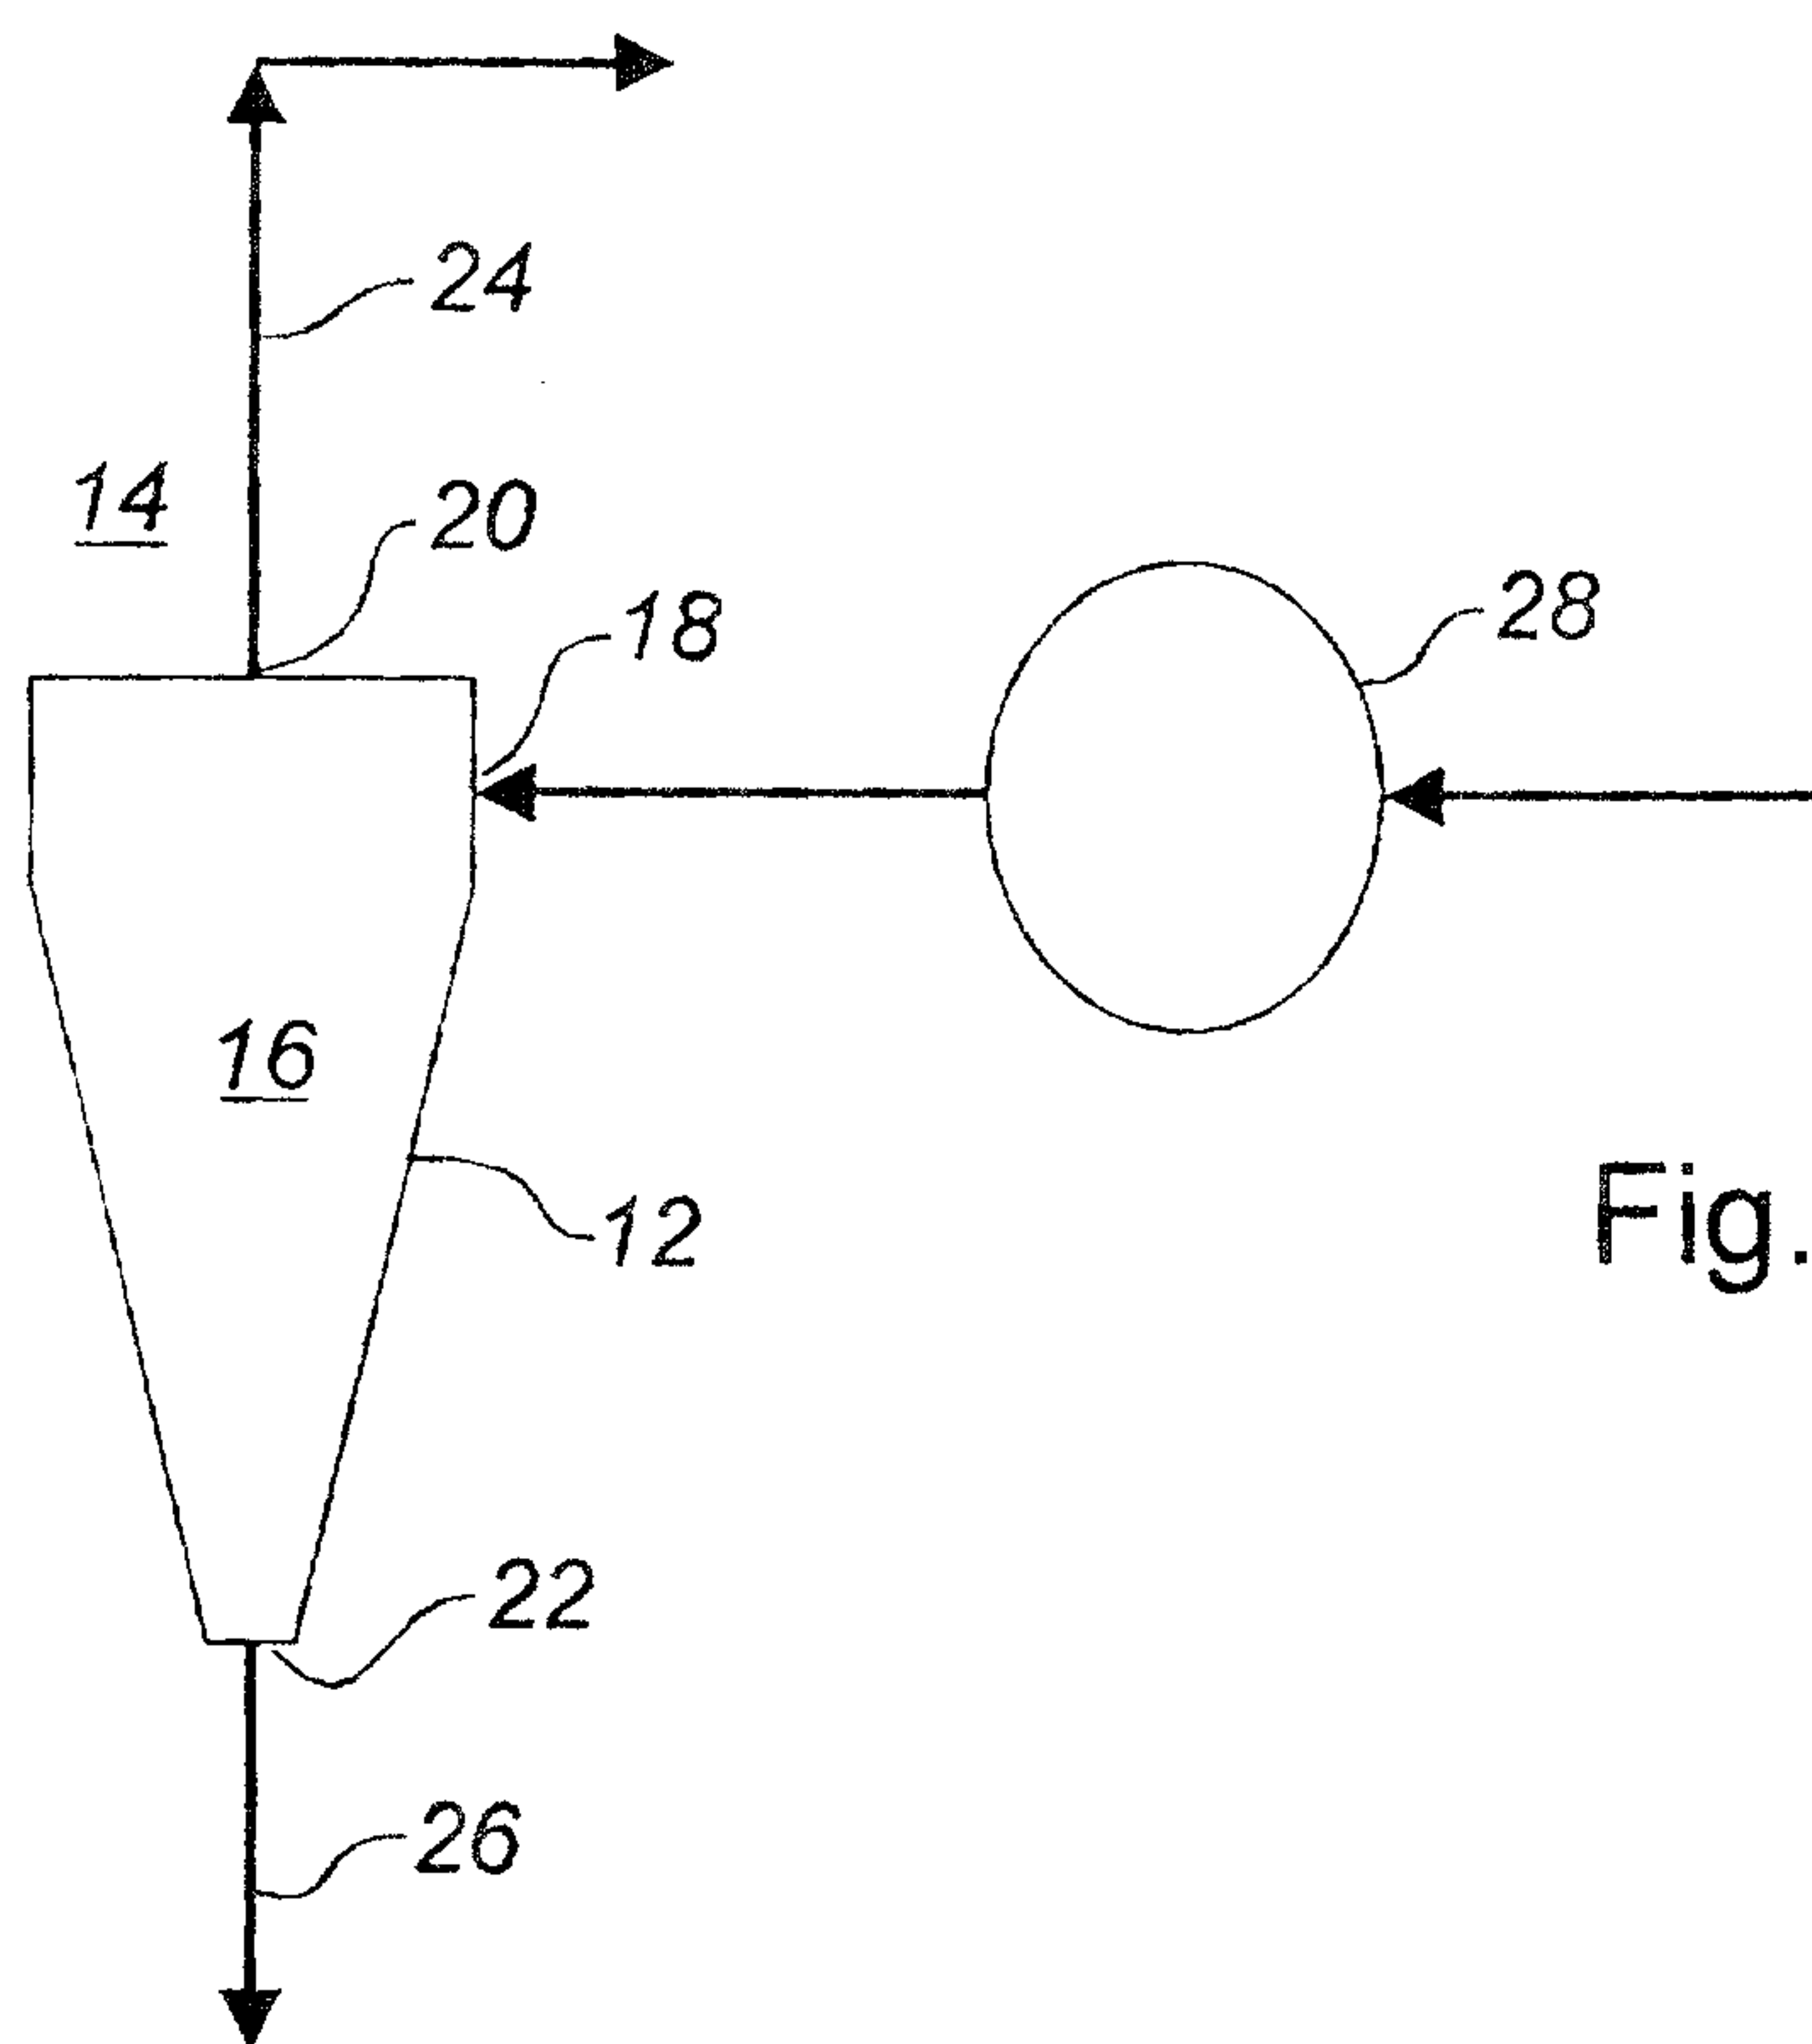


Fig. 1.

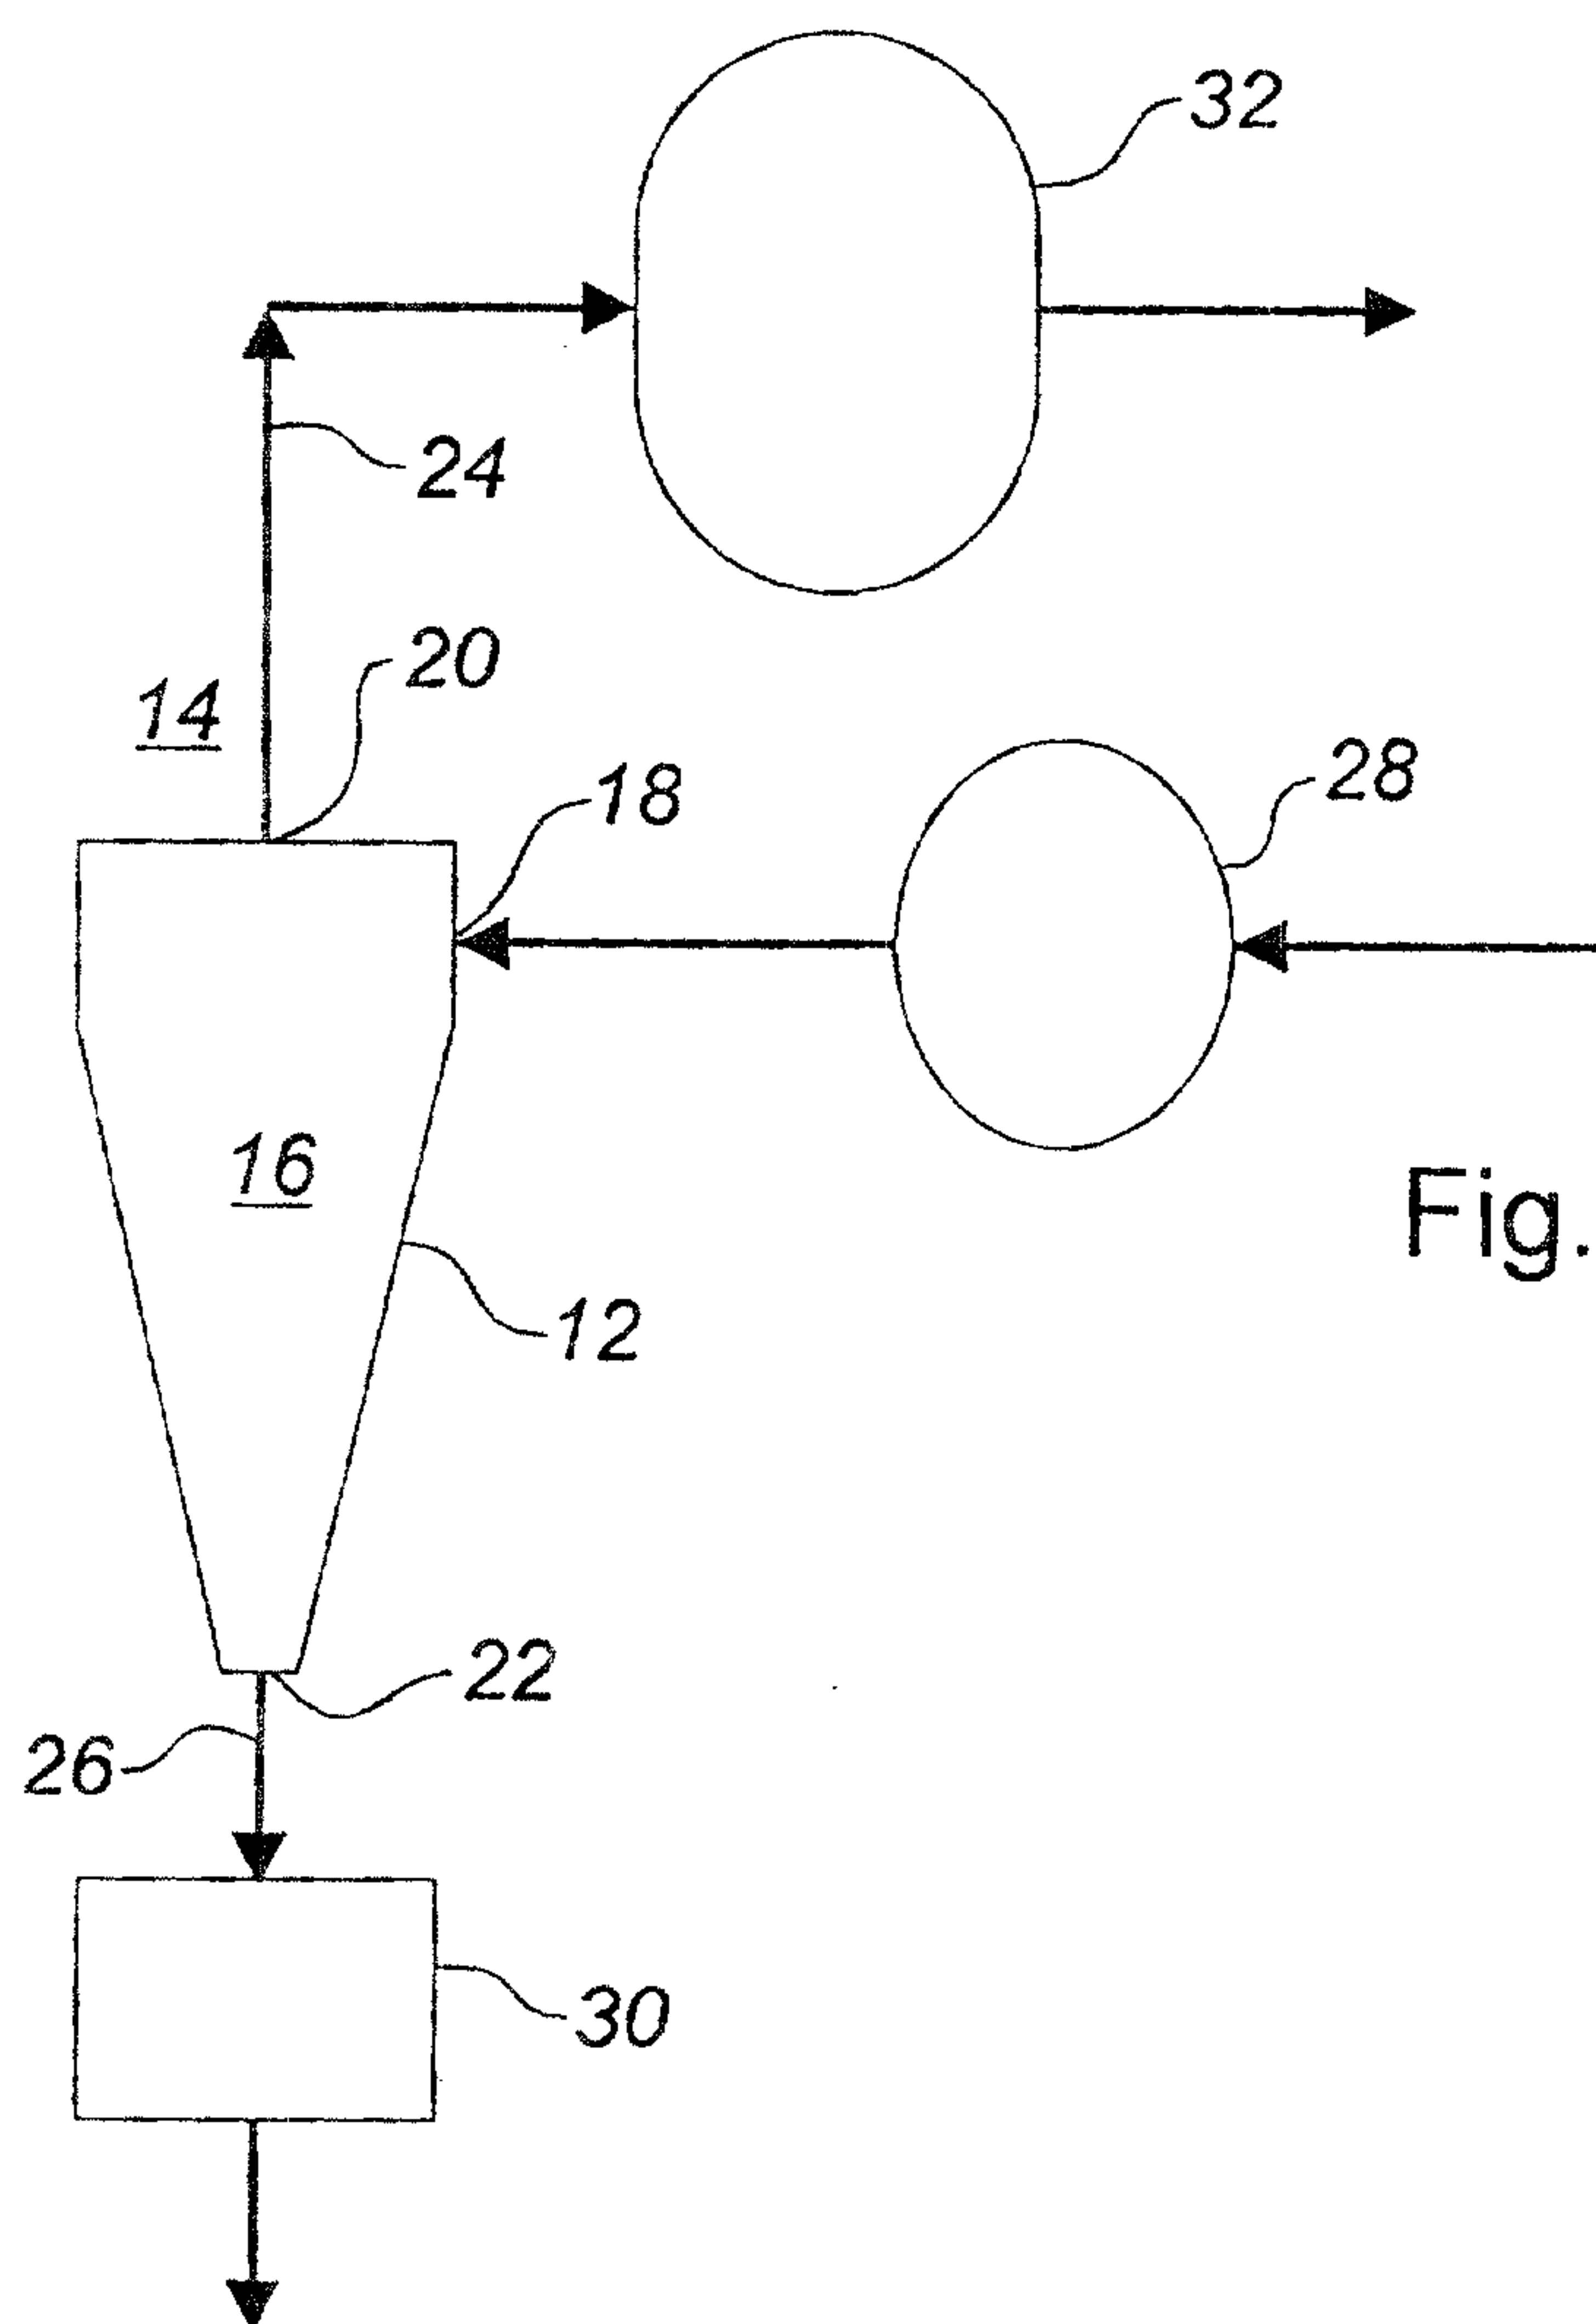
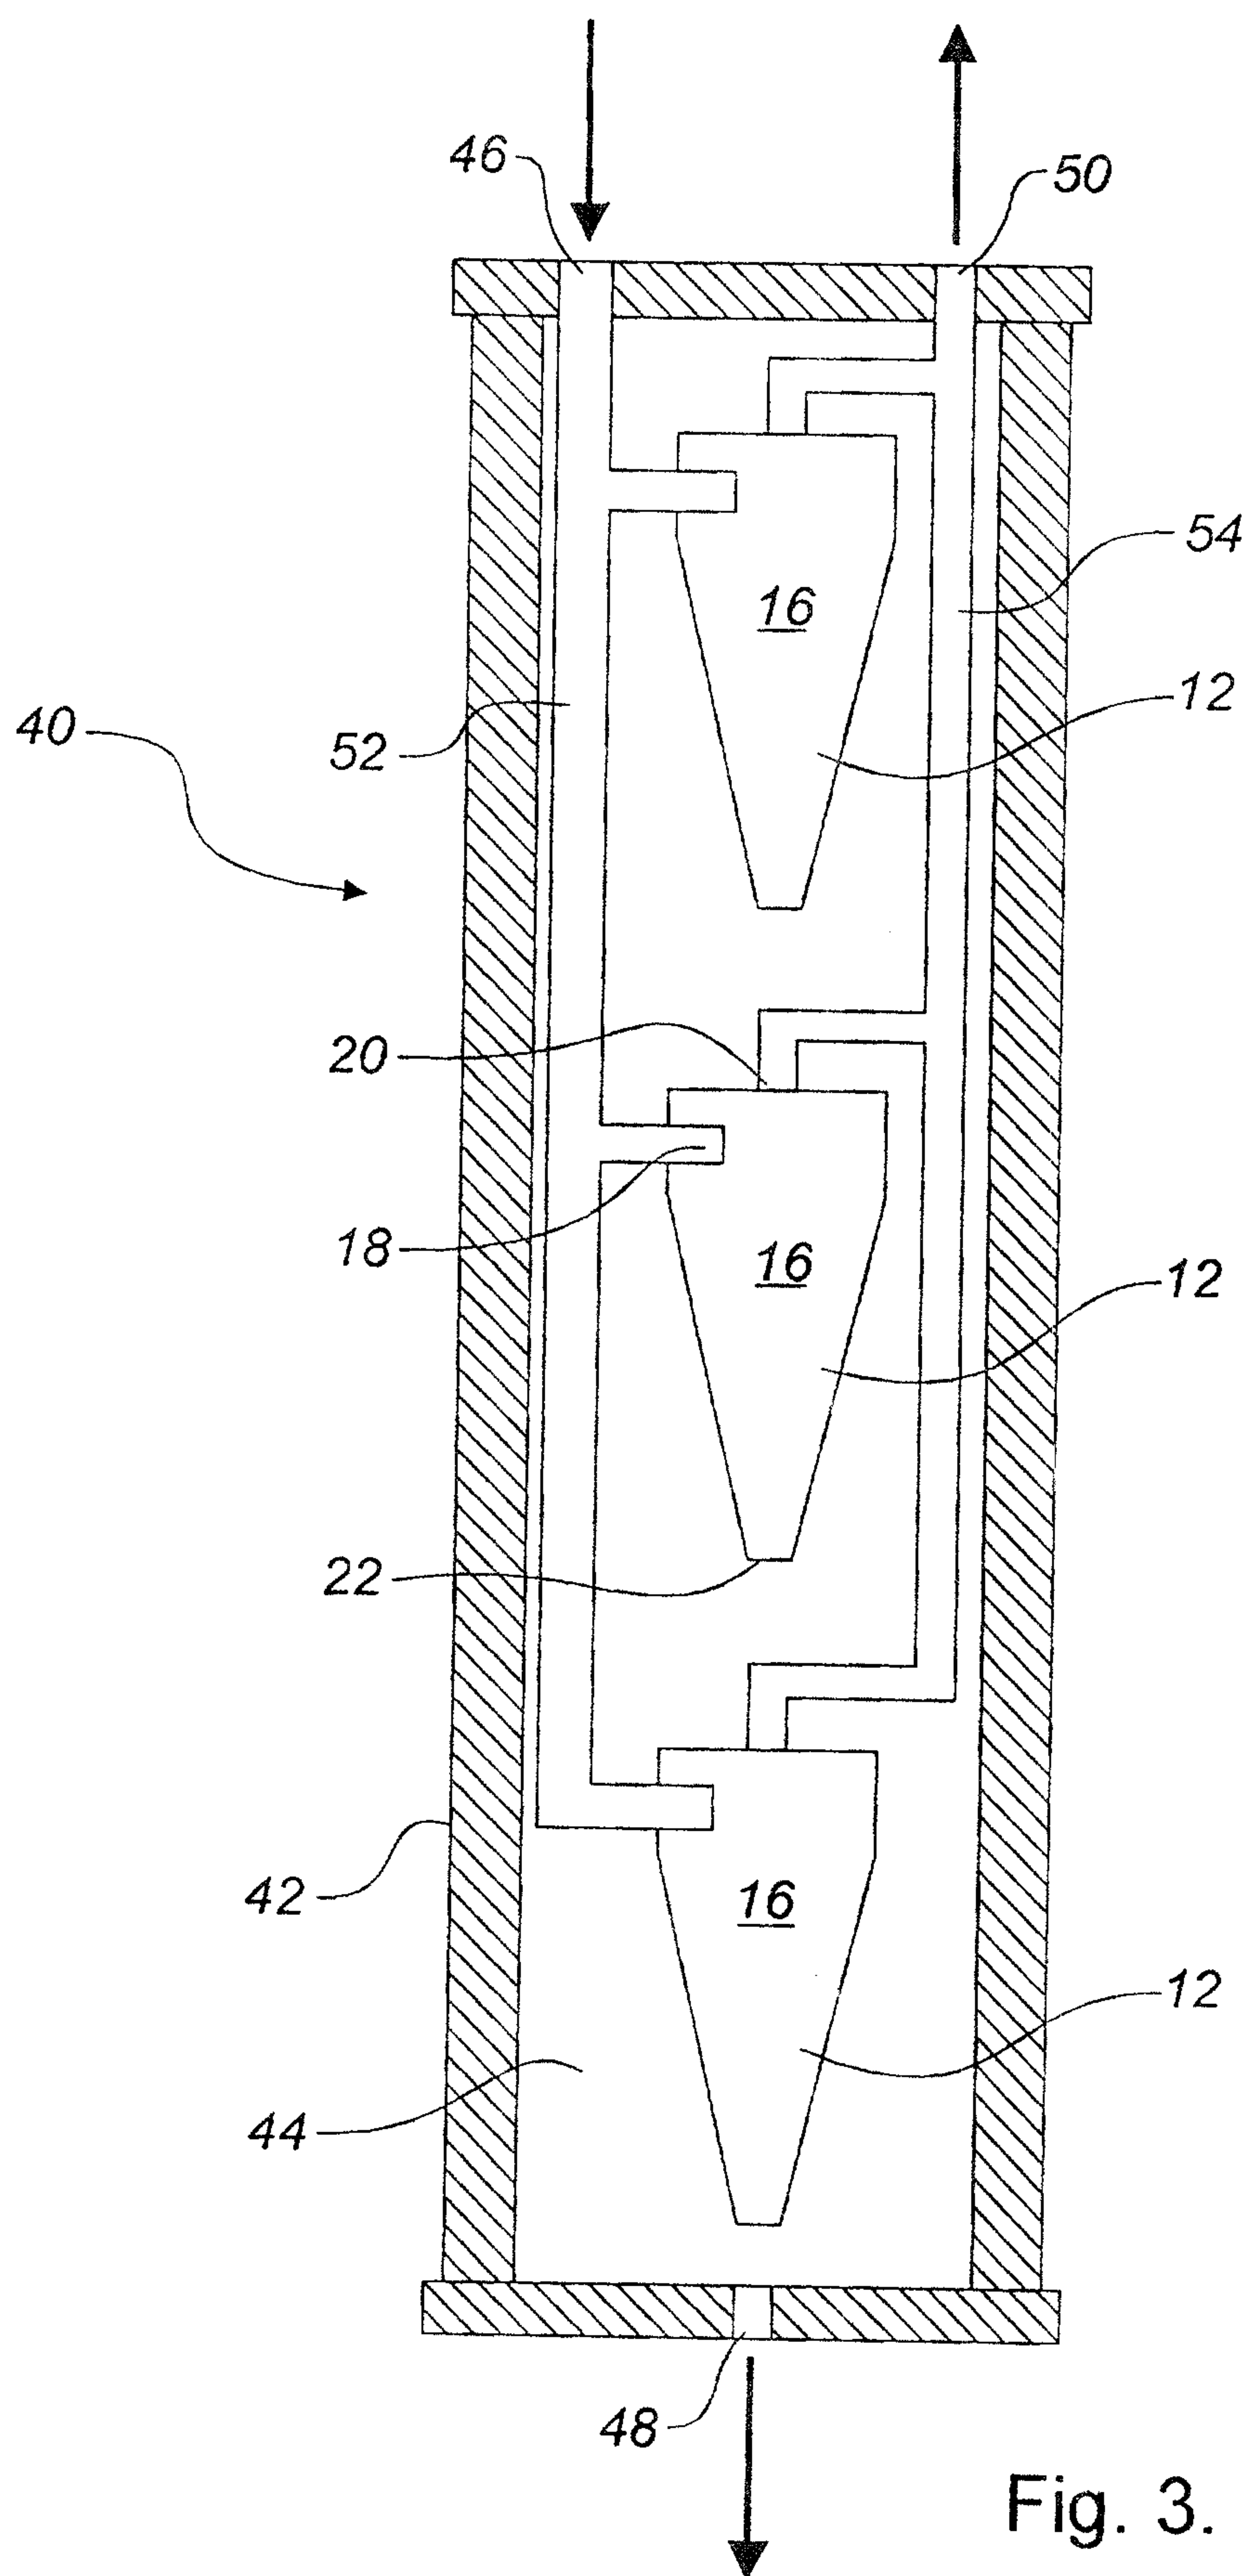
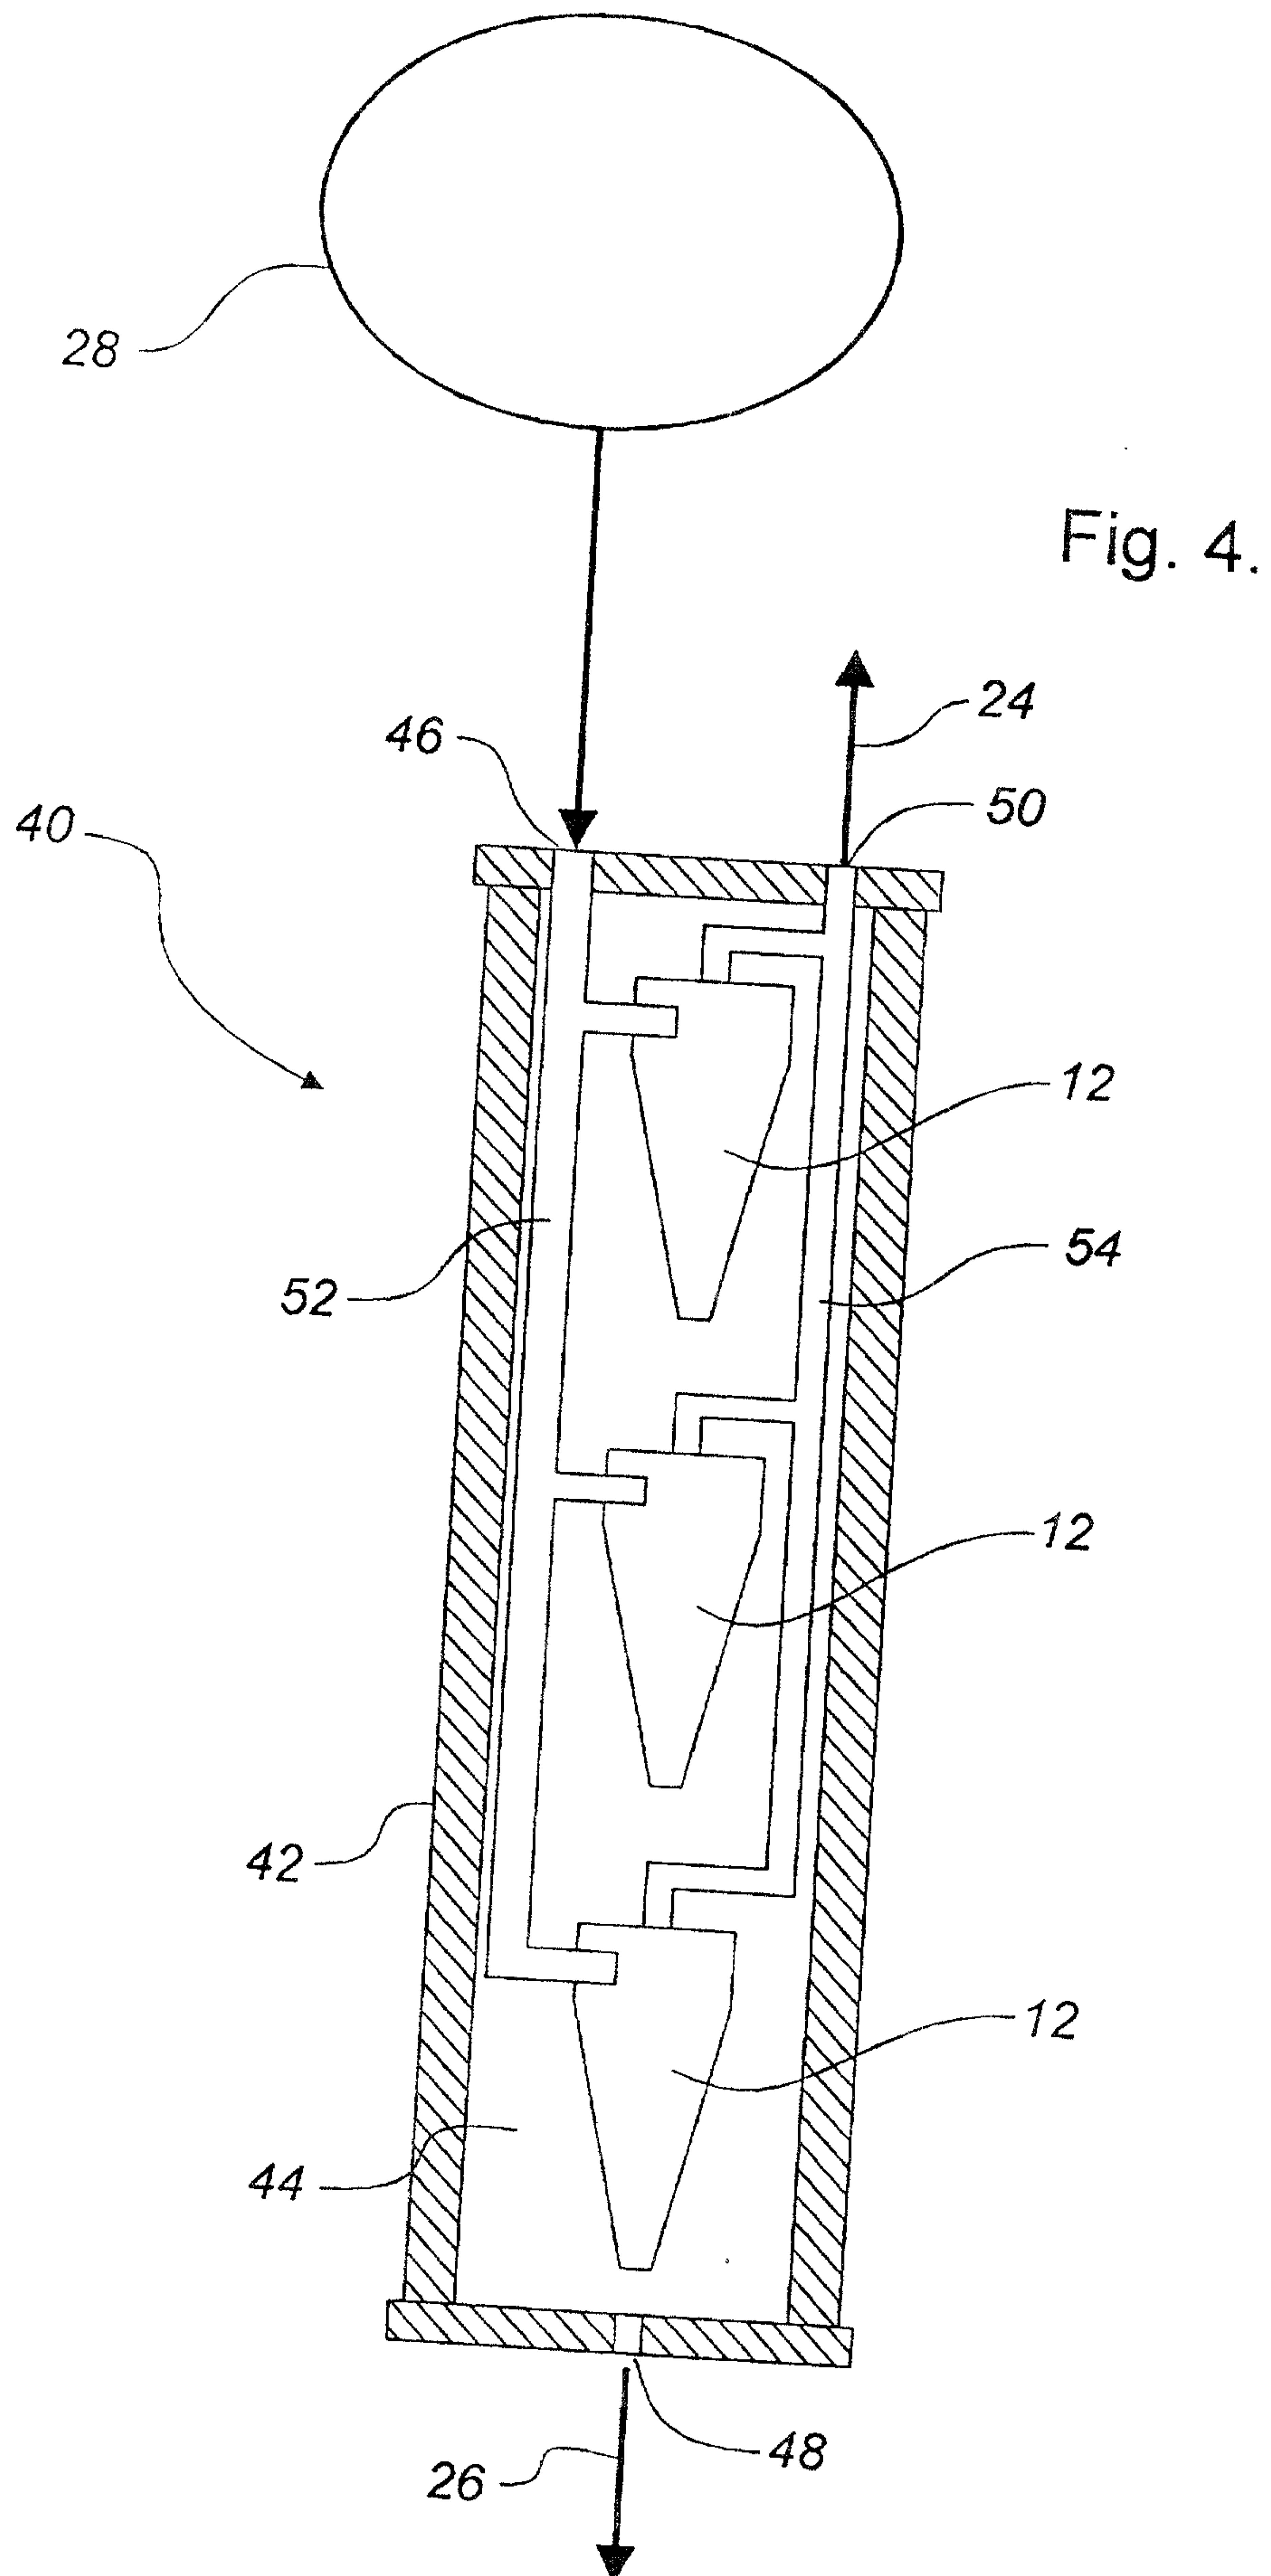


Fig. 2.





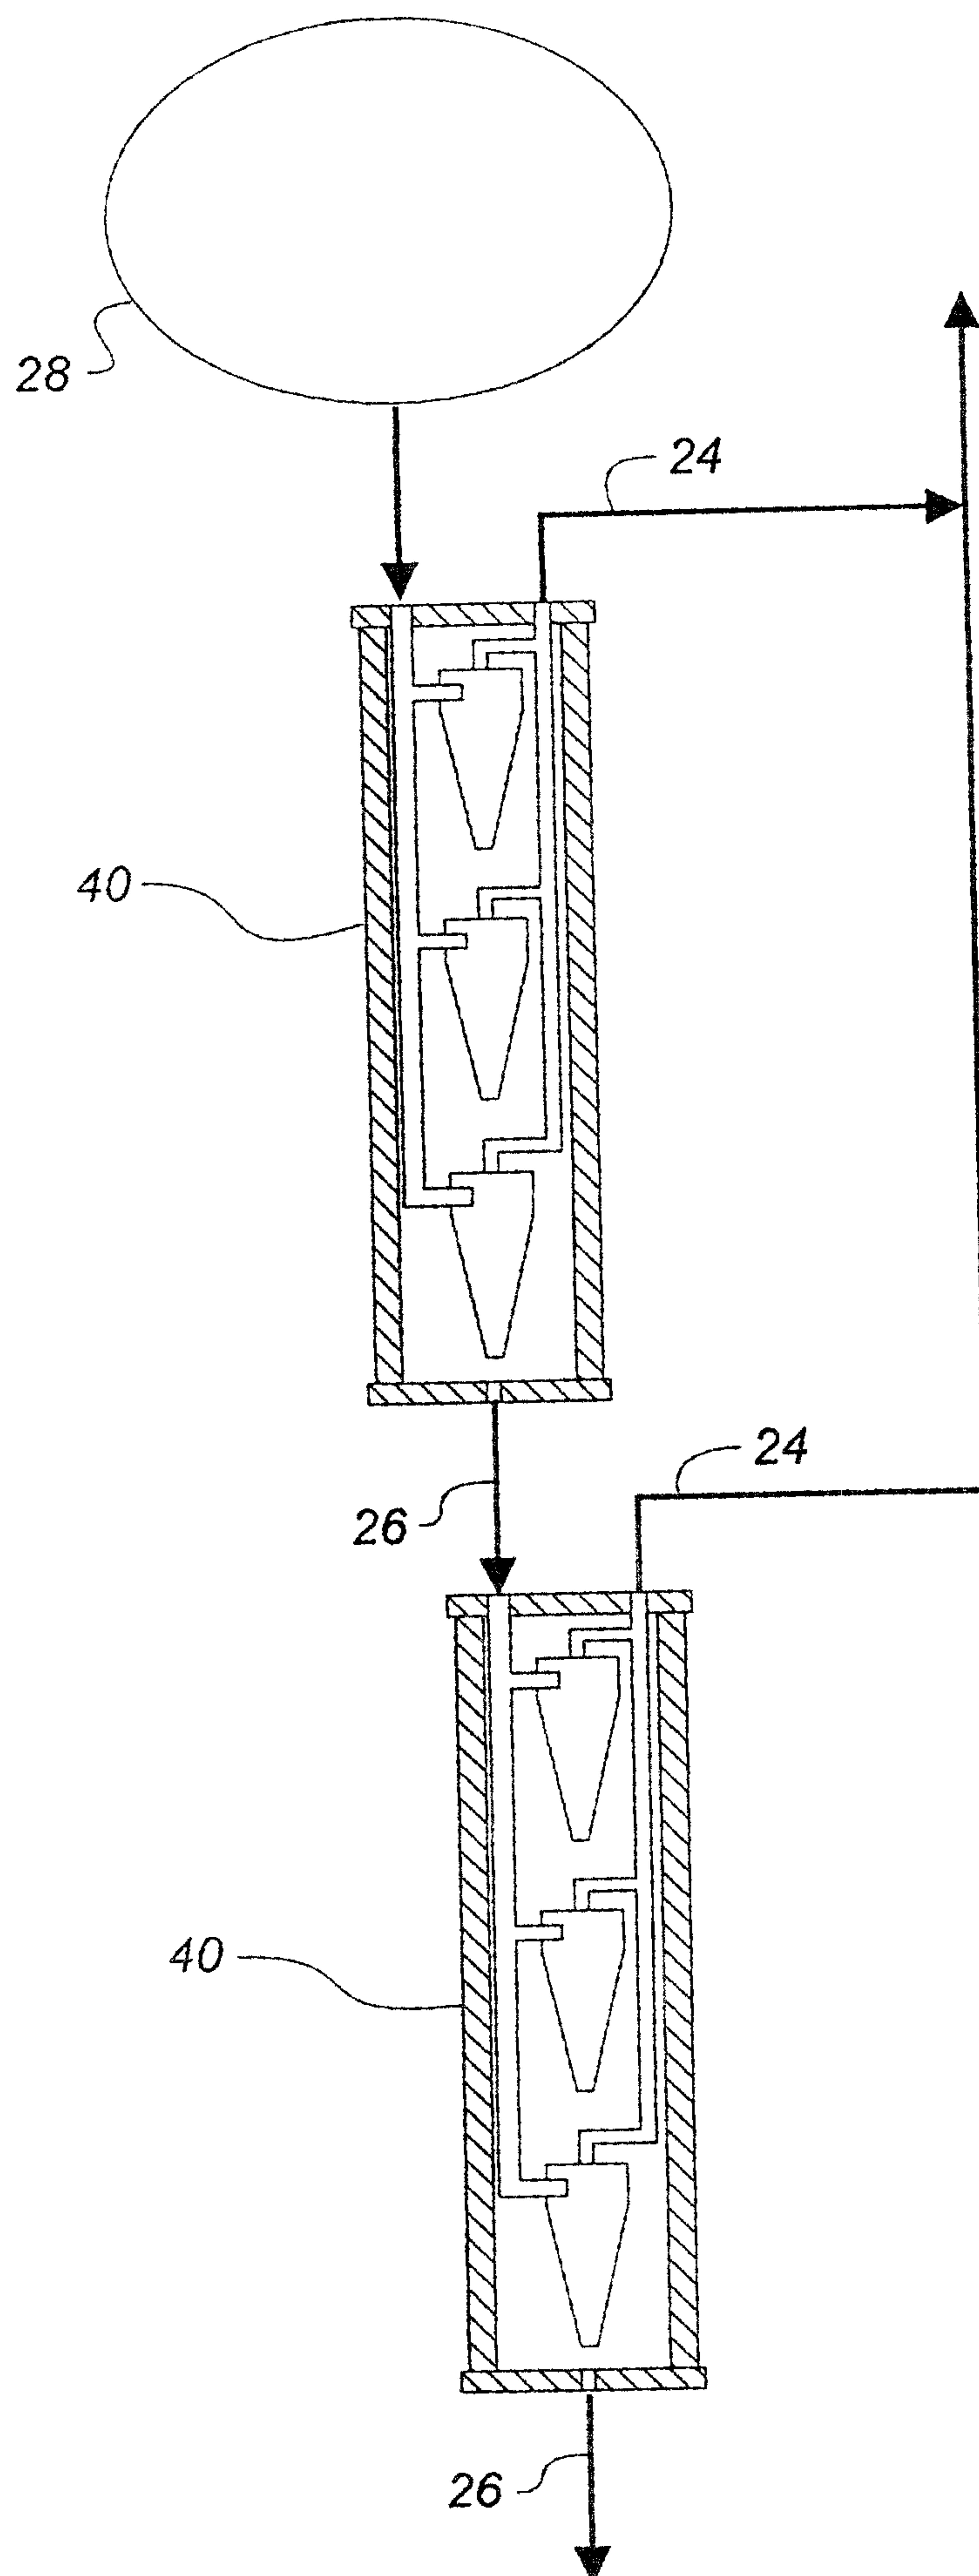


Fig. 5

