

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 August 2005 (25.08.2005)

PCT

(10) International Publication Number
WO 2005/078530 A1

(51) International Patent Classification⁷: **G03H 1/02**,
G09F 3/00, G06K 19/16, B60R 25/00, G03H 1/26

(74) Agents: ANDERA, Jiri et al.; Rott, Ruzicka & Guttman,
P.O. Box 94, 170 00 Praha 7 (CZ).

(21) International Application Number:
PCT/CZ2004/000082

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date: 2 December 2004 (02.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PV2004-234 12 February 2004 (12.02.2004) CZ

(71) Applicant (for all designated States except US): OP-
TAGLIO S.R.O. [CZ/CZ]; 250 68 Rez 199 (CZ).


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventor; and


(75) Inventor/Applicant (for US only): JERMOLAJEV, Igor
[CZ/CZ]; Na Zertvach 40, 180 00 Praha (CZ).

[Continued on next page]

(54) Title: METAL IDENTIFICATION PLATELET AND METHOD OF PRODUCING THEREOF

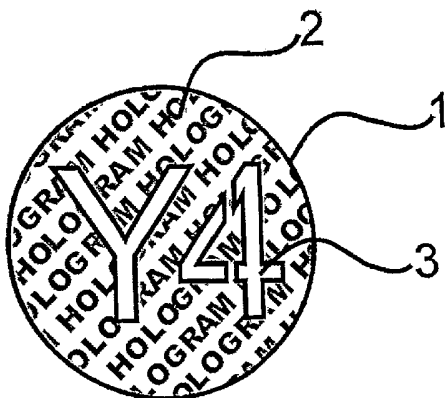

(57) Abstract: A metal identification platelet
(1) equipped with an identification code,
while the identification code comprises a
hologram (2). A method of producing the
identification platelet (1) with the identification
code, comprising the following steps: A shield
(9) from an electro-insulation material is
formed on a shim (4) with a holographic motif
(7). Then, the shim (4) is galvanized in the
places not covered by the shield (9) from the
electro-insulation material. And the completed
metal identification platelets (1) are removed
from the shim (4).

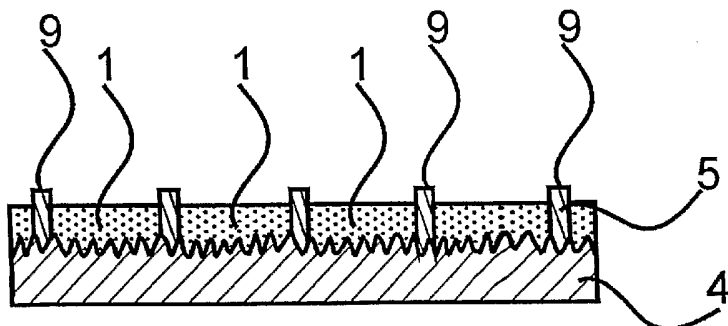



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Metal identification platelet and method of producing thereof

Technical Field

The invention relates to a metal identification platelet equipped with an identification code, and to the production of the metal identification platelet.

Background Art

There are many systems for marking products, which are aimed at clear identification of products at all times and thus at discouraging an eventual thief, since a marked product cannot be sold easily. The success of such identification systems, however, depends on the fact, how easily the applied identification elements can be removed or modified.

For instance, each produced automobile bears a unique code, the so-called VIN (Vehicle Identification Number), which enables to identify the origin of a vehicle. However, presentation of the VIN code on a production label of a car is only a little obstacle for a thief, because there exist many possible ways how to modify the VIN code on a production label.

As a result, an Australian company, the Datadot Technology Limited, use so-called data dots - polyester platelets in the shape of little discs having cca 1 mm in diameter and being cca 0.1 mm thick, which bear an identification code burned on by laser. As for cars, this code can be the same as the abovementioned VIN code, consisting of 17 characters.

These platelets are to be mixed with a special adhesive material, which, upon hardening, is transparent and fluoresces under ultraviolet light. The mixture of the adhesive and the platelets can be applied on selected parts of a car by means of e.g. a spray gun, so the marking of the individual parts of the car does not last long. The adhesive is resistant to high or low temperatures and commonly accessible chemicals. The code presented on the platelets can be read by means

of a simple and cheap microscope. A great amount of identification platelets (cca 5000 identification platelets applied during tests) are applied on various parts of one car, so an eventual thief will not be able to remove all of them.

A device for applying such identification platelets has been known from e.g. Australian patent AU 2001100633, or US patent 715864, or European patent application EP 1216758.

From British patent GB 2346583 a microdot for identification of products is known. The microdot comprises 14 lines of an alphanumeric code and 16 lines of a code, which is a mirrored image of the abovementioned alphanumeric code. This solution enables to read the code from both sides of the microdot.

The purpose of the invention is to design such identification platelets/dots that cannot be copied easily, and, at the same time, to suggest the production of such identification platelets/dots, which would enable to create a hologram on the smallest possible platelet.

Disclosure of Invention

The abovementioned goal is achieved by a metal identification platelet equipped with an identification code, in accordance with the invention, the essence of which is that the identification code comprises a hologram.

The metal identification platelet with the hologram allows more identification data to be applied on one platelet in comparison with a well-known identification platelet, which bears an identification code burned on by laser.

According to a preferred embodiment, in addition to the hologram the identification code on the platelet can be constituted by an arbitrarily formed passage shape hole, which is visible from both sides of the identification platelet, although in a mirrored image only. Moreover, the identification code can be constituted by an external shape of the platelet, thus representing another distinguishing element

when a marked product is to be identified.

According to another preferred embodiment, the hologram and/or shape hole comprises of alphanumeric characters.

The identification platelet can be made from nickel being 1 to 15 μm thick.

The abovementioned goal will be achieved also by means of a method of producing of a metal identification platelet with an identification code, according to the invention, the essence of which is that it comprises the following steps:

A shield from an electro-insulation material is formed on a shim with a holographic motif. Then, the shim is galvanized in the places not covered by the shield from the electro-insulation material. The completed metal identification platelets are removed from the shim.

Using the method according to the invention, a hologram can be created with advantage also on a metal platelet of minimum size; however, the method according to the invention can be applied during the production of any identification elements, such as tags or labels of any shape and size, provided with a hologram and applied on a product in order to facilitate its identification.

The shield from the electro-insulation material can be formed by means of direct shim printmaking using non-conductive varnish, or a paint in a common printing manner, or by developing a photoresist layer.

According to one of the embodiments, the electro-insulation material shield is produced as follows: a photoresist layer is applied on the shim with a holographic motif, then a mask is put on the photoresist layer and the photoresist layer with the mask is exposed by a UV lamp and the exposed photoresist layer is etched from the shim in a developer.

Then the shim is galvanized in the places where the photoresist layer was etched, The waste photoresist layer is removed.

Finally the completed metal identification platelets are taken from the shim.

In order to facilitate the removal of the completed identification platelets from the shim, the shim surface can be passivated with the solution of potassium dichromate.

According to a preferred embodiment, the shim can be galvanized in a galvanic-plastic nickel bath.

The waste electro-insulation shield and/or waste photoresist layer can be removed with advantage by being washed in a solvent, and then the shim can be washed in demineralised water and dried.

The final metal identification platelets can be removed from the shim with advantage by fine scraping or in an ultrasonic bath.

According to a preferred embodiment, the shim with a holographic motif can be made from nickel.

According to another preferred embodiment, the electro-insulation shield can be applied directly on a shim with a holographic motif using a printing method, with advantage by intaglio printing.

Brief Description of Drawings

The invention will be explained by means of drawings. Fig. 1 represents schematically the first embodiment of the metal identification platelet according to the invention, round-shaped, the identification code of which is constituted by a hologram combined with passage holes in the form of a letter and numeral. Fig. 2 shows the second embodiment of the metal identification platelet according to the invention, oblong-shaped. Figures 3 to 7 show a shim schematically drawn in various steps of the first example of the metal identification platelet production method according to the invention. Figures 8 to 10 show again a shim schematically drawn in various steps of the second example of the metal

identification platelets production method according to the invention.

Modes for Carrying Out the Invention

Fig. 1 shows the first example of a particular embodiment of metal identification platelet 1. Identification platelet 1 is made from nickel, 5 μm thick; it is enlarged in fig. 1, because the actual diameter of this embodiment is 0.5 mm. Identification platelet 1 is equipped with an identification code, which, in this embodiment, comprises a hologram 2 as well as a passage shape holes 3. The hologram 2 and the passage shape holes 3 are shown in a simplified way only. Experts understand that the holograms 2 and the passage shape holes 3 may include arbitrary images and groups of alphanumeric characters.

Fig. 2 shows the second embodiment of metal identification platelet 1 (enlarged), made from nickel, 10 μm thick, 3 mm long and 0.3 mm wide. The identification platelet 1 is provided with an identification code, which again includes hologram 2 and passage shape holes 3 shown as alphanumeric characters for simplicity purposes.

Metal identification platelets 1 are produced on shim 4 with holographic motif 7, corresponding to required hologram 2, which is to be carried by the identification platelets 1.

In the embodiments described below, a shim 4 was used, made from nickel by a well-known method used in the production of pressed holograms, and described, for instance, in a book by Graham Saxby, Practical Holography – Second Edition, Prentice Hall International, the disclosure of which is incorporated by reference. Therefore, the well-know method of the production of the shim for pressed holograms will not be described further.

Shield 9 from the electro-insulation material is made by development of a photoresist layer 5 or by direct printmaking of the shim 4 using a non-conductive varnish or paint applying a common printing method.

In the first embodiment, the method of producing metal identification platelet 1 will be described, where the shield 9 from the electro-insulation material was produced by using the photoresist layer 5.

While forming the shield 9 from the electro-insulation material by developing the photoresist layer 5, a method known as photolithography, which is commonly used in the production of printed circuits and integrated circuits, can be applied. Such methods are described for example in a book by Mark A. McCord, M. J. Rooks, SPIE HANDBOOK OF MICROLITHOGRAPHY, MICROMACHINING AND MICROFABRICATION, the disclosure of which is incorporated by reference. Therefore, detailed information on the production of shield 9 from the electro-insulation material by the development of the photoresist layer 5 will not be described further.

In order to make removing the completed identification platelets 1 easier, the shim 4 with the holographic motif 7 was passivated by the solution of potassium dichromate with the concentration of 3g/l.

Then, the photoresist layer 5 having thickness of 3 μm , was applied on shim 4 with the holographic motif 7. Thickness ranging from 1 to 5 μm is recommended. A positive photoresist was used. However, experts understand that a negative photoresist can be used as well. The photoresist 5 was applied in a centrifuge. After that a burning in a furnace at the temperature ranging from 60 to 65 $^{\circ}\text{C}$ followed.

Then a mask 6, constituted by a printing film produced on a well-known imagesetter, was put on the photoresist layer 5. The mask 6 is made from a transparent material, on which non-transparent areas 8 have been created (see fig. 4).

The shim 4 with applied photoresist layer 5 and the mask 6 are shown in Fig. 3 in cross section.

Fig. 4 shows that non-transparent areas 8 of the mask 6 cover the shim 4 in the places that separate future individual identification platelets, as well as in the places, where passage shape holes are to be created in the future identification platelets, for instance, in the form of the shown alphanumeric characters. As for more complicated shape passages, the final shape can be "dotted".

By shaping the mask 6 and/or the final shield 9 any shape of the identification platelets 1 as well as the passage shape holes 3 can be produced. The shape of the platelets 1 is thus another distinguishing element, when a marked product is to be identified.

After that the photoresist layer 5 with the applied mask 6 was exposed by a UV lamp and then the exposed photoresist layer 5 was etched from the shim 4 in a developer. Microposir 351 Developer produced by Shipley Europe Limited was used. However, experts understand that any standard developer can be used.

Fig. 5 shows the shim 4 in section, where photoresist layer 5 is etched from the shim 4 in the places outside the non-transparent areas 8 of the mask 6. Remaining photoresist layer 5 thus constitutes shield 9 made of electro-insulation material. In the places of the future identification platelets 1, the holographic motif 7 of the future hologram 2 can be seen.

Then the shim 4 was dipped into the galvanic-plastic nickel bath and covered by a layer of nickel having thickness of 4 μm . The layer of nickel was built in the places where the photoresist layer 5 was removed. The nickel layer formed the identification platelets 1. The surface of the shim 4 covered by the shield 9 from the electro-insulation material is insulated and therefore not plated. The shim 4 in this stage of production is shown in Fig. 6.

Waste photoresist layer 5 was removed from the shim 4 by lye. Then the shim 4 was washed with demineralised water and dried. The shim 4 in this stage of production is shown in Fig. 7.

Completed metal identification platelets 1 were removed from the shim 4 in an ultrasonic bath.

The second embodiment will describe the production of metal identification platelet 1, where shield 9 from the electro-insulation material was formed by printmaking using a non-conductive paint.

In order to make removing the completed identification platelets 1 easier, the shim 4 with the holographic motif 7 was passivated by the solution of potassium dichromate with the concentration of 3g/l.

Then the shield 9 from the electro-insulation material was printed on the shim 4 with holographic motif 7. The shield 9 from the electro-insulation material was produced by printing the shim 4 with the non-conductive paint applying the method of intaglio printing.

The shim 4 in this stage of production, i.e. with applied shield 9 from the electro-insulation material, is shown in Fig. 8 in a simplified section.

The shim 4 prepared in this way was dipped into the galvanic-plastic nickel bath and covered with 5 µm thick nickel layer in the places not covered by shield 9 from the electro-insulation material. The nickel layers then created the identification platelets 1. The surface of the shim 4 covered with the shield 9 from the electro-insulation material is insulated, therefore not plated. The shim 4 in this stage of production is shown in Fig. 9.

The example describes galvanisation with nickel; however, experts understand that other metals that can be applied in a galvanic manner may be used as well.

In the next step, the shim 4 was dipped into a solvent, which removed the electro-insulation material of the shield 9, and then the shim 4 was washed with demineralised water and dried. The shim 4 in this stage of production is shown in

Fig. 10.

Finally, the completed metal identification platelets 1 were removed from the shim 4 by fine scraping. Alternately, an ultrasonic bath can be used to remove the identification platelets 1 from the shim 4.

The completed identification platelets 1 bear hologram 2, which is an imprint of the holographic motif 7, initially created on the shim 4. This method of production enables to create the hologram 2 also on identification platelets of minimum size, which would not be possible using the well-known method of producing pressed holograms.

The size of the identification platelet 1 and the passage shape holes 3 in this identification platelet 1 is limited only by the graphic resolution of photolithographic or printing devices used for the production of the shield 9 from electro-insulation material.

This resolution amounts to 10000 dpi in optical photolithography and 200000 dpi in electron photolithography. The resolution in well-known printing devices is lower; for instance, in intaglio printing, it does not exceed 500 dpi.

CLAIMS

1. A metal identification platelet (1) equipped with an identification code, **characterized by the fact**, that the identification code comprises a hologram (2).
2. The metal identification platelet (1) as in Claim 1, **characterized by the fact**, that the identification code further comprises a passage shape hole (3), and/or the identification code is constituted by an external shape of the platelet (1).
3. The metal identification platelet (1) as in Claim 2, **characterized by the fact**, that the hologram (2) and/or shape hole (3) comprises of alphanumeric characters.
4. The metal identification platelet (1) as in any of the Claims 1 to 3, **characterized by the fact**, that the metal used is nickel, 1 to 15 μm thick.
5. A method of producing an identification platelet (1) with the identification code, **characterized by the fact**, that it comprises the following steps:
a shield (9) from an electro-insulation material is formed on a shim (4) with a holographic motif (7),
then, the shim (4) is galvanized in the places not covered by the shield (9) from the electro-insulation material,
and the completed metal identification platelets (1) are removed from the shim (4).
6. The method as in Claim 5, **characterized by the fact**, that shield (9) from the electro-insulation material is produced in the following way:
a photoresist layer (5) is applied on the shim (4) with a holographic motif (7), then
a mask (6) is put on the photoresist layer (5), and the photoresist layer (5) with the mask (6) is exposed by a UV lamp, and the exposed photoresist layer (5) is etched from the shim (4) in a developer,
than the shim (4) is galvanized in the places where the photoresist layer (5) was etched,
the waste photoresist layer (5) is removed,

and the completed metal identification platelets (1) are taken from the shim (4).

7. The method as in Claim 5 or 6, **characterized by the fact**, that the shim (4) is passivated by the solution of potassium dichromate.

8. The method as in any of the Claims 6 to 7, **characterized by the fact**, that a printing film is used as the mask (6).

9. The method as in any of the Claims 5 to 8, **characterized by the fact**, that the shim (4) is galvanized in a galvanic-plastic nickel bath.

10. The method as in any of the Claims 5 to 9, **characterized by the fact**, that the waste shield (9) from the electro-insulation material and/or waste photoresist layer (5) is removed by washing in a solvent, and then the shim (4) is washed in demineralised water and dried.

11. The method as in any of the Claims 5 to 10, **characterized by the fact**, that the completed metal identification platelets (1) are removed from the shim (4) by fine scraping or in an ultrasonic bath.

12. The method as in any of the Claims 5 to 11, **characterized by the fact**, that the shim (4) with the holographic motif (7) is made from nickel.

13. The method as in Claim 5, **characterized by the fact**, that the shield (9) from the electro-insulation material is applied directly on the shim (4) with the holographic motif (7) using a printing method.

14. The method as in Claim 13, **characterized by the fact**, that the shield (9) from the electro-insulation material is applied using the method of intaglio printing.

1/4

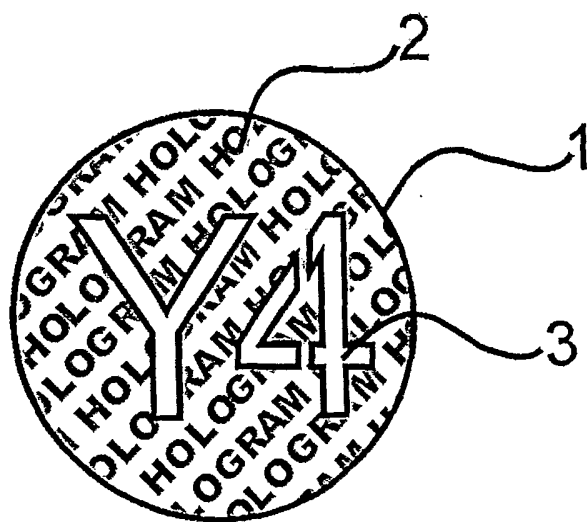


Fig. 1

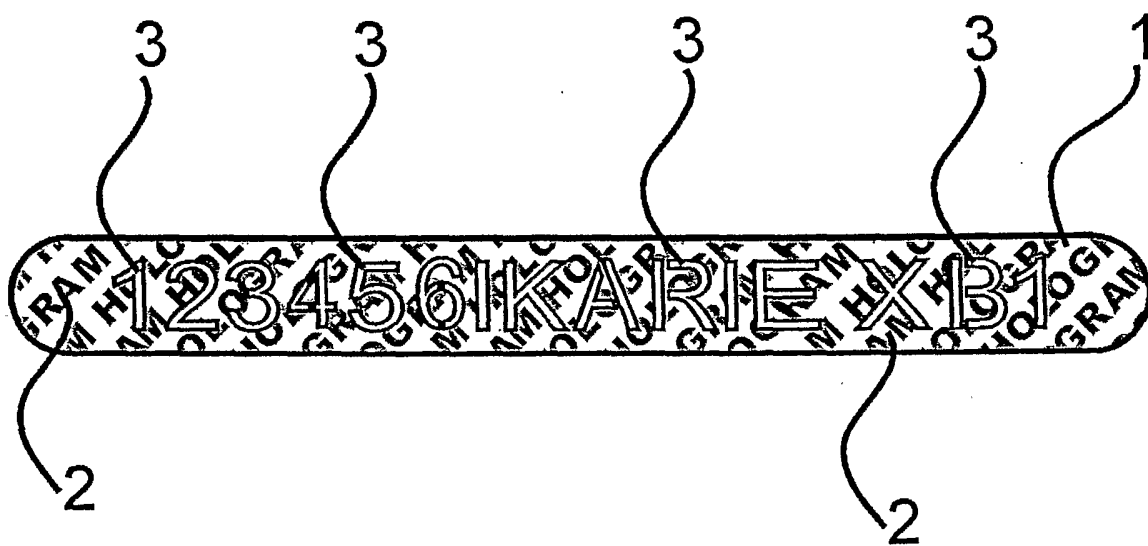


Fig. 2

2/4

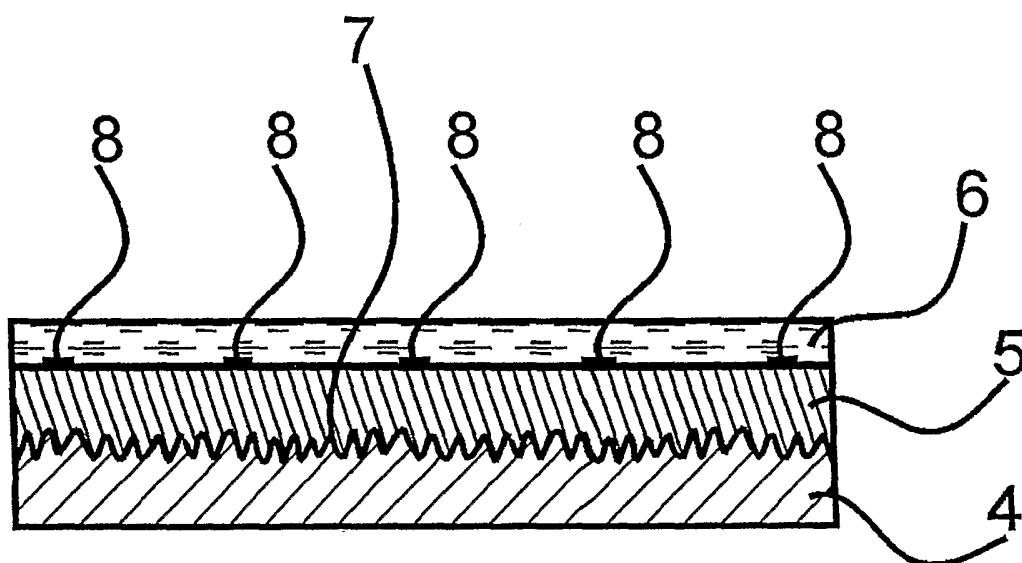


Fig. 3

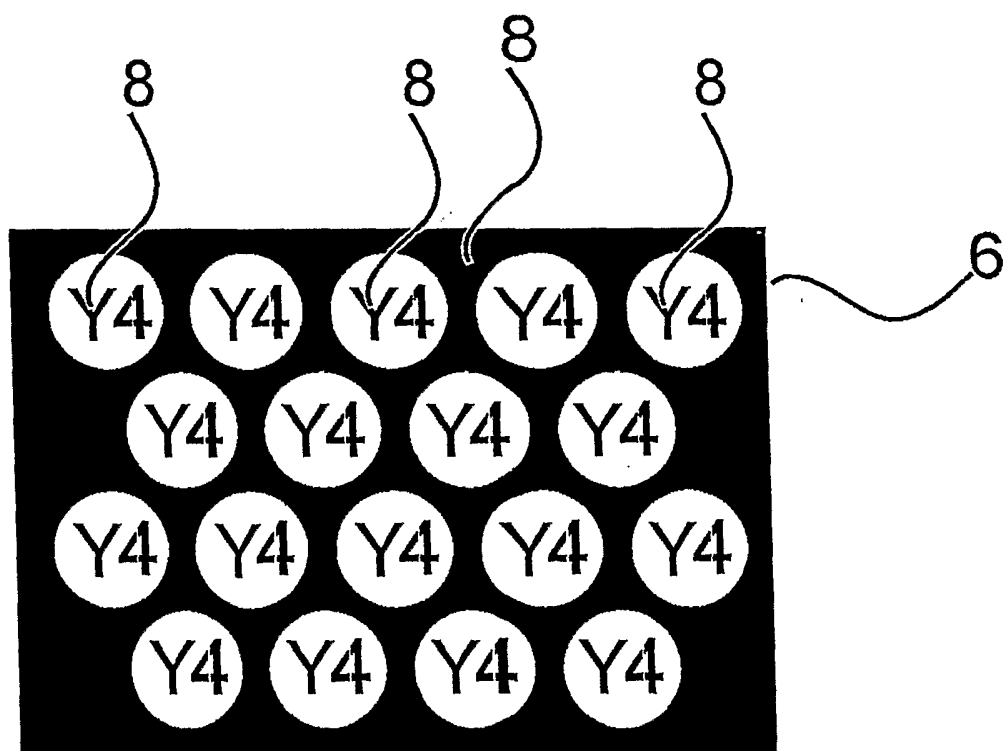


Fig. 4

3/4

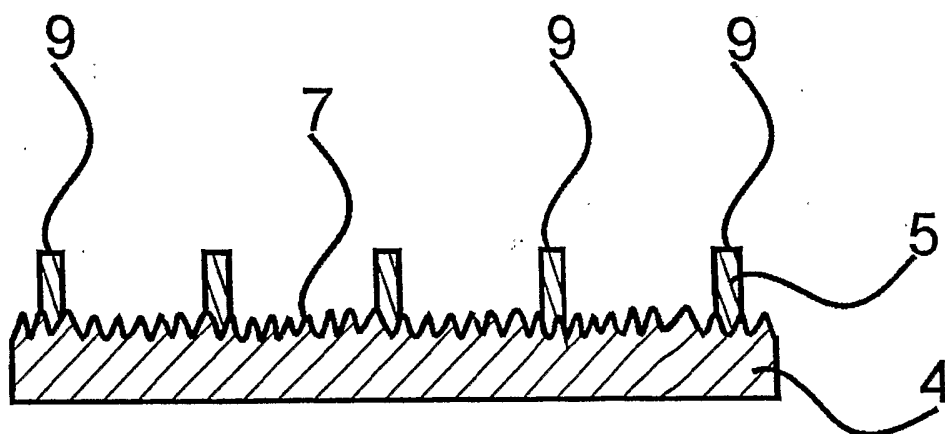


Fig. 5

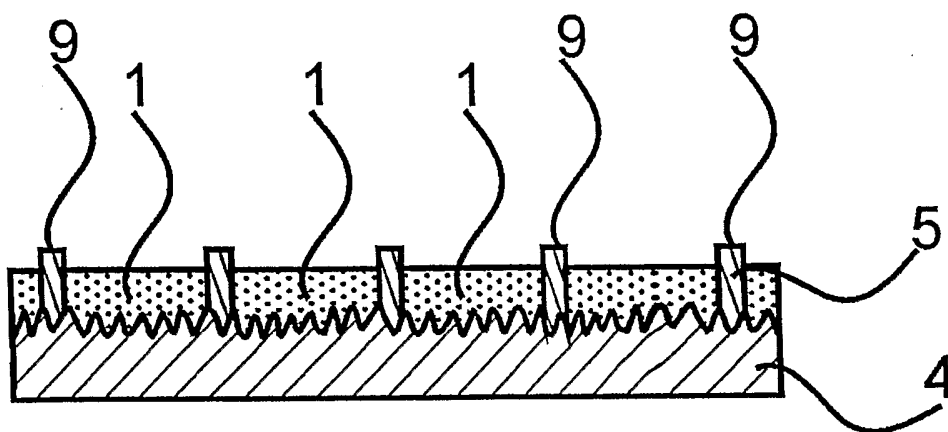


Fig. 6

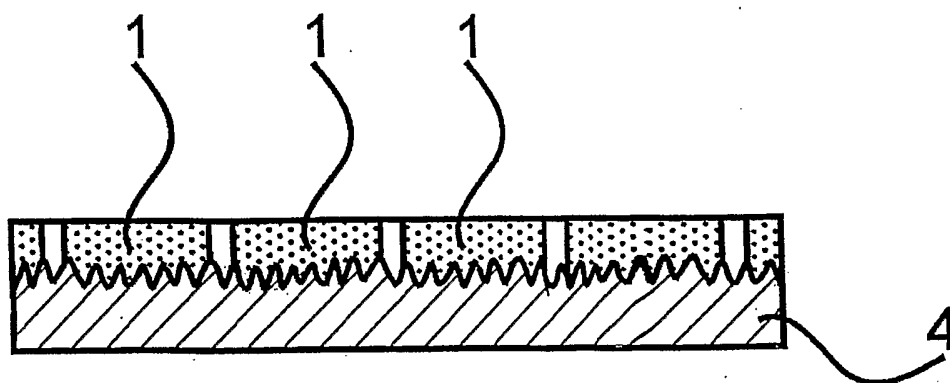


Fig. 7

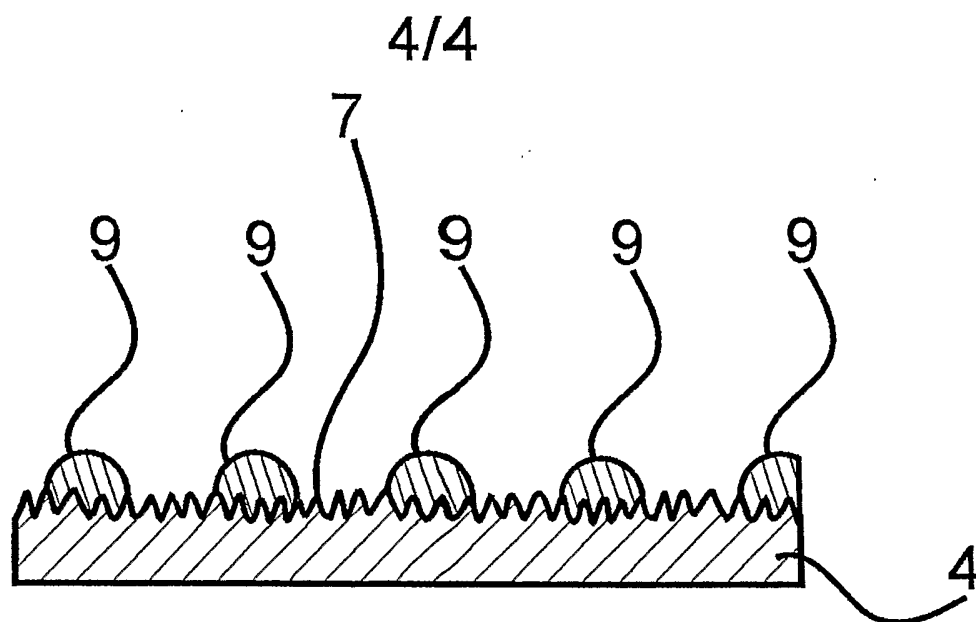


Fig. 8

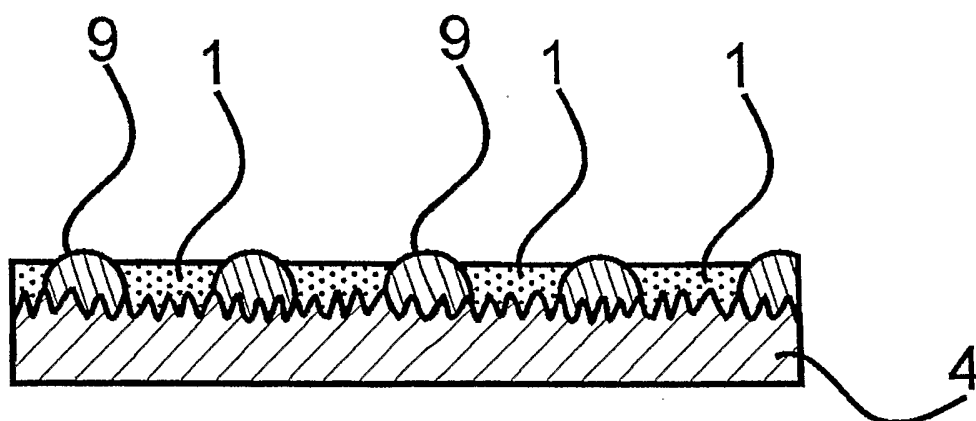


Fig. 9

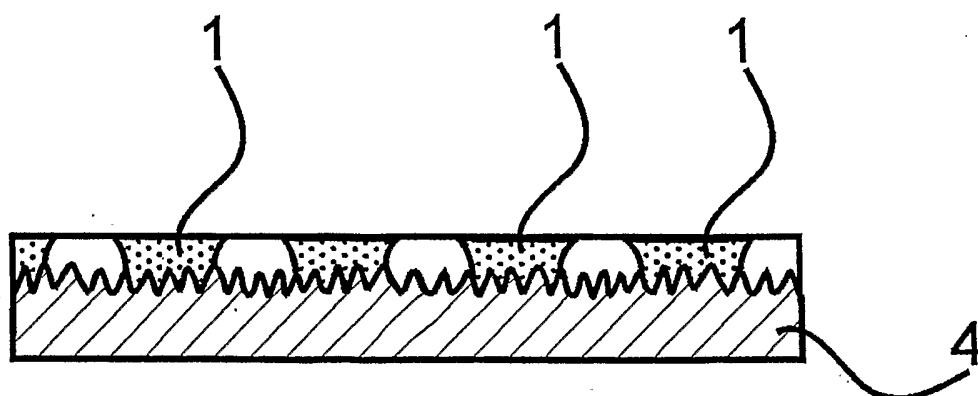


Fig. 10

INTERNATIONAL SEARCH REPORT

International Application No
PCT/CZ2004/000082

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G03H1/02 G09F3/00 G06K19/16 B60R25/00 G03H1/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G03H G09F G06K B60R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 643 001 B1 (FARIS SADEG M) 4 November 2003 (2003-11-04)	1-3
Y	the whole document	4
A		5
X	EP 0 629 989 A (LOVING, CHARLES DENNIS; ALPHA DOT LTD) 21 December 1994 (1994-12-21) column 3, line 24 - column 4, line 2 column 4, line 42 - column 5, line 55; figures 1,2	1,2
X	US 6 666 995 B1 (MEIKKA RICHARD G ET AL) 23 December 2003 (2003-12-23)	1
Y	column 6, lines 39-53; figure 1	4
X	US 2003/178734 A1 (JOSEPHY KARL ET AL) 25 September 2003 (2003-09-25) paragraphs '0002!, '0077!	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

8 June 2005

Date of mailing of the international search report

04/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Noirard, P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CZ2004/000082

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 6643001	B1	04-11-2003	US	2005024626 A1		03-02-2005
EP 0629989	A	21-12-1994	US	5429392 A		04-07-1995
			EP	0629989 A1		21-12-1994
US 6666995	B1	23-12-2003	US	6068691 A		30-05-2000
			US	5672410 A		30-09-1997
			AT	162207 T		15-01-1998
			AU	4247793 A		13-12-1993
			CA	2135622 A1		25-11-1993
			DE	69316359 D1		19-02-1998
			DE	69316359 T2		30-04-1998
			EP	0643745 A1		22-03-1995
			JP	8502301 T		12-03-1996
			WO	9323481 A1		25-11-1993
			US	5650248 A		22-07-1997
			US	5624076 A		29-04-1997
US 2003178734	A1	25-09-2003	US	2002041047 A1		11-04-2002
			US	6398999 B1		04-06-2002
			CA	2445694 A1		14-11-2002
			CN	1513039 A		14-07-2004
			EP	1390560 A2		25-02-2004
			JP	2004536961 T		09-12-2004
			MX	PA03010078 A		02-04-2004
			WO	02090613 A2		14-11-2002
			US	2004146642 A1		29-07-2004
			TW	573028 B		21-01-2004
			US	2003008068 A1		09-01-2003
			AT	257182 T		15-01-2004
			AU	765738 B2		25-09-2003
			AU	6522699 A		15-05-2000
			BR	9914744 A		31-07-2001
			CA	2347830 A1		04-05-2000
			CN	1328606 A		26-12-2001
			DE	69913982 D1		05-02-2004
			DE	69913982 T2		09-12-2004
			EP	1131473 A1		12-09-2001
			ES	2212645 T3		16-07-2004
			JP	2002528639 T		03-09-2002
			MX	PA01004046 A		02-07-2002
			WO	0024946 A1		04-05-2000
			AU	2002364515 A1		10-06-2003
			CA	2467912 A1		05-06-2003
			EP	1453987 A2		08-09-2004
			JP	2005510629 T		21-04-2005
			WO	03046245 A2		05-06-2003