

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 February 2007 (08.02.2007)

PCT

(10) International Publication Number
WO 2007/015992 A1

(51) International Patent Classification:
G01V 3/28 (2006.01) **E21B 47/022** (2006.01)

(21) International Application Number:
PCT/US2006/028514

(22) International Filing Date: 21 July 2006 (21.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/703,037 27 July 2005 (27.07.2005) US
60/777,351 28 February 2006 (28.02.2006) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WANG, Tsili** [US/US]; 20723 Fawnbrook Court, Katy, TX 77450 (US).

(74) Agents: **RIDDLE, J., Albert** et al.; Baker Hughes Incorporated, Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMPENSATION FOR TOOL DISPOSITION IN LWD RESISTIVITY MEASUREMENTS

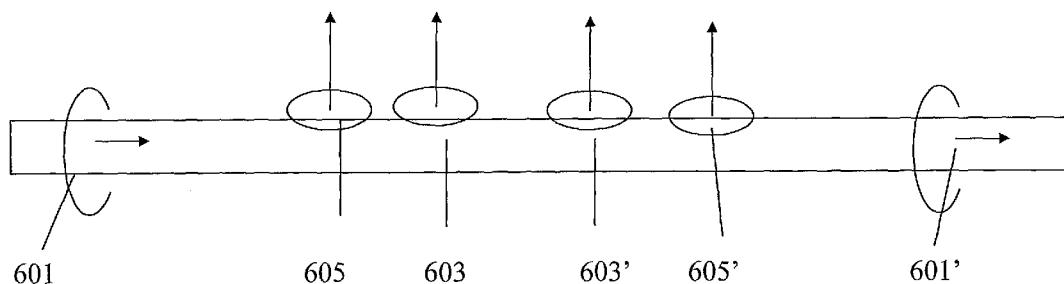

(57) Abstract: A logging tool having an axial transmitter antenna and a transverse receiver antenna is provided with a bucking coil that compensates for the environmental effects including tool-bending and eccentricity.

WO 2007/015992 A1

COMPENSATION FOR TOOL DISPOSITION IN LWD RESISTIVITY MEASUREMENTS

Tsili Wang

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] This invention relates generally to drilling of lateral wells into earth formations, and more particularly to the maintaining the wells in a desired position relative to an interface within a reservoir.

10

2. Description of the Related Art

[0002] To obtain hydrocarbons such as oil and gas, well boreholes are drilled by rotating a drill bit attached at a drill string end. The drill string may be a jointed rotatable pipe or a coiled tube. Boreholes may be drilled vertically, but directional
15 drilling systems are often used for drilling boreholes deviated from vertical and/or horizontal boreholes to increase the hydrocarbon production. Modern directional drilling systems generally employ a drill string having a bottomhole assembly (BHA), and a drill bit at an end thereof, that is rotated by a drill motor (mud motor) and/or the drill string. A number of downhole devices placed in close proximity to the drill bit
20 measure certain downhole operating parameters associated with the drill string. Such devices typically include sensors for measuring downhole temperature and pressure, tool azimuth, tool inclination. Also used are measuring devices such as a resistivity-measuring device to determine the presence of hydrocarbons and water. Additional downhole instruments, known as measurement-while-drilling (MWD) or logging-
25 while-drilling (LWD) tools, are frequently attached to the drill string to determine formation geology and formation fluid conditions during the drilling operations.

[0003] Boreholes are usually drilled along predetermined paths and proceed through various formations. A drilling operator typically controls the surface-controlled
30 drilling parameters during drilling operations. These parameters include weight on

bit, drilling fluid flow through the drill pipe, drill string rotational speed (r.p.m. of the surface motor coupled to the drill pipe) and the density and viscosity of the drilling fluid. The downhole operating conditions continually change and the operator must react to such changes and adjust the surface-controlled parameters to properly control the drilling operations. For drilling a borehole in a virgin region, the operator typically relies on seismic survey plots, which provide a macro picture of the subsurface formations and a pre-planned borehole path. For drilling multiple boreholes in the same formation, the operator may also have information about the previously drilled boreholes in the same formation.

10

[0004] In development of reservoirs, it is common to drill boreholes at a specified distance from fluid contacts within the reservoir. An example of this is shown in **Fig. 2** where a porous formation denoted by **105a**, **105b** has an oil-water contact denoted by **113**. The porous formation is typically capped by a caprock such as **103** that is impermeable and may further have a non-porous interval denoted by **109** underneath. The oil-water contact is denoted by **113** with oil above the contact and water below the contact: this relative positioning occurs due to the fact the oil has a lower density than water. In reality, there may not be a sharp demarcation defining the oil-water contact; instead, there may be a transition zone with a change from high oil-saturation at the top to high water-saturation at the bottom. In other situations, it may be desirable to maintain a desired spacing from a gas-oil contact. This is depicted by **114** in **Fig. 1**. It should also be noted that a boundary such as **114** could, in other situations, be a gas-water contact.

15

20

[0005] In order to maximize the amount of recovered oil from such a borehole, the boreholes are commonly drilled in a substantially horizontal orientation in close proximity to the oil-water contact, but still within the oil zone. US Patent RE35386 to *Wu et al*, having the same assignee as the present application and the contents of which are fully incorporated herein by reference, teaches a method for detecting and sensing boundaries in a formation during directional drilling so that the drilling operation can be adjusted to maintain the drillstring within a selected stratum. The

25

30

method comprises the initial drilling of an offset well from which resistivity of the formation with depth is determined. This resistivity information is then modeled to provide a modeled log indicative of the response of a resistivity tool within a selected stratum in a substantially horizontal direction. A directional (e.g., horizontal) well is thereafter drilled wherein resistivity is logged in real time and compared to that of the modeled horizontal resistivity to determine the location of the drill string and thereby the borehole in the substantially horizontal stratum. From this, the direction of drilling can be corrected or adjusted so that the borehole is maintained within the desired stratum. The resistivity sensor typically comprises a transmitter and a plurality of sensors. Measurements may be made with propagation sensors that operate in the 400 kHz and higher frequency range.

[0006] A limitation of the method and apparatus used by *Wu* is that resistivity sensors are responsive to oil-water contacts for relatively small distances, typically no more than 5 m; at larger distances, conventional propagation tools are not responsive to the resistivity contrast between water and oil. One solution that can be used in such a case is to use an induction logging tool that typically operates in frequencies between 10kHz and 50kHz. US Patent 6,308,136 to *Tabarovsky* et al, having the same assignee as the present application and the contents of which are fully incorporated herein by reference, teaches a method of interpretation of induction logs in near horizontal boreholes and determining distances to boundaries in proximity to the borehole.

[0007] An alternative approach to determination of distances to bed boundaries is disclosed in US Patent Application Ser. No. 10/373,365 of *Merchant* et al. Taught therein is the use of multicomponent induction logging tools and measurements as an indicator of a distance to a bed boundary and altering the drilling direction based on such measurements. In conventional induction logging tools, the transmitter and receiver antenna coils have axes substantially parallel to the tool axis (and the borehole). The antenna configuration of the multicomponent tool of *Merchant* et al. is illustrated in **Fig. 3**.

[0008] Fig. 3 (prior art) shows the configuration of transmitter and receiver coils in the 3DEXplorer™ (3DEX) induction logging instrument of Baker Hughes Incorporated. Three orthogonal transmitters **201**, **203**, and **205** that are referred to as the T_x , T_z , and T_y transmitters respectively are provided. The three transmitters **201**, **203**, **205** induce magnetic fields in three spatial directions. The subscripts (x, y, z) indicate an orthogonal system substantially defined by the directions of the normal to the coils of the transmitters. The z-axis is chosen to be along the longitudinal axis of the tool, while the x-axis and y-axis are mutually perpendicular directions lying in the plane transverse to the axis. Corresponding to each transmitter **201**, **203**, and **205** are associated receivers **207**, **209**, and **211**, referred to as the R_x , R_z , and R_y receivers respectively, aligned along the orthogonal system defined by the transmitter normals, placed in the order shown in Fig. 3. R_x , R_z , and R_y are responsible for measuring the corresponding magnetic fields H_{xx} , H_{zz} , and H_{yy} . Within this system for naming the magnetic fields, the first index indicates the direction of the transmitter and the second index indicates the direction of the receiver. In addition, the receivers R_y and R_z measure two cross-components, H_{xy} and H_{xz} , of the magnetic field produced by the T_x transmitter (**201**). This embodiment is operable in single frequency or multiple frequency modes. It should further be noted that the description herein with the orthogonal coils and one of the axes parallel to the tool axis is for illustrative purposes only. Additional components could be measured, and, in particular, the coils could be inclined at an angle other than 0° or 90° to the tool axis, and furthermore, need not be orthogonal; as long as the measurements can be “rotated” or “projected” onto three orthogonal axes, the methodology described herein is applicable. Measurements may also be made at a plurality of frequencies, and/or at a plurality of transmitter-receiver distances.

[0009] While the teachings of *Merchant* show that the 3DEX measurements are very useful in determination of distances to bed boundaries (and in reservoir navigation), *Merchant* discusses the reservoir navigation problem in terms of measurements made with the borehole in a substantially horizontal configuration (parallel to the bed

boundary). This may not always be the case in field applications where the borehole is approaching the bed boundary at an angle. In a situation where the borehole is inclined, then the multicomponent measurements, particularly the cross-component measurements, are responsive to both the distance to the bed boundary and to the anisotropy in the formation.

[0010] It would be desirable to have a method of determination of distance to a bed boundary in a deviated well in anisotropic earth formations. The present invention satisfies this need.

10

SUMMARY OF THE INVENTION

[0011] One embodiment of the invention is an apparatus for evaluating an earth formation. The apparatus includes a logging tool conveyed in a borehole. The tool has a transmitter coil having a first direction and a receiver coil which has a second direction different from the first direction. The receiver coil produces a signal resulting from activation of the transmitter. An additional coil arrangement on the logging tool has an output which is used to reduce an environmental effect on the signal resulting from a disposition of the logging tool in the borehole. The disposition may include a bending of the logging tool. The disposition may include the tool being in a non-circular borehole, an eccentric position of the logging tool in the borehole, a non-circular borehole and/or eccentric positioning of the tool in an invaded zone. The additional coil arrangement may include a coil having an axis substantially parallel to the second direction. The second direction may be substantially orthogonal to the first direction. The output of the additional coil arrangement may be combined with the signal from the receiver coil. The apparatus may include a processor which accumulates the signal from the receiver coil and the output of the additional coil arrangement and combines the two accumulated outputs. The first direction may be substantially parallel to a longitudinal axis of the tool.

The apparatus may further include a processor which uses the signal and the output to estimate a distance to an interface in the earth formation. The logging tool may be on

a bottomhole assembly and the apparatus may include a processor which uses the signal and the output to control a direction of drilling of the BHA.

[0012] Another embodiment of the invention is a method of evaluating an earth
5 formation. A signal is produced using a receiver coil on a logging tool in response to
activation of a transmitter coil on the logging tool, the two coils having different
directions. An output of an additional coil arrangement is used to reduce an
environmental effect on the signal resulting from disposition of the logging tool in the
borehole. The logging tool may be bent. The logging tool may be positioned in a
10 non-circular borehole, eccentrically positioned in a circular borehole, positioned in a
borehole having a non-circular invasion zone and/or positioned in a borehole having
an eccentric invasion zone. The additional coil may be oriented in a direction
substantially parallel to the direction of the receiver coil. The receiver coil may be
oriented substantially orthogonal to the transmitter coil. The outputs of the additional
15 coil arrangement may be combined with the signal from the receiver. The signal from
the receiver coil may be accumulated and combined with the accumulated output of
the additional coil arrangement. The transmitter coil may be oriented substantially
parallel to a longitudinal axis of the logging tool. The signal and the output may be
used to estimate a distance to an interface in the earth formation. The logging tool
20 may be conveyed on a BHA and the direction of drilling of the BHA may be
controlled using the signal and the output.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] For a detailed understanding of the present invention, reference should be
25 made to the following detailed description of the exemplary embodiments, taken in
conjunction with the accompanying drawings, in which like elements have been given
like numerals and wherein:

Figure 1 shows a schematic diagram of a drilling system having a drill string
that includes a sensor system according to the present invention;
30 **Figure 2** is an illustration of a substantially horizontal borehole proximate to
an oil-water contact in a reservoir;

Figure 3 (prior art) illustrates the 3DEXTM multi-component induction tool of Baker Hughes Incorporated;

Figure 4 illustrates the transmitter and receiver configuration of a logging-while- drilling tool according to the present invention;

5 **Figure 5** illustrates the use of bucking coils with the tool illustrated in Figure 4;

Figures 6a, 6b show exemplary responses of the tool of Figure 4 to a resistive bed above a conductive bed, and a conductive bed above a resistive bed respectively;

10 **Figures 7a and 7c** show the effect of tool eccentricity on the response of the logging tool of Figure 4;

Figures 7b and 7d show the effects of tool eccentricity on the response of the logging tool of Figure 5;

15 **Figure 8a and 8b** show the effect of tool bending on azimuthal resistivity measurements; and

Figure 8c shows the results of using the bucking coils in the presence of tool bending.

20 DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0014] **Fig. 1** shows a schematic diagram of a drilling system **10** with a drillstring **20** carrying a drilling assembly **90** (also referred to as the bottomhole assembly, or "BHA") conveyed in a "wellbore" or "borehole" **26** for drilling the wellbore. The drilling system **10** includes a conventional derrick **11** erected on a floor **12** which
25 supports a rotary table **14** that is rotated by a prime mover such as an electric motor (not shown) at a desired rotational speed. The drillstring **20** includes a tubing such as a drill pipe **22** or a coiled-tubing extending downward from the surface into the borehole **26**. The drillstring **20** is pushed into the wellbore **26** when a drill pipe **22** is used as the tubing. For coiled-tubing applications, a tubing injector, such as an
30 injector (not shown), however, is used to move the tubing from a source thereof, such as a reel (not shown), to the wellbore **26**. The drill bit **50** attached to the end of the

drillstring breaks up the geological formations when it is rotated to drill the borehole 26. If a drill pipe 22 is used, the drillstring 20 is coupled to a drawworks 30 via a Kelly joint 21, swivel 28, and line 29 through a pulley 23. During drilling operations, the drawworks 30 is operated to control the weight on bit, which is an important parameter that affects the rate of penetration. The operation of the drawworks is well known in the art and is thus not described in detail herein.

[0015] During drilling operations, a suitable drilling fluid 31 from a mud pit (source) 32 is circulated under pressure through a channel in the drillstring 20 by a mud pump 34. The drilling fluid passes from the mud pump 34 into the drillstring 20 via a desurger (not shown), fluid line 38 and Kelly joint 21. The drilling fluid 31 is discharged at the borehole bottom 51 through an opening in the drill bit 50. The drilling fluid 31 circulates uphole through the annular space 27 between the drillstring 20 and the borehole 26 and returns to the mud pit 32 via a return line 35. The drilling fluid acts to lubricate the drill bit 50 and to carry borehole cutting or chips away from the drill bit 50. A sensor S_1 typically placed in the line 38 provides information about the fluid flow rate. A surface torque sensor S_2 and a sensor S_3 associated with the drillstring 20 respectively provide information about the torque and rotational speed of the drillstring. Additionally, a sensor (not shown) associated with line 29 is used to provide the hook load of the drillstring 20.

[0016] In one embodiment of the invention, the drill bit 50 is rotated by only rotating the drill pipe 22. In another embodiment of the invention, a downhole motor 55 (mud motor) is disposed in the drilling assembly 90 to rotate the drill bit 50 and the drill pipe 22 is rotated usually to supplement the rotational power, if required, and to effect changes in the drilling direction.

[0017] In an exemplary embodiment of Fig. 1, the mud motor 55 is coupled to the drill bit 50 via a drive shaft (not shown) disposed in a bearing assembly 57. The mud motor rotates the drill bit 50 when the drilling fluid 31 passes through the mud motor 55 under pressure. The bearing assembly 57 supports the radial and axial forces of

the drill bit. A stabilizer **58** coupled to the bearing assembly **57** acts as a centralizer for the lowermost portion of the mud motor assembly.

5 [0018] In one embodiment of the invention, a drilling sensor module **59** is placed near the drill bit **50**. The drilling sensor module contains sensors, circuitry and processing software and algorithms relating to the dynamic drilling parameters. Such parameters typically include bit bounce, stick-slip of the drilling assembly, backward rotation, torque, shocks, borehole and annulus pressure, acceleration measurements and other measurements of the drill bit condition. A suitable telemetry or communication sub
10 **72** using, for example, two-way telemetry, is also provided as illustrated in the drilling assembly **90**. The drilling sensor module processes the sensor information and transmits it to the surface control unit **40** via the telemetry system **72**.

[0019] The communication sub **72**, a power unit **78** and an MWD tool **79** are all
15 connected in tandem with the drillstring **20**. Flex subs, for example, are used in connecting the MWD tool **79** in the drilling assembly **90**. Such subs and tools form the bottom hole drilling assembly **90** between the drillstring **20** and the drill bit **50**. The drilling assembly **90** makes various measurements including the pulsed nuclear magnetic resonance measurements while the borehole **26** is being drilled. The
20 communication sub **72** obtains the signals and measurements and transfers the signals, using two-way telemetry, for example, to be processed on the surface. Alternatively, the signals can be processed using a downhole processor in the drilling assembly **90**.

[0020] The surface control unit or processor **40** also receives signals from other
25 downhole sensors and devices and signals from sensors **S₁-S₃** and other sensors used in the system **10** and processes such signals according to programmed instructions provided to the surface control unit **40**. The surface control unit **40** displays desired drilling parameters and other information on a display/monitor **42** utilized by an operator to control the drilling operations. The surface control unit **40** typically
30 includes a computer or a microprocessor-based processing system, memory for storing programs or models and data, a recorder for recording data, and other

peripherals. The control unit **40** is typically adapted to activate alarms **44** when certain unsafe or undesirable operating conditions occur. The BHA also includes an azimuthal resistivity tool described in more detail below. I

5 **[0021]** **Fig. 4** shows an azimuthal resistivity tool configuration suitable for use with various embodiments of the present invention. This is a modification of the basic 3DEX tool of **Fig. 3** and comprises two transmitters **251, 251'** whose dipole moments are parallel to the tool axis direction and two receivers **253, 253'** that are perpendicular to the transmitter direction. In one embodiment of the invention, the
 10 tool operates at 400 kHz frequency. When the first transmitter fires, the two receivers measure the magnetic field produced by the induced current in the formation. This is repeated for, the second transmitter. The signals are combined in following way:

$$\begin{aligned} H_{T1} &= H_2 - (d_1/(d_1 + d_2))^3 \cdot H_1 \\ H_{T2} &= H_1 - (d_1/(d_1 + d_2))^3 \cdot H_2 \end{aligned} \quad (1).$$

15 Here, H_1 and H_2 are the measurements from the first and second receivers, respectively, and the distances d_1 and d_2 are as indicated in **Fig. 4**. The tool rotates with the BHA and in an exemplary mode of operation, makes measurements at 16 angular orientations 22.5° apart. The measurement point is at the center of the two receivers. In a uniform, isotropic formation, no signal would be detected at either of
 20 the two receivers. The invention thus makes use of cross-component measurements, called principal cross-components, obtained from a pair of transmitters disposed on either side of at least one receiver. It should further be noted that using well known rotation of coordinates, the method of the present invention also works with various combinations of measurements as long as they (i) correspond to signals generated
 25 from opposite sides of a receiver, and, (ii) can be rotated to give the principal cross-components.

[0022] The dual transmitter configuration was originally developed to reduce electronic errors in the instrument and to increase the signal to noise ratio. See US
 30 Patent 6,586,939 to *Fanini et al.* The use of the configuration of **Fig. 4** is discussed in

detail in US Patent Application Ser. No. 11/298,255 of *Yu et al.*, having the same assignee as the present invention and the contents of which are incorporated herein by reference. The response of a cross-component receiver is sensitive to the direction of a bed boundary near the logging tool. When the transmitter and receiver coils are
 5 perfectly aligned, i.e., mutually orthogonal, the direct coupling between them will be zero. The only contribution then comes from the remote bed that can be approximated with a mirror image of the transmitter coil. If the remote bed is conductive, the mirror transmitter will have the same moment direction as the real transmitter. This also is true if the remote bed is below the transmitter.

10

[0023] In what follows, the invention is described with reference to a single transmitter antenna and a single receiver antenna. **Fig. 6a** shows the tool response at different distances from a bed boundary for an exemplary model. The response corresponds to a signal at a transverse receiver antenna in response to excitation of an
 15 axially oriented transmitter coil. The abscissa is the signal in μV and the ordinate is the tool depth. The model includes a layer of resistivity $100\ \Omega\text{-m}$ above a bed of resistivity $1\ \Omega\text{-m}$. The boundary between the two layers is at the depth indicated by 1000m . The curves **301, 301'** are the quadrature component of the induced magnetic field at the receiver, i.e., the component that has a phase of 90° relative to the
 20 transmitter signal. The segments **301** have a positive polarity while the segments **301'** have a negative polarity. The curves **311, 311'** are the in-phase component of the induced magnetic field at the receiver. Again, the segments **311'** have a negative polarity relative to the segments **311**.

25 [0024] **Fig. 6b** shows the tool response at different distances from a bed boundary for another exemplary model. The model differs from the model of **Fig. 6a** in that the layer of resistivity $100\ \Omega\text{-m}$ is below a bed of resistivity $1\ \Omega\text{-m}$. The interface is again at the depth indicated by 1000m . The curves **321, 321'** are the quadrature component of the induced magnetic field at the receiver, i.e., the component that has a
 30 phase of 90° relative to the transmitter signal. The segments **321** have a positive polarity while the segments **321'** have a negative polarity. The curves **331, 331'** are

the in-phase component of the induced magnetic field at the receiver. Again, the segments **331'** have a negative polarity relative to the segments **331**.

5 [0025] As can be seen, the responses above 1000m in **Fig. 6a** are the mirror images of those in **Fig. 6b** below 1000m. The quadrature component has simpler characteristics than the in-phase component in that the former has the same sign as the tool crosses the boundary. This property makes the quadrature component more useful for data interpretation.

10 [0026] Like other resistivity measurements, the azimuthal resistivity tool is subject to various environmental effects. The primary ones are (1) an eccentricity effect, (2) a temperature effect, and (3) a tool bending effect. Here, the term "eccentric" encompasses both the dictionary definitions of the word, i.e., deviating from a circularity (for the borehole), or located elsewhere than at the geometrical center. The measurement accuracy is sensitive to fluctuations in downhole temperatures in single
15 transmitter systems. The tool bending effect can introduce strong direct coupling into the measurement, particularly in wells with high build-up or drop-down angles. To remove or suppress all the environmental effects, a bucking-coil system has been included in the present invention. The bucking coil works as in wireline array
20 induction tools. Use of bucking coils removes all fields that decay as $1/r^3$, where r is the receiver spacing.

[0027] Turning now to **Fig. 5**, a modification of the tool of **Fig. 4** that has been developed to address environmental effects is shown. As in **Fig. 4**, there are two
25 transmitter antennas **601, 601'** and two receiver antennas **603, 603'**. The bucking coils (antennas) **605, 605'** are positioned between the corresponding transmitter and receiver antennas. The bucking coils **605, 605'** have axes that are substantially parallel to the axes of the receiver antennas **603, 603'**. The bucking coil will thus see the same tool-bending effect and eccentricity effect as the receiver antenna.

30

[0028] To illustrate the magnitude of the effect of eccentricity of the tool, model simulations using a finite-difference method were carried out. The tool outer diameter was taken as 6.75 in (.171 m). The borehole diameter was taken as 8.5 in (.216m). The borehole fluid resistivity was 1000 Ω -m. **Fig. 7a** shows the in-phase components **401, 402, 403, 404** for four different distances (from the top 7 ft., 6ft., 5ft. and 4 ft.; or 2.134m, 1.829m, 1.524m and 1.219m) without the bucking coils. The ordinate is the signal in nV and the abscissa is the tool eccentricity in inches. **Fig. 7b** shows the in-phase signal **401', 402', 403', 404'** when bucking coils are used.

[0029] **Fig. 7c** shows the quadrature components **405, 406, 407, 408** for the four different distances (4 ft., 5ft., 6ft. and 7 ft.; or 1.219m, 1.524m, 1.829m, and 2.134m) without the bucking coils. The ordinate is the signal in nV and the abscissa is the tool eccentricity in inches. **Fig. 7d** shows the quadrature signal **405', 406', 407', 408'** when bucking coils are used.

[0030] **Figs. 7a** and **7c** shows that both in-phase and quadrature components can be severely distorted by tool eccentricity, especially when the tool is far from the bed boundary. Note that the percentage variation in **408** (7 ft. or 2.134m distance) over the range of eccentricity is much greater than the percentage variation in **405** (4 ft. or 1.219m distance) over the same range of eccentricity. As seen in the relatively flat behavior of the curves in **Fig. 7b** and **7d**, the effect on the in-phase component and the quadrature component of the signals due to the eccentricity is substantially eliminated. As noted above, the eccentricity could be due to decentralization of the tool in a circular borehole as well as due to a non-circular borehole. Thus, the measurements made by the tool can be used to estimate a parameter of interest of the earth formation such as a distance to an interface (such as a bed-boundary) in the earth formation.

[0031] There is a simple explanation for the reduction in eccentricity effects with a bucking coil system. The effect of an eccentric tool can be approximated by an image transmitter placed symmetrically with respect to the borehole wall. Because of the proximity of the image transmitter to the tool axis, the response decays roughly as

1/r³. Therefore, the image transmitter response can be bucked the same way as for the direct coupling. It should be noted that similar benefits accrue when the tool of the present invention is used in a borehole with a non-circular invasion zone, or when the tool is positioned off center in an invaded zone of a borehole.

5

[0032] The tool bending effect can be more severe for the azimuthal resistivity tool than for a conventional, coaxial tool. The reason for this is that tool bending introduces direct coupling between the transmitter and receiver antennas, whereas a coaxial coil tool is relatively insensitive to tool bending. A strong direct coupling
10 may destroy the sign reversal property of the azimuthal measurement as mentioned earlier. A bent tool will produce coplanar and/or coaxial coupling. The field produced by both types of coupling in the air falls as 1/r³. In view of the 1/r³ decay, it is recognized by the inventors that bucking can be effective to cancel the effect of tool bending. This is verified in **Figs. 8a, 8b, and 8c.**

15

[0033] Simulation results were obtained for a tool bent at 4°/ 100ft (1.3°/10m). **Fig. 8a** shows the responses **501, 503, 505, 507** at distances of (4 ft., 5ft., 6ft. and 7 ft.; or 1.219m, 1.524m, 1.829m and 2.134m) respectively as a function of transmitter-receiver offset in feet for a tool with no bending. **Fig. 8b** shows the responses **511, 513, 515, 517** when the tool is bent. The differences between the curves of **Fig. 8b** and those of **Fig. 8a** are dramatic, and indicate that the tool performance would be seriously degraded at 4°/ 100ft (1.3°/10m). **Fig. 8c** shows the results when the bucking coil arrangement of **Fig. 5** is used. The curves **521, 523, 525, 527** differ little from **501, 503, 505, 507** for the straight tool without bucking coils. Again, using the
25 apparatus of the present invention, it is possible to determine a distance to a bed boundary in the presence of tool-bending.

[0034] The environmental effects discussed above result from a non-ideal disposition of the logging tool in the borehole, i.e., if the condition of a straight tool positioned in
30 the center of a circular borehole is not satisfied.

[0035] It should be noted that the signals from the (main) receiver antenna may be combined with the signals from the corresponding bucking coil by analog or digital circuitry to accomplish the cancellation of the undesired signal. In an alternative embodiment of the invention, signals measured by the bucking coil and the receiver
5 antenna are digitally accumulated (stacked) prior to the cancellation.

[0036] Once the distance to the interface has been determined, the processor may control the direction of drilling of the BHA. Alternatively, a real-time display may be provided to a human operator to alter the direction of drilling. The usual objective in
10 such is reservoir navigation

[0037] The processing of the data may be done by a downhole processor to give corrected measurements substantially in real time. Alternatively, the measurements could be recorded downhole, retrieved when the drillstring is tripped, and processed
15 using a surface processor. Implicit in the control and processing of the data is the use of a computer program on a suitable machine-readable medium that enables the processor to perform the control and processing. The machine-readable medium may include ROMs, EAROMs, EPROMs, EEPROMs, Flash Memories, and Optical disks.

[0038] The foregoing description is directed to particular embodiments of the present invention for the purpose of illustration and explanation. It will be apparent, however,
20 to one skilled in the art having the benefit of the present disclosure that many modifications and changes to the embodiments set forth above are possible without departing from the scope and the spirit of the invention. It is intended that the
25 following claims be interpreted to embrace all such modifications and changes.

CLAIMS

What is claimed is:

- 1 1. An apparatus for evaluating of an earth formation, the apparatus comprising:
 - 2 (a) a logging tool conveyed in a borehole, the tool having:
 - 3 (A) a transmitter coil having a first direction;
 - 4 (B) a receiver coil having a second direction different from the first
 - 5 direction, the receiver coil producing a signal resulting from
 - 6 activation of the transmitter;
 - 7 (b) an additional coil arrangement an output of which is used to reduce an
 - 8 environmental effect on the signal resulting from a disposition of the
 - 9 logging tool in the borehole.
- 10
- 1 2. The apparatus of claim 1 wherein the disposition of the tool comprises a
- 2 bending of the logging tool.
- 3
- 1 3. The apparatus of claim 1 wherein the disposition comprises at least one of (i)
- 2 the tool being in non-circular borehole, (ii) an eccentric position of the logging
- 3 tool in the borehole, (iii) a non-circular invasion zone, and (iv) an eccentric
- 4 invasion zone.
- 5
- 1 4. The apparatus of claim 1 wherein the additional coil arrangement further
- 2 comprises a coil having an axis substantially parallel to the second direction.
- 3
- 1 5. The apparatus of claim 1 wherein the second direction is substantially
- 2 orthogonal to the first direction.
- 3
- 1 6. The apparatus of claim 1 wherein the output of the additional coil arrangement
- 2 is combined with the signal from the receiver coil.
- 3
- 1 7. The apparatus of claim 1 further comprising a processor which:

- 2 (i) accumulates the signal from the receiver coil and the output of the
3 additional coil arrangement, and
4 (ii) combines the accumulated signal and the accumulate output.
5
- 1 8. The apparatus of claim 1 wherein the first direction is substantially parallel to
2 a longitudinal axis of the logging tool.
3
- 1 9. The apparatus of claim 1 further comprising a processor which uses the signal
2 and the output to estimate a distance to an interface in the earth formation.
3
- 1 10. The apparatus of claim 1 wherein the logging tool is on a bottomhole
2 assembly (BHA), the apparatus further comprising a processor which uses the
3 signal and the output to control a direction of drilling of the BHA.
4
- 1 11. A method of evaluating an earth formation, the method comprising:
2 (a) activating a transmitter coil having a first direction on a logging
3 conveyed in a borehole in the earth formation;
4 (b) producing a signal responsive to the activation of the transmitter coil
5 using a receiver coil on the logging tool, the receiver coil having a
6 second direction different from the first direction, and
7 (c) using an output of an additional coil arrangement to reduce an
8 environmental effect on the signal resulting from a disposition of the
9 logging tool in the borehole.
10
- 1 12. The method of claim 11 further comprising having a bending in the logging
2 tool.
3
- 1 13. The method of claim 11 further comprising positioning the logging tool in one
2 of (i) a non-circular borehole, (ii) an eccentric position in a circular borehole,
3 (iii) a borehole having a non-circular invasion zone, and (iv) a borehole having
4 an eccentric invasion zone.

5

1 14. The method of claim 11 further comprising orienting the additional coil
2 arrangement in a direction substantially parallel to the second direction.
3

1 15. The method of claim 11 further comprising orienting the receiver coil in a
2 direction substantially orthogonal to the first direction.
3


1 16. The method of claim 11 wherein reducing the effect further comprises
2 combining the output of the additional coil arrangement with the signal from
3 the receiver coil.
4

1 17. The method of claim 11 further comprising:
2 (i) accumulating the signal from the receiver coil and the output of the
3 additional coil arrangement, and
4 (ii) combining the accumulated signal and the accumulate output.
5

1 18. The method of claim 11 further comprising orienting the transmitter coil in a
2 direction that is substantially parallel to a longitudinal axis of the logging tool.
3

1 19. The method of claim 11 further comprising using the signal and the output to
2 estimate a distance to an interface in the earth formation.
3

1 20. The method of claim 11 further comprising conveying the logging tool on a
2 bottomhole assembly (BHA), and using the signal and the output to control a
3 direction of drilling of the BHA.

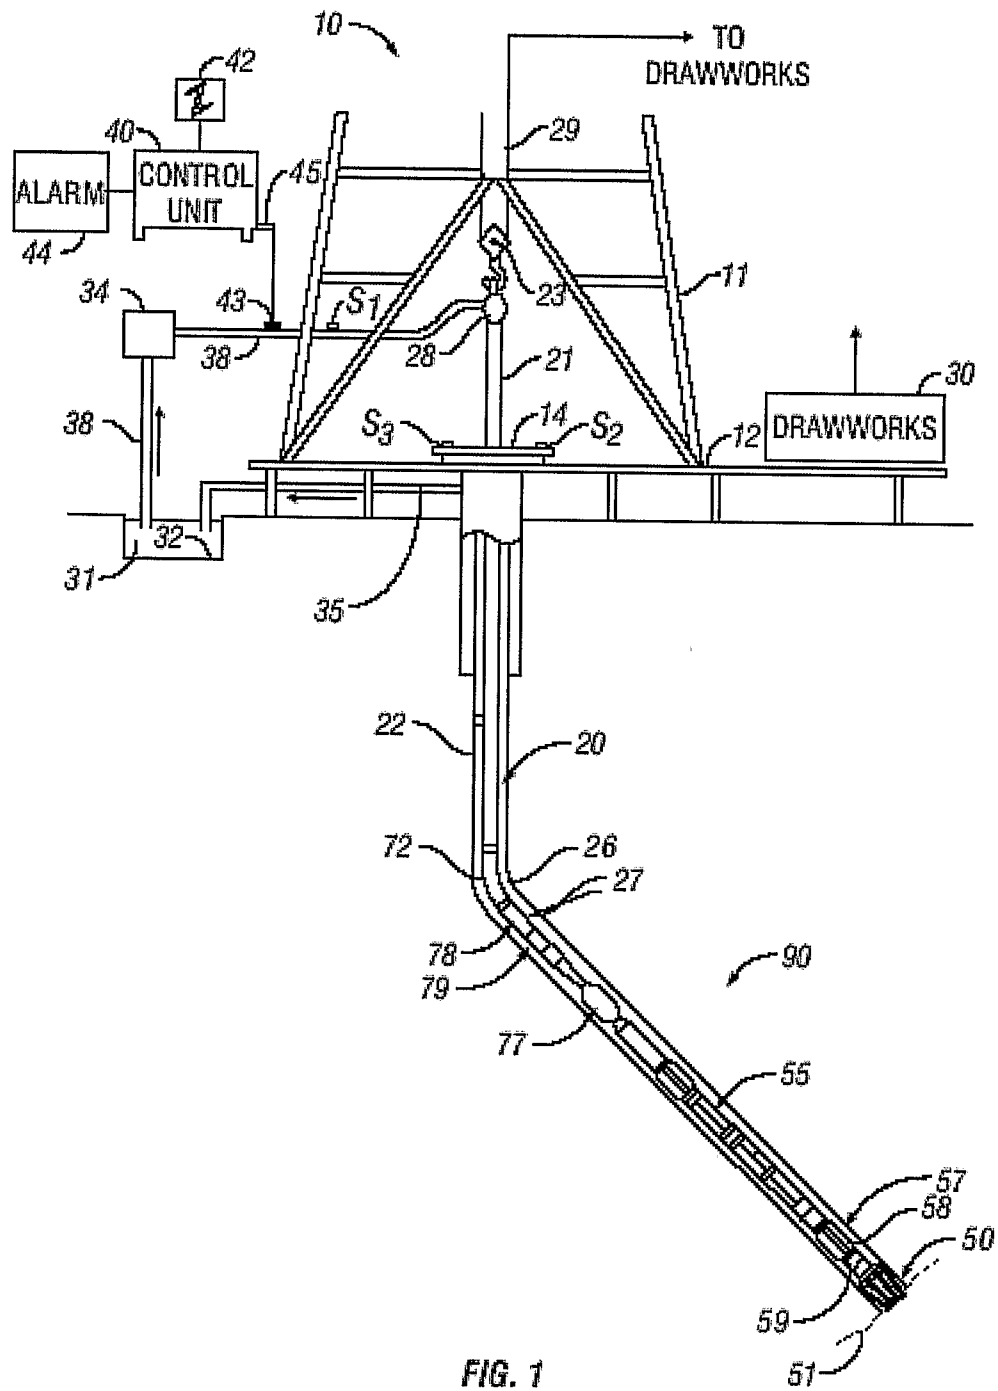

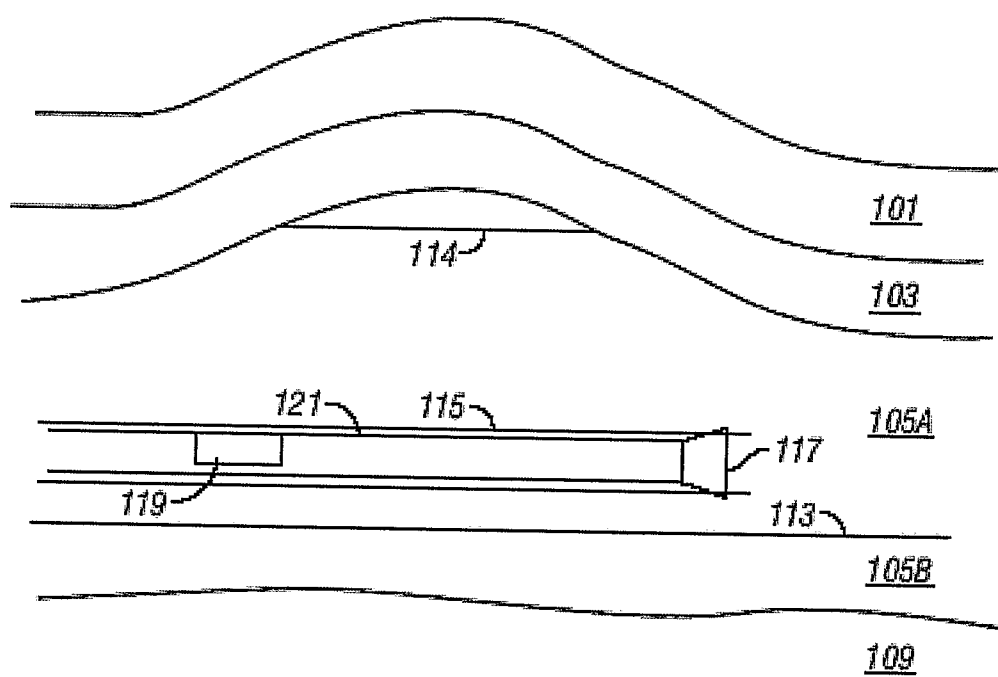


FIG. 2

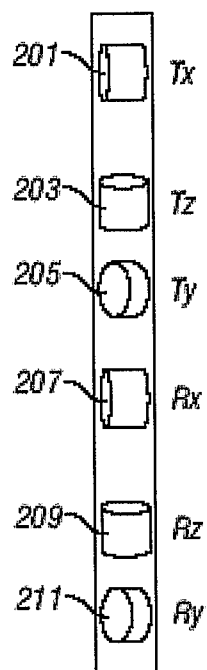


FIG. 3
(Prior Art)

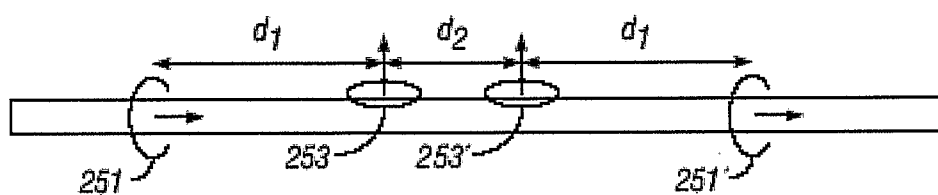


FIG. 4

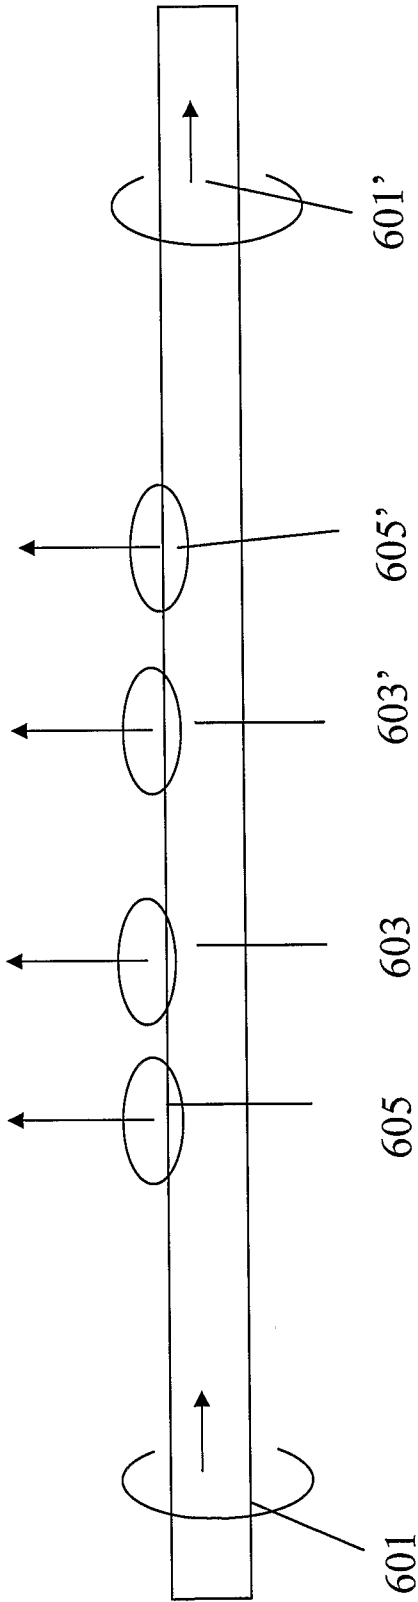


Figure 5

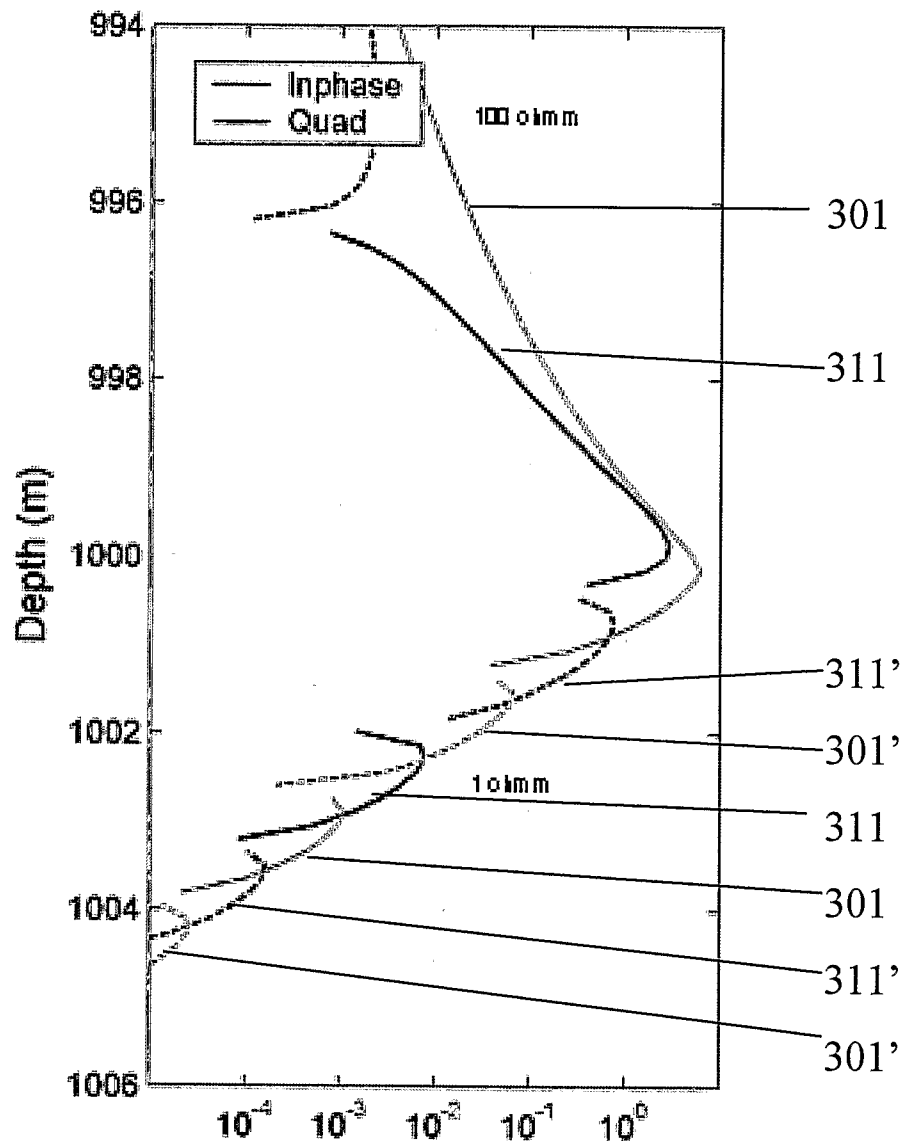


Figure 6a

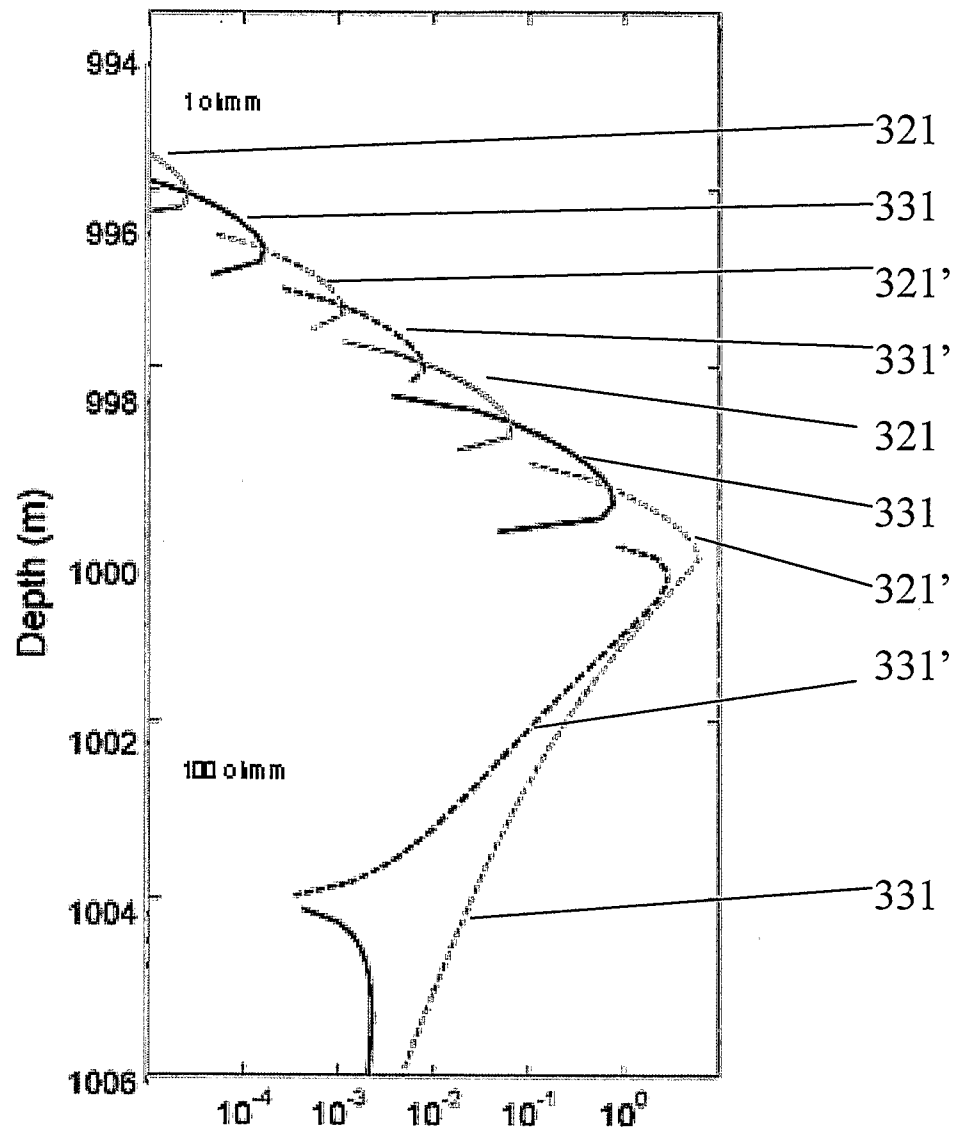


Figure 6b

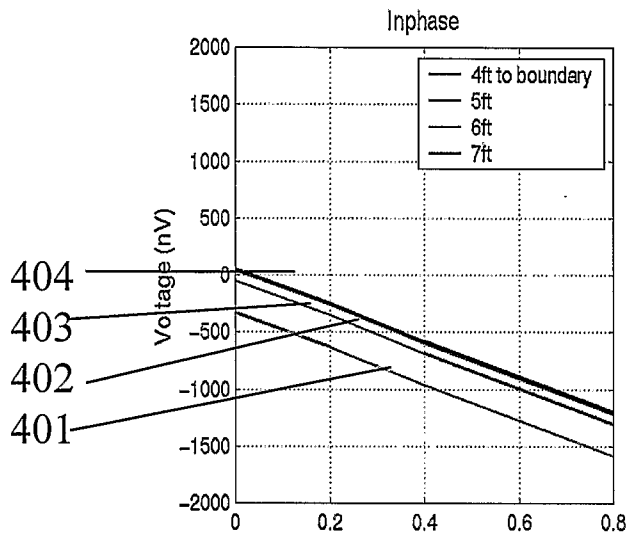


Figure 7a

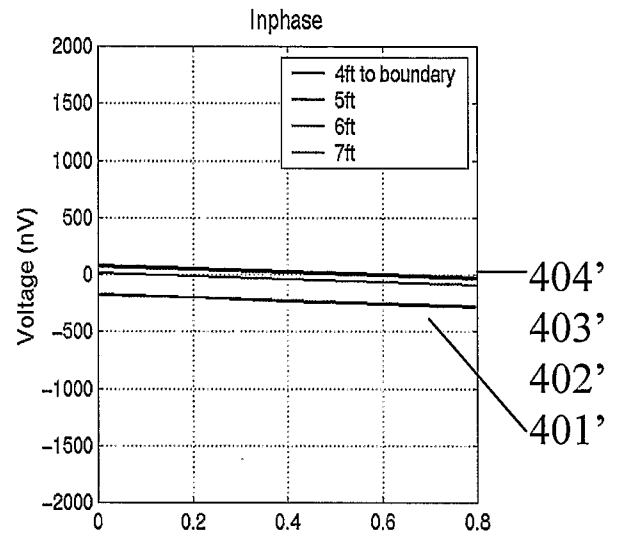


Figure 7b

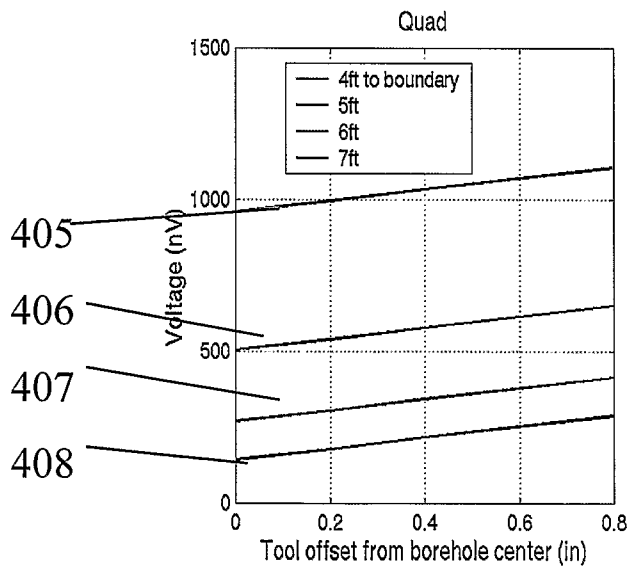


Figure 7c


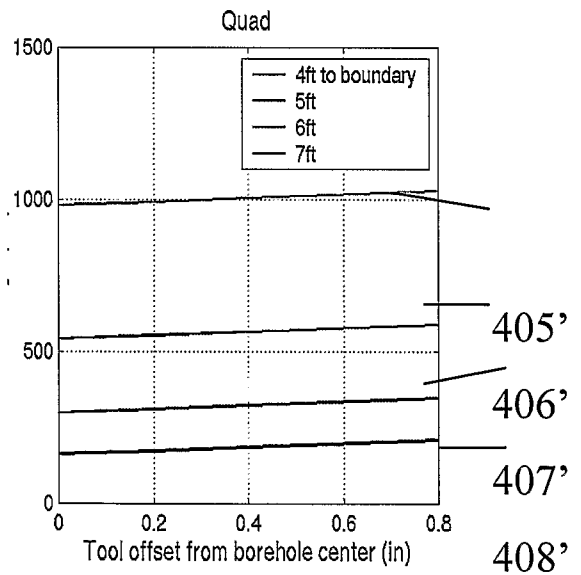


Figure 7d

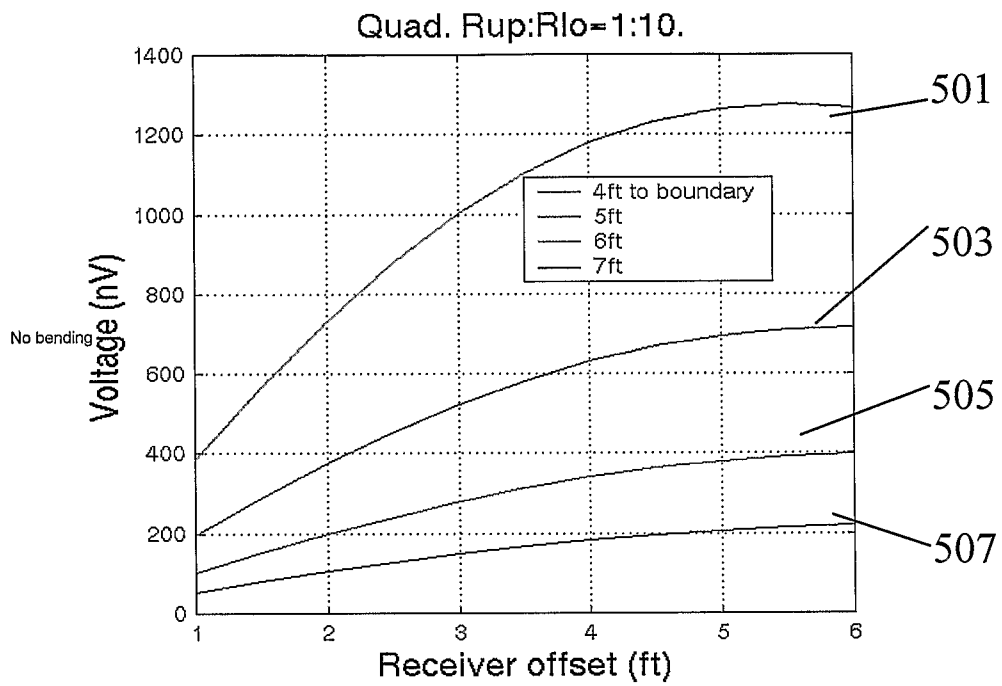

Before bucking

Figure 8a

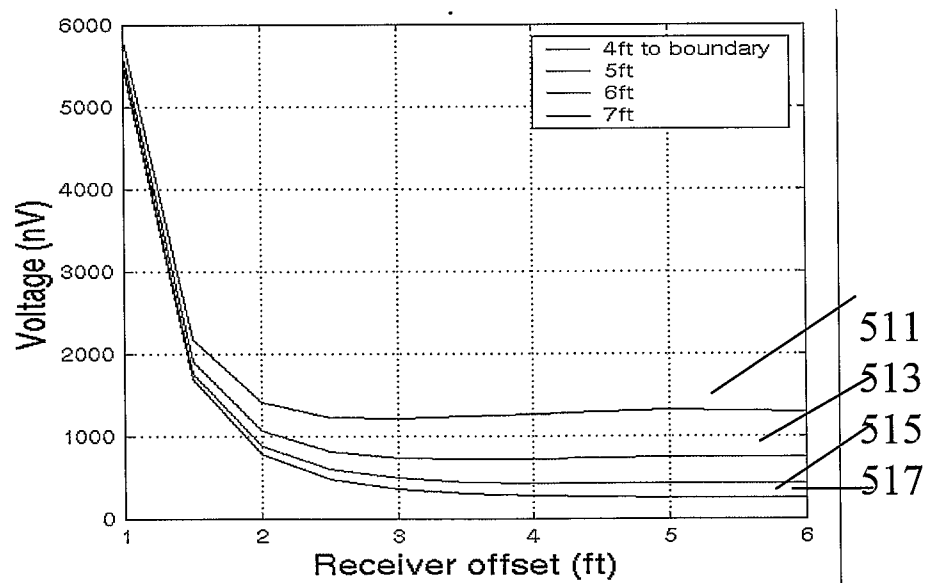


Figure 8b

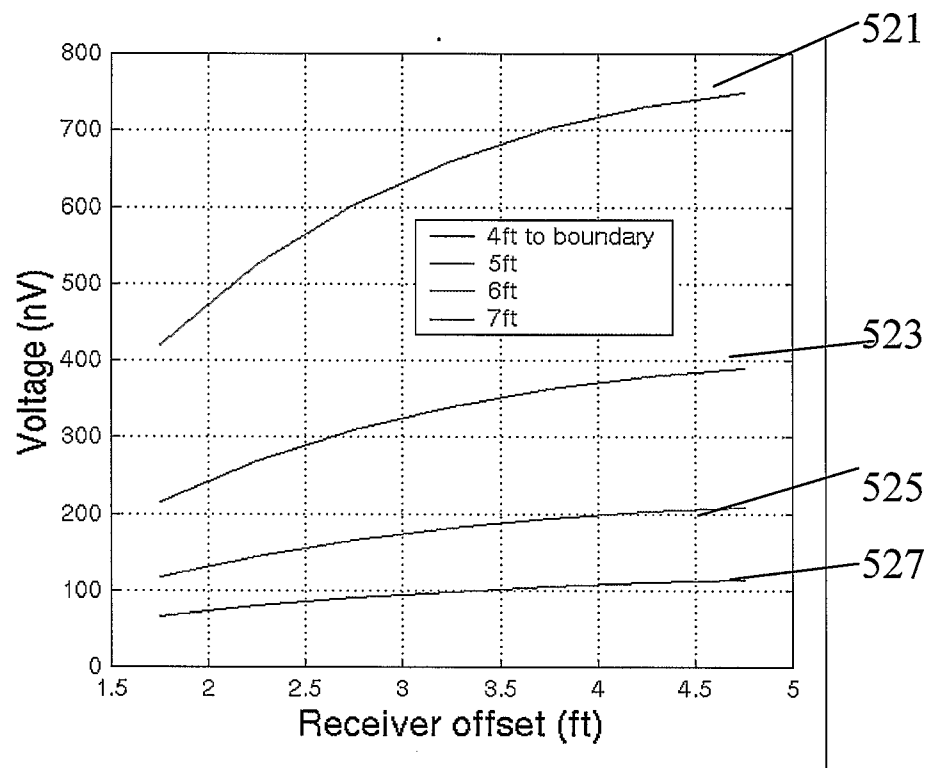


Figure 8c

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/028514

A. CLASSIFICATION OF SUBJECT MATTER
INV. G01V3/28 E21B47/022

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01V E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/113626 A1 (WANG TSILI [US] ET AL) 17 June 2004 (2004-06-17) paragraphs [0025] - [0028], [0034], [0037]; claims 9-12, 18	1-20
A	US 4 553 097 A (CLARK BRIAN [US]) 12 November 1985 (1985-11-12) column 2, line 33 - line 60; claims 1,7; figure 1	1,11
A	US R E35 386 E (WU JIAN-QUN [US] ET AL) 3 December 1996 (1996-12-03) cited in the application abstract; figure 1	1,11
A	US 2003/085707 A1 (MINERBO GERALD N [US] ET AL) 8 May 2003 (2003-05-08) paragraphs [0090] - [0093]; figures 6,7	1,11

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

16 November 2006

Date of mailing of the international search report

23/11/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-8016

Authorized officer

Trique, Michael

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/028514

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2004113626	A1	17-06-2004	NONE	
US 4553097	A	12-11-1985	AU 1973083 A	05-04-1984
			BR 8305335 A	08-05-1984
			DE 3382273 D1	13-06-1991
			DK 453083 A	31-03-1984
			EP 0105801 A2	18-04-1984
			ES 8502205 A1	16-03-1985
			GR 79422 A1	22-10-1984
			MA 19908 A1	01-04-1984
			MX 155292 A	12-02-1988
			NO 833131 A	02-04-1984
			OA 7552 A	31-03-1985
US RE35386	E	03-12-1996	NONE	
US 2003085707	A1	08-05-2003	CA 2400581 A1	26-03-2003
			GB 2382659 A	04-06-2003
			NO 20024595 A	27-03-2003