

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3406490 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **B 60 R 15/00 (2006.01)** **B 60 R 15/04 (2006.01)** **B 61 D 35/00 (2006.01)**
B 63 B 29/14 (2006.01) **E 03 D 9/10 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2022-04-11**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2022-03-16**
- (86) Europæisk ansøgning nr.: **18170900.7**
- (86) Europæisk indleveringsdag: **2018-05-04**
- (87) Den europæiske ansøgnings publiceringsdag: **2018-11-28**
- (30) Prioritet: **2017-05-04 US 201762501250 P** **2018-05-01 US 201815968132**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland**
- (72) Opfinder: **van Beek, Jacco, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland**
van Leeuwen, Joop, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
Slezak, Tijs, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
Wessels, Wilco, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
van den Heijkant, Ruud, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
van der Hoeven, Ronald, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
Mulders, Mark, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
Kieboom, Tom, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
van Riel, Didier, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
van de Sande, Mitchell, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
van Duijn, Dineke, c/o Thetford BV, Nijverheidsweg 29, 4879 AP Etten-Leur, Holland
- (74) Fuldmægtig i Danmark: **NORDIC PATENT SERVICE A/S, Bredgade 30, 1260 København K, Danmark**
- (54) Benævnelse: **SPILDEVANDSHÅNDTERINGSSYSTEM TIL KØRETØJER OG TILHØRENDE FREMGANGSMÅDE**
- (56) Fremdragne publikationer:
EP-A1- 2 977 271
CA-A1- 2 462 064
DE-B3-102013 205 084
GB-A- 2 071 025
US-A- 4 903 716
US-A- 5 141 017
US-A- 6 006 766
US-A1- 2008 023 090

DESCRIPTION

FIELD

[0001] The present disclosure relates to a wastewater management system according to claim 1 for vehicles. The present disclosure also relates to a wastewater management method according to claim 11 for vehicles.

BACKGROUND

[0002] In the recreational vehicle or motor home industry, for example, it is common to incorporate a waste management system having at least a permanent waste holding tank. More commonly, RVs are outfitted with two such independent tanks: a "black water" tank for holding semi solid human waste and a grey water tank for holding wastewater from sinks and showers, for example. It is also known to equip an RV with a waste management system having a holding tank that is removable from the RV for emptying and cleaning. Boats and other vehicles may be equipped with similar waste management systems. The laid-open publication US 2008/023090 A1 discloses a wastewater system comprising a black water tank and a grey water tank. For rinsing the black water tank with grey water, the black water tank and the grey water tank are connected to each other via conduits and a valve. US 4903716

[0003] A discloses a flushing system for a vehicle, the system being configured to flush a potable water tank, a black water tank and a grey water tank of the vehicle. EP 2 977 271 A1 discloses a waste fluid containment and draining system comprising a macerator pump, wherein an input of the macerator pump is in flow communication with a black water tank and a grey water tank via respective valves, such that the tanks can be selectively pumped out by means of the macerator pump. US 6,006,766 A discloses a sewer system of a vehicle. The system comprises a black water tank and a grey water tank that are connected to a dump hose via a multiple pipe connector. For rinsing the dump hose, the system comprises a flushing tank connected to said multiple pipe connector in axial alignment with the dump hose. US 5,141,017 A discloses a wastewater management system according to the preamble of claim 1, in particular a sewage removal adapter that can be connected to a dump hose of a recreational vehicle to facilitate the drainage of waste water holding tanks of the vehicle. The adapter includes the capacity to direct a backflushing stream of water back into dump tubes of the vehicle to clear blockages existing in the dump tubes. CA 2 462 064 A1 discloses a further adapter for facilitating the drainage of waste water tanks. DE 10 2013 205 084 B3 discloses a grey water holding tank comprising a filter integrated therein. GB 2 071 025 A discloses a towable facility comprising a potable water storage system, a grey water collection system and a black water isolation system. Holding tanks of said systems are arranged in the facility such that a collective center of gravity of the systems will remain at substantially the same location independent of the volume and the amount of fluid deposited or transported therebetween.

[0004] While known sanitation systems for vehicles may have proven to be successful for their intended purposes, a continuous need for improvement remains in the pertinent art.

SUMMARY

[0005] The present teachings are generally related to various aspects of a wastewater management system for a recreational vehicle or other vehicle.

[0006] The present teachings more particularly provide a system for managing wastewater of a vehicle such as an RV that makes disposal of waste (black and grey) water more hygienic, safe and convenient. Through a single discharge nozzle that connects to the black water tank, emptying of all waste from all waste tanks, without spilling, on any types of connection to a wastewater infrastructure is provided. Any observable odor of the waste will be less dominant than in existing situations because of reduced exposure to the waste water, controlled use of additives, and regular mixing of wastewater.

[0007] The present teachings additionally provide a system for managing wastewater of a vehicle such as an RV which increases the time period between each black water discharge moment by more effective control of chemical and biochemical decomposition processes by mixing the waste in the tanks regularly with continuous and precisely dosed additives, and by reusing grey water to flush the toilet, thereby reducing waste and reducing usage of fresh water.

[0008] The system re-uses water from the grey water tank to flush the toilet to reduce fresh water usage, and to reduce the volume of wastewater. Solids may be filtered out from the grey water and the grey water may be treated with additives. The use of additives to control the system is made more convenient, accurate and safe by replacing manual dosage with an intelligent and automated dosing system that doses additives as required.

[0009] The vehicle manufacturer is given freedom of placing a toilet practically anywhere in the vehicle by eliminating the traditional, removable waste holding tank and replacing the traditional, removable waste holding tank with a smart macerator and positive pressure pump that uses much less water than traditional macerator toilets and pumps out through very tiny diameter tubing. The reduced tubing diameters lead to reduced dead volumes of waste. This also allows the toilet to be movable in the vehicle.

[0010] The system provides the user information about the status of the wastewater management system, based on real time data measured in the system and provides communication via a user interface panel or portable smart device application.

[0011] The system reduces the fouling of the wastewater tank walls, extending system life and reducing problems associated with fouling such as odor nuisance and clogging by using

appropriately formulated additives dosed as needed and by cleaning the black water tank with grey water upon each discharge.

[0012] The system combines discharging of black water and grey water into one action, speeding up the process by eliminating many manual actions such as: carrying the traditionally heavy ($\pm 20\text{kg}$) waste holding tank to the dump location, pouring the unpleasant content into the dump spot, cleaning the inside of the waste holding tank, uncontrolled dosing of new additives, adding a start volume of water to the tank and placing back the waste holding tank in the vehicle.

[0013] In one aspect, the present disclosure relates to a wastewater management system according to claim 1 for vehicles. The system includes a black water tank for holding black wastewater and a grey water tank for holding grey wastewater. The system additionally includes a filtering device for filtering suspended solids from the grey water; a first conduit between the grey water tank and the filter; a second conduit between the filter and the toilet, the second conduit associated with a first valve; and a third conduit between the filter and the black water tank, the third conduit associated with a second valve; and a fourth conduit between the filter and the grey water tank, the fourth conduit associated with the second valve. The system further includes a control sub-system in communication with the first and second valves for controlling the first and second valves to deliver filtered grey water to the toilet for flush, to mix the content in the grey water tank and to periodically clean the filter of captured solids and deliver the captured solids to the black water tank.

[0014] In another aspect, the present disclosure relates to a method according to claim 11 for managing wastewater of a vehicle with the wastewater management system of the preceding paragraph.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The drawings described herein are for illustration purposes only and are not intended to limit the scope of the present disclosure in any way.

Figure 1 is a high level block diagram of wastewater management system for a vehicle in accordance with one embodiment of the present disclosure for enabling storage and emptying of black water and grey water from associated black water and grey water holding tanks.

Figure 1A is a cross-sectional view of a macerator housing for use with the wastewater management system of Figure 1.

Figure 2 is an illustration of one example of a control panel for controlling the system of Figure 1.

Figure 3 is an environmental view of an apparatus for delivering wastewater from a vehicle to a drain in accordance with the present teachings, the apparatus or discharge adapter shown

operatively associated with a drain.

Figure 4 is a simplified view of a macerator pump arrangement in accordance with the present teachings.

Figure 5A is a simplified view of another macerator pump arrangement in accordance with the present teachings.

Figure 5B is a simplified view of another macerator pump arrangement in accordance with the present teachings.

Figure 6 is a perspective view of the discharge adapter of Figure 3.

Figure 7 is a cross-sectional view taken through a base of the discharge adapter of Figure 3.

Figure 8 is a cross-sectional view taken through the discharge adapter of Figure 6, illustrated with a valve of the discharge adapter in a closed position.

Figure 9 is another cross-sectional view taken through the discharge adapter of Figure 6, illustrated with a valve of the discharge adapter in an open position.

Figure 10 is a cross-sectional view of a combination valve of the wastewater management system of the present teachings.

Figure 11 is another view of the combination valve of Figure 10, the combination valve shown integrated with a filter of the system.

DETAILED DESCRIPTION

[0016] The following description is merely exemplary in nature and is not intended to limit the present disclosure, application, or uses. It should be understood that throughout the drawings, corresponding reference numerals indicate like or corresponding parts and features.

[0017] Referring generally to the drawings and particularly to Figure 1, a wastewater management system in accordance with exemplary embodiment of the present teachings is illustrated and identified at reference character 10 (hereinafter simply the "system 10"). The present teachings are particular adapted for enabling efficient usage and storage of wastewater on a recreational vehicle ("RV") and emptying of wastewater from the RV. It will be understood, however, that the present teachings may be adapted for other applications where wastewater is collected for periodically emptying.

[0018] As noted above, present teachings are generally related to various aspects of a wastewater management system for a vehicle. These various aspects are shown in Figure 1 incorporated into an exemplary system 10, with alternative structures described below and

shown in various of the other drawings. These various aspects may be used alone or in combination with each other within the scope of the present teachings.

[0019] The system 10 of the present teachings may generally include a first holding structure defined by a black water holding tank 12 and a second holding structure defined by a grey water holding tank 14. The system 10 may also include a fresh water holding tank 16. In general, the grey water tank 14 may hold grey water in the form of kitchen wastewater 18 from a kitchen sink, for example, and bathroom wastewater 20 from a bathroom sink and/or shower, for example. The grey water in the grey water holding tank 14 may be used for flushing of a toilet 22 for purposes of conserving water in the fresh water tank 16, and reduction of grey water in the grey water tank. The black water tank 12, in general, receives black water from a positive pressure pump 34b associated with a macerator housing 24 associated with the toilet 22.

[0020] The system 10 is illustrated to include various valves for controlling flow between the various components. As shown, the valves may be electronically controlled valves 26 or manually controlled valves 28. The valves 26 and 28 may be gate valves, or ball valves, for example. Certain of the valves may be three-way valves 26A. It will be understood, however, that the system 10 is not limited to use with any particular type of valves; essentially any form of valve that can be electronically or manually commanded to open and close to accomplish the desired flow within the system 10 may potentially be used with the system 10 within the scope of the present teachings. Explaining further, it will be understood that electronic valves 26 may be substituted with manually controlled valves 28 throughout the system 10 for specific applications within the scope of the present teachings. Additionally, it will be understood that where the system 10 is described to include a combination valve 26A, the combination valve 26A may be replaced with multiple valves to accomplish the same function. In another embodiment, the valves around the tank module are integrated in one single valve housing system using one motor, opening and closing various conduits by different angular states of the motor shaft.

[0021] The system 10 may include level sensors 30A, 30B and 30C for sensing the level within the black water tank 12, the grey water tank 14 and the fresh water tank 16, respectively. The level sensors 30A, 30B and 30C may be float assemblies, for example, configured to transmit electronic signals that indicate a fluid level within the corresponding tank 12, 14, and 16. While the level sensors 30A, 30B and 30C may be float assemblies, it will be appreciated that the system 10 is not so limited. Essentially any type of level sensing device (e.g., capacitive, acoustic or otherwise) that is able to sense the level of the fluid within the tanks 12, 14 and 16 and provide electrical signals indicative of the sensed levels, may be used with the system 10. Certain of the tanks 12, 14 and 16 may include further sensors for more accurately sensing tank capacity. For example, the black water tank 12 may include an acceleration sensor 31 and a temperature sensor 33.

[0022] The system 10 may further include pumps 32 for pumping fluid (e.g., fresh water, grey water, and black water and additives) through the system 10. The pumps may be any suitable

pump known in the art. Preferably, the pumps 32 may be automatically controlled by electronic signals from the controller 38. Alternatively, the pumps 32 may be controlled by user input. In one particular application, the pumps 32 for the grey and black water tanks 14 and 12 are centrifugal pumps and the pumps 32 for the additives are piston pumps. It will be appreciated, however, that any type of pump may be used within the scope of the present teachings.

[0023] Traditional macerator toilets macerate and pump the waste at the same time in one action. As a result, the waste is not sufficiently macerated and therefore large diameter hoses and a large amount of flush water must be used to prevent clogging. According to the present teachings, the housing 24 associated with the toilet 22 may include a macerator pump arrangement 34. The macerator pump arrangement will be described with particular reference to the simplified view of Figure 4. The housing 24 is illustrated to include an upper portion 24A and a lower portion 24B. The upper portion 24A of the housing 24 defines an upper chamber 24C. A toilet valve is conventionally mounted in the upper portion 24A for movement between open and closed positions. The upper portion 24A may be generally cylindrical and elongated along an axis B. The lower portion 24B defines lower chamber 24D. The lower portion 24B may have a generally circular cross section in a plane perpendicular to axis C, and may taper in a direction parallel to axis C as it extends from the upper portion 24A. The axes B and C enclose an obtuse angle less than 180°. More particularly, the angle enclosed by the axes B and C is between 60° and 80°.

[0024] A narrowing 24E of the housing 24 is located at an intersection of the upper and lower portions 24A and 24B. The narrowing 24E in the outer wall to prevent the waste from being forced upwards by the centrifugal forces during the maceration. The narrowing 24E guides the waste back towards the bottom of the chamber 24C/24D.

[0025] The macerator pump arrangement 34 may include a macerator 34A and a positive pressure pump 34B that may work independently from each other. The macerator 24A is located at a lower end of the lower portion 24B and in fluid communication with a hose 72.

[0026] First, the macerator 34A runs within the housing 24 like a blender, ensuring that all toilet waste received within the housing 24 is sufficiently macerated into a slurry with use of very little toilet flush water. After that, the waste can be pumped out through a small diameter hose by positive pressure in the macerator chamber 24C/24D, created by the positive pressure pump 34B. The present teachings allow for a small diameter hose 72 having an internal diameter of less than 25mm, preferably less than 20mm and more preferably approximately 16mm or less. This compares with a conventional hose diameter of 25-30mm. The macerating knives 37 and the pump 34B may be driven by at least one motor. As illustrated, the macerating knives 37 of the macerator 34A may be driven by a first motor 35A and the positive pressure pump (e.g., airpump 34B) may be driven by a second motor 35B. The macerator pump arrangement 34 and resultantly the complete system 10 are much more silent as compared to conventional macerator toilets due to the separated mixing and pumping functions.

[0027] The toilet macerator housing 24 may include a sieve 140, positioned between the macerator 34A and the chamber 24D. The sieve prevents large particles of the waste water from entering the small diameter hose 72 to thereby prevent clogging of the hose 72. Particles blocked by the sieve 140 being macerated by the knives 37 that run close to the sieve 140.

[0028] In use, the first and second motors 34A and 35B may be automatically controlled with the controller 38. In this regard, a single user initiated flush command (e.g., passing a button or level) may cause the controller 38 to first run the first motor 35A and to subsequently run the second motor 35B.

[0029] In another embodiment of this invention, which is shown in the simplified view of Figure 5A, the macerator pump arrangement 34 may similarly include a macerator 34A and a pump 34B' that may work independent from each other. In this embodiment, the pump 34B' is a centrifugal pump. As above, the macerator 34A first runs within the housing 24 like a blender, ensuring that all toilet waste received within the housing 24 is sufficiently macerated into a slurry with use of very little toilet flush water. After that, the waste can be pumped out through a small diameter hose by the pump 34B'. Macerating knives 37 of the macerator 34A may be driven by a first motor 35B and pump blades 39 of the centrifuged pump 34B' may be driven by a second motor 35B. Again, the macerator pump arrangement 34 and resultantly the complete system 10 are much more silent as compared to conventional macerator toilets due to the separated mixing and pumping function.

[0030] In another embodiment of the present invention shown in the simplified view of Figure 5B, the housing 24 associated with the toilet 22 may include a macerator pump arrangement 34" and a valve 26 (shown immediately below the macerator pump 34 in the schematic drawing of Figure 1). The macerator pump arrangement 34" has both a macerating and pumping function integrated in one design with one motor. A single motor 35a is operative to drive both macerating knives 37 and pump blades 39 of the macerator pump 34. The valve 26 associated with the macerator pump 34 steers the pump mode between macerating and pumping. When the valve 26 is closed, ensuring that all waste does not leave the macerating housing 24, the macerator pump arrangement 34" is operated by the controller 38 in macerating mode on high voltage, and all waste is mashed into slurry. After that, the valve 26 opens and the macerator pump arrangement 34" is controlled by the controller 38 to operate in pumping mode on low voltage. When the macerator pump arrangement 34" operates in the pumping mode, the slurry gets pumped to the black water tank 12. By alternating the voltage of the macerator pump arrangement 34" between the different modes, reduced noise may be achieved.

[0031] With further reference to Figure 1, a control sub-system in the form of a control unit 38 and a display unit may be incorporated for controlling the management of wastewater within the system 10 and for emptying of the wastewater tanks 12, among other functions to be described herein. The control unit 36 may be located anywhere in the vehicle. The control unit 38 may include a controller 38 which is in communication with the macerator pump 34, with each of the valves 26, and with each of the level sensors 30A, 30B and 30C. While not

illustrated in Figure 1, it will be understood that the controller 38 may also be in communication with the various pumps 32 of the system.

[0032] The display unit 50 may incorporate a user operated keypad 40 or other buttons in communication with the controller 38 for initiating programmed routines of the system 10 and/or for opening/closing selected ones of the valves 26 or pumps. The macerator pump 34 may be controlled at the toilet 22, for example. The grey water pump 32 may be controlled at both the toilet 22 (for flushing) and at a display 50 of the display unit 36 (for instance, for pumping grey water to the black water tank 12, for mixing grey water or as part of an automated cleaning cycle). The controller 38 may be in communication with a display 42. The display may be an LCD touchscreen display 42, for example. The display 42 may have soft touch keys or controls to enable user selection various functions. Such soft touch keys or controls may be in addition to or in lieu of the keypad 40.

[0033] In other implementations remote actuation of the black water pump 32 and opening/closing of the valves 26 may be accomplished by either a key fob or even a smartphone running a suitable software application. In either event, the key fob or the smartphone may be in wireless communications with a suitable RF transceiver sub-system (not shown) in communication with the controller 38. The RF transceiver sub-system may operate in accordance with a well-known short range, wireless communication protocol, for example the BLUETOOTH® wireless communications protocol, or any other suitable protocol. This enables the user to remotely control the system 10 from a short distance. The user may also have the ability to view tank levels and notifications on a long range distance.

[0034] With particular reference to Figure 2, an exemplary display 42 in accordance with the present teachings is illustrated. The display 42 may include a first portion 42A that visually represents a capacity of the fresh water tank 16. The display 42 may also include a second portion 42B that visually represents a capacity of the black and grey water tank combined 12. Other portions of the display 42 may include a storage mode, connectivity options, notifications, including but not limited to a notification for an empty additive stock.

[0035] It will be understood that the system 10 of the present teachings may be controlled in any manner. In this regard, the control/display unit may be separated into a control unit (always fixed in the tank or toilet module) and a display unit (remote device or integrated in the RV central panel). The display unit 36 may be integrated in the central display unit already present in conventional RV's through any type of communication. The display unit may also be a remote device.

[0036] As shown in dashed lines in Figure 1, the fresh water tank 16 may optionally be in fluid communication with the grey water tank 14. This fluid communication may be through a valve 26. This fluid communication may also be through a bacterial backflow prevention 52. With such an optional communication between the fresh water tank 16 and the grey water tank 14, fluid communication between the fresh water tank 16 and the toilet 22 would not be required. Explaining further, such optional fluid communication may deliver fresh water to the grey water

tank 14 for toilet flushing in the event the grey water tank 14 is empty or below a predetermined level and the system 10 does not provide for direct communication between the fresh water tank 14 and the toilet 22. Additionally, this communication between the fresh water tank 16 and the grey water tank 14 may be used for complete flushing/rinsing of the system 10.

[0037] The system 10 may additionally include an additive sub-system 54. The additive sub-system 54 may include additive dispensers 54A, 54B, and 54C. Each of the additive dispensers 54A, 54B, and 54C may be refillable with specific additives. In one embodiment, the additive dispensers 54A, 54B, and 54C may receive replaceable cartridges containing the specific additives. Each additive cartridge 54A, 54B, and 54C may be associated with an RFID label 56 that communicates with the controller to keep track of the pumped volume of additives from the dispenser. In this manner, the controller 38 can communicate the remaining level of additives to the user on the display. The RFID label 56 may also include, store and communicate other information such as, but not limited to, cartridge lifetime, cartridge type for keying in the wrong receptacle, cartridge producer, relevant usage data, etc.

[0038] In alternative applications within the scope of the present teachings, each additive dispenser 54A, 54B, and 54C may be associated with a level sensor (not shown) for delivering an electronic signal to the controller 38 indicative of a corresponding level or indicative that the additive is out or almost out (e.g., the additive requires filling or cartridge replacement).

[0039] In one particular application, the amperage value of each additive dispenser 54A, 54B, and 54C may be monitored during pumping. A relatively high amperage value will confirm that the dispenser is pumping liquid (e.g., additive remains in the dispenser). A relatively low amperage will indicate that the dispenser is pumping air and the cartridge level is too low (e.g., additive needs to be added).

[0040] The additive dispenser 54A may be in fluid communication with the grey water tank 14 through a pump 32 for delivering a grey water additive to the grey water tank 14. Dosing of the grey water additive to the grey water tank 14 may be controlled automatically by the controller 38. For example, the controller 38 may control dosing of the grey water additive to the grey water tank 14 in response to detection of a predetermined volume level of grey water in the grey water tank 14 by the level sensor 30B.

[0041] The additive dispenser 54B may be in fluid communication with the housing 24 associated with the toilet 22 through a pump 32 for delivering a black water additive. In this manner, black water additive may be delivered to the macerator housing 34A in response to a flush of the toilet 22. Alternatively, the black water additive may be delivered directly to the black water tank 12 (as shown in Figure 1 in dashed lines). The amount of additive per flush may be fixed and be sufficient to control the generation of malodor by the contents of the black water tank 12. Alternatively, the amount of black water additive per flush may be adjusted by the control 38 based on various factors, including but not limited to a time that waste is held in the black water tank 12, a temperature of the black water tank 12, a volume of black water in

the black water tank.

[0042] The additive dispenser 54C may be in fluid communication with the flush conduit 65 through a pump 32 for delivering a flush water additive to the toilet bowl which is activated by a flush signal. In certain applications, each of the additive dispensers 54A, 54B, and 54C may also be associated with a sensor to sense the age of the corresponding additive and communicate a corresponding signal to the controller 38 when replacement is needed due to additive expiration.

[0043] As described, the wastewater management system 10 of the present teachings includes three cartridges 54A, 54B and 54C each containing a liquid composition to serve grey water, black water and flush water, respectively. The flush water additive of the system 10 provides a synergistic effect when grey water is reused. Similarly, the flush water additive has a synergistic effect with the black water additive. The grey water additive keeps the microbiological activity and malodour formation controlled in the grey water, enabling the flush water additive to improve the odour experience. This function is achieved by a mix of surfactants, sequestrants and odour control agents. The flush water additive reinforces the activity of the black water additive, thereby enabling malodour control in the black water tank. This function is achieved by a mix of surfactants, perfume and odour control agents.

[0044] Use of the system 10 of the present teachings will now be further described. When an RV equipped with the system 10 begins a trip, the fresh water tank 16 may be substantially or completely full. The black water tank 12 and the grey water tank 14 may be substantially or completely empty. The system 10 may monitor the levels within the tanks 12, 14 and 16 with the sensors 30A, 30B and 30C, respectively. At least the level of the black water tank 12 may be additionally monitored with an acceleration sensor 31 to more accurately assess tank capacity. The sensed levels of the tanks 12, 14, and 16 may be communicated to the controller 38 and in turn displayed for the user on the display 42, or the remote display.

[0045] Kitchen wastewater 18 from a kitchen sink, for example, and bathroom wastewater 20 from a bathroom sink and/or shower, for example, may drain to the grey water tank 14 under the force of gravity through a conduit 60. The kitchen wastewater 18 and bathroom wastewater 20 may be collected and stored in the grey water tank 14. The grey water in the grey water tank 14 may be used for flushing of the toilet 22 in response to a user request for flushing. This grey flush water is delivered to a filter 62 through a conduit 64. The filter 62 filters solids from the grey water to create a visually acceptable toilet flush water for the user. Filtered grey flush water is delivered to the toilet 22 for flushing through a conduit 65. The flush water additive discussed below may be introduced at this location. The conduit 65 is associated with a valve 26. Explaining further, the controller 38 may operate to open the electronically actuated valve 26 associated with the conduit 65 and pump grey water to the toilet 22.

[0046] At the toilet 22, there may be an optional extra valve to route the flush water to either a bowl of the toilet 22 (to flush the toilet) or to the macerator housing 24 (to rinse the housing 24 as part of an automated cleaning cycle).

[0047] The conduit 65 may also be associated with a pressure sensor (not shown). If there is no pressure sensed by the pressure sensor, a clogged filter condition may exist. Appropriate user notification may be sent to the controller 38 and displayed on the display 42.

[0048] The solids collected by the filter 62 may be periodically transported to the black water tank 12 through a conduit 66. In this regard, the controller 38 periodically functions to close the valve 26 associated with the conduit 65, open a three-way valve 26A associated with the conduit 66 to communicate the filter 62 with the black water tank 12, and pump grey water from the grey water tank 14 through conduit 64 and into the filter 62. These actions clean the inside of the filter 62 and transport the filtered solids through conduit 66 from the filter 62 to the black water tank 12.

[0049] The grey water in the grey water tank 14 is treated with automatically dosed additives. The filter 62 also enables a grey water mixing cycle that more evenly distributes grey water additives to treat the grey water and at the same time flushes the filter medium of the filter 62 clean. In this regard, a further conduit 69 extends from the filter 62 to the grey water tank 14. As shown in the embodiment illustrated, the further conduit 69 may be associated with the three-way valve 26A. Explaining further, the valve 26A may be controlled to completely close flow to either conduit 66 or conduit 69, may be opened to flow only to conduit 66 or may be open to flow only to conduit 69. As will be discussed below, a hose or conduit 72 may extend between the black water tank 12 and the discharge adapter 74. The conduit 72 may be associated with a three-way valve 26A and a pump 32. The valve 26A may be connected back to the black water tank 12 through black water mix conduit 71. When the valve 26A is positioned in a mixing mode to allow flow back to the black water tank, the black water gets mixed when the black water pump 32 runs. Mixing of the black water is preferred to avoid sediments of black water in the tank and also to distribute incoming additives from the toilet macerator chamber with the total black water volume in the tank. The 26A valve can also be operating in dumping mode open to the discharge adapter 74.

[0050] In the event that the grey water tank 14 does not have sufficient grey water to complete a requested flush cycle of the toilet, the toilet 22 may be flushed with fresh water. Flushing of the toilet 22 with fresh water may be accomplished in two different manners depending on the particular configuration of the system 10. In a first manner, upon sensing of a low level of grey water within the grey water tank 14, the controller 38 opens an electronically actuated valve 26 associated with a conduit 68 between the fresh water tank 16 and the toilet 22. Fresh water is pumped from the fresh water tank 16 to the toilet 22. In a second manner, the controller 38 may open an electronically actuated valve 26 associated with an option conduit 70 between the fresh water tank 16 and the grey water tank 14. Fresh water is pumped from the fresh water tank 16 to the grey water tank 14. The controller then delivers the fresh water residing in the grey water tank 14 to the toilet 22 in the manner discussed above.

[0051] The flush water additive may be dosed into the system 10 anywhere along the supply line of grey water flush 65.

[0052] The additive sub-system 54 provides for a flexible and automatic dosage of additives as required based on actual waste production. This makes sure that the quantity of additives in the waste tanks is always appropriate for the actual situation; not too high (waste of additives) and not too low (uncontrolled microbial activity).

[0053] The black water tank 12 and the grey water tank 14 may be periodically emptied in response to a user command entered through a control on the discharge adapter 74 or by a remote device. Such emptying of the black water tank 12 may be desired when the black water tank 12 has reached capacity or when an RV trip has been completed, for example. In response to user input, the controller 38 may operate to open the valve 26 associated with the conduit 72 providing fluid communication between the black water tank 12 and a drain 96 or discharge adapter 74. The conduit 72 may also be associated with a first manually actuated valve 28 proximate the discharge adapter 74. Upon opening the valve 28, the controller 38 may pump black water from the black water tank 12 to the discharge adapter 74. After the black water tank 12 is emptied, the grey water pump will pump the grey water into the black water tank 12 to rinse the walls of the black water tank 12 and empty the grey water tank 14. The grey water will then travel from the black water tank 12 to the discharge adapter 74 to clean out the discharge adapter 74 and associated hoses.

[0054] Optionally, the discharge adapter 74 may be connected to a further waste holding tank 76. The further waste holding tank 76 may be permanently or removably carried by the RV, may provide further capacity for black water storage, and may be able to dump waste in a traditional way (i.e., transport of the waste holding tank 76 without moving the vehicle). One suitable type of portable waste holding tank 76 is sold by the assignee of this application under the trademark Cassette@.

[0055] The discharge adapter 74 enables a high flow rate through small diameter hoses while discharging waste from the black water tank 12 without spilling waste outside of the designated disposal area. The discharge adapter 74 is designed to fit a large variety of sewer grates 96. Preferably the discharge adapter 74 is stored on the outside of the vehicle, or stored in a separate compartment that is easily accessed and hygienic to use. With particular reference to Figures 3 and 6 through 9 an exemplary embodiment of a discharge adapter 74 for delivering wastewater from a recreational vehicle to a drain 96 is shown and generally identified at reference character 74. In Figure 3, the discharge adapter 74 is shown operatively associated with a conventional drain 96 and further operatively associated with hose 72 or conduit for delivering waste from the system 10 to the discharge adapter 74.

[0056] The discharge adapter 74 is illustrated to generally include a housing 80, a sealing member 83 and a handgrip 91. The housing 80 may be unitarily constructed of plastic, for example. In the embodiment illustrated, the housing 80 is shown to be cylindrical in shape. An outer wall 82 of the housing 80 includes an upper portion 82A circumferentially defining an inlet chamber 84 and a lower portion 82B circumferentially defining a further chamber 86 for receiving the sealing member 83. The inlet chamber 84 is in fluid communication with an inlet 97. The conduit 72 is attached to the inlet 97.

[0057] The housing 80 further includes an outlet 88 downwardly extending from the inlet chamber 84. The outlet 88 may be cylindrical and centrally located within the housing 80. The outlet 88 may be connected to the outer wall 82 of the housing 80 through an inner wall 90. The inner wall 90 may be generally perpendicular or slightly angled to the outer wall 82. As shown, the inner wall 90 radially extends and separates the inlet chamber 84 from the further chamber 86. The outlet 88 may terminate short of a lowermost end 82C of the outer wall 82 of the housing 80.

[0058] In one particular application, the sealing member 83 may be constructed of any suitable material. In a radial direction, the sealing member 83 is positioned between the outlet 88 and the outer wall 82. In an axial direction, the sealing member 83 is positioned below the radially extending wall 90. In an uncompressed state, the sealing member 83 extends below the lowermost end 82C of the outer wall 82 of the housing 80. As illustrated, the sealing member 83 may include a lower portion 82B that radially extends inwardly below the wall defining the outlet 88.

[0059] The handgrip 91 may be formed separately from the housing 80 and attached thereto to make the handle collapsible. Alternatively, the handgrip 91 may be formed unitarily with the remainder of the housing 80. The handgrip 91 is generally U-shaped including first and second downwardly extending legs 98 and 100 connected by an intermediate portion 102. As illustrated, the handgrip 91 is hollow and is formed of first and second handgrip halves 91A and 91B. The handgrip halves 91A and 91B may be snap-fit together, connected with fasteners or connected in any manner well known in the art. Lower ends of the first and second legs 98 and 100 are rotatably received within ears 104 upstanding from an upper surface of the housing 80. Explaining further, the ears 104 define radially outward facing and cylindrically shaped openings 106. These openings 106 rotatably receive the correspondingly shaped free ends of the first and second legs 98 and 100 such that the handgrip 91 may be rotated between an upright, use position (as shown in the drawings) and a lowered or stored position. While not shown in the drawings, it will be understood that the lowered, stored position is attained by rotating the handgrip 91 ninety degrees from the upright, use position.

[0060] As illustrated, the discharge adapter 74 may include a valve 94 that ensures a closed and leak-free gate after each discharge cycle. The valve 94 may be opened and closed by the user. The closed position is shown in Figure 9. The open position is shown in Figure 10. The valve 94 has a sealing part that presses against the wall 90. The sealing part 98 is positioned in close proximity to the outlet 88 of the discharge adapter 92 to ensure minimal dripping of waste from the discharge adapter 92.

[0061] The discharge adapter 74 may include a valve activation mechanism 95 that is an integrated part of the handgrip 91 of the discharge adapter 74.

[0062] The valve activation mechanism 95 is illustrated to generally include a plunger 106 and a user control member 108. The valve 94 is carried at a lower end of the plunger 106. The

valve 94 may be integrally formed with the plunger 94 or formed as a separate part and secured to the lower end of the plunger 106. In the embodiment illustrated, the plunger 106 is cylindrical in shape and disposed within a correspondingly, cylindrically shaped conduit 110 integrally formed with the housing 80. The plunger 106 is movable within the conduit 110 between a lowered position (shown in Figures 7 and 8, for example) and an upper position (shown in Figure 9, for example). In the lowered position, the valve 94 is seated and flow between the chamber 84 and the outlet 88 is prevented. In the upper position, the valve 94 is unseated to allow flow between the chamber 84 and the outlet 88. The plunger 106 may be biased to its lowered position with a spring, for example.

[0063] The user control member 108 is generally disposed within a cavity 112 defined between the halves 91A and 91B of the handgrip 91 and rotates with the handgrip 91. As shown, the user control member 108 includes first and second legs 108A and 108B, an upper laterally extending portion 108C that laterally extends between the first and second legs 108A and 108B, and a lower laterally extending portion 108D that also laterally extends between the first and second legs 108A and 108B.

[0064] The user control member 108 is rotatably coupled to the upper end of the plunger 106. In this manner, the handgrip 91 (and thereby the user control member 108) may be rotated relative to the housing 80. As illustrated, the lower laterally extending portion 108C is formed to include a pair of inwardly extending portions 116. The inwardly extending portions 116 may be disk shaped or cylindrical and may be rotatably received within correspondingly shaped cavities 118 formed in the upper end of the plunger 106.

[0065] The user control member 108 is movable within the handgrip 91 between a lowered position (shown in Figures 7 and 8, for example) and an upper position (shown in Figure 9, for example). In the lowered position, the plunger 106 is in its lowered position, the valve 94 is seated and flow between the chamber 84 and the outlet 88 is prevented. In the upper position, the plunger 106 is in its upper position and the valve 94 is unseated to allow flow between the chamber 84 and the outlet 88.

[0066] The user control member 108 further includes a button 120 that may be depressed by the user. The button 120 may be integrally formed with the user control member 108 and extend through an opening 122 in the intermediate portion 102 of the handgrip 91. In this regard, the button 120 may normally extend into a central opening 124 defined by the handgrip 91. The user may grasp the handgrip 91 and squeeze the button 120 to translate the user control member 108 from the lowered position to the upper position. In use, the discharge adapter 74 may be placed upon a conventional drain 96 (as shown in the environmental view of Figure 3, for example). The discharge adapter 74 may be balanced and of sufficient weight such placement by the user on the drain 96 operates to compress the sealing member 83. In response to user input to the activation button, the controller 38 may open the electronically actuated valve 26 associated with a conduit 72 to thereby deliver wastewater from the recreational vehicle to the drain 96 via the discharge adapter 74. Explaining further, by opening the valve 26 associated with the conduit 72, the controller 38 may pump black water from the

black water tank 12 to the discharge adapter 74. After the black water tank 12 is emptied, the grey water pump will pump the grey water into the black water tank 12 to rinse the walls of the black water tank 12 and empty the grey water tank 14. The grey water will then travel from the black water tank 12 to the discharge adapter 74 to clean out the discharge adapter 74 and associated hoses.

[0067] The user control member 108 may include a retention mechanism 128 for retaining the user control device 108 in the upper position and thereby maintain the valve 94 in an open orientation. The retention mechanism 128 may be integrally formed with or carried by the user control member 108. As shown in the drawings, the retention mechanism 128 is integrally formed with the user control member 108 and upwardly extends from the leg 108B. The user control mechanism 128 includes a detent 130. As the user control member 108 translates from its lower position to its upper position, the detent 130 rides along a ramp 132 carried by the leg 108B of the handgrip 91. As the user control member 108 approaches the upper position, the upper end 134 of the retention mechanism and the detent 130 are inwardly deflected. When the detent 130 passes the ramp 132, the retention mechanism elastically rebounds such that the detent 130 is positioned over the ramp 132 (as shown in Figure 9, for example) and engagement between the detent 130 and the ramp 132 prevents inadvertent movement of the user control mechanism 128 from the upper position to the lower position. In this regard, the upper end of the retention mechanism 128 must be deflected in an inward direction A before the user control mechanism 128 can be lowered from the upper position.

[0068] Turning to Figures 10 and 11, the three-way valve 26A of the present teachings is further illustrated. In Figure 11, the valve 26A is shown as part of a subassembly 126 that includes the filter 62.

[0069] It will now be appreciated that the system 10 of the present teachings is an intelligent structure of components (e.g. pumps, valves, sensors) that provides for real time monitoring and managing of wastewater within an RV. The system 10 thus provides a highly convenient and easy to use means for enabling a user to monitor the black water and grey water levels in the holding tanks of an RV, to conveniently empty the tanks 12 and 14 when needed. In particular, the system 10 eliminates the need for manual emptying of the black water tank by a Cassette® type system. With the system 10, the user may use a single drain hose, and simply empty the black water tank 12 and the grey water tank 14 through the black water tank 12 to rinse the system 12 clean. If a key fob or smartphone application is included, the user may even remotely start the emptying operation from a remote location where the end of a drain hose has been coupled to a remote sanitation/sewer hookup.

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US2008023090A1 [0002]
- US4903716A [0002]
- EP2977271A1 [0003]
- US6006766A [0003]
- US5141017A [0003]
- CA2462064A1 [0003]
- DE102013205084B3 [0003]
- GB2071025A [0003]

PATENTKRAV

1. Spildevandshåndteringssystem (10) til et køretøj, hvilket spildevandshåndteringssystem (10) omfatter:

en sortvandstank (12) til at indeholde sort vand;

5 en gråtvandstank (14) til at indeholde gråt vand;

mindst én trevejsventil (26A) til at lede af gråt vand fra gråtvandstanken (14);

en første ledning (64) mellem gråtvandstanken (14) og den mindst ene trevejsventil (26A); og

en anden ledning (66) mellem den mindst ene trevejsventil (26A) og sortvandstanken (12), hvilken mindst én trevejsventil (26A) selektivt kan fungere til at lede gråt vand fra

10 gråtvandstanken (14) til sortvandstanken (12),

kendetegnet ved, at spildevandshåndteringssystemet (10) endvidere omfatter et filter (62) til filtrering af faststoffer fra det grå vand placeret mellem gråtvandstanken (14) og den mindst ene trevejsventil (26A), hvilket filter (62) står i fluidforbindelse med gråtvandstanken (14) og den mindst ene trevejsventil (26A) for levering af ufiltrerede faststoffer til sortvandstanken (12); og

15 et styringsundersystem (36), der indbefatter en styreenhed (38) til selektiv styring af den mindst ene trevejsventil (26A) til at levere opfangede faststoffer til sortvandstanken (12).

2. Spildevandshåndteringssystem ifølge krav 1, der endvidere omfatter en tredje ledning (69) mellem den mindst ene trevejsventil (26A) og gråtvandstanken (14), hvilken mindst én trevejsventil (26A) endvidere selektivt kan fungere til at lede gråt vand tilbage til gråtvandstanken (14).

3. Spildevandshåndteringssystem ifølge et af de foregående krav, hvor styreenheden (38) periodisk fungerer til at lukke en ventil (26) forbundet med en yderligere ledning (65), åbne en trevejsventil (26A) forbundet med den anden ledning (66) for at forbinde filteret (62) med sortvandstanken (12), og pumpe gråt vand fra gråtvandstanken (14) gennem den første ledning (64) og ind i filteret (62) til sortvandstanken (12).

4. Spildevandshåndteringssystem ifølge et af de foregående krav, hvor filteret (62) står i yderligere fluidforbindelse med et toilet (22) af systemet (10) gennem en fjerde ledning (65) for levering af gråt vand til toilettet til skylning.

5. Spildevandshåndteringssystem ifølge et af de foregående krav, der endvidere omfatter en femte ledning (71) til selektiv strømning fra sortvandstanken (12) tilbage til sortvandstanken (12)

for at blande sort vand inde i sortvandstanken (12), hvilken femte ledning (71) fortrinsvis er forbundet med en anden trevejsventil (26A).

5 **6.** Spildevandshåndteringssystem ifølge et af de foregående krav, der endvidere omfatter en sjette ledning (72) til selektiv strømning af det sorte vand ud af sortvandstanken (12) for udledning fra systemet, hvilken sjette ledning (72) fortrinsvis er forbundet med en anden trevejsventil (26A).

10 **7.** Spildevandshåndteringssystem ifølge et af de foregående krav, der endvidere omfatter en ferskvandstank (16) i fluidforbindelse med toilettet (22), hvor styringsundersystemets (36) styreenhed (38) kan fungere til automatisk skylning af toilettet (22) med ferskvand fra ferskvandstanken (16) efter registrering af et niveau af gråt vand i gråtvandstanken (14), der er under en forudbestemt værdi.

15 **8.** Spildevandshåndteringssystem ifølge et af de foregående krav, der endvidere omfatter en ferskvandstank (16), hvilken ferskvandstank (16) står i fluidforbindelse med gråtvandstanken (14) for skylning af systemet (10).

20 **9.** System ifølge et af de foregående krav, hvor filteret (62) står i fluidforbindelse med gråtvandstanken (14) gennem en pumpe (32) og i fluidforbindelse med både gråtvandstanken og sortvandstanken gennem den mindst ene trevejsventil (26A), hvilken mindst én trevejsventil (26A) kan styres selektivt til at levere gråt vand fra filteret (62) til enten gråtvandstanken (14) eller sortvandstanken (12).

25 **10.** System ifølge krav 9, hvor filteret (62) står i yderligere fluidforbindelse med systemets (10) toilet (22) via en yderligere ventil (26) for selektiv levering af en kilde af skyllevand.

30 **11.** Fremgangsmåde til håndtering af spildevandshåndteringssystemet (10) ifølge krav 3, hvilken fremgangsmåde omfatter:
automatisk styring af den mindst ene trevejsventil (26A) med styringsundersystemets (36) styreenheden (38) til at levere filtreret gråt vand til toilettet (22) til skylning og til periodisk rensning af filteret (62) for opfangede faststoffer og levering af de opfangede faststoffer til sortvandstanken (12).

12. Fremgangsmåde ifølge krav 11, der endvidere omfatter levering af additiver til mindst én af tankene (12, 14) eller toilettet (22) ved automatisk styring af en pumpe (32) og pumpning af additiver gennem en ledning, der strækker sig mellem en additivtilførsel (54) og den mindst ene af tankene (12, 14) eller toilettet (22).

5

13. Fremgangsmåde ifølge krav 11 eller 12, der endvidere omfatter:
registrering af et niveau af gråt vand inde i gråtvandstanken (14); og
afsendelse af ferskvand fra ferskvandstanken (16) til toilettet (22) til skylning som reaktion på en brugerkommando om at skylle toilettet (22), når et registreret niveau af gråt vand er under en
forudbestemt værdi.

10

DRAWINGS

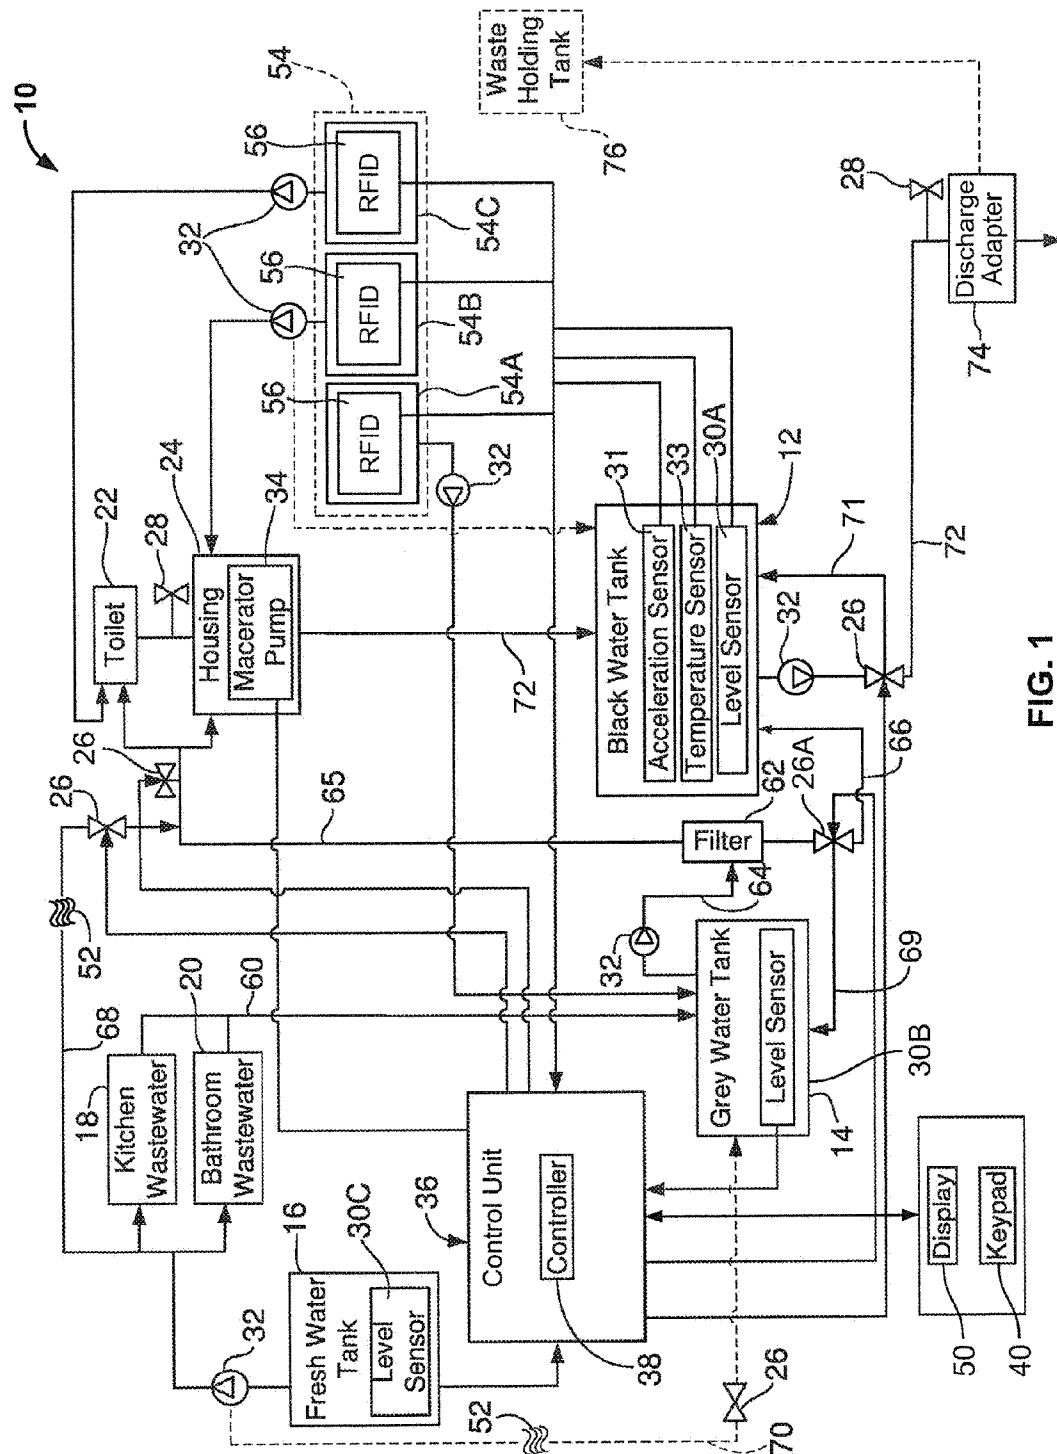


FIG. 1

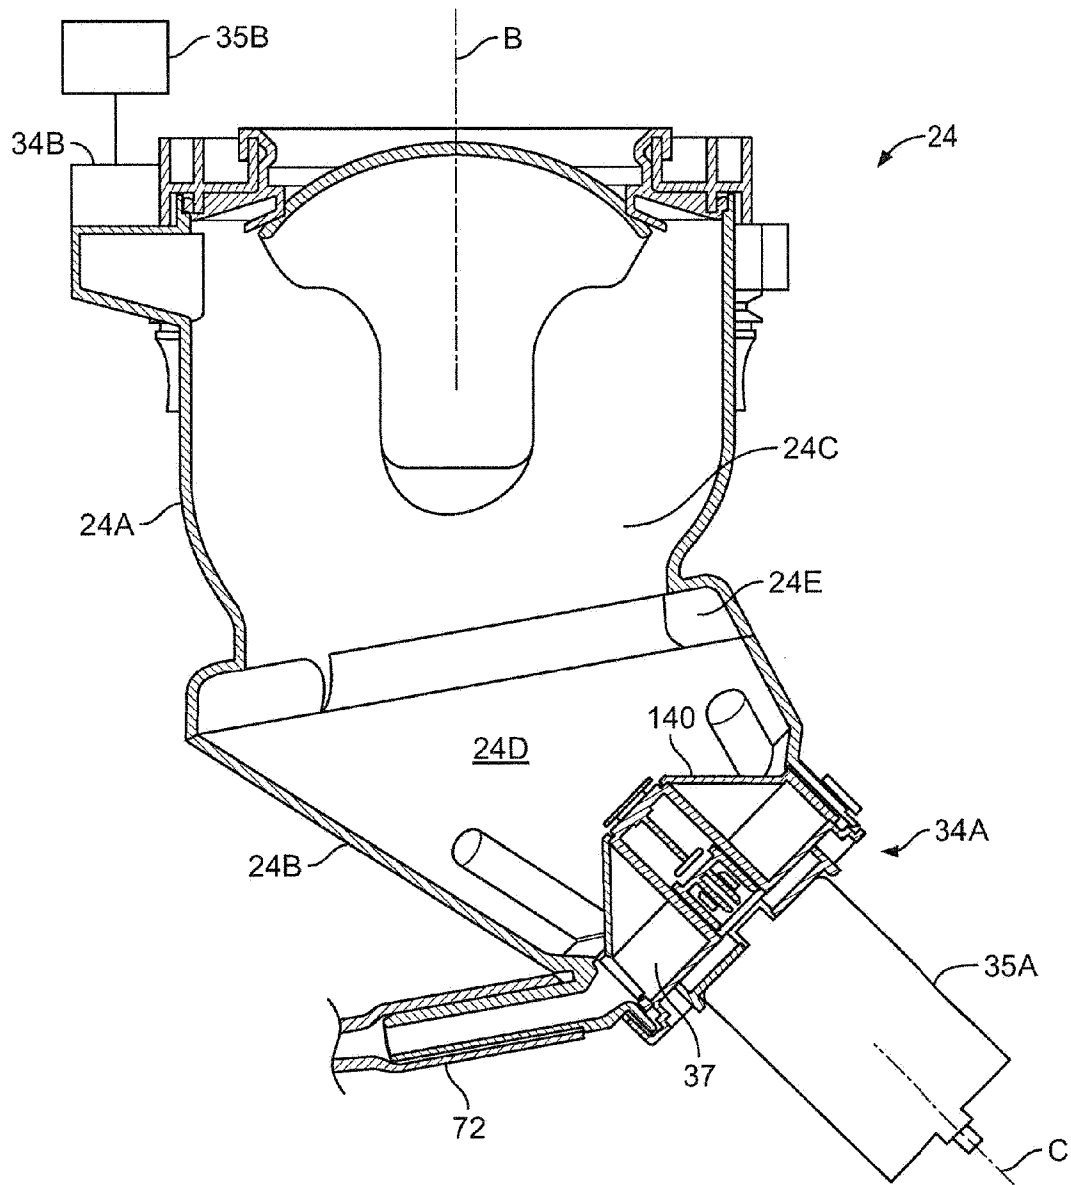


FIG. 1A

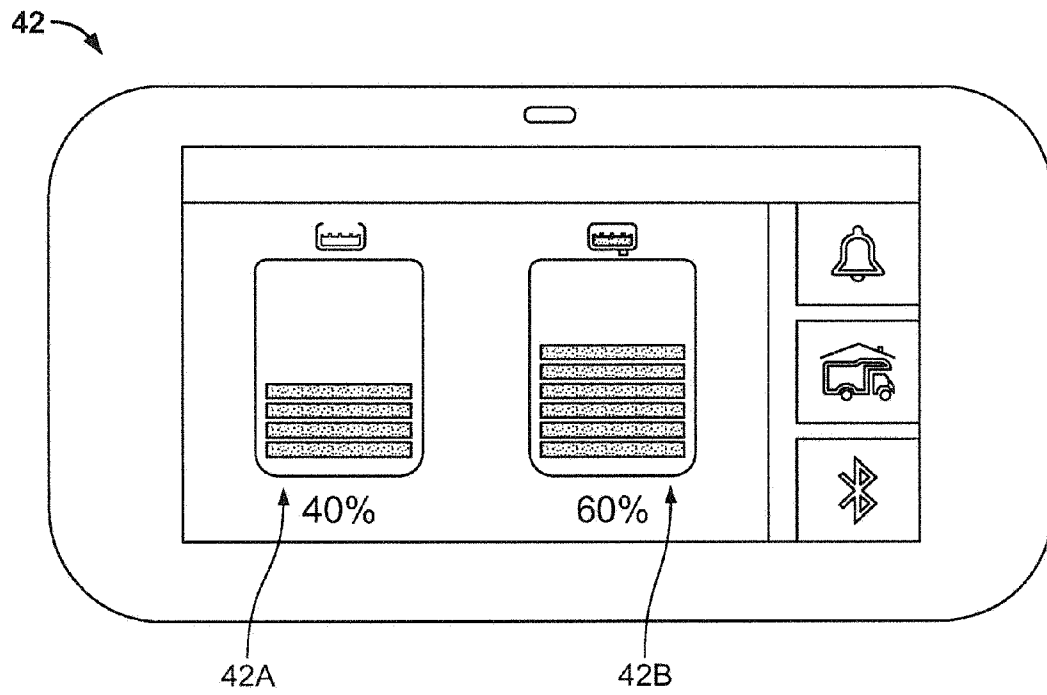


FIG. 2

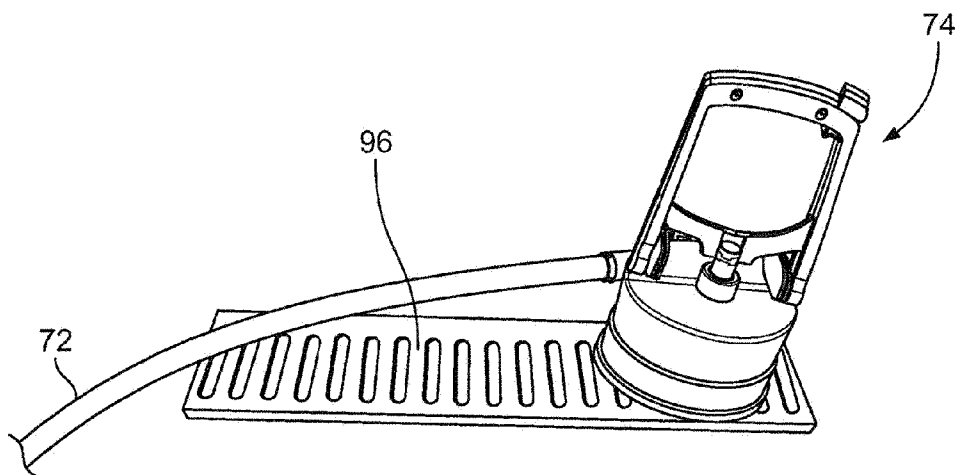


FIG. 3

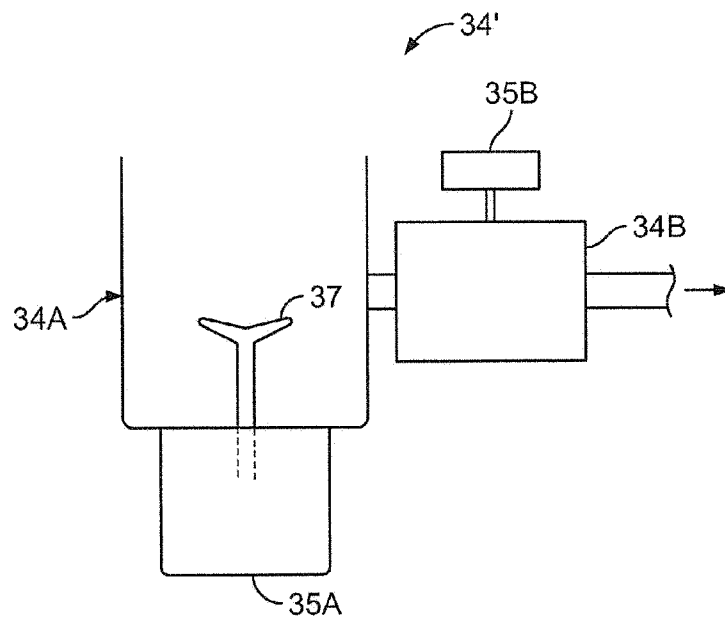
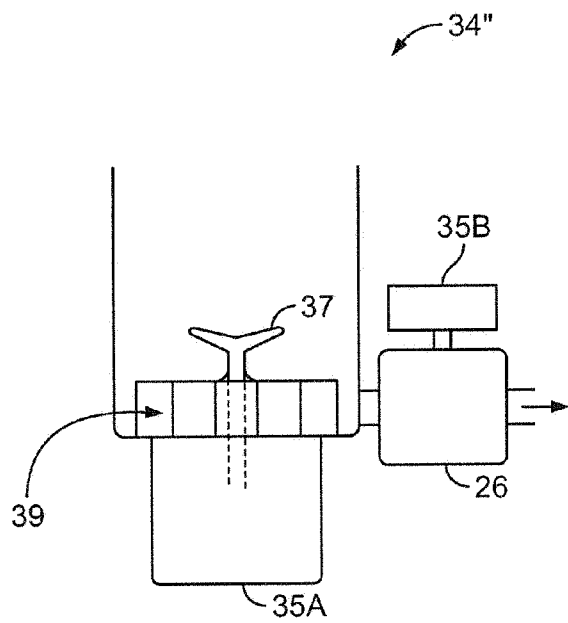
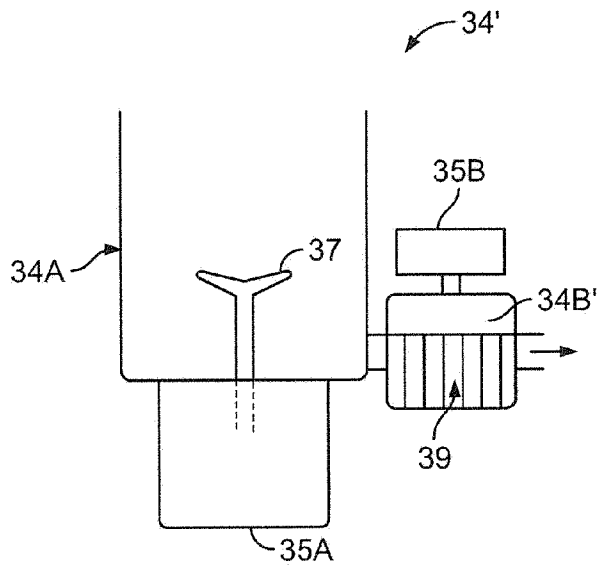


FIG. 4



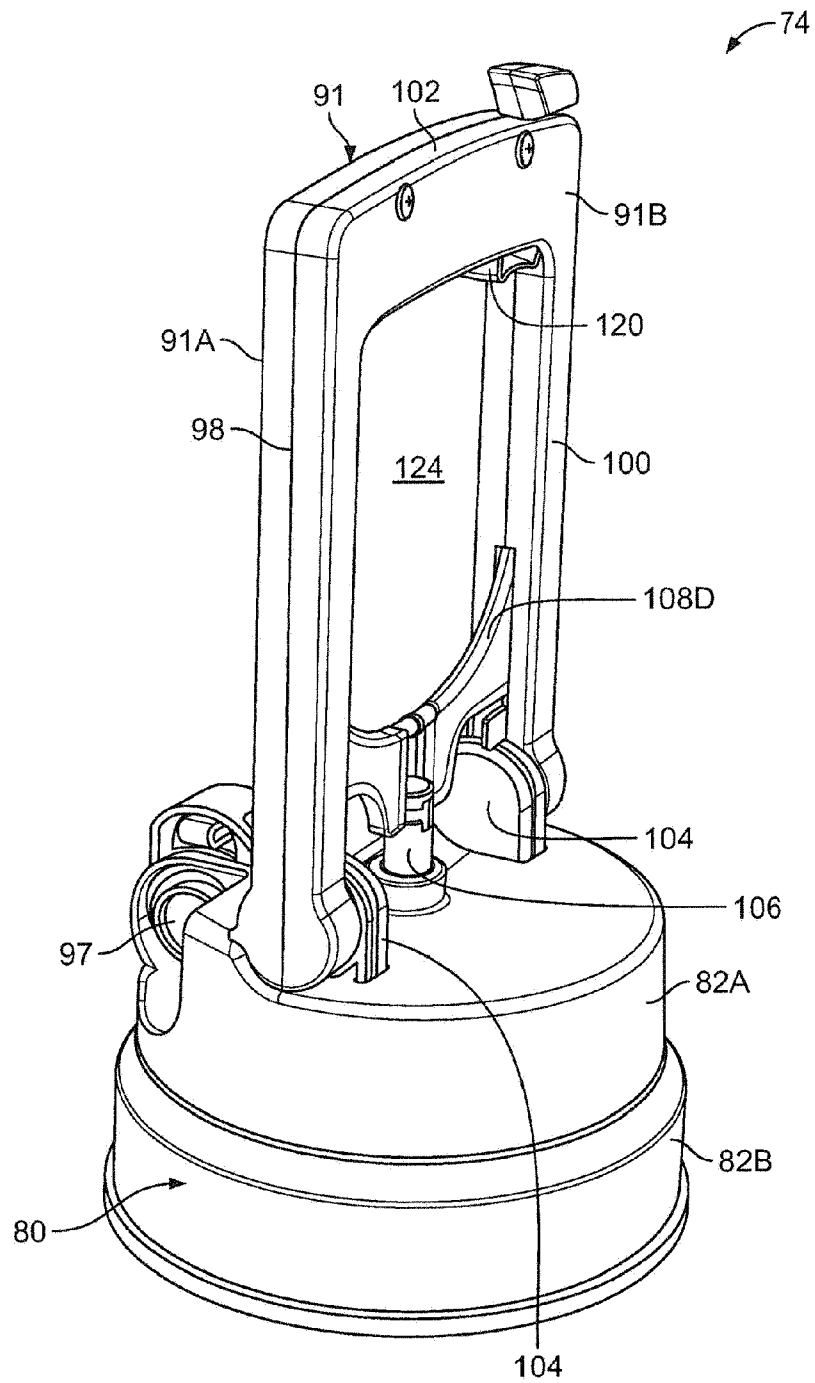
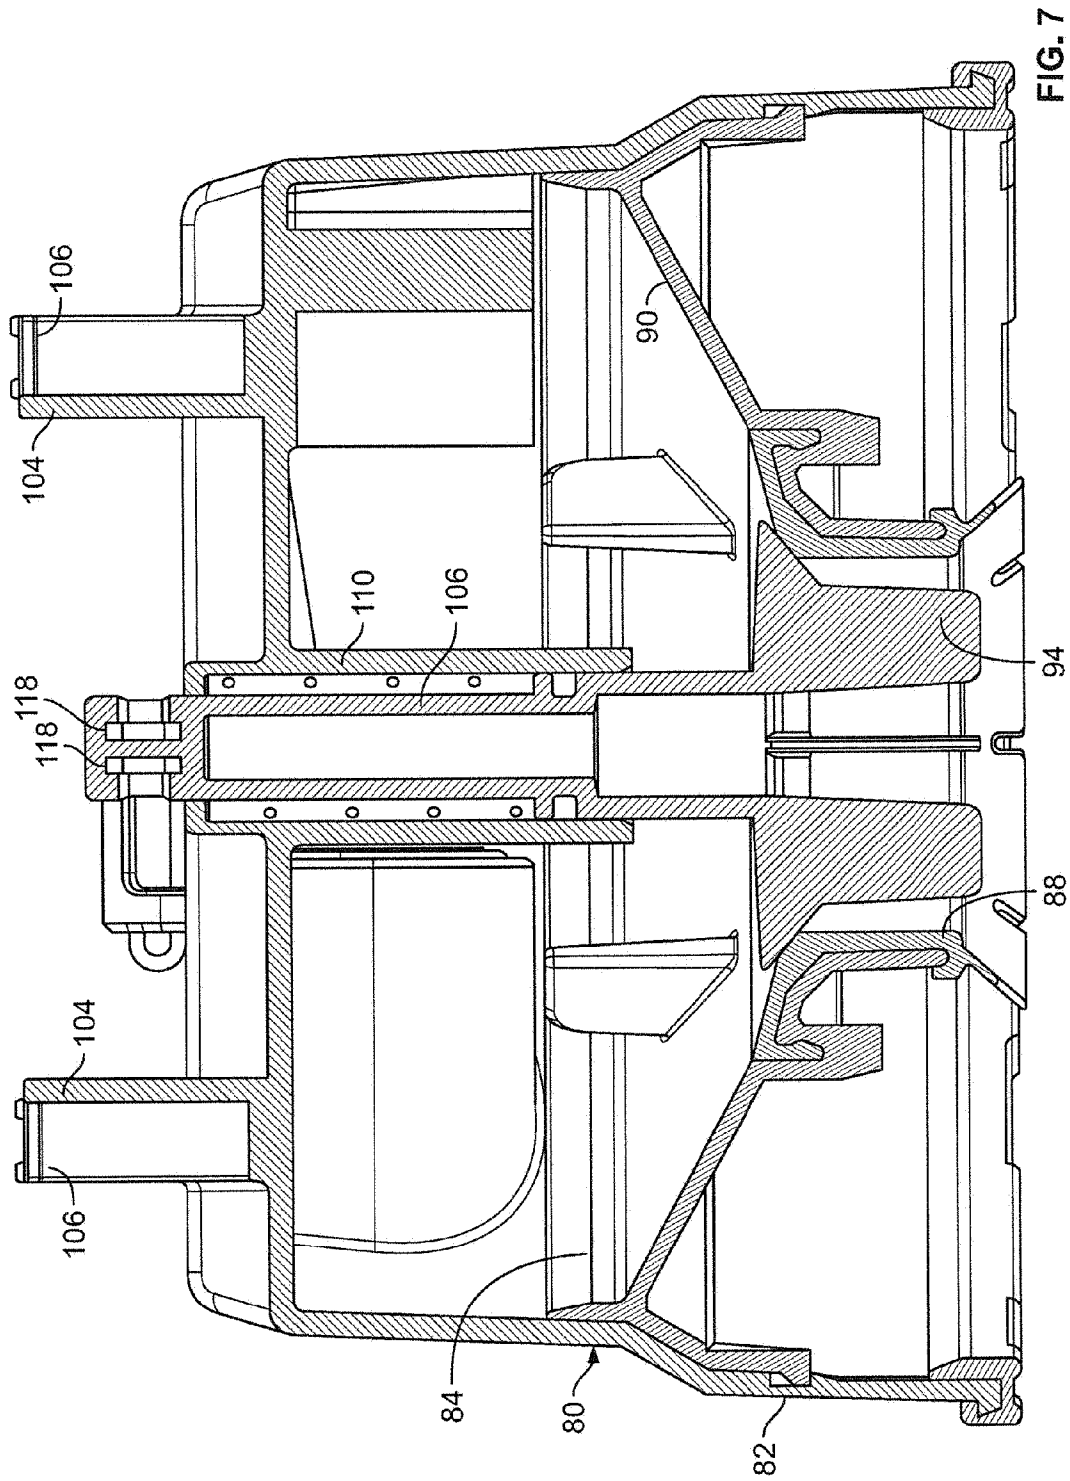


FIG. 6



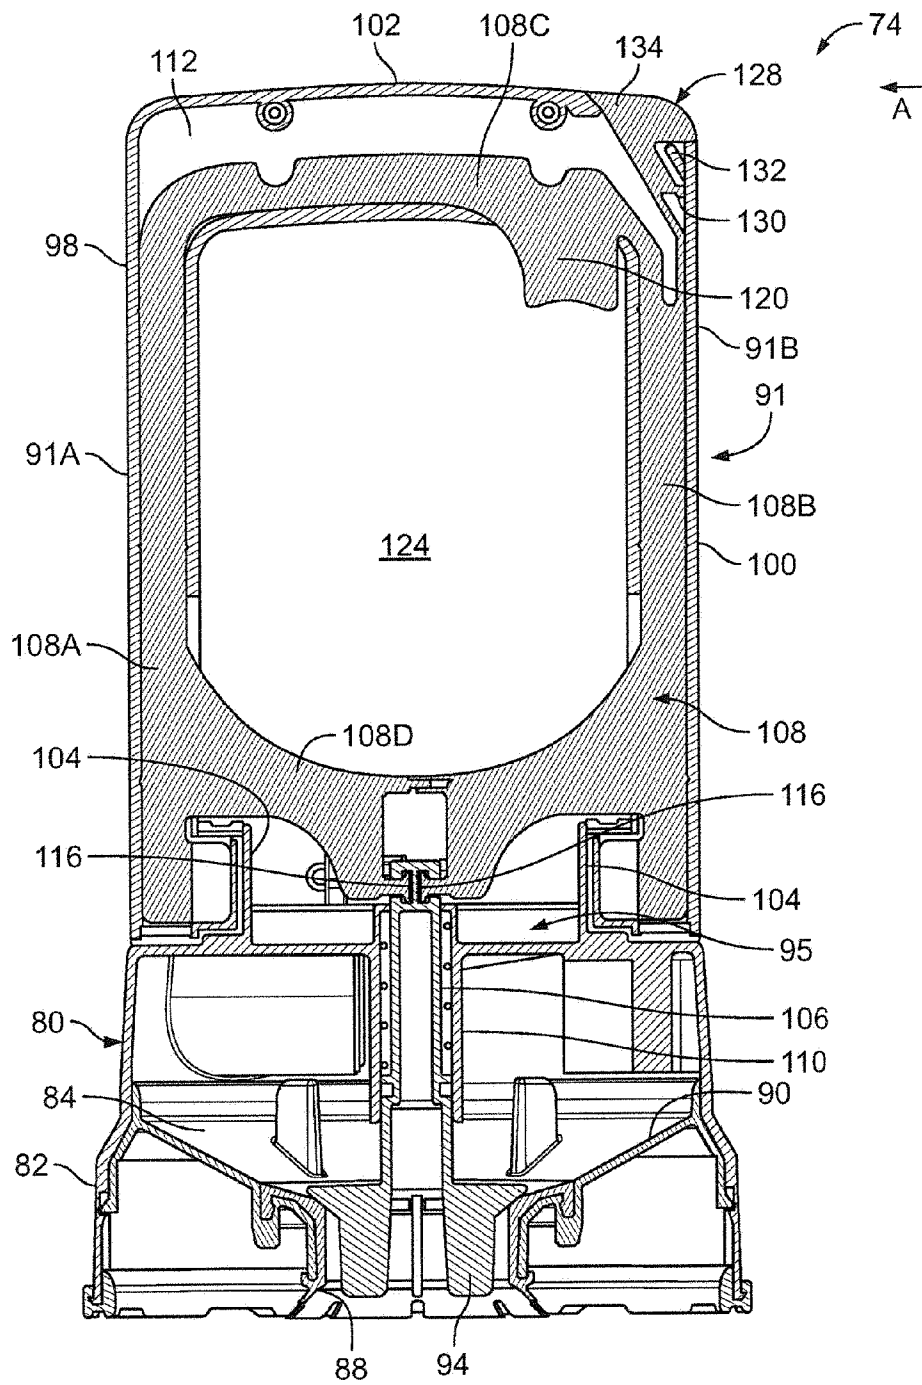


FIG. 8

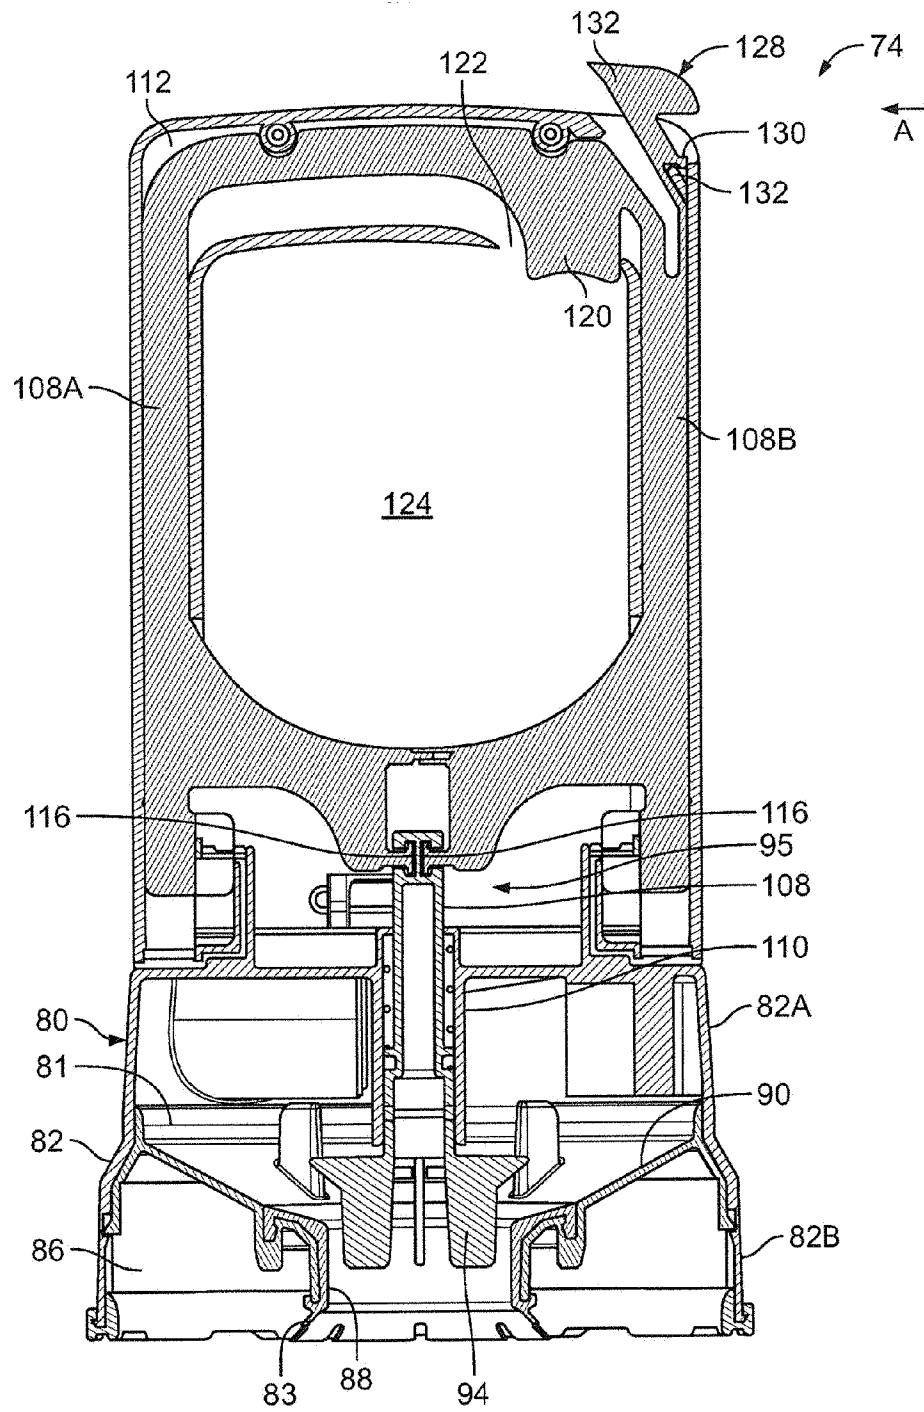


FIG. 9

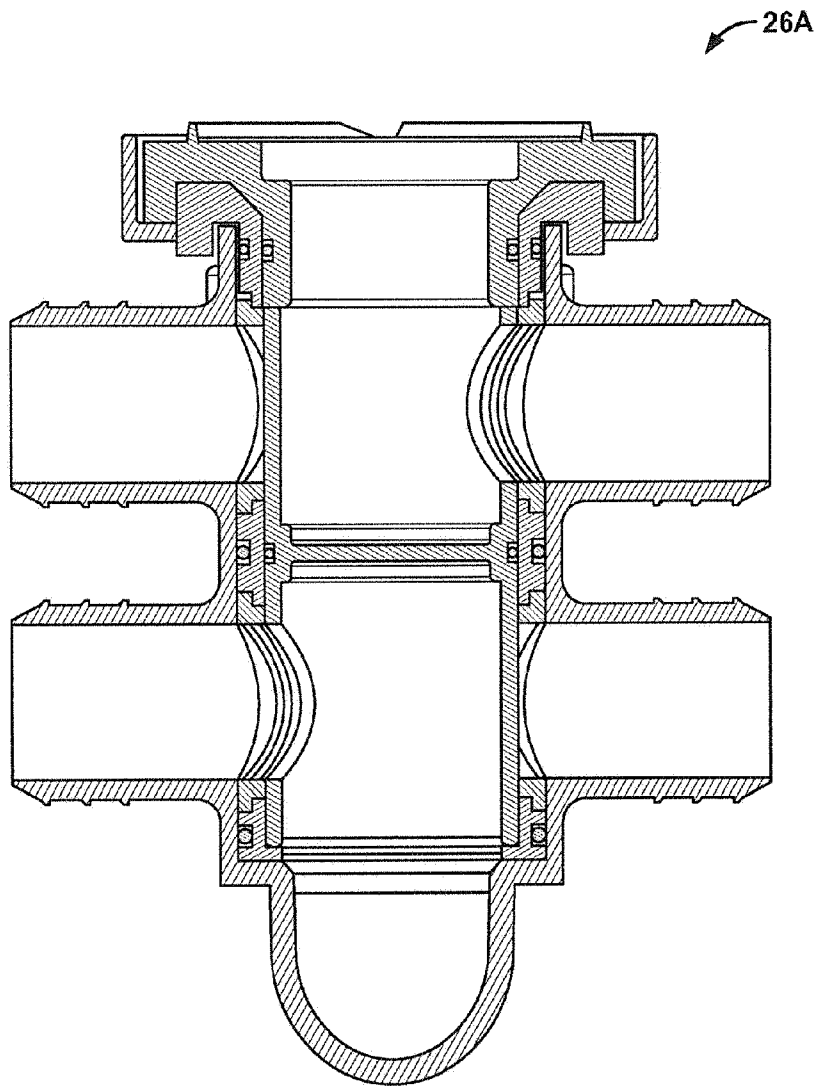


FIG. 10

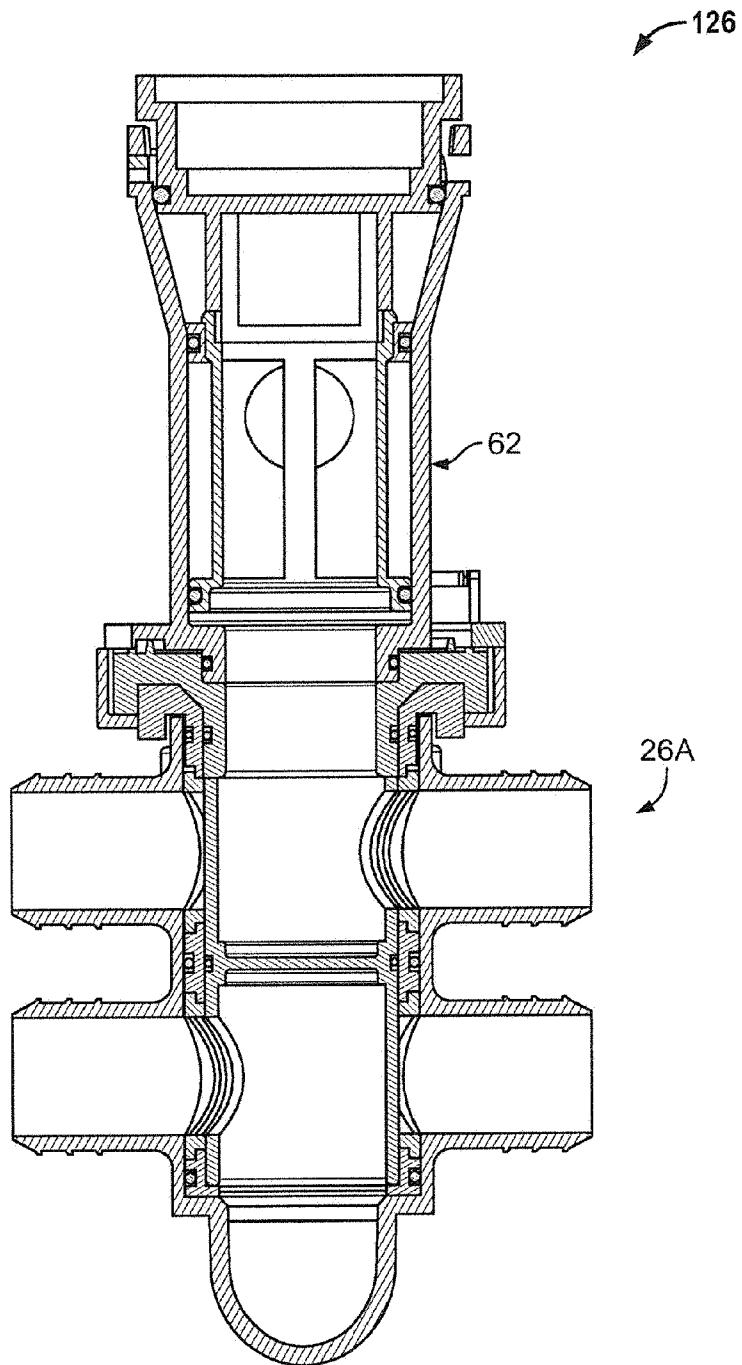


FIG. 11