

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/087665 A1**

(51) International Patent Classification<sup>7</sup>: **C01F 7/02**,  
C08K 3/22

(21) International Application Number:  
PCT/JP2005/005045

(22) International Filing Date: 15 March 2005 (15.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-073345 15 March 2004 (15.03.2004) JP  
60/555,415 23 March 2004 (23.03.2004) US  
2004-336293 19 November 2004 (19.11.2004) JP

(71) Applicant (for all designated States except US): **SHOWA DENKO K.K.** [JP/JP]; 13-9, Shibadaimon 1-chome, Minato-ku, Tokyo, 1058518 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MIYAZAWA, Hirokazu** [JP/JP]; c/o Shiojiri Plant SHOWA DENKO K.K., 1, Oaza Soga, Shiojiri-shi, Nagano, 3996461 (JP). **TOMIKAWA, Shinichiro** [JP/JP]; c/o Shiojiri Plant SHOWA DENKO K.K., 1, Oaza Soga, Shiojiri-shi, Nagano, 3996461 (JP).

(74) Agents: **AOKI, Atsushi** et al.; A. Aoki, Ishida & Associates, Toranomon 37 Mori Bldg., 5-1, Toranomon 3-chome, Minato-ku, Tokyo 105-8423 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ROUNDISH FUSED ALUMINA PARTICLES, PRODUCTION PROCESS THEREOF, AND RESIN COMPOSITION CONTAINING THE PARTICLES.

(57) Abstract: A roundish fused alumina particles having a mean particle size of 5 to 4,000 µm and a roundness of 0.85 or more, and a producing method thereof are provided. The method comprises removing edges of fused alumina particles by making the fused alumina particles collide with each other.



WO 2005/087665 A1

## DESCRIPTION

ROUNDISH FUSED ALUMINA PARTICLES, PRODUCTION PROCESS  
THEREOF, AND RESIN COMPOSITION CONTAINING THE PARTICLES

5

## Technical Field

The present invention relates to roundish (or rounded) fused alumina particles, and more particularly, to roundish fused alumina particles which are useful for wear-resistant floor material; sealing material for electronic parts; heat-dissipation substrate material; fillers; final lapping material; and aggregates and fillers incorporated into refractories, ceramics, or composites thereof, which causes little wear of apparatuses, and which exhibit excellent flow characteristics and filling characteristics. The invention also relates to an industrial, economical method for producing the roundish fused alumina particles, to a wear-resistant resin composition, to a high-thermal-conductivity rubber composition, and to a high-thermal-conductivity resin composition, all containing the alumina particles.

## 20 Related Art

In recent years, electric vehicles, hybrid vehicles, fuel cell vehicles, and similar vehicles have been remarkably developed to cope with environmental problems. Electronic parts used therein are operated by large currents, and the heat generated by the parts has increased. In addition, demands for higher integration and higher density of electronic parts have increased electric power consumption per chip. Thus, effective removal of generated heat, in order to suppress temperature elevation of electric and electronic elements, is a critical issue.

35 In order to solve the problems, a large amount of corundum ( $\alpha$ -alumina), which exhibits excellent thermal conductivity, is desirably incorporated into a high-

thermal-conductivity rubber or resin composition. Among alumina materials, fused alumina particles have sharp edges, and are used as an abrasive, because the particles of the fused alumina are formed through crushing.

5 Therefore, fused alumina particles cannot be incorporated into these parts in a large amount, and wear an apparatus such as a kneader or a mold, thereby elevating the production costs of alumina-particle-containing parts. For this reason, fused alumina particles have not been  
10 used as a filler.

Currently, roundish alumina particles are known to be produced through firing after addition of a chemical reagent (see, for example, Japanese Unexamined Patent Publication (*kokai*) No. 4-32004, 5-294613 and No. 2002-  
15 348116) or thermal spraying (see, for example, Japanese Unexamined Patent Publication (*kokai*) No. 5-193908, 63-156011 and 2001-19425). The roundish alumina particles are not fused alumina particles.

As the roundish alumina particles produced through firing after addition of a chemical reagent are sintered alumina particles, each particle is polycrystalline alumina having crystal grain boundaries. The roundish alumina particles produced through thermal spraying are also polycrystalline particles containing  $\alpha$ -alumina,  $\delta$ -  
20 alumina, and  $\gamma$ -alumina. These alumina particle species exhibit low thermal conductivity as compared with fused alumina virtually composed of single crystals, and are economically disadvantageous in that these species require a number of production steps and a large amount  
25 of heat energy.  
30

Meanwhile, fused alumina particles have already been incorporated in some wear-resistant resin composition, e.g. floor materials requiring wear resistance. The thus-employed fused alumina particles also have drawbacks  
35 in that a large amount of the alumina particles, for enhancing wear resistance, cannot be incorporated into the parts, and that the alumina particles scratch a

molding plate during formation of laminated products, due to the sharp edges of the particles.

According to the methods disclosed in the  
aforementioned patent documents, roundish alumina  
5 particles having no edges can be produced. However, the  
methods require a large amount of heat energy, which is  
disadvantageous in terms of economy, and the thus-  
produced alumina particles exhibit low thermal  
conductivity. In order to solve all of the  
10 aforementioned problems, preferably, roundish fused  
alumina particles must be fused alumina particles which  
exhibit high thermal conductivity without thermal  
treatment.

If roundish fused alumina particles can be produced  
15 through only shaping and rounding, without heat  
treatment, a heating apparatus and a cooling apparatus  
are no longer required, leading to the merit of a low  
facility cost.

#### Disclosure of the Invention

20 The present inventors have conducted extensive  
studies in order to solve the problems involved in the  
conventional techniques, and have found that the problems  
can be solved by employing a production method using a  
jet mill so as to produce roundish fused alumina  
25 particles. The present invention has been accomplished  
on the basis of this finding.

Accordingly, the present invention for solving the  
problems is directed to the following:

[1] Roundish fused alumina particles having a mean  
30 particle size of 5 to 4,000  $\mu\text{m}$  and a roundness of 0.85 or  
more.

[2] A method for producing the roundish fused  
alumina particles as recited in [1] above, characterized  
in that the method comprises removing edges of fused  
35 alumina particles by making the fused alumina particles  
collide with each other.

[3] A method for producing the roundish fused

alumina particles as recited in [1] above, characterized in that the method comprises removing edges of fused alumina particles by means of a jet mill.

5 [4] The method for producing the roundish fused alumina particles as described in [3] above, wherein the jet mill is a counter-flow type mill.

[5] The method for producing the roundish fused alumina particles as described in [3] above, wherein the jet mill is a rotational-flow type jet mill.

10 [6] The method for producing the roundish fused alumina particles as described in [4] above, wherein the counter-flow type jet mill can arbitrarily control the nozzle pressure, the rotation speed of a classifier, and the operation time thereof.

15 [7] The method for producing the roundish fused alumina particles as described in [4] or [6] above, wherein the counter-flow type jet mill is operated at a nozzle pressure of 0.6 to 0.8 MPa.

20 [8] The method for producing the roundish fused alumina particles as described in [4], [6], or [7] above, wherein the counter-flow type jet mill is operated in a batch manner and the residue is provided as a product.

[9] A wear-resistant resin composition, characterized in that the resin composition contains the roundish fused alumina particles as recited in [1] above.

25 [10] A high-thermal-conductivity rubber composition, characterized in that the rubber composition contains the roundish fused alumina particles as recited in [1] above.

30 [11] A high-thermal-conductivity resin composition, characterized in that the resin composition contains the roundish fused alumina particles as recited in [1] above.

[12] A method for producing a wear-resistant resin composition, characterized by using the roundish fused alumina particles as described in [1] above.

35 [13] A method for producing a high-thermal-conductivity rubber composition, characterized by using

roundish fused alumina particles as described in [1] above.

[14] A method for producing a high-thermal-conductivity resin composition, characterized by using the roundish fused alumina particles as described in [1] above.

According to the present invention, roundish fused alumina particles can be produced, industrially, at a low cost. The roundish fused alumina particles of the present invention exhibit a high thermal conductivity, as compared with conventional roundish alumina particles, and excellent filling characteristics. The roundish fused alumina particles of the present invention reduce wear of the machines and apparatuses for producing alumina-particle-containing compositions.

#### Brief Description of Drawings

Fig. 1 is a schematic view of an apparatus used for determining bulk-density according to JIS-R6126 (1970).  
Best Modes for Carrying Out the Invention

The present invention will be described in detail as follows.

The present invention is directed to roundish fused alumina particles having a mean particle size of 5 to 4,000  $\mu\text{m}$  and a roundness of 0.85 or more, and to a method for producing the roundish fused alumina particles, characterized in that the method comprises rounding fused alumina particles by means of a jet mill which is generally employed as a pulverizer.

In the present invention, the term "roundness" refers to a ratio of (a) to (b), wherein (a) is a projection area of a particle, and (b) is an area of a true circle having a peripheral length equal to the peripheral length of the projection image of the particle. As the shape of a particle approximates a true circle, the roundness of the particle approaches 1.

The roundish fused alumina particles of the present invention have a roundness of 0.85 or more, preferably

0.86 or more, more preferably 0.87 or more, still more preferably 0.88 or more. It is naturally possible for the roundish fused alumina particles of the present invention have a roundness of 0.90 or more. However, a  
5 roundness more than necessary leads to economical disadvantages such as a long shaping period. Generally speaking, a roundness no larger than 0.91 is preferable.

The fused alumina employed as a starting material in the present invention may be produced through a known  
10 method. The fused alumina preferably has a mean particle size of 5 to 4,000  $\mu\text{m}$ , more preferably 5 to 500  $\mu\text{m}$ . When the mean particle size is less than 5  $\mu\text{m}$ , production yield becomes poor, because a classifier attached to a jet mill generally has a classification limit of about 2  
15 to 3  $\mu\text{m}$ . When the mean particle size is in excess of 4,000  $\mu\text{m}$ , the particles are not sufficiently accelerated within a jet mill, thereby failing to gain the kinetic energy required to make the particles collide with each other to round them.

20 Though no particular limitation is imposed on the type of the jet mill used in the present invention, examples include counter-flow type (opposed) jet mills (e.g., Majac (Hosokawa Alpine)), and rotational-flow type jet mills (e.g., STJ (Seishin Enterprise Co., Ltd.) and  
25 PJM (Nippon Pneumatic Mfg. Co., Ltd.)).

As fused alumina particles *per se* have conventionally been employed as an abrasives, they cause considerable and problematic wear in a machine for handling them. Thus, running cost of the machine must be  
30 taken into account. From this viewpoint, a counter-flow type jet mill, in which few particles are brought into direct contact with the inner wall of the mill, is preferably employed.

No particular limitation is imposed on the mode of  
35 operation of the opposed jet mill. However, a batch operation, rather than a typical continuous operation, is

employed. In a preferred mode, raw material is fed in advance to the mill in such an amount that a pusher nozzle is buried in the material, and the operation is started. During operation, no additional raw material is  
5 fed to the mill. After operation for a predetermined period of time, the mill is stopped, and the powder in the mill is removed as a product through a lower discharge outlet.

Fused alumina is virtually formed of a single  
10 crystal and has high hardness. Thus, the so-called "pulverization" of alumina, in a jet mill, hardly occurs. One possible reason for formation of roundish fused alumina particles by means of a jet mill is the following. When fused alumina particles are processed by  
15 means of a jet mill, the characteristic edges of fused alumina particles are broken through collision between particles. Through repetition of such collisions, the number of sharp edges are reduced. Fine debris formed by collision is discharged to the outside of the system by a  
20 classifier, and coarse particles having no sharp edges remain in the mill.

The roundness is preferably controlled on the basis of operation time. When the operation time is too short, the roundness is insufficient, whereas when the operation  
25 time is excessively long, the process is not economical.

No particular limitation is imposed on the jet mill nozzle pressure, and a higher nozzle pressure is preferred from the viewpoint of shaping efficacy. In consideration of the cost for realizing pressure-  
30 resistance of a machine, a nozzle pressure of 0.6 to 0.8 MPa is preferred.

No particular limitation is imposed on the lower cut point of the classifier, and the lower cut point may be predetermined on the basis of the desired product.

35 The roundish fused alumina particles according to the present invention are preferably incorporated into a rubber or a resin composition and, particularly, in high-



thermal-conductivity rubber or resin compositions and in wear-resistant resin compositions especially containing alumina at high filling ratio.

5 A high-thermal-conductivity rubber or resin composition preferably contains the roundish fused alumina particles in an amount of 80 mass% or more.

In the present invention, no particular limitation is imposed on the resin for forming the aforementioned high-thermal-conductivity resin composition, and any  
10 known resin may be employed. Examples of the resin include unsaturated polyester resins, acrylic resins, vinyl ester resins, epoxy resins, xylene-formaldehyde resins, guanamine resins, diallyl phthalate resins, phenolic resins, furan resins, polyimide resins, melamine  
15 resins, and urea resins. Among these, unsaturated polyester resins, acrylic resins, vinyl ester resins, epoxy resins, etc. are preferred.

In the present invention, no particular limitation is imposed on the resin for forming the aforementioned wear-resistant resin composition, and any known resins  
20 may be employed. Examples of the resin include unsaturated polyester resins, acrylic resins, vinyl ester resins, epoxy resins, xylene-formaldehyde resins, guanamine resins, diallyl phthalate resins, phenolic  
25 resins, furan resins, polyimide resins, melamine resins, and urea resins. Among these, melamine resins, phenolic resins, etc. are preferred.

In the present invention, no particular limitation is imposed on the rubber for forming the aforementioned high-thermal-conductivity rubber composition, and any  
30 known rubber may be employed.

The present invention will next be described in detail by way of Examples and Comparative Examples, which should not be construed as limiting the invention  
35 thereto.

<Method for determining roundness>

The projection area of a particle (a) and the

peripheral length of the projection area were measured. The area of a true circle having a peripheral length equal to the peripheral length of the projection image of the particle (b) was calculated. The roundness was  
5 calculated by dividing (a) by (b). As the shape of a particle approximates a true circle, the roundness of the particle approaches 1.

In the case where the mean particle size was found to be 200  $\mu\text{m}$  or less, the mean roundness was determined  
10 by use of an FPIA-2000 (product of Sysmex).

In the case where the mean particle size was found to be 200  $\mu\text{m}$  or more, the mean roundness was determined by use of a Luzex graphic image analyzer.

<Bulk density>

15 Bulk density is determined in accordance with JIS-R6126 (1976). That is, an apparatus shown in Fig. 1, which is composed of funnel 1, stopper 2, cylinder 3 and support 4, was used to determine a bulk density (According to JIS R6126-1970, the funnel 1 is made of  
20 stainless steel, and the stopper 2 and cylinder 3 are made of brass, the cylinder 3 being JIS H3631 (a brass seamless tube with a brass bottom). The sizes in Fig. 1 are described in mm, and sizes and shapes of the parts other than ones specified in Fig. 1 may be appropriately  
25 determined.)

(1) determining the volume V (ml) of the cylinder;  
(2) plugging the outlet of the cylinder with the stopper, charging about 120 g of sample in the funnel, and then locating the cylinder under the funnel;

30 (3) pulling out the stopper to drop the all of the sample into the cylinder, removing a heaped part of the sample from the cylinder as if scooping it up, and then weighting the sample in the cylinder;

(4) repeating the steps (2) and (3) above for the  
35 same sample to obtain 3 measurement  $W_1$  (g),  $W_2$  (g) and  $W_3$  (g); and

(5) calculating a bulk density from the volume V

(ml) of the step (1) and the 3 measurement  $W_1$  (g),  $W_2$  (g) and  $W_3$  (g) of the step (4) above, according to the following formula:

$$\text{Bulk density (g/ml)} = \{(W_1 + W_2 + W_3) / 3\} / V$$

5 <Example 1>

Alumina balls (HD-2, 20 mm $\phi$ , product of Nikkato Corporation) (8 kg) were placed in a counter-flow type jet mill (200 AFG, product of Hosokawa Alpine). Fused alumina (mean particle size: 70  $\mu$ m, product of Showa Denko K.K.) (10 kg) was placed on the alumina balls. Shaping was performed at a nozzle pressure of 0.6 MPa and a classifier rotation speed of 2,000 rpm for a predetermined times (15 min, 30 min, 60 min, and 120 min) for rounding the particles. After rounding, roundness, bulk density, and mean particle size (Micro-truck HRA) of the resulted particles were determined. The results are shown in Table 1.

[Table 1]

Table 1

	Mean particle size ( $\mu$ m)	Bulk density	Roundness
Starting material	75.6	1.80	0.830
15 min. shaping	72.8	1.88	0.863
30 min. shaping	72.5	1.92	0.864
60 min. shaping	71.7	1.96	0.872
120 min. shaping	67.9	1.99	0.887

20 <Example 2>

Alumina balls (HD-2, 20 mm $\phi$ , product of Nikkato Corporation) (8 kg) were placed in a counter-flow type jet mill (200 AFG, product of Hosokawa Alpine). Fused alumina (mean particle size: 500  $\mu$ m, product of Showa Denko K.K.) (10 kg) was placed on the alumna balls. Shaping was performed at a nozzle pressure of 0.6 MPa and

a classifier rotation speed of 2,000 rpm for a predetermined time (15 min, 30 min, 60 min, and 120 min) for rounding the particles. After rounding, roundness, bulk density, and grain size (screen grain size) of the resulted particles were determined. The results are shown in Table 2.

[Table 2]

Table 2

	Sieve grain size					Bulk density	Roundness
	1	2	3	3+4	F		
Starting material	0	4	55	93	0	1.82	0.803
15 min. shaping	0	2	34	66	20	2.07	0.866
30 min. shaping	0	1	26	57	26	2.12	0.870
60 min. shaping	0	1	26	52	30	2.18	0.875
120 min. shaping	0	1	24	49	34	2.20	0.888

<Example 3>

Alumina balls (HD-2, 20 mm $\phi$ , product of Nikkato Corporation) (8 kg) were placed in a counter-flow type jet mill (200 AFG, product of Hosokawa Alpine). Each of the fused alumina samples having mean particle size of 5 to 4,000  $\mu$ m shown in Tables 3 to 8 (4,000  $\mu$ m, 2,000  $\mu$ m, 500  $\mu$ m, 75  $\mu$ m, 10  $\mu$ m, and 5  $\mu$ m, product of Showa Denko K.K.) (10 kg) was placed on the alumina balls. Shaping was performed at a nozzle pressure of 0.6 MPa and a classifier rotation speed tuned in accordance with the grain size of interest for rounding the particles. After rounding, roundness and bulk density of the resulted particles were determined.

The results are shown in Tables 3 to 8. The sizes attached to each of Tables 3 to 8 are mean particle sizes.

[Table 3]

Table 3

Mean particle size: 4,000  $\mu\text{m}$ 

	Bulk density	Roundness
Starting material	1.93	0.750
After shaping	2.08	0.883

Table 4

5 Mean particle size: 2,000  $\mu\text{m}$ 

	Bulk density	Roundness
Starting material	1.98	0.784
After shaping	2.39	0.888

Table 5

Mean particle size: 500  $\mu\text{m}$ 

	Bulk density	Roundness
Starting material	1.82	0.829
After shaping	2.18	0.898

10 Table 6

Mean particle size: 75  $\mu\text{m}$ 

	Bulk density	Roundness
Starting material	1.8	0.830
After shaping	1.99	0.872

Table 7

Mean particle size: 10  $\mu\text{m}$ 

	Bulk density	Roundness
Starting material	—	0.832
After shaping	—	0.886

15

Table 8

Mean particle size: 5  $\mu\text{m}$ 

	Bulk density	Roundness
Starting material	—	0.832
After shaping	—	0.901

## &lt;Example 4&gt;

20 Starting material (fused alumina, mean particle size: 70  $\mu\text{m}$ , product of Showa Denko K.K.) (15 kg/hr) was

fed to a rotational-flow type jet mill (STJ-200, product of Seishin Enterprise Co., Ltd.). Shaping was performed at a pusher nozzle pressure of 0.74 MPa and a gliding nozzle pressure of 0.64 MPa for rounding the particles. After rounding, roundness, bulk density, and mean particle size (Micro-truck HRA) of the particles were determined. The results are shown in Table 4.

Table 9

	Mean particle size ( $\mu\text{m}$ )	Bulk density	Roundness
Starting material	75.6	1.80	0.830
After shaping	74.5	1.97	0.856

## &lt;Example 5&gt;

Alumina balls (HD-2, 20 mm $\phi$ , product of Nikkato Corporation) (8 kg) were placed in a counter-flow type jet mill (200 AFG, product of Hosokawa Alpine). A fused alumina samples having mean particle size of 30  $\mu\text{m}$  (product of Showa Denko K.K., WA No. 400) (10 kg) was placed on the alumina balls. Shaping was performed at a nozzle pressure of 0.6 MPa and a classifier rotation speed at 6000 rpm for 60 minutes for rounding the particles. The obtained roundish fused alumina has a mean particle size of 23.4  $\mu\text{m}$ , and a roundness of 0.90.

A Silicone resin (TSE-3070 (A), product of GE Toshiba silicone) (25g), a silicone resin (TSE-3070 (B), product of GE Toshiba silicone), and the roundish fused alumina obtained (200g) was mixed at 50 rpm for 10 minutes by a mixer (T.K.HIVIS MIX03 type, product of Tokushukikakogyo Co., Ltd.), and then defoamed at 500 rpm for 5 minutes by a centrifuge defoamer (NBK-1 type, product of Nippon Seiki Co., Ltd). The resulted mixture was cured at 140°C for 60 minutes to obtain a resin product.

The heat conductivity of the resulted resin product

was determined by a quick thermal conductivity meter (QTM-500, product of Kyoto Electronics Manufacturing Co., Ltd.). The results are shown in Table 10.

<Comparative Example 1>

5           A resin product was obtained and the thermal conductivity thereof was determined according to the Example 5 above, except that nearly-perfect-spherical alumina beads (CB-A20A, mean particle size 22.8  $\mu\text{m}$ , roundness 0.96, product of Showa Denko K.K.) was used  
10 instead of the roundish fused alumina. The results are shown in Table 10.

<Comparative Example 2>

          A resin product was obtained and a thermal conductivity thereof was determined according to the  
15 Example 5 above, except that a roundish alumina which was not a fused alumina (AS-20, mean particle size 23.1  $\mu\text{m}$ , roundness 0.90, product of Showa Denko K.K.) was used instead of the roundish fused alumina. The results are shown in Table 10.

20       Table 10

	Thermal conductivity (W/mk)
Ex. 5	1.2040
Comp. Ex. 1	1.0555
Comp. Ex. 2	1.1192

          In comparison to the alumina of Example 5, the aluminas of Comparative Examples 1 and 2 have similar mean particle size and better roundness. However, as seen  
25 from Table 10, the resin product of Example 5 has a larger heat conductivity by about 10 % than that of Comparative Examples 1 and 2. That is, the roundish fused alumina of Example 5 is a superior thermally-conductive filler.

30       <Example 6>

          To a melamine resin (Suntop M-700, product of Nissan Chemical Industries, Ltd.) (10 g), a roundish fused alumina (1.5 g) having a mean diameter of 70  $\mu\text{m}$ , which

was shaped for 60 minutes as in Example 1 was mixed, and cured into cylindrical bodies having a diameter of 25  $\mu\text{m}$ . The cylindrical bodies cured were polished with an auto-polishing machine (Automet II polishing machine / Ecomet III polishing machine, Product of BUEHLER) to determine the weight-loss of the samples caused by the polishing. The polishing was achieved by applying a SiC water-proof abrasive paper (No. 240) on the Ecomet III polishing machine, locating three samples on the Automet II polishing machine, and then rotating the Ecomet III polishing machine at 150 rpm with providing water to polish the samples for 20 minutes, while providing down force of 5.4 kg by the Automet II polishing machine which was rotating at 30 rpm. The results are shown in Table 11.

<Comparative Example 3>

To a melamine resin (Suntop M-700, product of Nissan Chemical Industries, Ltd.) (10 g), a fused alumina (1.5 g) having a mean diameter of 75  $\mu\text{m}$  was mixed, and cured into cylindrical bodies having a diameter of 25  $\mu\text{m}$ . The cylindrical bodies cured were polished with the auto-polishing machine as in Example 6 to determine the weight-loss of the samples caused by the polishing. The results are shown in Table 11.

Table 11

	Weight-loss (total amount of 3 samples)
Ex. 6	0.182 g
Comp. Ex. 3	0.204 g

It is seen from Table 11 that the weight-loss of the samples of Example 6, which use roundish fused alumina, is smaller than that of Comparative Example 3, which use normal fused alumina. It is believed that this is because a roundish filler is preferable for improving wear resistance.



CLAIMS

1. Roundish fused alumina particles having a mean particle size of 5 to 4,000  $\mu\text{m}$  and a roundness of 0.85 or more.

5           2. A method for producing the roundish fused alumina particles according to claim 1, characterized in that the method comprises removing edges of fused alumina particles by making the fused alumina particles collide with each other.

10           3. A method for producing the roundish fused alumina particles according to claim 1, characterized in that the method comprises removing edges of fused alumina particles by means of a jet mill.

15           4. The method for producing the roundish fused alumina particles according to claim 3, wherein the jet mill is a counter-flow type jet mill.

            5. The method for producing the roundish fused alumina particles according to claim 3, wherein the jet mill is a rotational-flow type jet mill.

20           6. The method for producing the roundish fused alumina particles according to claim 4, wherein the counter-flow type jet mill is one which can arbitrarily control nozzle pressure, rotation speed of a classifier, and operation time thereof.

25           7. The method for producing the roundish fused alumina particles according to claim 4, wherein the counter-flow type jet mill is operated at a nozzle pressure of 0.6 to 0.8 MPa.

30           8. The method for producing the roundish fused alumina particles according to claim 4, wherein the counter-flow type jet mill is operated in a batch manner and the residue is provided as a product.

35           9. A wear-resistant resin composition, characterized in that the resin composition contains the roundish fused alumina particles according to claim 1.

            10. A high-thermal-conductivity rubber composition, characterized in that the rubber composition contains the

roundish fused alumina particles according to claim 1.

11. A high-thermal-conductivity resin composition, characterized in that the resin composition contains the roundish fused alumina particles according to claim 1.


5 12. A method for producing a wear-resistant resin composition, characterized by using the roundish fused alumina particles according to claim 1.

13. A method for producing a high-thermal-conductivity rubber composition, characterized by using  
10 the roundish fused alumina particles according to claim 1.

14. A method for producing a high-thermal-conductivity resin composition, characterized by using  
15 the roundish fused alumina particles according to claim 1.

1/1

Fig.1

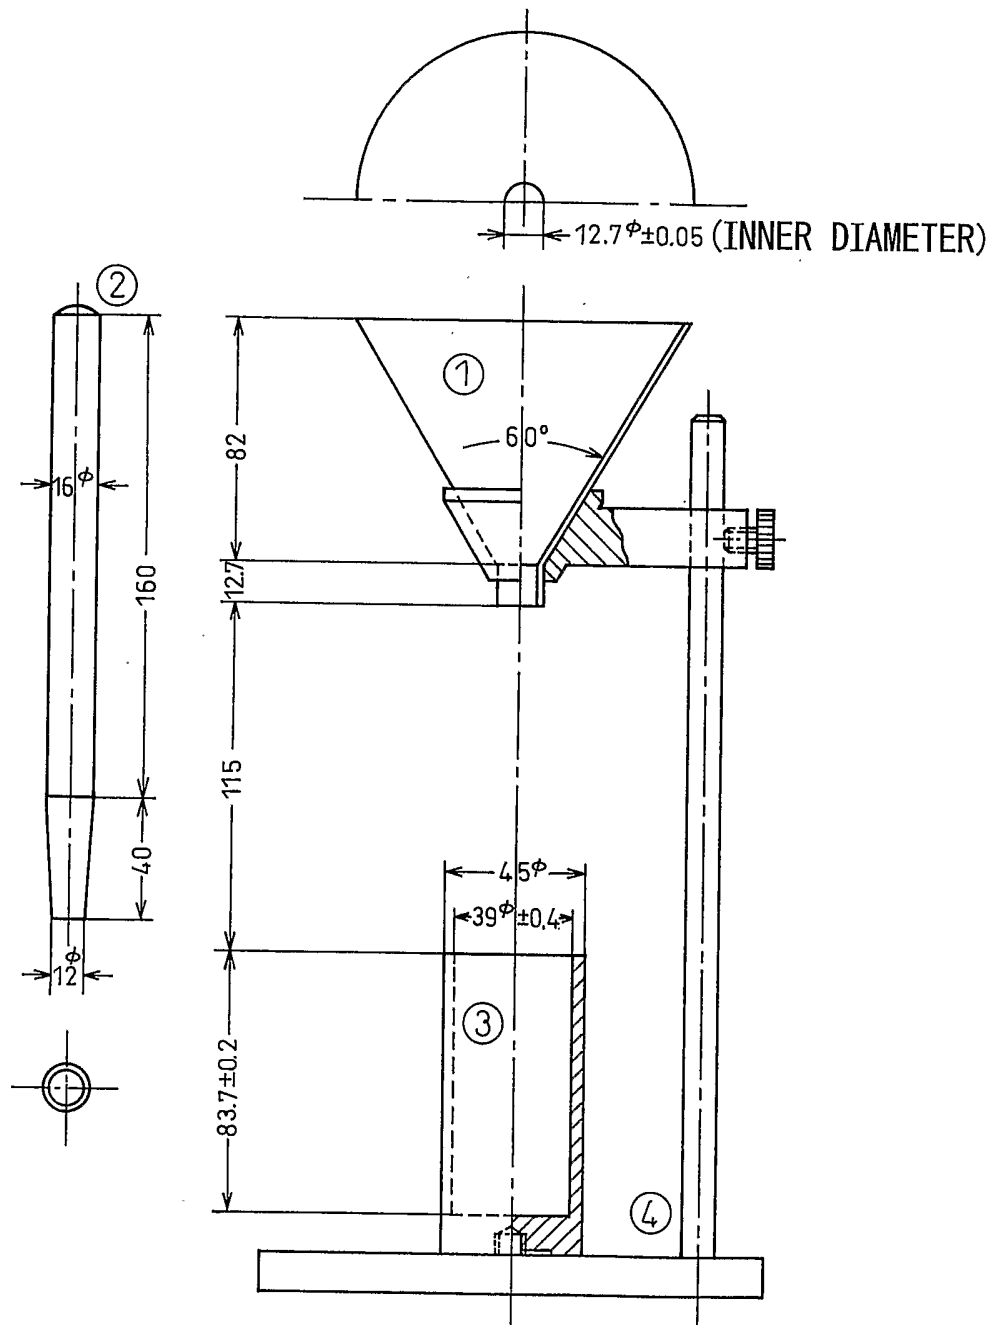

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP2005/005045

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 C01F/02 C08K3/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C01F C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 261 484 B1 (PHILLIPS JONATHAN ET AL) 17 July 2001 (2001-07-17)	1
Y	claims 1-3,22,25 figures 5,8,10b,10c	9-14
Y	EP 0 276 321 A (SHOWA DENKO KABUSHIKI KAISHA) 3 August 1988 (1988-08-03) the whole document	9-14
Y	WO 02/098796 A (SHOWA DENKO K.K; KANBARA, EIJI; SHIBUSAWA, SUSUMU) 12 December 2002 (2002-12-12) cited in the application the whole document	9-14
Y	WO 02/098795 A (SHOWA DENKO K.K; KANBARA, EIJI; YAMADA, TOMIHARU) 12 December 2002 (2002-12-12) the whole document	9-14



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 July 2005

Date of mailing of the international search report

27/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Rhodes, K

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP2005/005045

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6261484	B1	17-07-2001	NONE	
EP 0276321	A	03-08-1988	JP 1721194 C	24-12-1992
			JP 4008465 B	17-02-1992
			JP 63020340 A	28-01-1988
			DE 3786249 D1	22-07-1993
			DE 3786249 T2	07-10-1993
			EP 0276321 A1	03-08-1988
			WO 8800573 A1	28-01-1988
			US 5340781 A	23-08-1994
WO 02098796	A	12-12-2002	JP 2002348116 A	04-12-2002
			CN 1463251 A	24-12-2003
			WO 02098796 A1	12-12-2002
			US 2005035230 A1	17-02-2005
WO 02098795	A	12-12-2002	JP 2002348115 A	04-12-2002
			CN 1463250 A	24-12-2003
			WO 02098795 A1	12-12-2002
			US 2004009120 A1	15-01-2004