



(11) (21) (C) **2,022,004**
(22) 1990/07/26
(43) 1991/03/17
(45) 2000/08/15

(72) Yonehara, Takashi, JP

(72) Yata, Yasuo, JP

(72) Matsumoto, Yasuhiko, JP

(73) Penguin Wax Co., Ltd., JP


(51) Int.Cl.⁵ A47L 11/06

(30) 1989/09/16 (1-240354) JP

(30) 1989/09/16 (1-240353) JP

(54) **MACHINE POUR L'APPLICATION D'UN ENDUIT POUR
PLANCHER, ET CONSTRUCTION DE CETTE MACHINE**

(54) **FLOOR COATING AGENT APPLYING MACHINE AND ITS
APPLYING UNIT CONSTRUCTION**

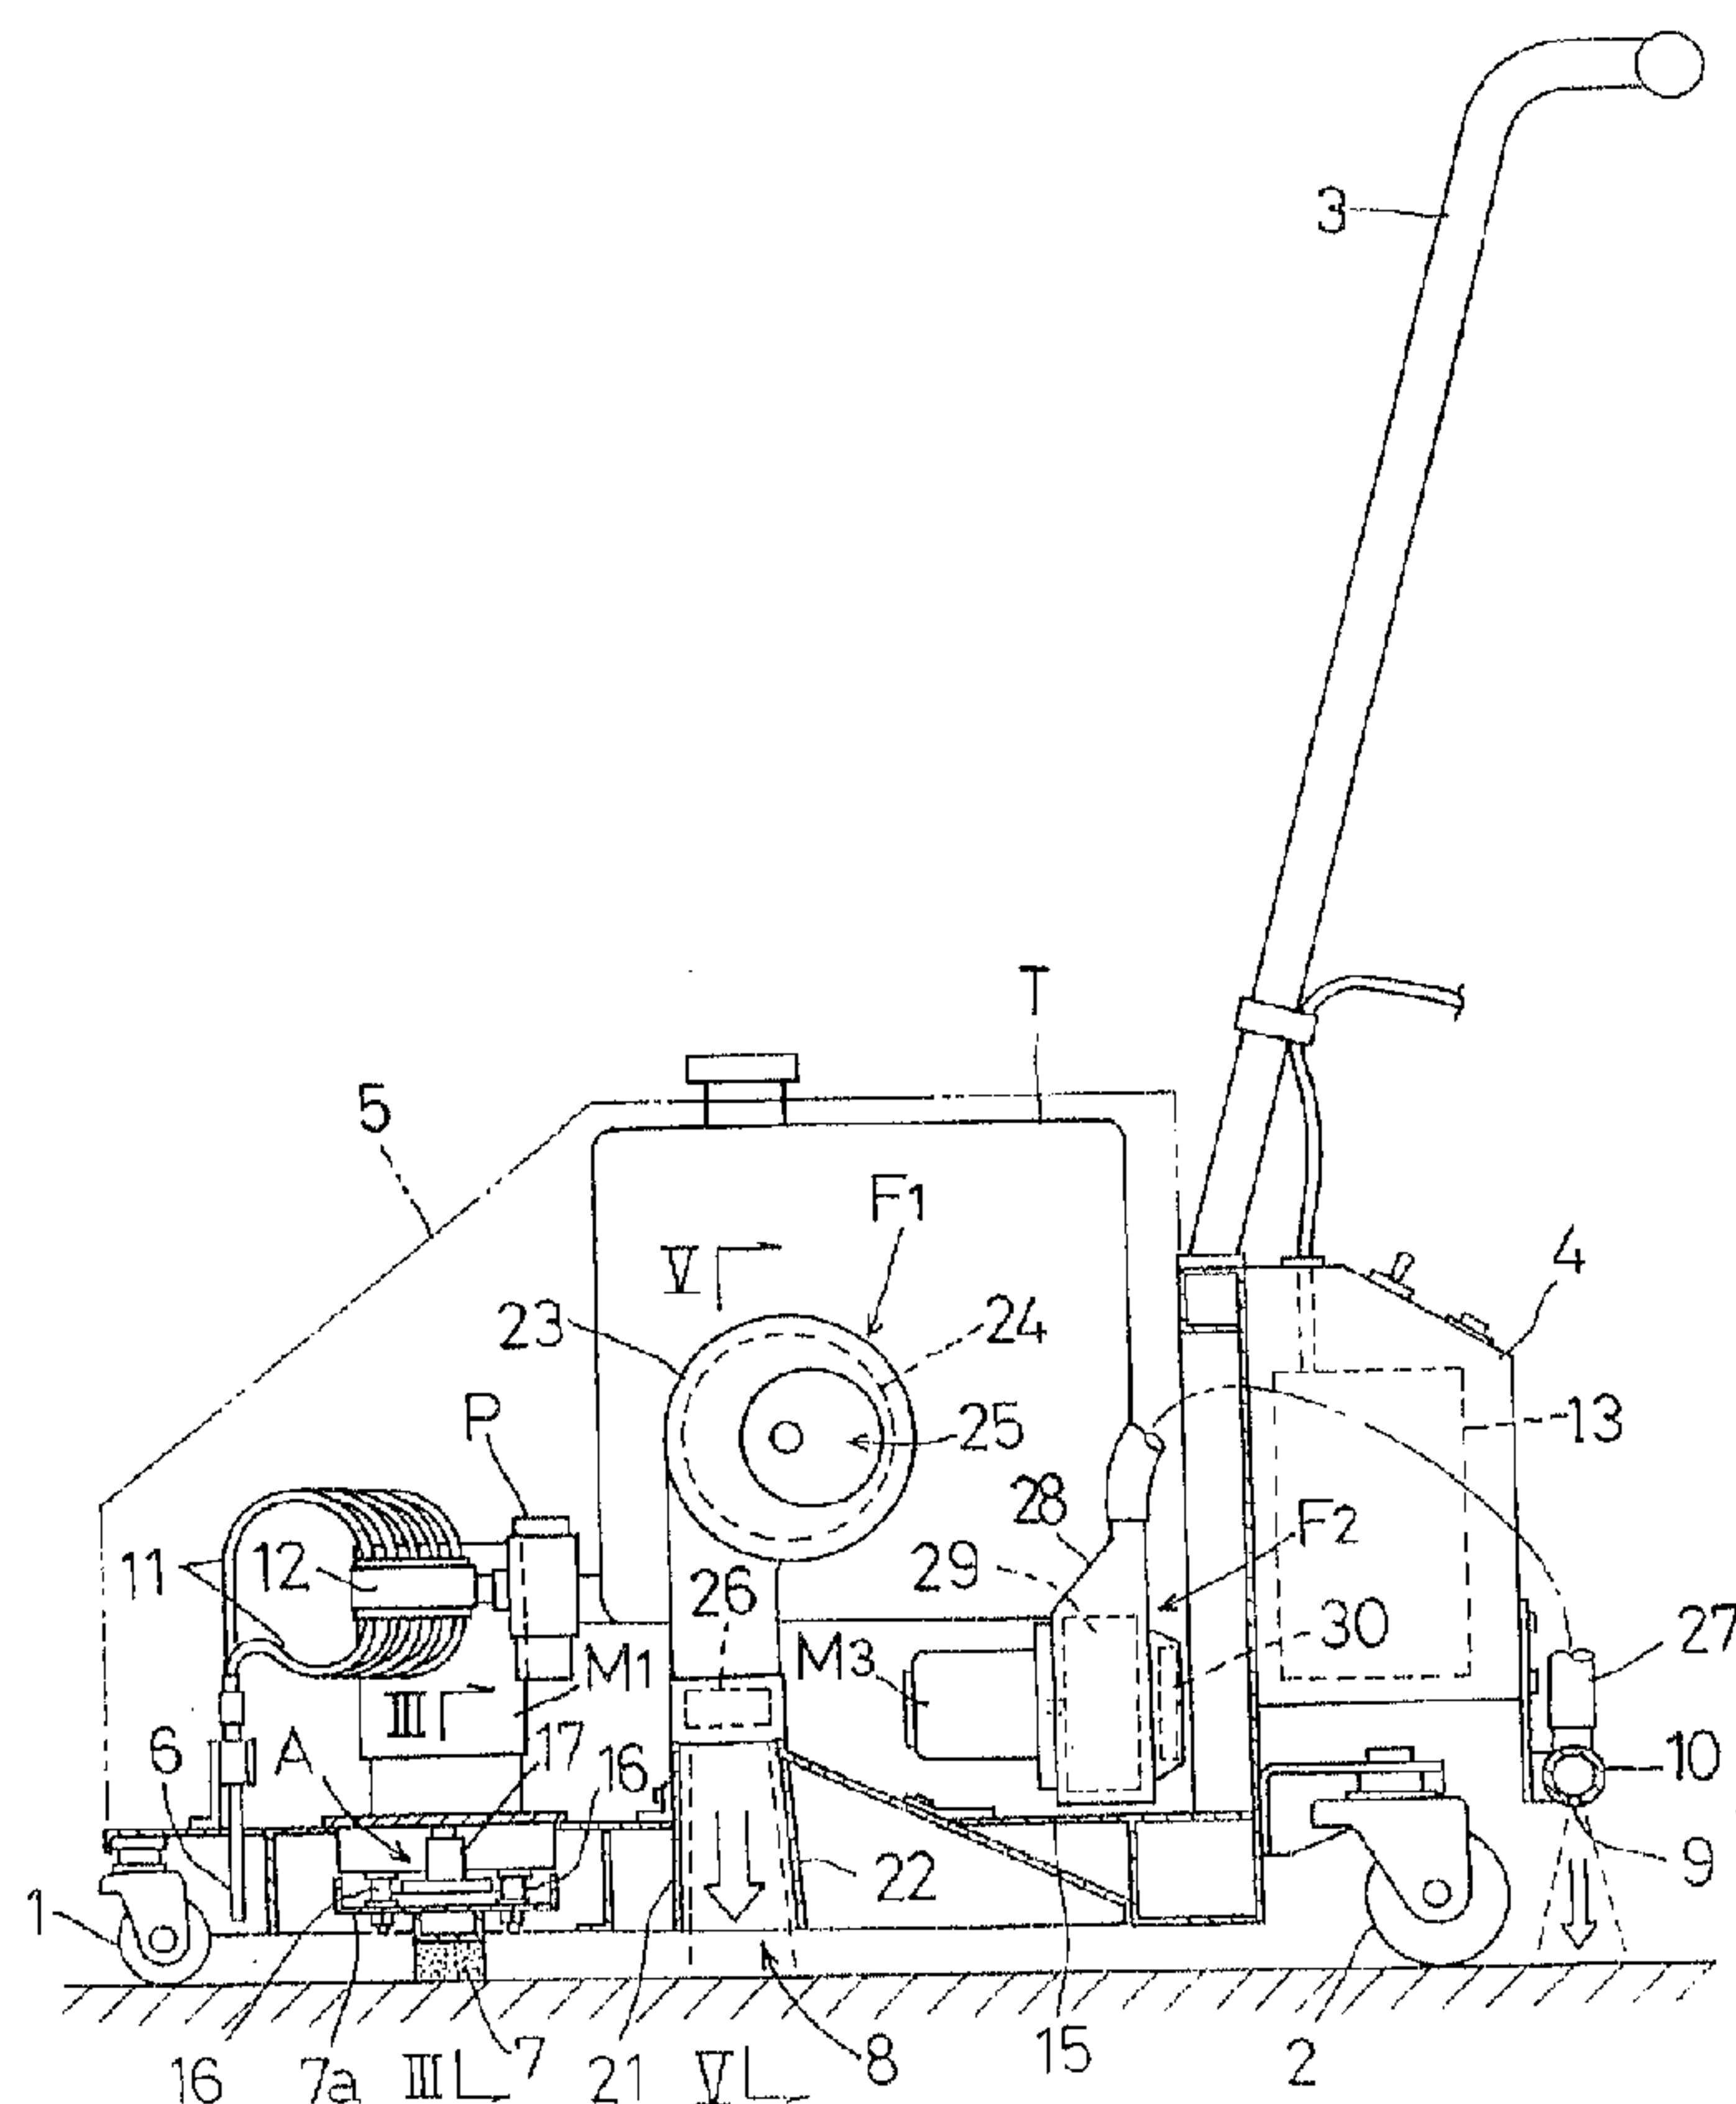

(57) A machine for applying a floor-coating agent has a movable machine body, and an application member attached to the movable machine body for applying a floor-coating agent onto a floor surface. The application member includes a plurality of elastic rods vertically extending downwards from the movable machine body. The rods are arranged in locations spaced around a loop as viewed rotationally from above. An eccentric rotary member drivably attached to



(11) (21) (C) **2,022,004**
(22) 1990/07/26
(43) 1991/03/17
(45) 2000/08/15

the movable machine body is rotatable on a vertical axis positioned inside the loop of the elastic rods. A circular recess is defined by means vertically and slidably fitted about the eccentric rotary member so as to permit rotational force of the cam to deform the elastic rods and thus produce vertical vibration of the application member.

ABSTRACT OF THE DISCLOSURE

A machine for applying a floor-coating agent has a movable machine body, and an application member attached to the movable machine body for applying a floor-coating agent onto a floor surface. The application member includes a plurality of elastic rods vertically extending downwards from the movable machine body. The rods are arranged in locations spaced around a loop as viewed rotationally from above. An eccentric rotary member drivably attached to the movable machine body is rotatable on a vertical axis positioned inside the loop of the elastic rods. A circular recess is defined by means vertically and slidably fitted about the eccentric rotary member so as to permit rotational force of the cam to deform the elastic rods and thus produce vertical vibration of the application member.

Floor Coating Agent Applying Machine And Its
Applying Unit Construction

The present invention relates to a floor-coating agent applying machine and its applying unit construction.

A typical floor-coating agent applying machine is known from e.g. a Japanese laid-open patent gazette No. 63-315169. In this machine, a drive mechanism is provided for
10 vertically vibrating an agent applying member so that the vibration can effectively apply and spread the agent uniformly over a floor surface thus forming as thin a coating layer as possible on the floor surface.

The above machine suffers, however, the problem that the vertical vibration generates air bubbles in the agent applied on the floor surface. If the coating as containing air bubbles therein is let to dry, there occurs nebula, roughness or irregularity in the finish surface.

20

Then, the primary object of the present invention is to overcome the above-described problem of the prior art by providing an improved floor-coating agent applying machine and its applying unit construction which can effectively restrict generation of air bubbles in the agent layer and which can uniformly apply the agent for superior finish.

For accomplishing the above-noted object, a floor-coating agent applying machine, according to the present invention,
30 comprises a movable machine body, an applying member

attached to the movable machine body for applying a thermoplastic floor-coating agent onto a floor surface, an applying-member driving mechanism, attached to the machine body by elastic rod means, for causing the coating agent applying member to vertically vibrate and laterally oscillate along a floor surface to be treated, and drying means mounted at a rear portion of the machine and disposed rearwardly of the applying member for blowing heated air against the floor surface.

10

Another aspect of the present invention relates to a floor-coating agent applying machine comprising a movable machine body, an applying member attached to the movable machine body for applying a floor-coating agent onto a floor surface to be treated, an applying member driving mechanism attached to the machine body by elastic rod means, the applying member driving mechanism causing the applying member to vertically vibrate and laterally oscillate along the floor surface, and means for drying the coating agent mounted to the applying machine, the means for drying comprising a first drying means and a second drying means, the first drying means being positioned behind the applying member and directing hot air toward the floor surface, the second drying means directing air of ambient temperature toward the floor surface subsequent to the first drying means.

20

The applying-member driving mechanism causes the applying member to vertically vibrate and laterally

oscillate along the floor surface, such that the oscillating motion of the applying member not only helps efficient application of the coating agent by the vertical vibrating motion of the applying member but also prevents mechanical resonance of the agent due to the vertical vibration of the member. Accordingly, the applying member, by its vertical vibration and oscillating motion, can apply the floor coating agent efficiently and uniformly over the floor surface with generation of air bubbles in the applied agent being effectively prevented. Consequently, the agent will be applied so thinly and uniformly over the entire floor surface that the applied agent can be dried speedily and the finish condition will be superior.

According to one preferred embodiment of the present invention, a floor coating agent applying machine comprises: a movable machine body; an applying member attached to the movable machine body for applying a floor coating agent onto a floor surface. The applying member includes; a plurality of elastic rods vertically suspended from the movable machine body, with the rods being arranged in a loop-like formation as viewed from above the movable machine body, an eccentric rotary cam drivably attached to the

movable machine body and rotatable on a vertical axis positioned inside the loop of the elastic rods, and a circular recess vertically slidably fitted about the eccentric rotary cam so as to cause a rotational force of the cam to elastically deform the elastic rods thus producing vertical vibration of the applying member.

With the above-described construction in operation, as the eccentric rotary cam being rotated, this cam rotation is transmitted through the circular recess to the applying member. Also, because of the eccentricity of the cam, the applying member is horizontally oscillated relative to the floor surface with a radius corresponding to the eccentricity of the rotary cam, while elastically deforming the elastic rods one after another. Accordingly, as the oscillating motion of the applying member proceeds, the elastic rods repeatedly contract and expand thereby to lift up and down the applying member. Further, with these movements of the elastic rods, the applying member moves up and down with respect to the machine body with the circular recess vertically sliding relative to the eccentric rotary cam.

Then, as the applying member effects vertical vibration and horizontal oscillation simultaneously, the floor coating agent can be efficiently and

uniformly applied over the floor surface with generation of air bubbles in the applied agent being effectively prevented.

5 As described above, according to the floor coating agent applying machine of the present invention, the simultaneous vertical vibration and horizontal oscillation of the applying member achieves uniform and thin coating agent layer. Thus, compared with the conventional applying machine, the machine of
10 the present invention can provide superior, i.e. thin and smooth coating surface and also achieve improvement of efficiency by quickening of subsequent drying operation by thinness of the coating layer.

Moreover, the driving mechanism for providing
15 simultaneous vertical vibration and horizontal oscillation of the applying member has a very simple construction consisting mainly of a plurality of elastic rods suspended vertically from the machine body and an eccentric rotary cam. This driving
20 mechanism construction, as compared with the conventional driving construction adapted for vertically vibrating the entire applying unit which supports the applying member and oscillates the same as well, requires considerably fewer number of machine
25 elements and therefore is very simple, compact and

economical.

Further and other objects, features and effects of the invention will become more apparent from the following more detailed description of the embodiments of the invention with reference to
5 the accompanying drawings.

Accompanying drawings illustrate preferred embodiments of a floor coating agent applying machine relating to the present invention; in which:

Fig. 1 is a side view showing an entire applying machine;

10 Fig. 2 is a bottom view of the applying machine;

Fig. 3 is a cross section taken along a line III-III of Fig. 1;

Fig. 4 is a partially cutaway plane view showing a rotary cam and its periphery;

Fig. 5 is a cross section taken along a line V-V of Fig. 1;

15 Fig. 6 is a cross section of an applying member;

Fig. 7 is a partially cutaway side view of an applying member relating to a further embodiment of the present invention;

Fig. 8 is a partially cutaway front view showing an applying-member driving mechanism relating to a still further embodiment of the invention; and

5 Fig. 9 is a cross section of an applying member relating to a further embodiment of the invention.

Preferred embodiments of a floor coating agent applying machine relating to the present invention will now be particularly described with reference to the accompanying drawings.

10 As shown in Fig. 1, a floor coating agent applying machine of the invention is constructed as a walking-operator type including front wheels 1 and rear wheels 2 both of free rotation type, a steering handle 3, a housing 5 for covering the movable machine body, a plurality of coating agent feed nozzles 6 attached to a bottom of the machine body and disposed side by side in the
15 transverse direction of the machine body, an agent applying member 7 formed of elastic material, a first air feed opening 8 and an air feed pipe 10 having a plurality of second air feed openings 9 aligned along the transverse direction of the machine body. The housing 5 accommodates therein

coating agent tank T, a pair of hot-air feed fans F1 ,
F1 disposed side by side along the transverse
direction, a further air feed fan F2 for feeding
normal temperature air and so on. Further, a control
5 box 4 is attached to the movable machine body.

In operation, a coating agent solution of
thermoplastic resin material is charged to and
reserved at the tank T. Then, as the machine body is
propelled by a walking operator on a floor surface
10 formed e.g. of stone, wood, concrete or other
artificial material so as to apply the coating agent
solution on the floor surface.

More particularly, the coating agent feed nozzles
6...are disposed with distance from the floor surface
15 and are connected with the tank T through agent feed
tubes 11, a distributor 12 and an electric pump P.
This pump P is controlled and driven by means of a
controller 13 housed at the control box 4 for
withdrawing the agent solution from the tank T and
20 feeding the solution to the distributor 12, so that a
fixed and substantially equal amount of the solution
is supplied from the tank T to the respective feed
nozzles 6 to be consequently applied therethrough to
the floor surface therethrough. The amount of the
25 solution is predetermined by the displacement of the

pump P and also by the number of the nozzles 6.

5 The applying member 7 is disposed rearwardly of the feed nozzles 6 with respect to the advancing direction of the machine body. Also, as shown in a plane view of Fig. 2, the applying member 7 is attached to an attaching portion 7a through a plurality of attaching bolts 14, for the purpose of facilitating cleaning and exchange operation of the applying member 7 if and when necessary. Further, 10 between the attaching portion 7a and a machine body frame 15 formed of plate metal, there are provided four rubber rods 16 as elastic rods oriented vertically relative to the machine body and together forming an angular loop as seen in the plane view of Fig. 2. Accordingly, the applying member 7 is 15 attached to the machine body frame 15 while being suspended therefrom through the elastic rubber rods 16. Incidentally, for obtaining proper contact pressure between the applying member 7 and a floor surface to be treated, the height of the machine body frame 15 as measured from the floor surface and the distance between the frame 15 and the applying member 7 are properly predetermined.

25 As shown in Fig. 3, for laterally oscillating and vertically vibrating the above-described applying

member 7, there is provided an applying member driving
mechanism A. This mechanism A includes a rotary cam
17 disposed between the attaching portion 7a and the
machine body frame 15 and an electric motor M2 fixedly
5 mounted on the frame 15. More particularly, the
rotary cam 17 is fitted on an output shaft 18 of the
electric motor M1, so that the cam 17 is rotated
together with the shaft 18 about a vertical axis X
thereof at a velocity of 3,000 rpm. The rotation and
10 operation of the motor M1 is controlled by the
controller 13. Further, the rotary cam 17 is
constructed as an eccentric rotary cam having two
axes, with one axis being positioned at a center of a
cylindrical outer periphery of the cam and the other
15 axis being the rotational axis corresponding to the
aforementioned vertical axis X and horizontally
displaced from the first-mentioned axis. Also, in
this particular embodiment, the vertical axis X is
positioned at the center of the angular loop formed by
20 the four rubber rods 16.

Moreover, as shown in Fig. 4, a bearing 19 having
an inner ring 19a acting as a circular recess
surrounding the rotary cam 17 is fixed through a
bearing holder 20 to an upper face of the attaching
25 portion 7a. Then, in operation, as the rotary cam 17

is driven to rotate, this rotational force of the cam 17 is transmitted through the bearing 19 to laterally oscillate the attaching portion 7a about the vertical axis X within the radial eccentricity of the cam 17 while elastically deforming the rubber rods 16, whereby the applying member 7 effects an oscillating motion relative to the floor surface. At the same time, because the oscillating motion of the attaching portion 7a causes elastic contraction and expansion of the rubber rods 16 repeatedly and also because the inner ring 19a is vertically slidable with respect to the rotary cam 17, the attaching portion 7a effects a vertical motion which produces vertical vibration of the applying member 7.

That is to say, because of the driving force of the electric motor M1, the eccentricity of the rotary cam 17 and also of the elastic deformation of the rubber rods 16, the applying member 7 laterally oscillates and vertically vibrates along the floor surface, so that the coating agent solution fed through the feed nozzles 6 can be applied onto the floor surface uniformly and thinnly.

The first air feed opening 8 includes an orifice type air guide member 21 attached to the machine body frame 15 with a downward orientation relative thereto

and rearwardly of the applying member 7 and an air guide plate 22 attached to an inner face of the guide member 21. As shown in Fig. 5, the pair of hot air feed fans F1, F1 are respectively driven by further electric motors M2 attached to fan casings 23 which are mounted on an upper plate portion of the air guide member 21. The electric motors M2 are controlled by the controller 13. In operation, as the motors M2 are driven by the controller 13, rotary fan bodies 24 are driven thereby to introduce ambient air through air intake openings 25 into the fan casings 23. The introduced air is caused to advance through air exhaust cylinders 23a incorporating heater cables 26, whereby the air is heated up to about 60 degrees Celsius by the cables 26 and this hot air is fed to the interior of the air guide member 21. In this way, the first air feed opening 8 feeds the heated air flow from the fans F1, F1 onto the floor surface coated with the agent solution applied by the applying member 7. That is to say, after the passage of the applying member 7 and when the presence of this member 7 no longer interferes with evaporation of water content in the applied agent solution, the hot air is fed to render the surface plasticized and glossy while effectively and speedily drying the applied solution.

The air feed pipe 10 is attached to a substantially rear end position of the machine body, i.e. to a rear face of the control box 4, with a predetermined downward orientation with respect to the machine body; hence, all of the second air feed openings 9 of the pipe 10 are disposed rearwardly of the first air feed opening 8. Also, the air feed pipe 10 is connected through an air tube 27 to the further fan F2 for feeding the normal temperature air flow. This fan F2 is operatively connected with a further electric motor M3 which is fixedly attached to a fan casing 28 and is controlled by the controller 13. In operation, as the motor M3 is driven by the controller 13 to drive the fan F3, a rotary fan body 29 is driven by the motor to introduce ambience air through an air filter 30 into the air tube 27, so that the second air feed openings 9 feed therethrough the normal-temperature air flow to the floor surface after the hot-air treatment by the first air feed opening 8. This normal-temperature air blowing operation is for forcibly drying any water content remaining after the hot-air blowing operation, thereby further quickening the entire machine operation.

As shown in Fig. 6, the applying member 7 comprises a combination of an elastic rubber element

31 and a sheet element 33 for forming an agent
applying face. This sheet element 33 is formed of
such material as woven material, non-woven material,
felt, paper, leather or the like. That is, the
5 element 31 for supporting the sheet element 33 is
formed of rubber material which is relatively soft and
elastic for conveniently preventing generation of air
bubbles in the applied coating and also for providing
cushion effect for the sheet element 33. Whereas, the
10 sheet element 33 is formed of one of the above-
mentioned material which is suitable for retaining the
coating agent solution therein.

Fig. 7 shows an alternate construction of the
applying unit. In this construction, the applying
15 member 7 is formed of a water-retentive material such
as sponge. Further, the coating agent feed nozzles 6
are adapted to first feed the agent solution to this
applying member 7. That is, the coating agent
solution from the tank T is caused to be once retained
20 in the applying member 7 and then applied onto the
floor surface.

Fig. 8 shows an alternate construction of the
applying member driving mechanism which is denoted by
a reference mark A'. In this alternate construction,
25 an applying member support member 36, which mounts the

applying member 7 through a first electric motor M4,
is vertically movably attached to a guide portion 35
of the machine body frame 15. Further, an eccentric
rotary cam 34 fitted within an oval slot defined in a
control arm portion 36a of the applying member support
member 36 is attached to the machine body frame 15
through a second electric motor M5, so that the second
electric motor M5 rotates the eccentric rotary cam 34
about a horizontal axis Y thereby vertically moving
the applying member support member 36 along a guide
slot of the guide portion 35. Also, the first
electric motor M4 drives the applying member 7 to
oscillate about a vertical axis Z. That is, as the
second electric motor M5 vertically oscillates the
applying member 7, the first electric motor M4 and
also the applying-member support member 36, the
applying member 7 vertically vibrates and laterally
oscillates along the floor surface.

Fig. 9 shows an alterante construction of the
applying member 7. The applying member 7 of this
construction includes a rubber element assembly 31, a
water-retentive sponge 37 and an applying-face forming
sheet element 33 formed of such material as woven
material, non-woven material, felt, paper, leather or
the like. With this construction, even if the rubber

element assembly 31 has relatively low elasticity, the entire elasticity of the applying member 7 is appropriately increased by that of the sponge 37. Also, the sponge 37 and the sheet 33 together provide the wetting power needed for retaining a certain amount of the coating agent solution. Furthermore, the sheet 33 acts to restrict generation of air bubbles due to air intake through elastic contraction and expansion of the sponge 37.

In the foregoing embodiment, the applying unit construction includes four rubber rods 16. Instead, less or more than four of the rubber rods 16 can be employed. Further alternately, coil springs or cylindrical springs can be used instead of the rubber rods 16.

In the foregoing embodiment, the rotational axis X of the rotary cam 17 is positioned at the center of the loop formed by the elastic rods 16. Instead, the axis X can be positioned off the center within the loop.

In place of the inner ring 19a, it is conceivable to form a circular through hole in the attaching portion 17a or to attach a cylindrical member to the portion 17a so that the attaching portion 17a outwardly engages the rotary cam 17 directly or

through the circular through hole for vertically
sliding relative to the cam 17. For this reason, the
inner ring 19a is generically referred to as a
circular recess 17a outwardly engaging the rotary cam
5 17.

The invention may be embodied in other specific
forms without departing from the spirit or essential
characteristics thereof. The present embodiments are
therefore to be considered in all respects as
10 illustrative and not restrictive, the scope of the
invention being indicated by the appended claims
rather than by the foregoing description and all
changes which come within the meaning and range of
equivalency of the claims are therefore intended to be
15 embraced therein.

20

25

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A floor-coating agent applying machine comprising:
a movable machine body;
an applying member attached to said movable machine body for applying the floor-coating agent onto a floor surface, said floor-coating agent being thermoplastic;
an applying-member driving mechanism, attached to said machine body by elastic rod means, for causing said coating agent applying member to vibrate vertically and to oscillate laterally along the floor surface to be treated; and
drying means mounted at a rear portion of the machine and disposed rearwardly of said applying member for blowing heated air against the floor surface.

2. A floor-coating agent applying machine comprising:
a movable machine body;
an applying member attached to said movable machine body for applying a floor-coating agent onto a floor surface to be treated;
an applying member driving mechanism attached to said machine body by elastic rod means, said applying member driving mechanism causing said applying member to vertically vibrate and laterally oscillate along the floor surface; and
means for drying said coating agent mounted to said applying machine, said means for drying comprising a first drying means and a second drying means, said first drying means being positioned behind said applying member and directing hot air toward said floor surface, said second drying means directing air of ambient temperature toward said floor surface subsequent to said first drying means.

3. The floor-coating agent applying machine as claimed in claim 1 or 2, wherein said applying member includes an

elastic element and an applying-face forming sheet at least in part surrounding said elastic element.

4. The floor-coating agent applying machine as claimed in claim 3, wherein said applying member further includes a water-retentive element interposed between said elastic element and said applying-face forming sheet.

5. The floor-coating agent applying machine as claimed in claim 1, 2 or 3, wherein said applying member is formed of water-retentive material.

6. A floor-coating agent applying machine comprising:
a movable machine body; and
an applying member attached to said movable machine body for applying a floor-coating agent onto a floor surface, said applying member including:


a plurality of elastic rods vertically suspended from the movable machine body, with said rods being arranged in a loop formation as viewed from above the movable machine body;

an eccentric rotary cam drivably attached to the movable machine body and rotatable on a vertical axis positioned inside said loop of the elastic rods; and

a circular recess vertically slidably fitted about said eccentric rotary cam so as to cause a rotational force of the cam to elastically deform said elastic rods thus producing vertical vibration of said applying member.

7. A floor-coating agent applying machine as claimed in claim 6, wherein said rods comprise four rubber rods forming said loop.

FIG. 1

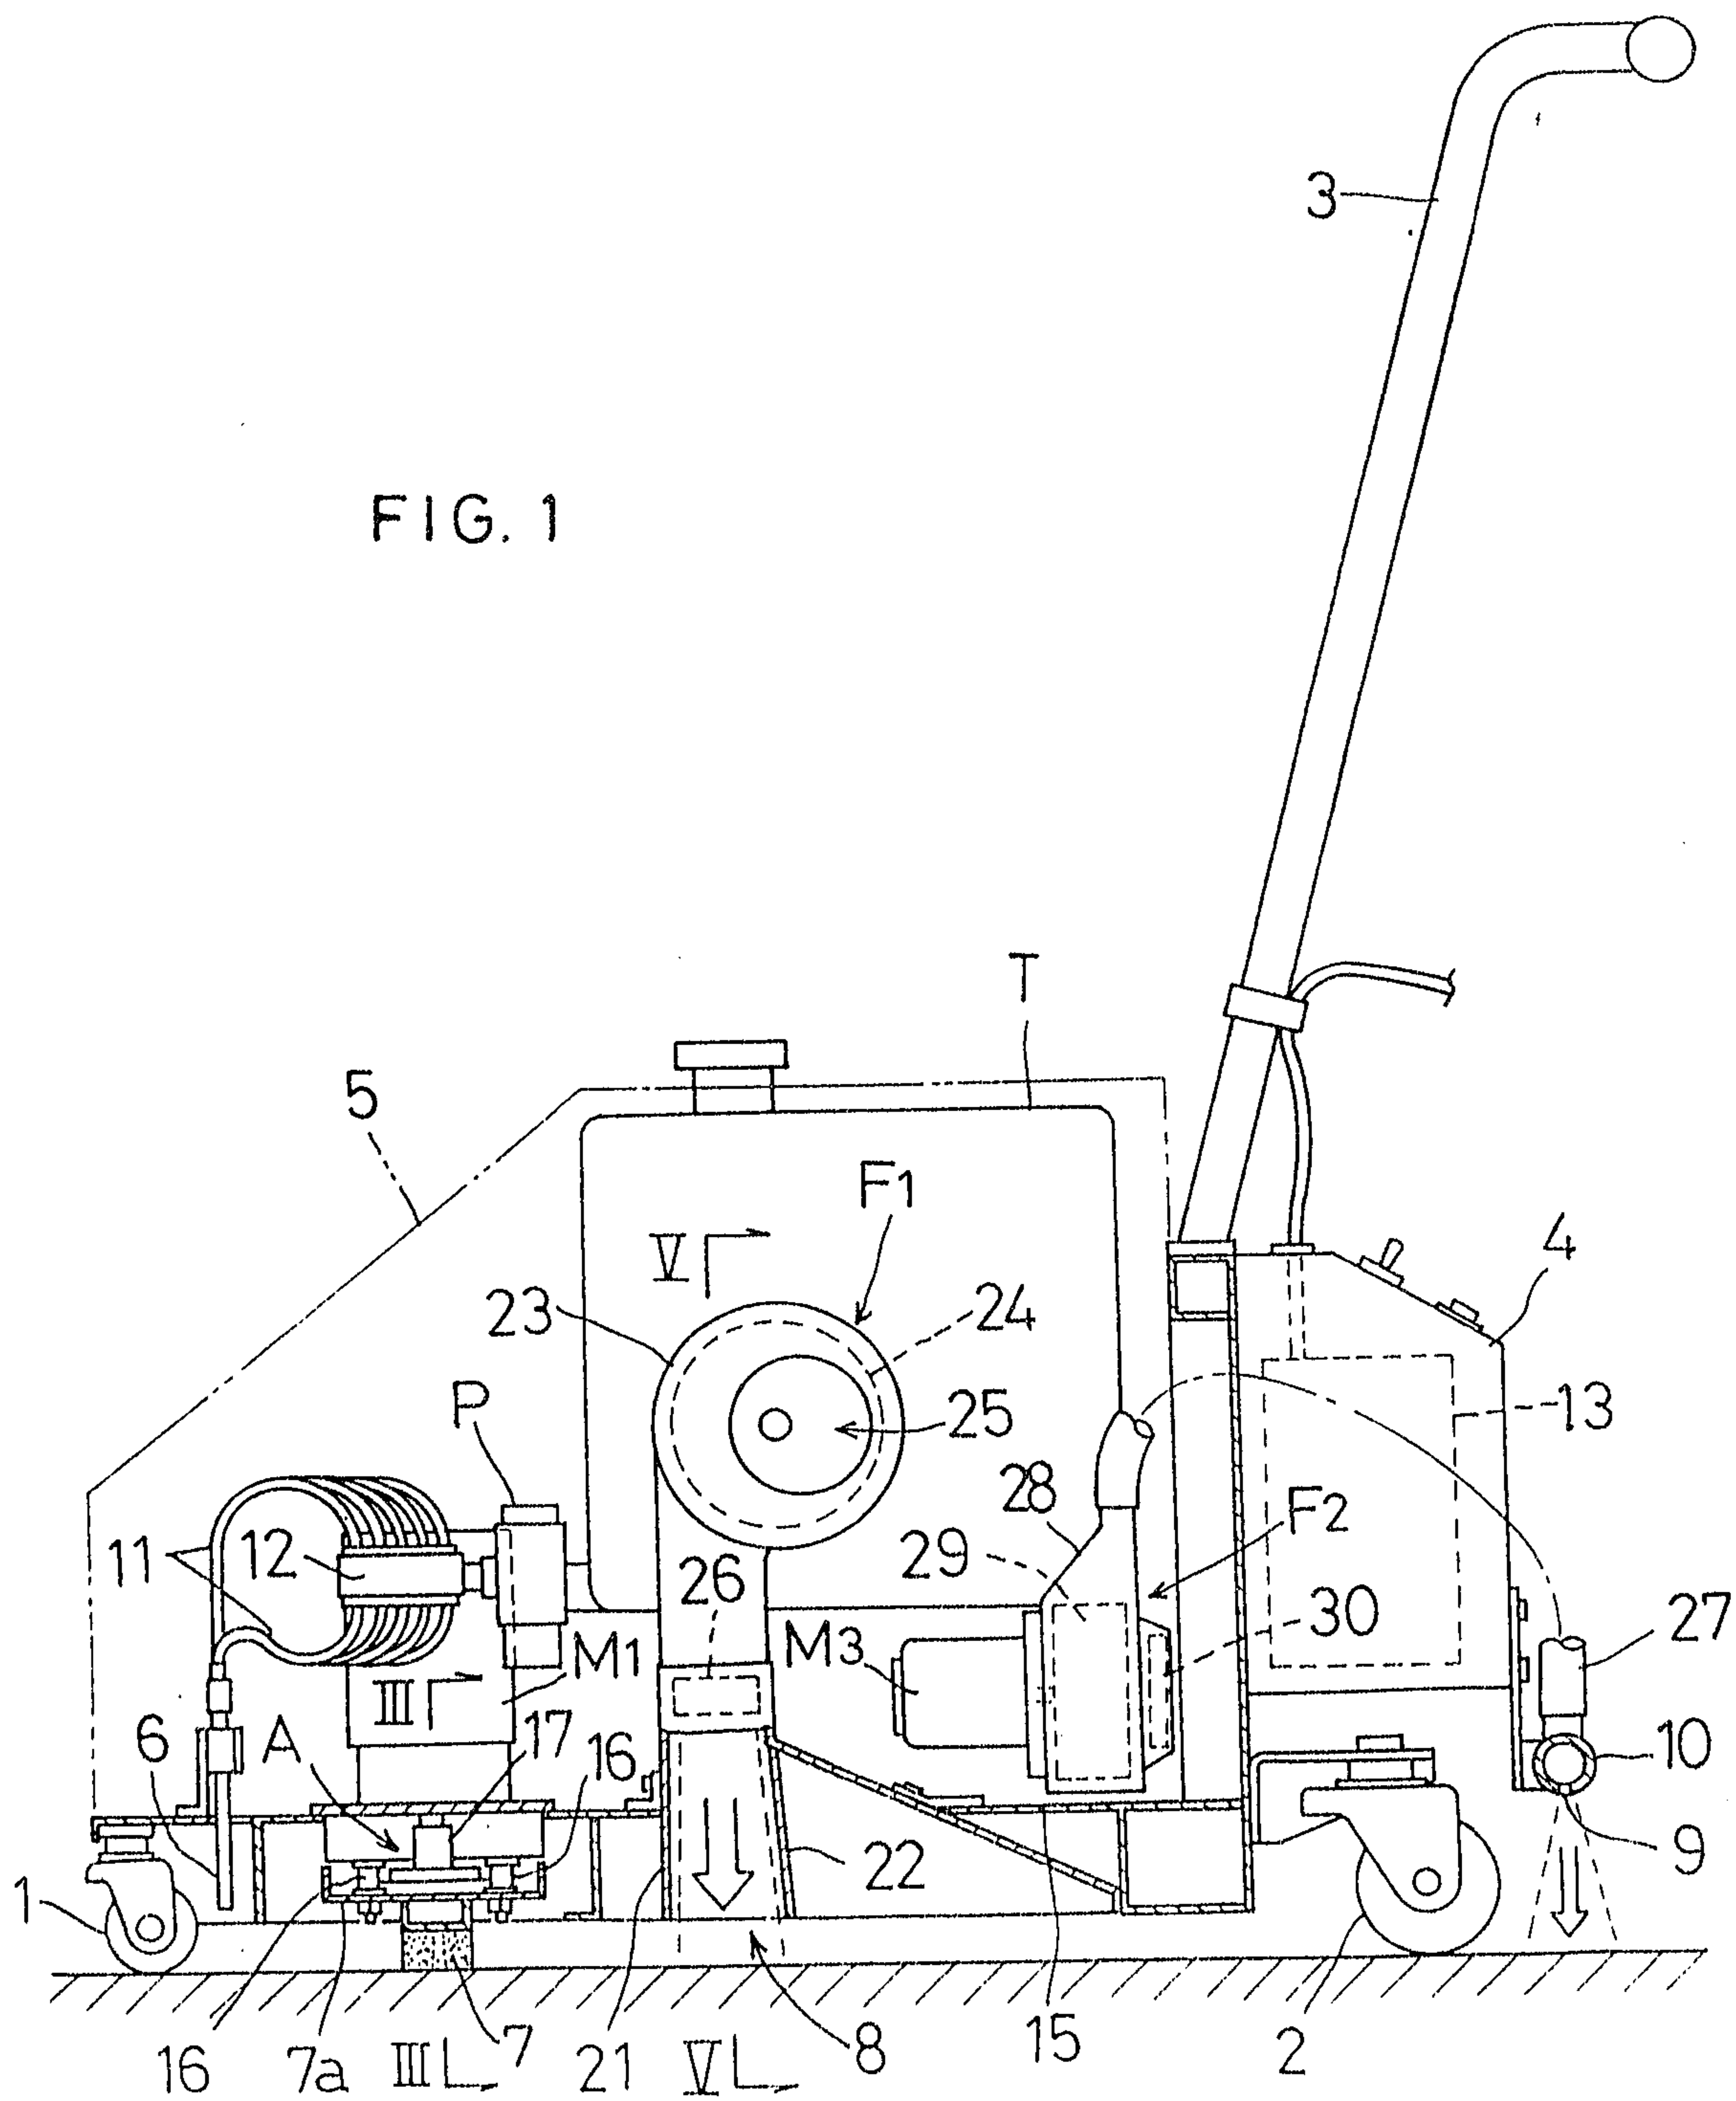

Heads a Clerk

FIG. 2






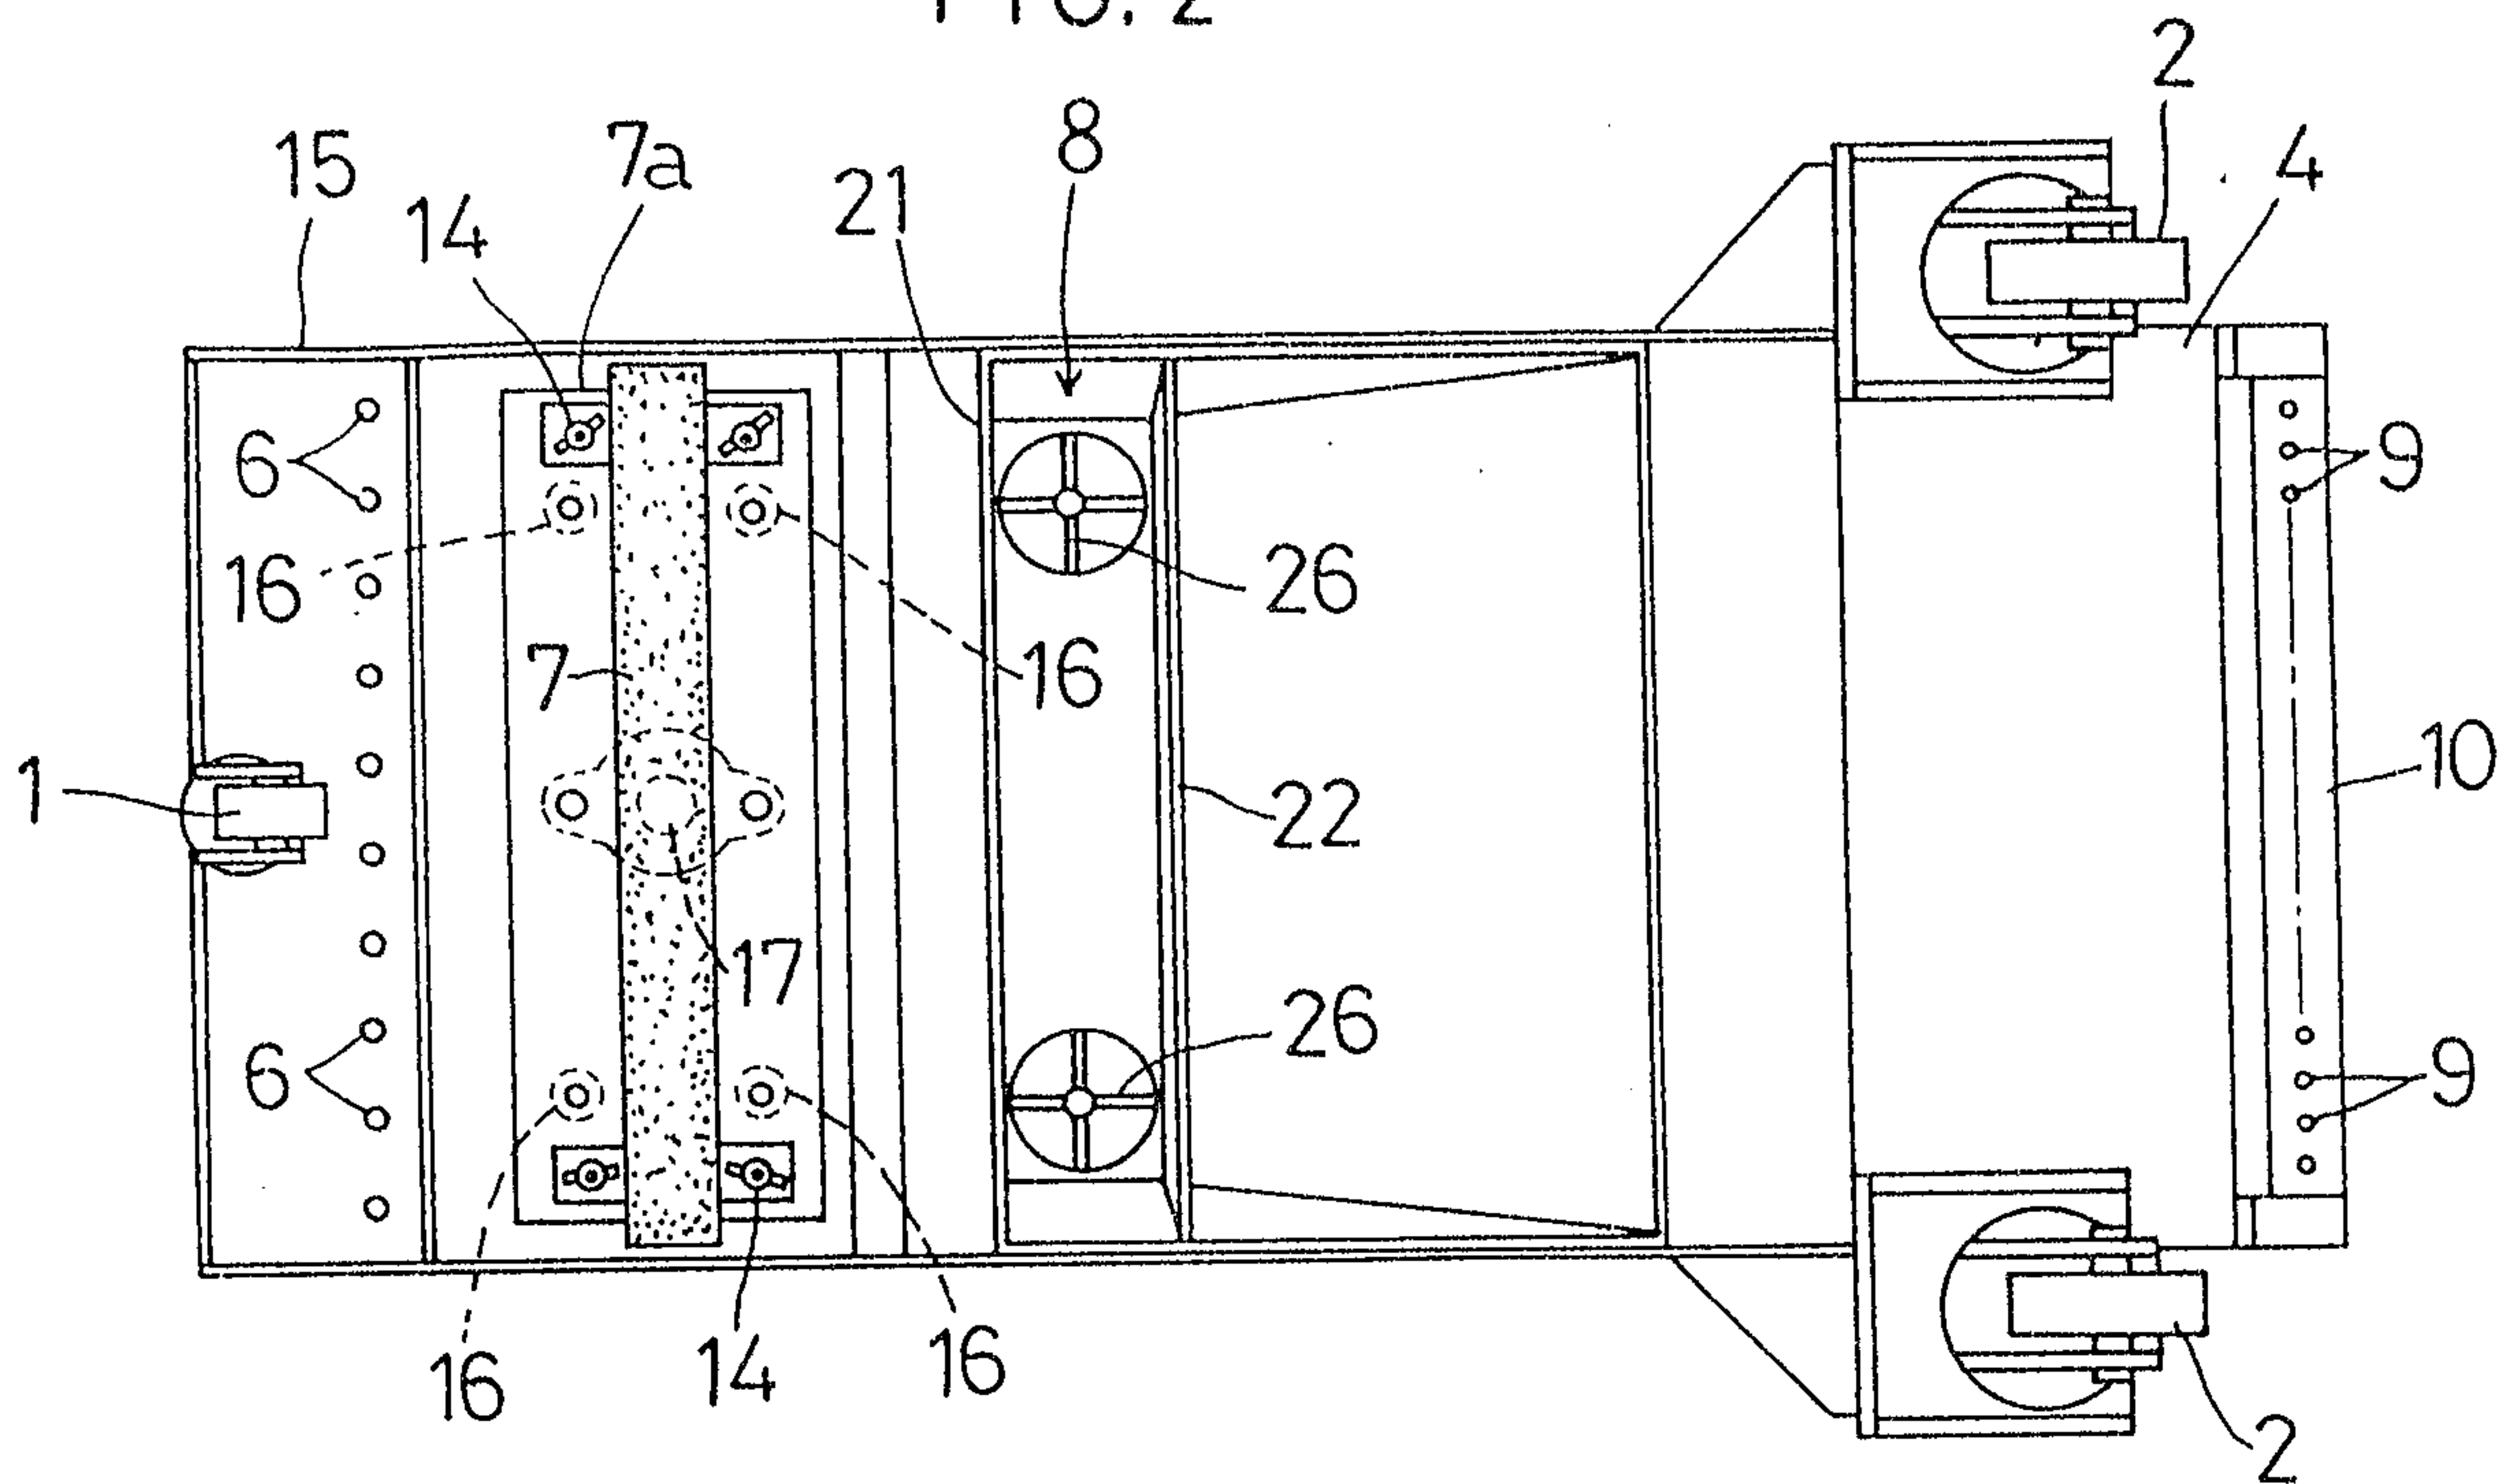


FIG. 3

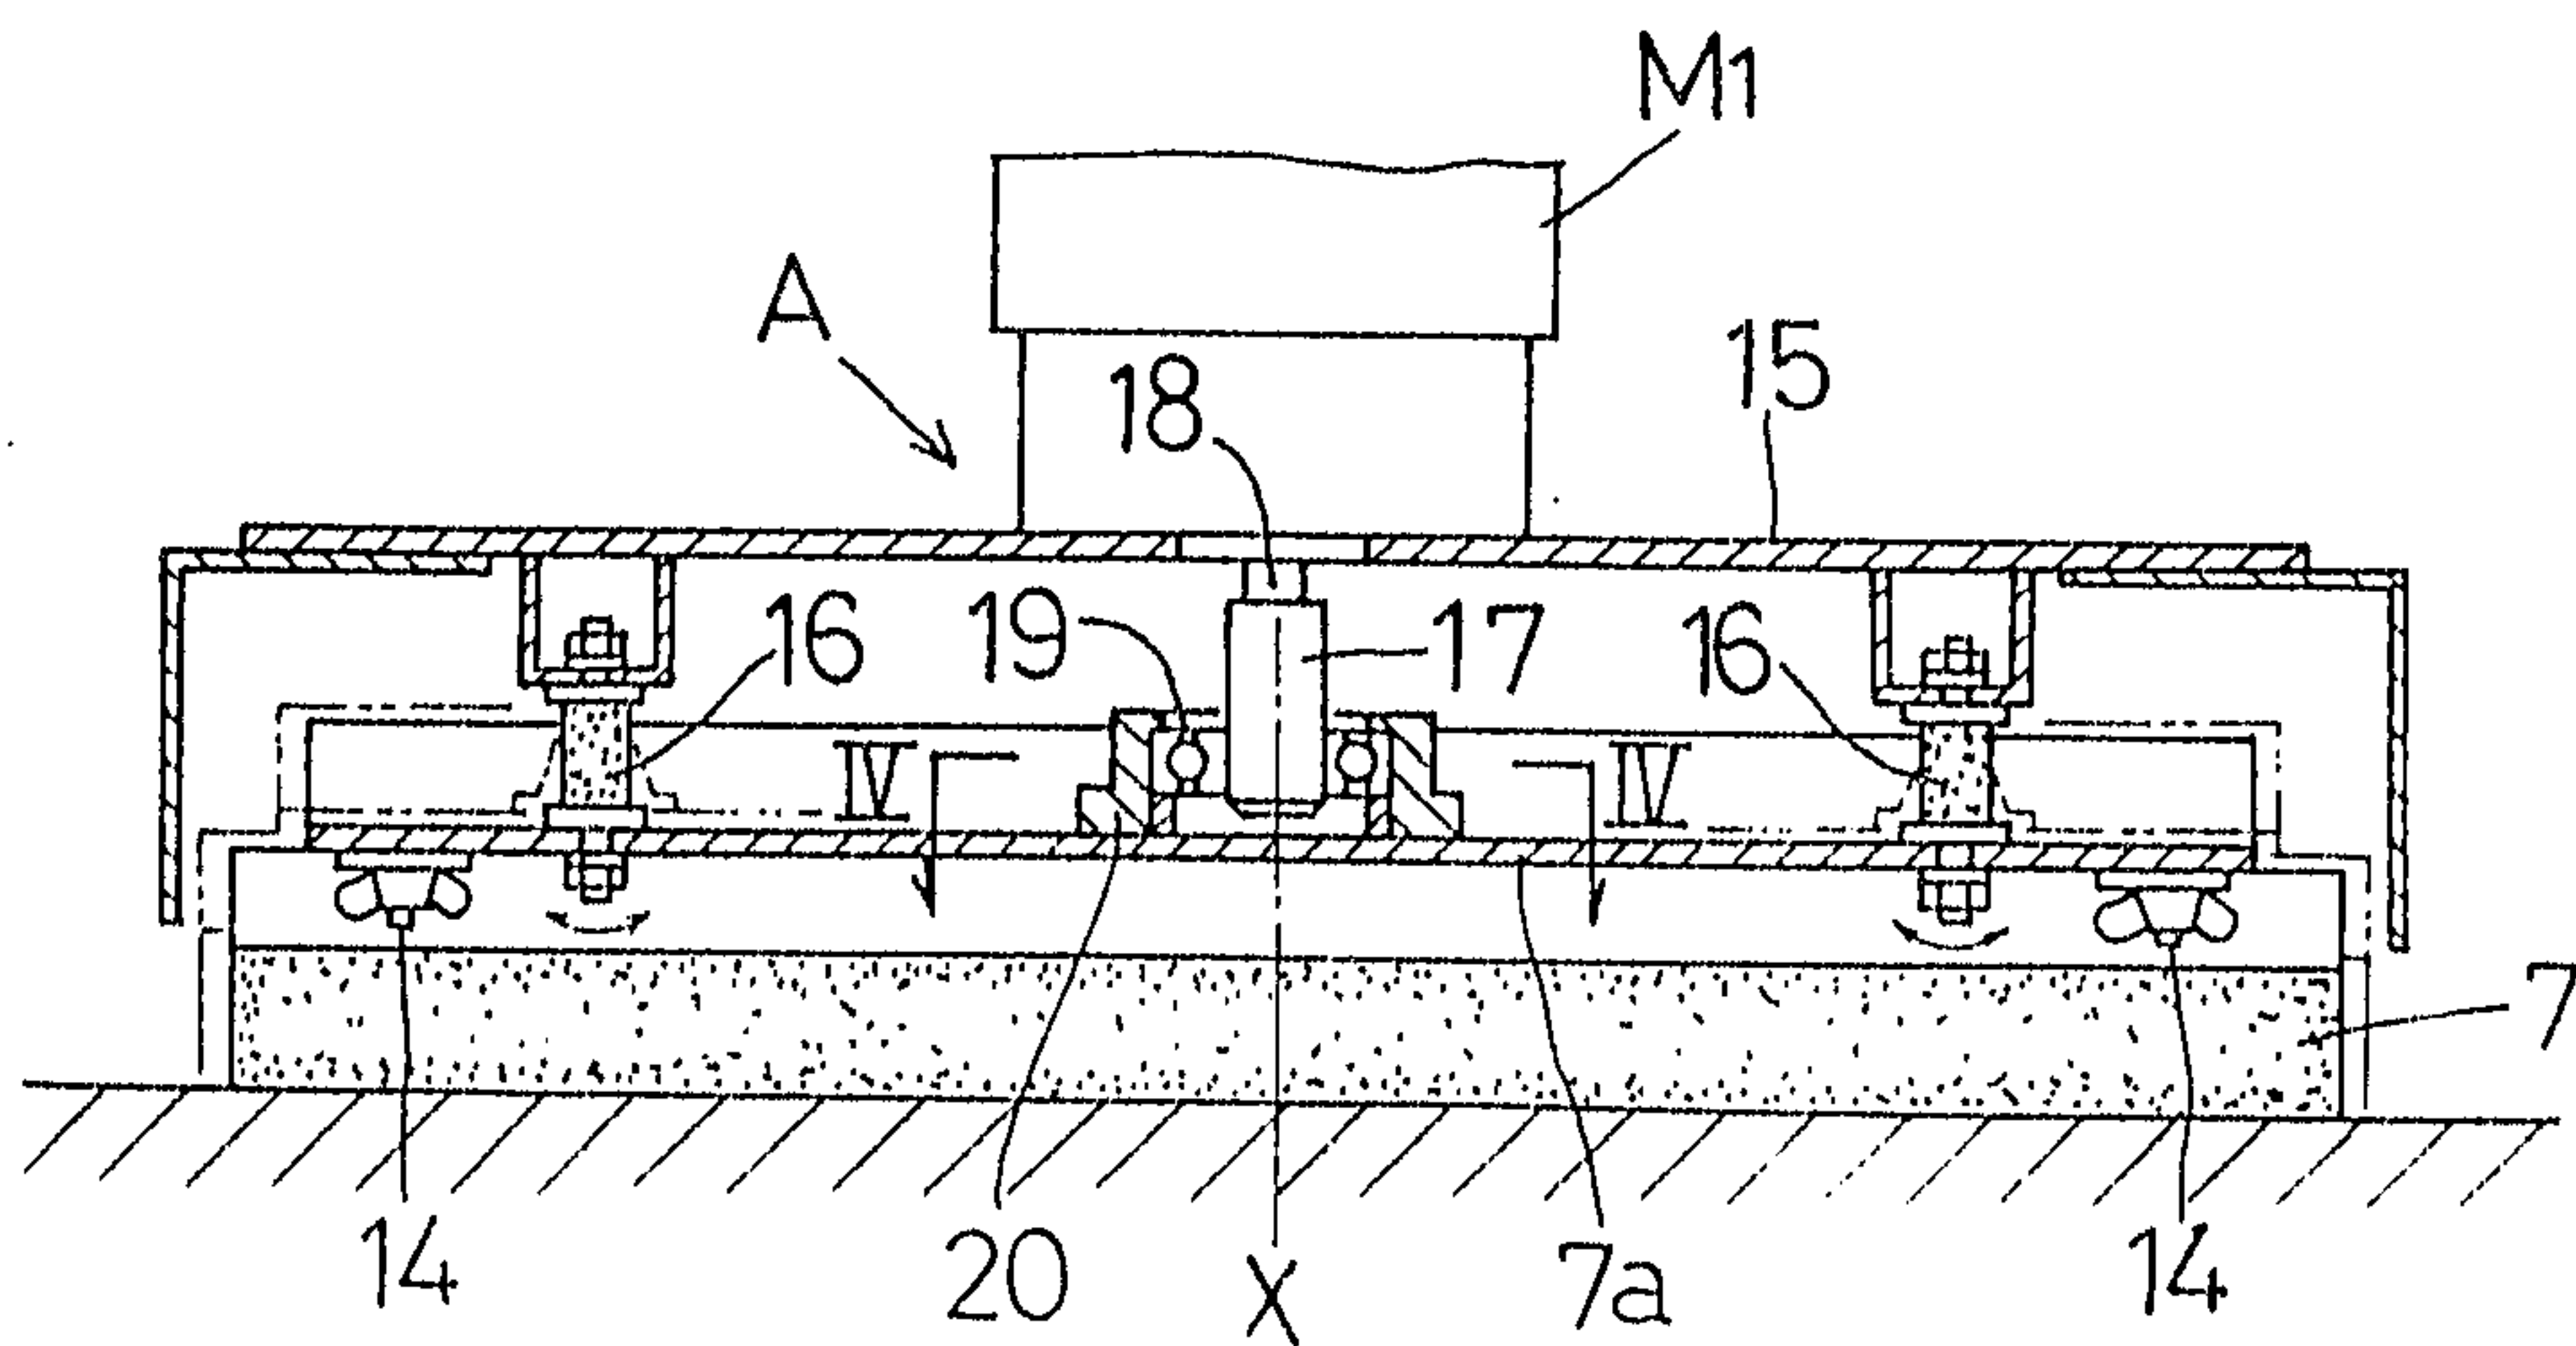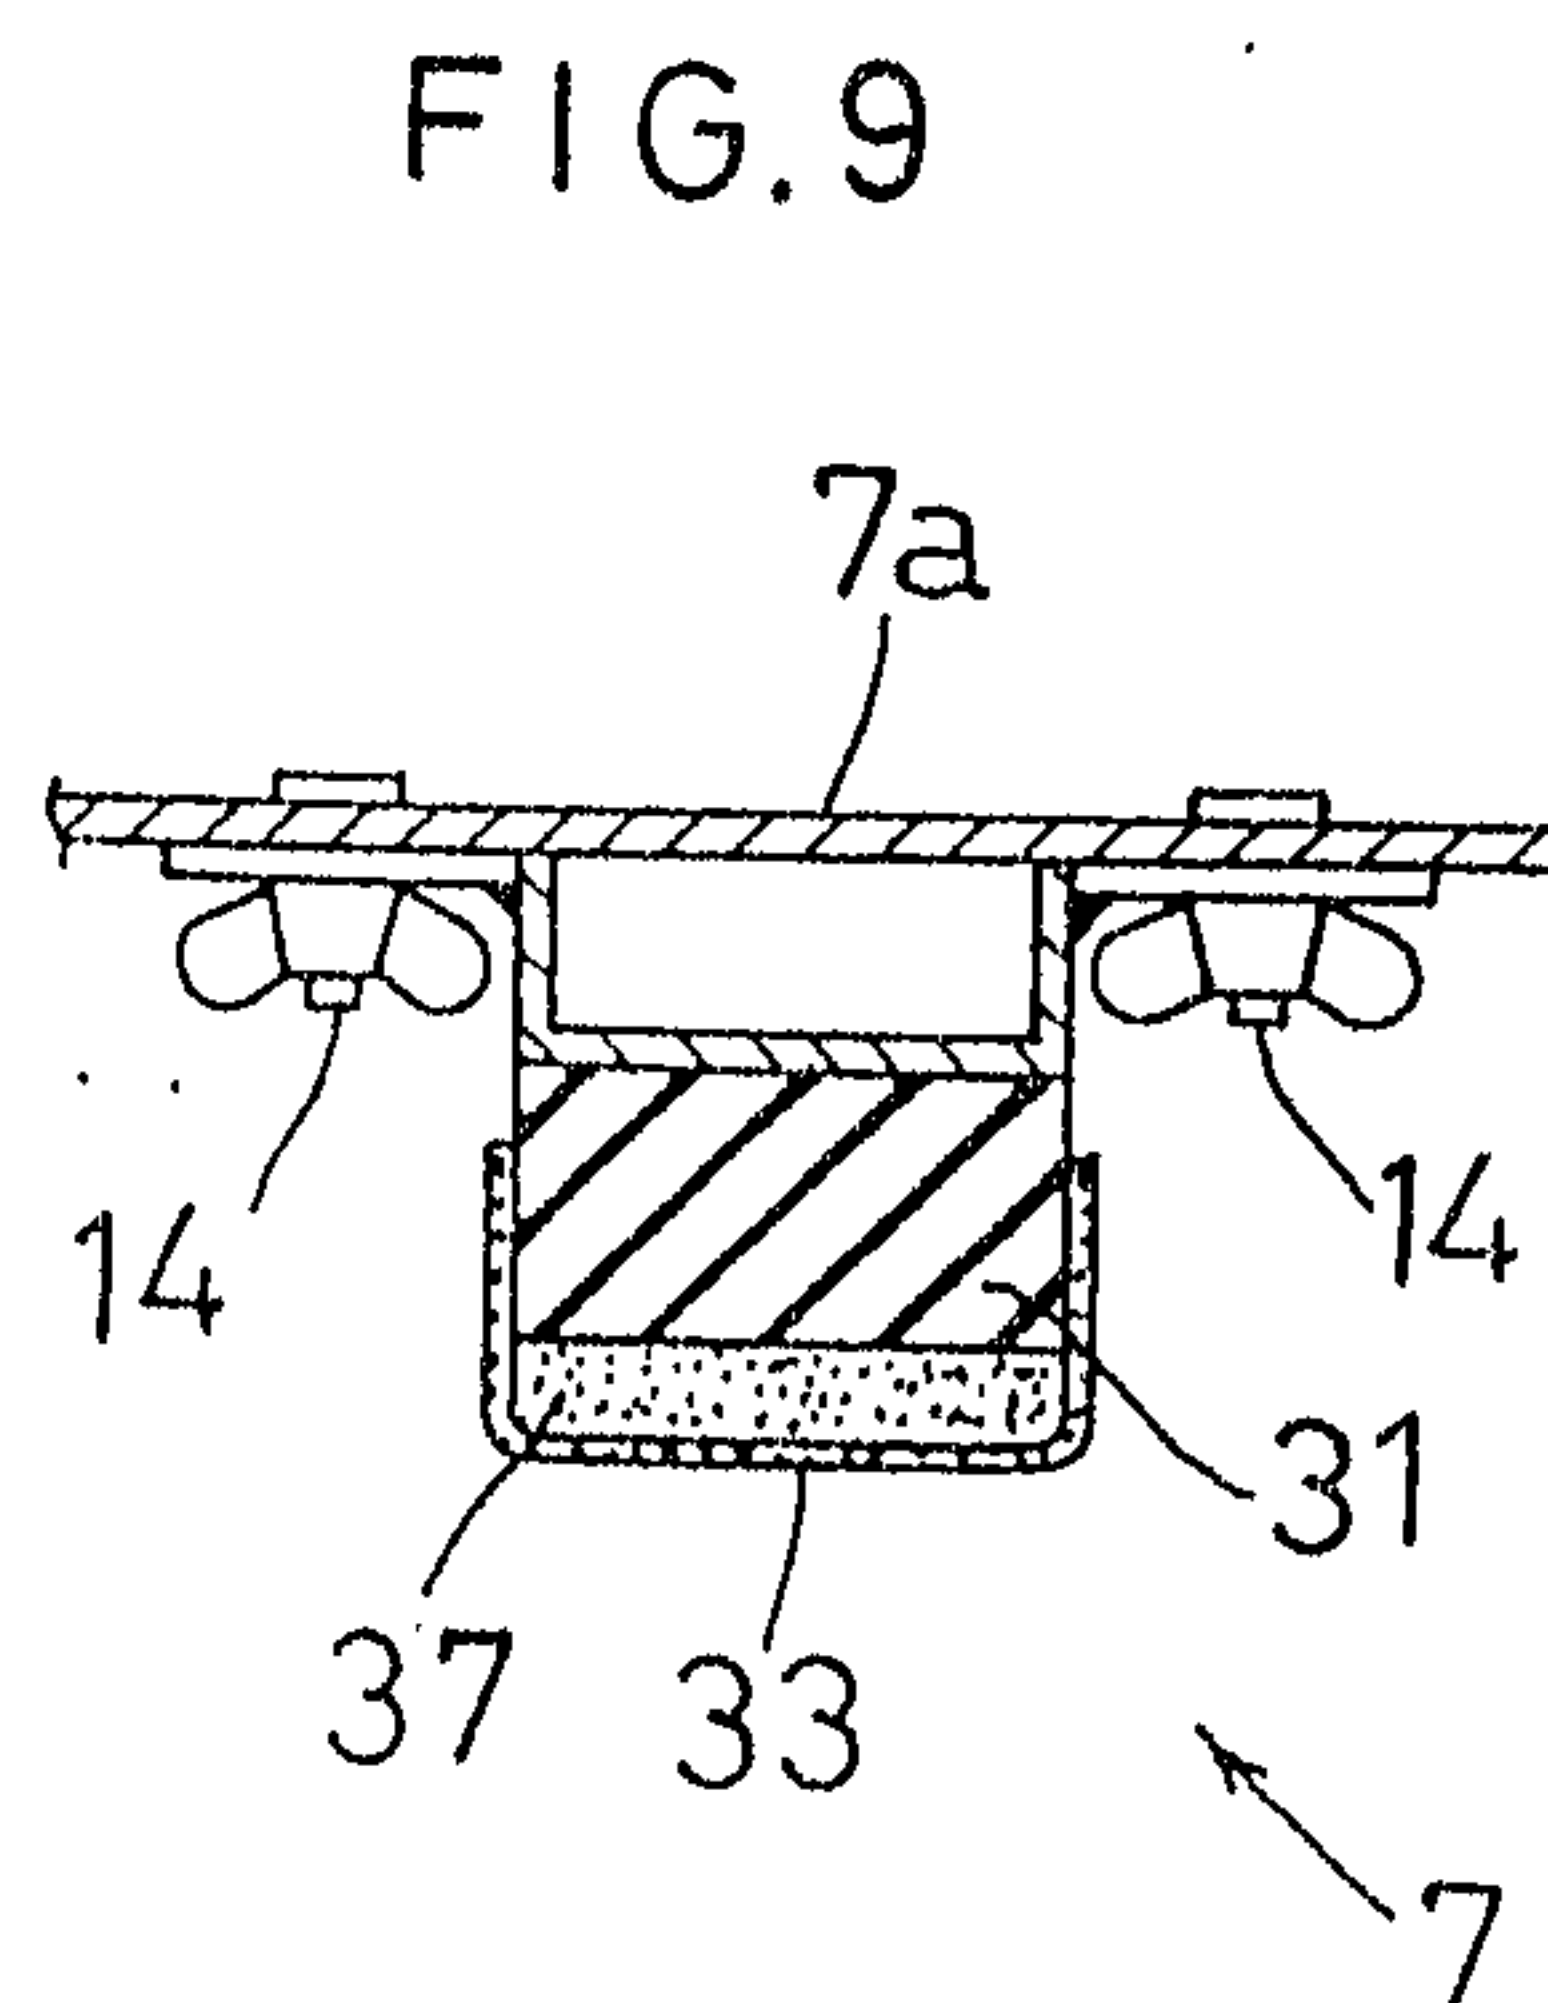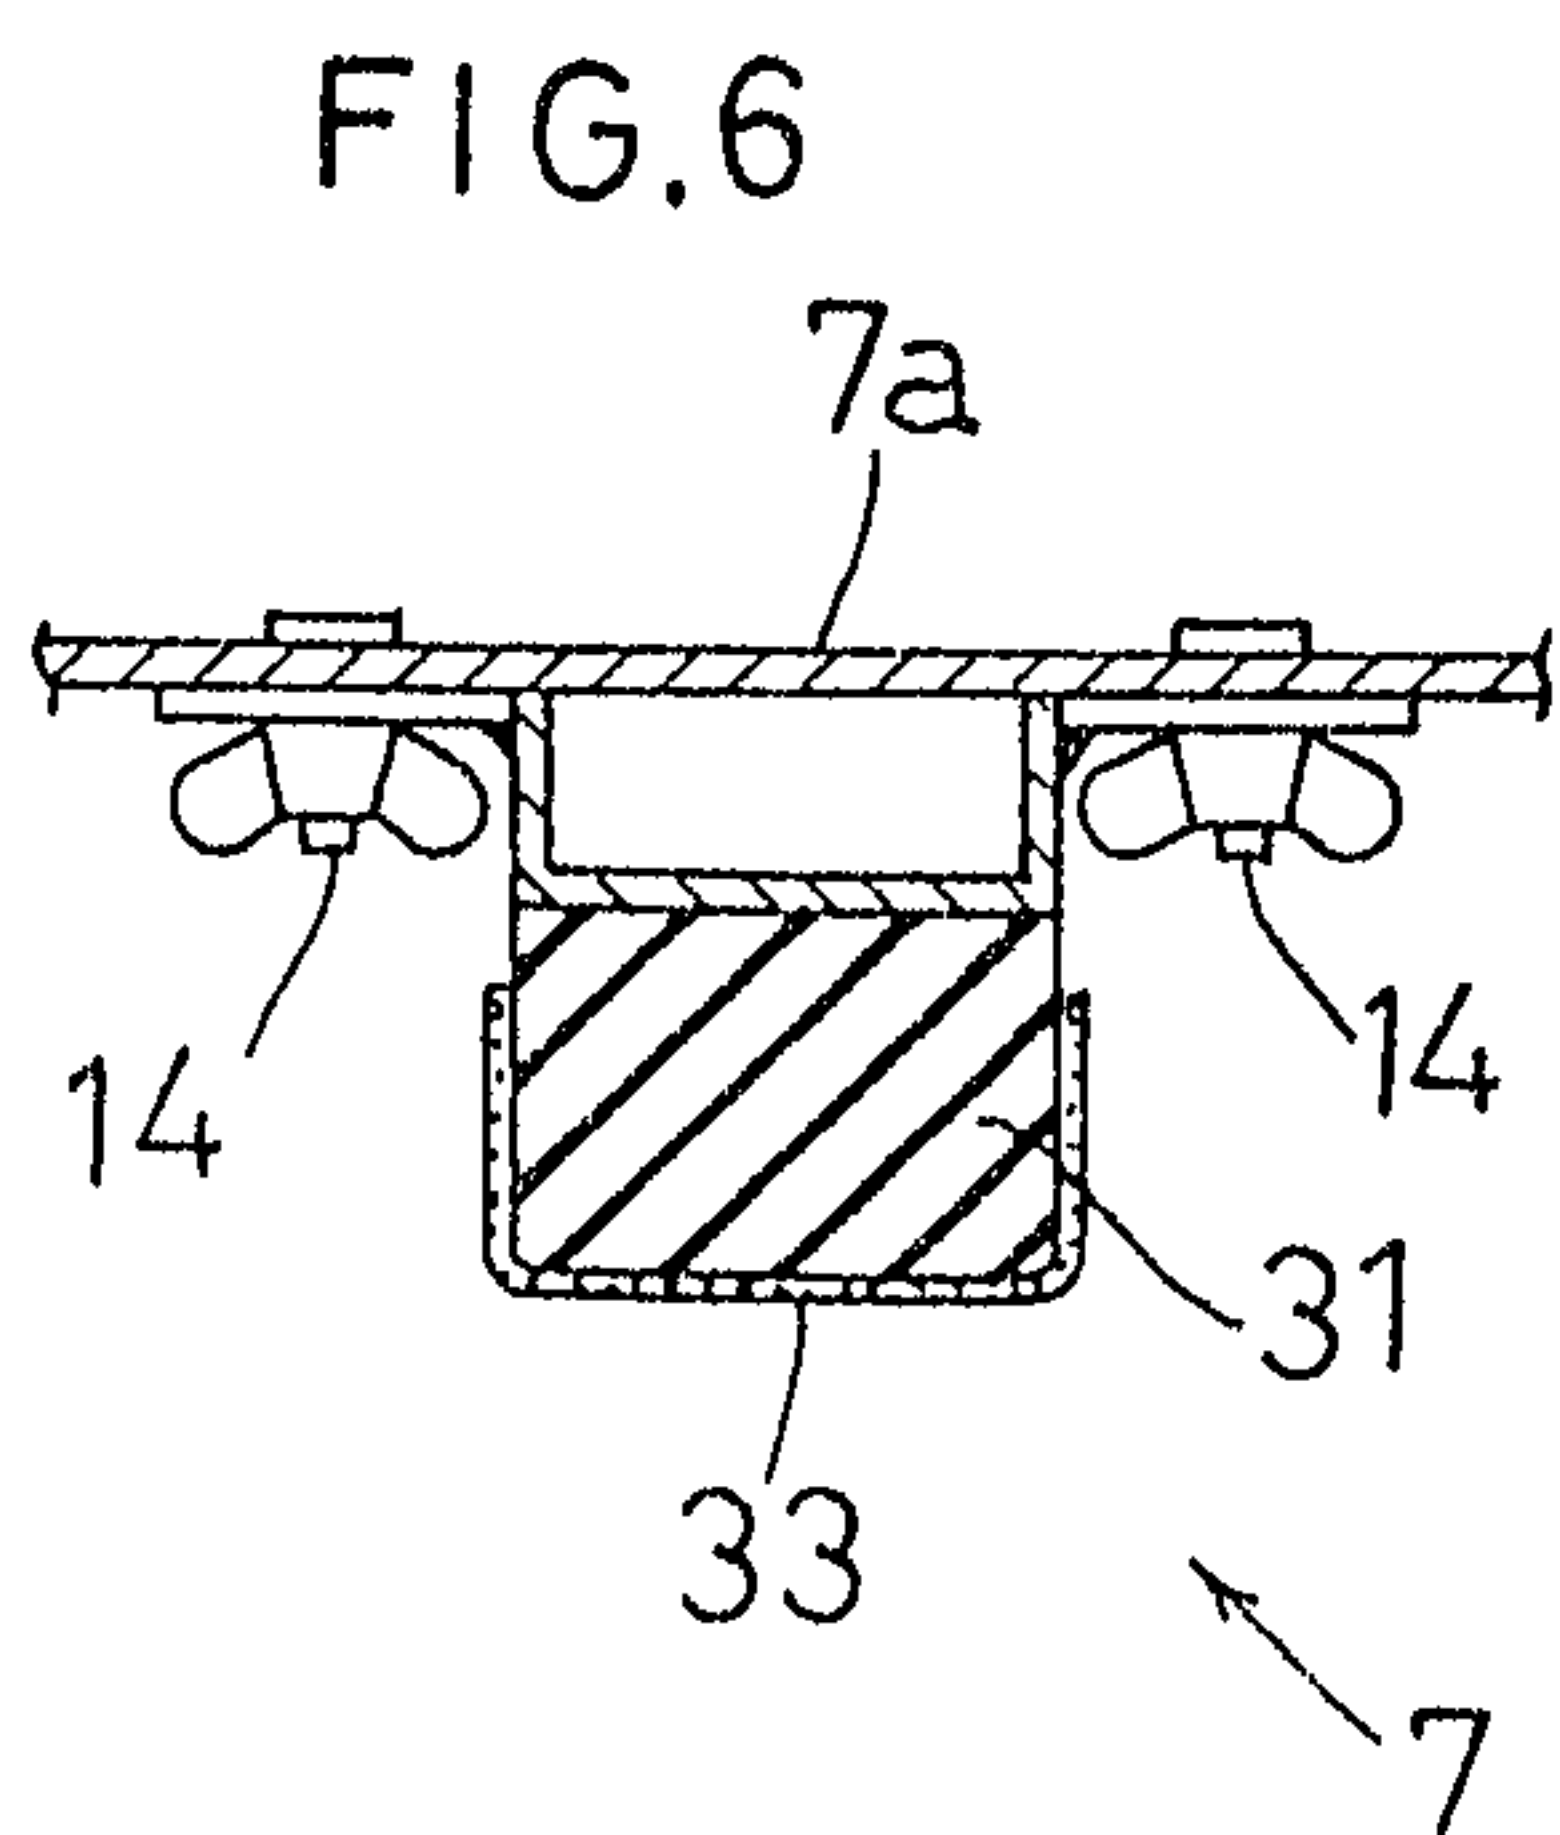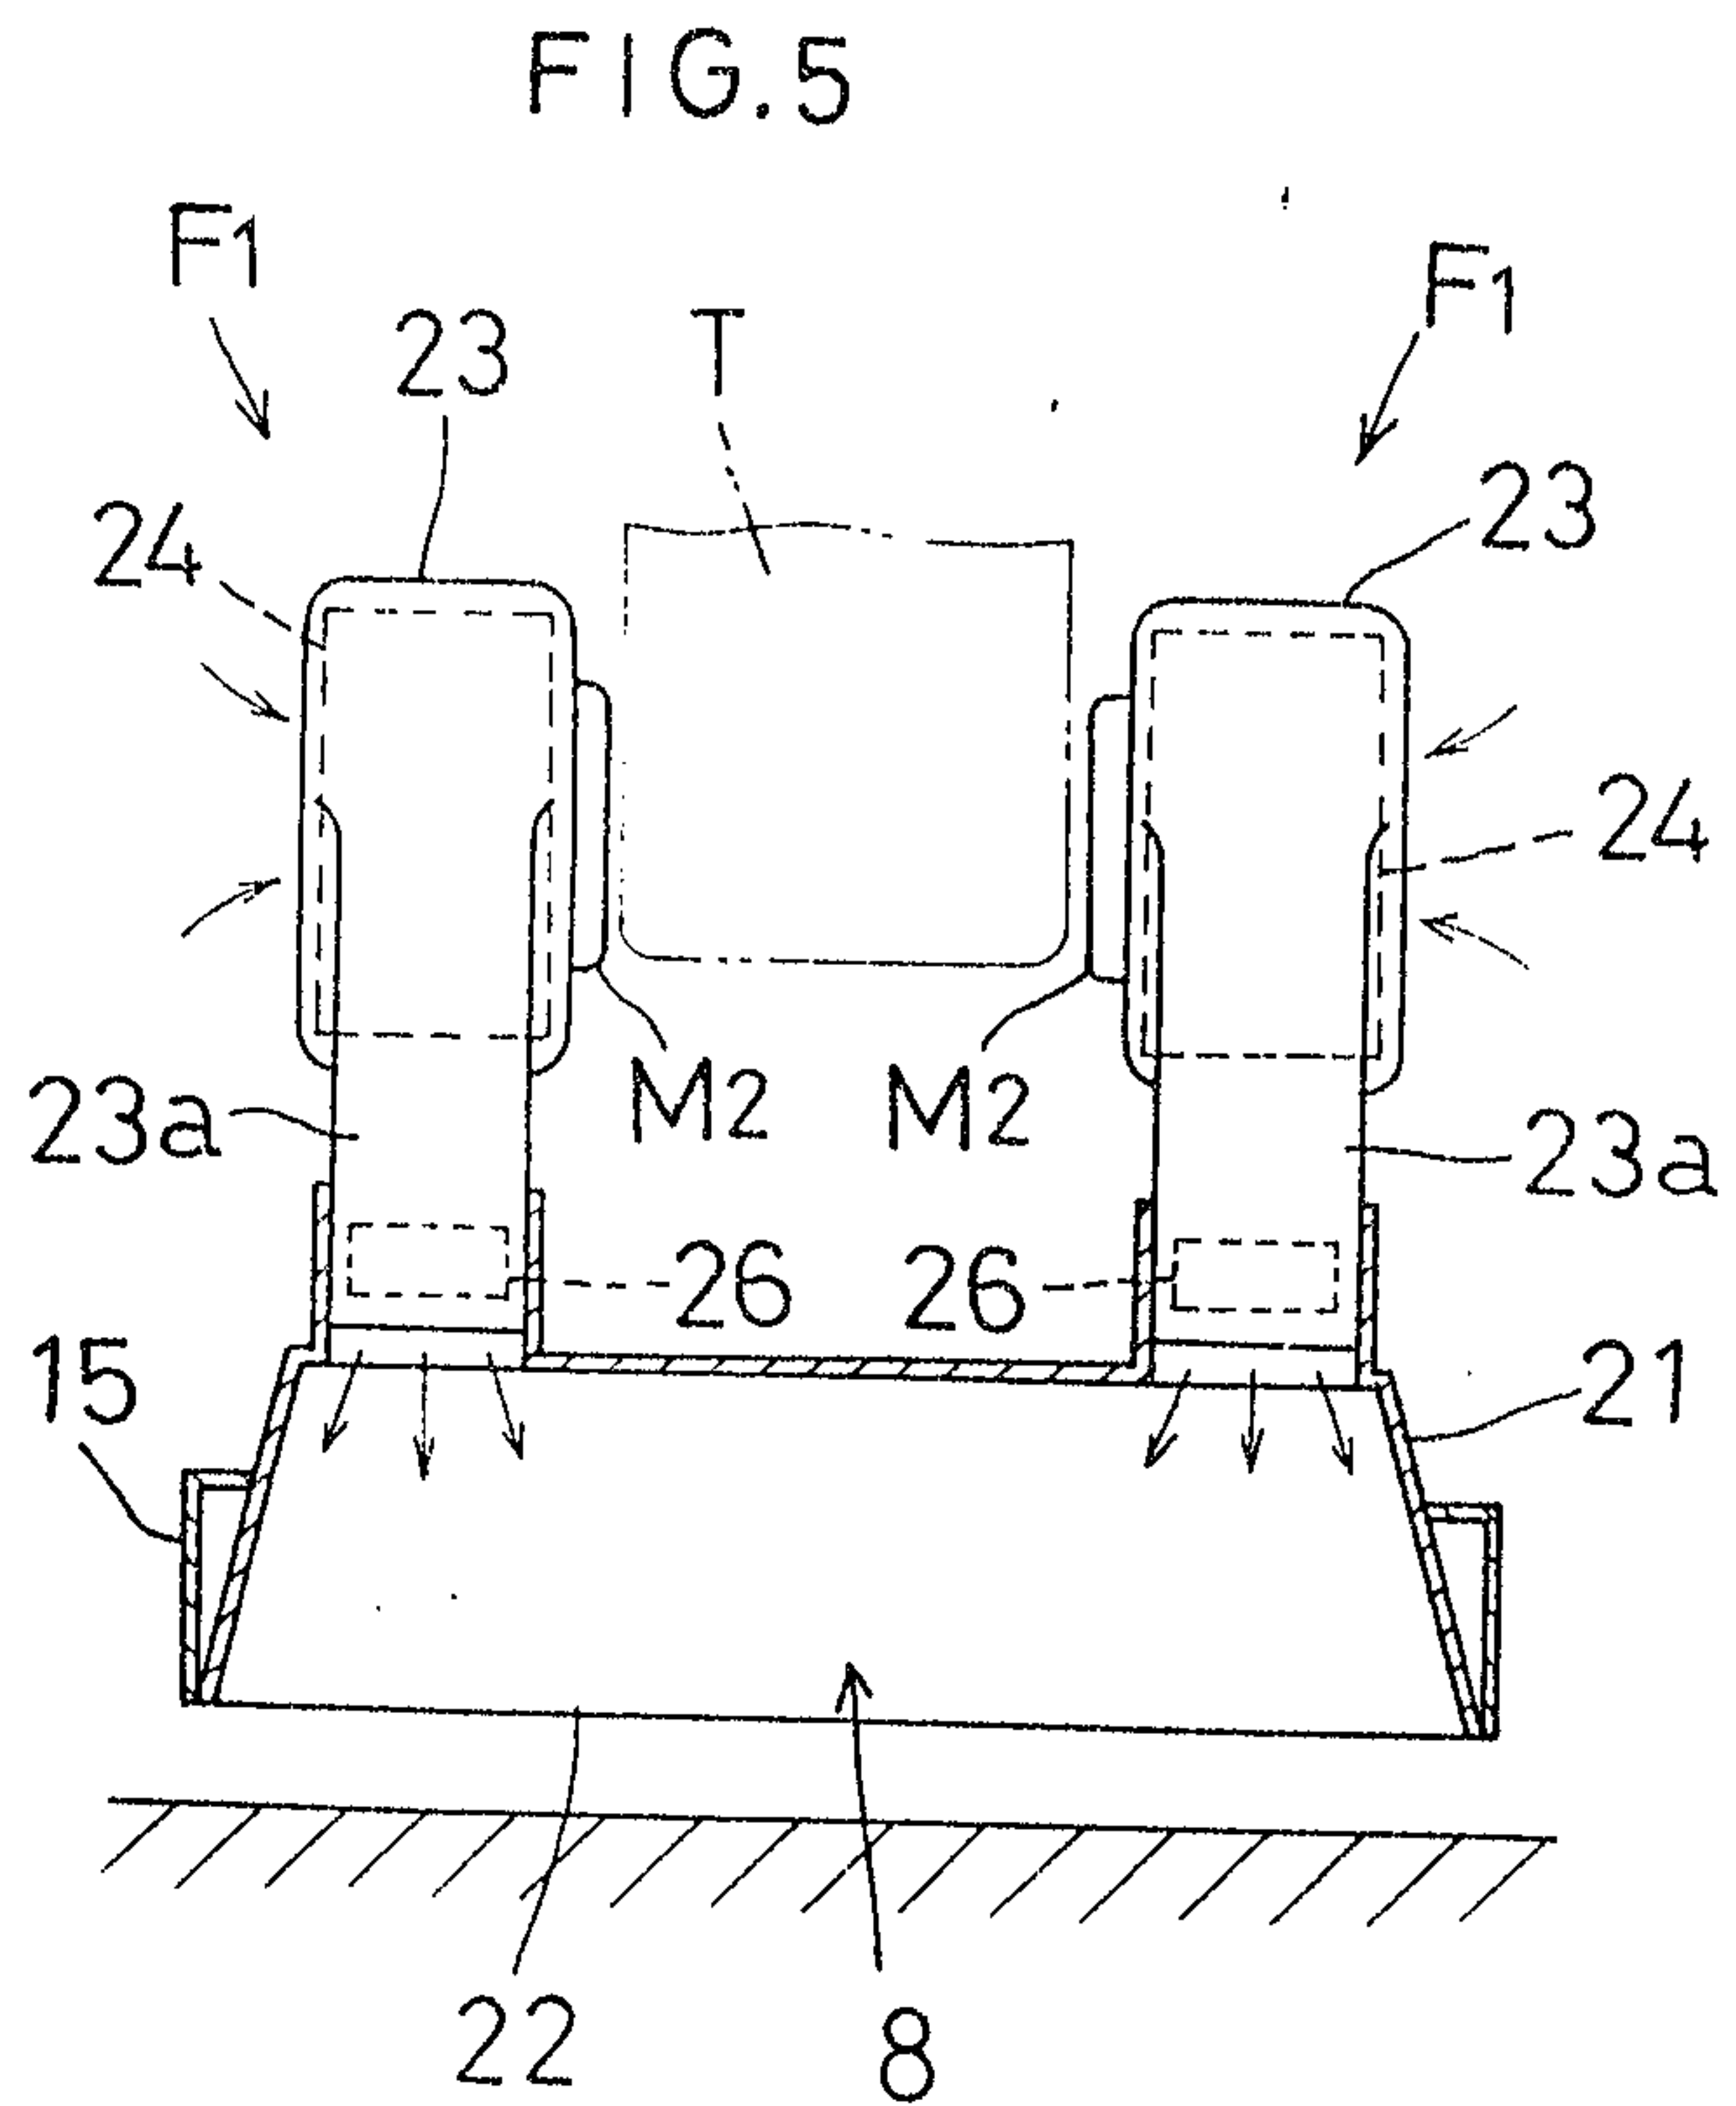

Marks & Clerk

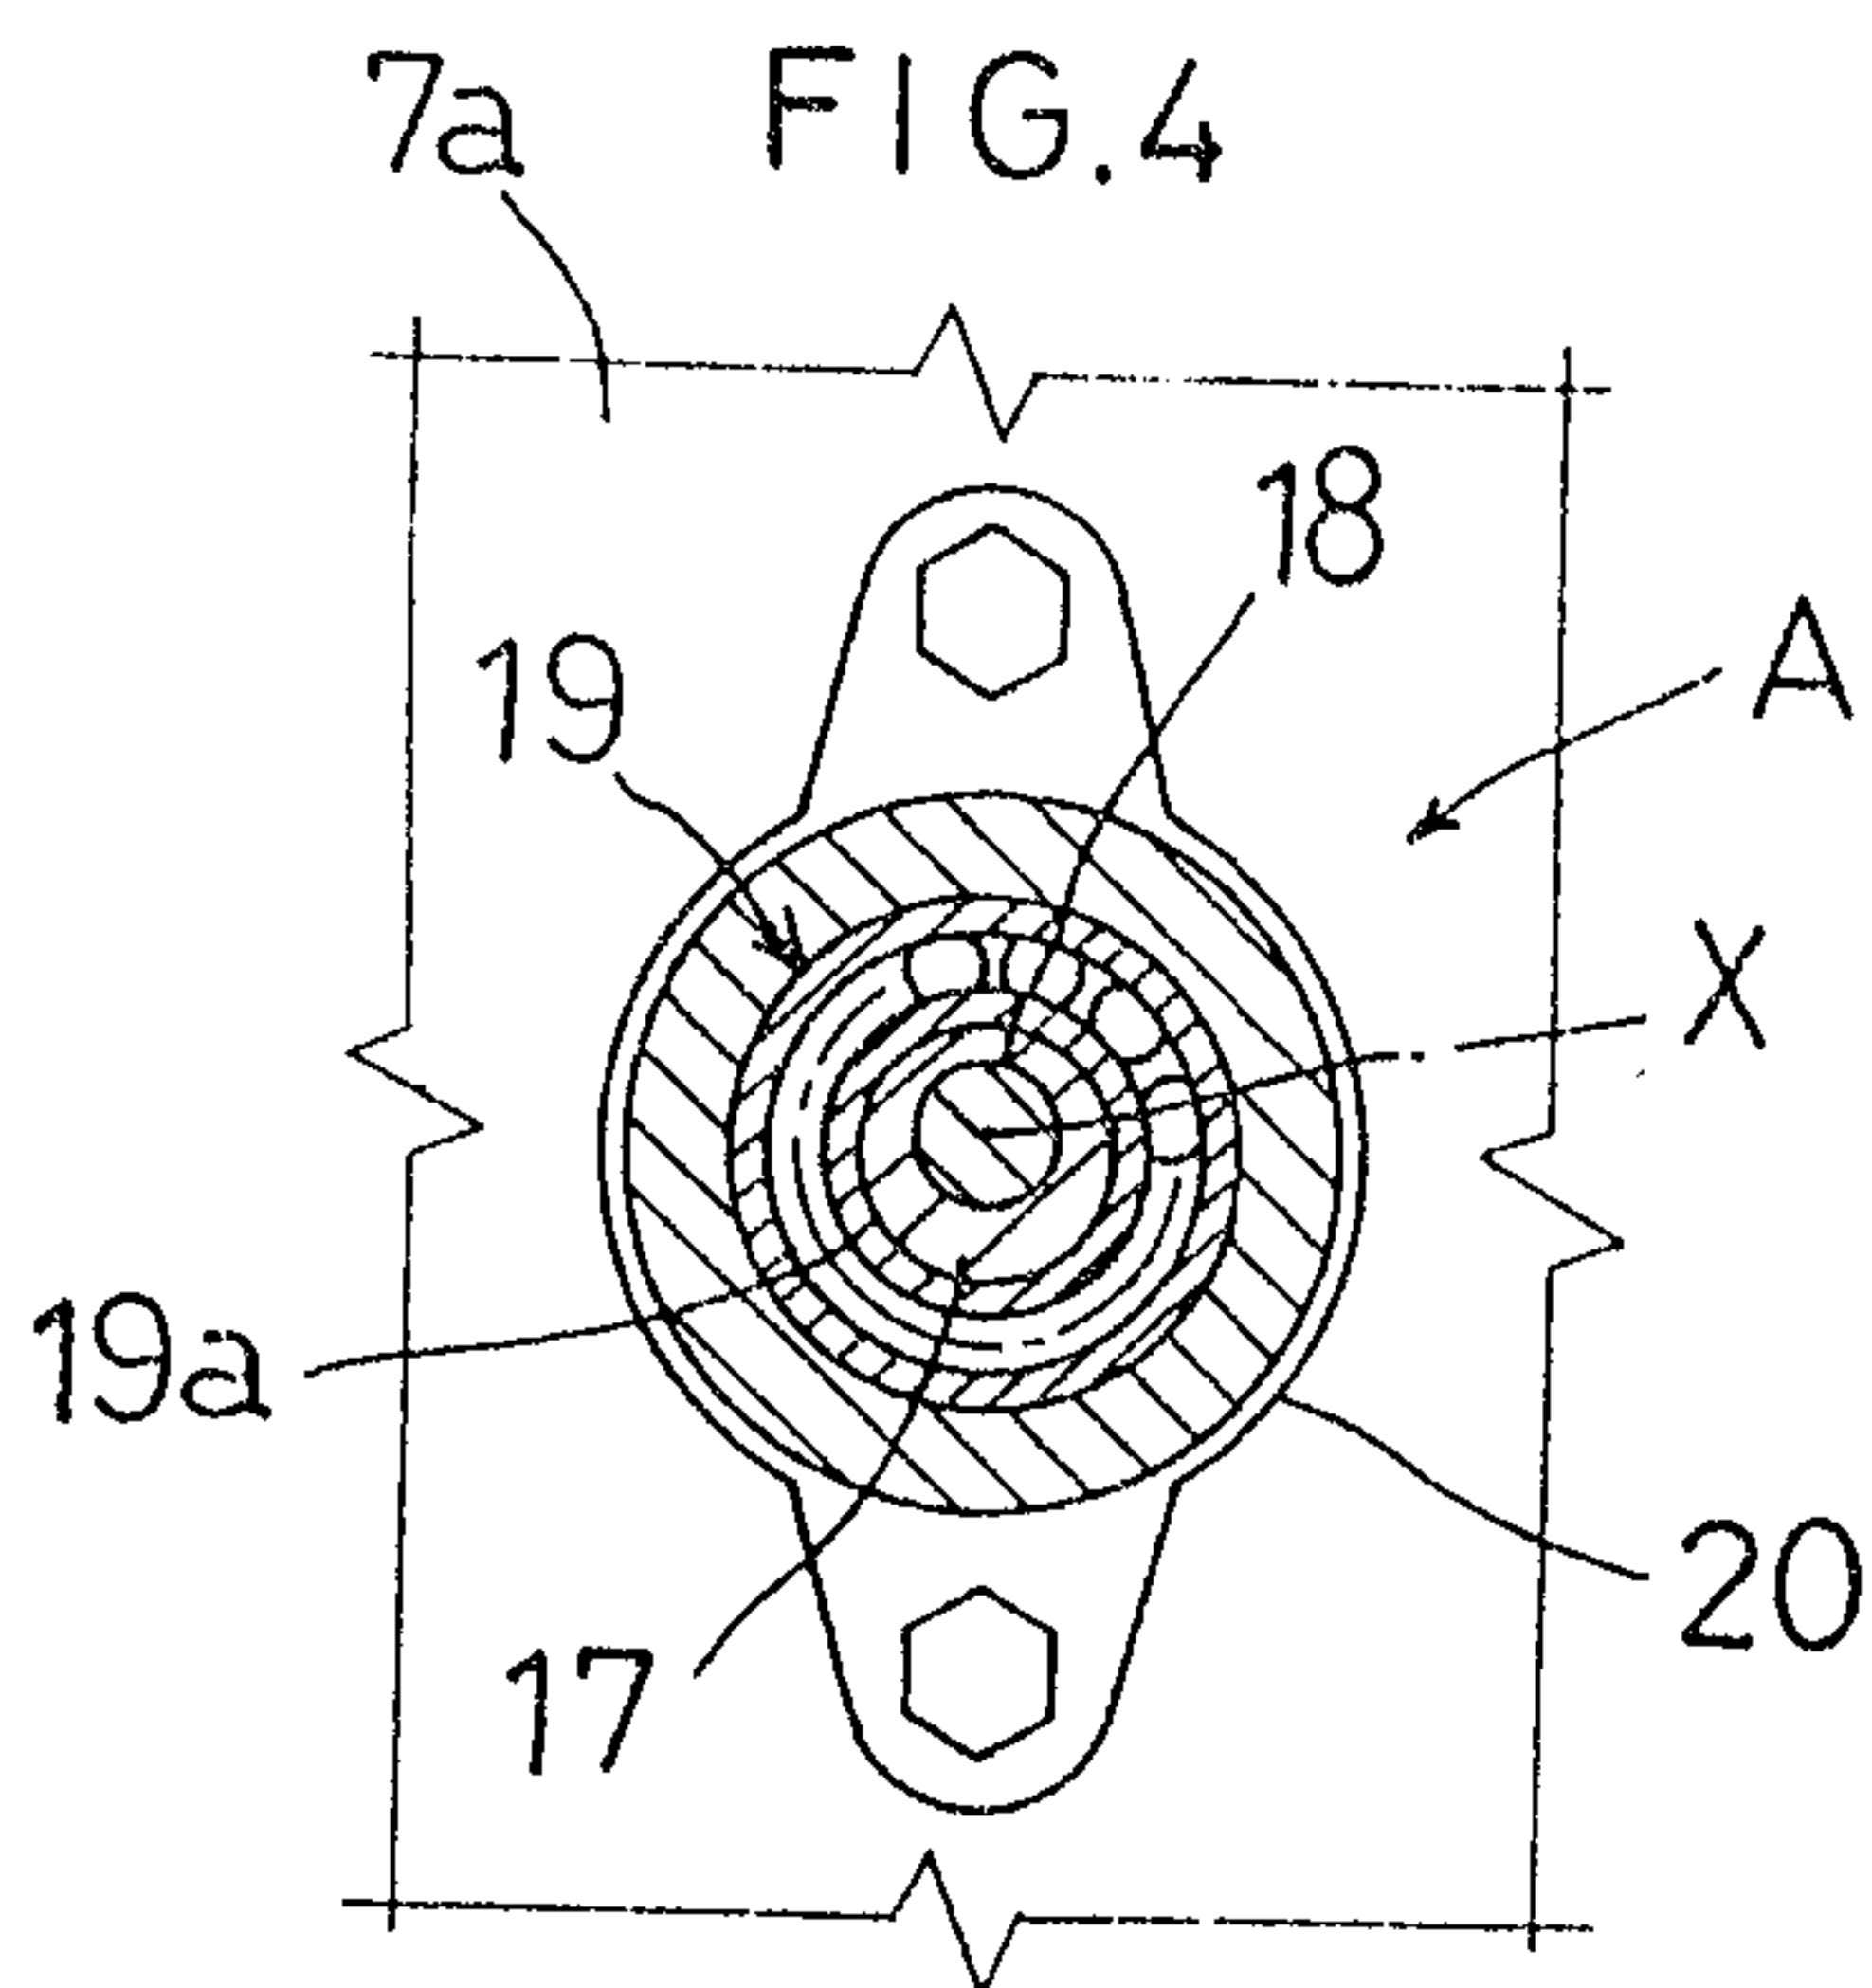

Markus & Clark

