

FORM 1

606197

REGULATION 9

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

We, HUNTER DOUGLAS INTERNATIONAL N.V., a Corporation of  
Curacao, Netherlands Antilles, of Kaya Flamboyen 11, Rooi Catootje,  
Curacao, Netherlands Antilles, hereby apply for the grant of a  
Standard Patent for an invention entitled:-

"EXPANDABLE COLLAPSIBLE PRODUCT AND METHOD AND  
APPARATUS FOR ITS MANUFACTURE"

which is described in the accompanying Complete Specification.

Details of basic application:-

Number: 090766

Country: United States of America

Date: 28th August, 1987

Our address for service is:

SHELSTON WATERS  
55 Clarence Street  
SYDNEY, N.S.W. 2000.

DATED this 12th Day of August, 1988

HUNTER DOUGLAS INTERNATIONAL N.V.

by

*P. Heathcote*

Fellow Institute of Patent Attorneys of Australia  
of SHELSTON WATERS

To: The Commissioner of Patents  
WODEN A.C.T. 2606

File: H10

Fee: \$415.00

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED ..... 2-11-96

5001673 12/08/88

# CONVENTION APPLICATION BY A COMPANY

FORM 8 - REGULATION 12 (2)

## AUSTRALIA PATENTS ACT 1952

### DECLARATION IN SUPPORT OF A CONVENTION APPLICATION FOR A PATENT

(a) Here insert (in full)  
Name of Company.

In support of the Convention Application made by.....  
(a) HUNTER DOUGLAS INTERNATIONAL N.V.

(b) Here insert Title of  
Invention.

(hereinafter referred to as "Applicant") for a patent for an invention entitled:  
(b) "EXPANDABLE COLLAPSIBLE PRODUCT AND METHOD AND APPARATUS  
FOR ITS MANUFACTURE"

(c) and (d) Here insert  
Full Name and Address  
of Company Official  
authorised to make  
declaration.

I, (c) F.W. VAN DER GREFT  
of (d) Kaya Flamboyen 11, Rooi Catootje, Curacao,  
Netherlands Antilles

do solemnly and sincerely declare as follows:

1. I am authorised by Applicant to make this declaration on its behalf.

2. The basic Application(s) as defined by section 141 of the Act was / ~~were~~ made

(e) Here insert Basic  
Country followed by date  
of Basic Application.

in (e) U.S.A. on the 28th day of August, 19 87

(f) Here insert Full  
Name(s) of Applicant(s)  
in Basic Country.

by (f) CRAIG A. NEFF

in ..... on the ..... day of ..... 19

by .....

in ..... on the ..... day of ..... 19

by .....

in ..... on the ..... day of ..... 19

by .....

(g) Here insert (in full)  
Name and Address of  
actual Inventor or  
Inventors

3. (g) CRAIG A. NEFF, of 11893 Hillcrest Road, Golden,  
Colorado 80403, U.S.A.

..... is/are  
the actual Inventor(s) of the invention and the facts upon which Applicant is entitled to make the  
Application are as follows:

Applicant is the Assignee of the said Inventor.

4. The basic Application(s) referred to in paragraph 2 of this Declaration was/~~were~~ the first  
Application(s) made in a Convention country in respect of the invention, the subject of the  
Application.

DECLARED at ..... WILLEMSTAD, CURACAO, NETHERLANDS ANTILLES.....  
this 27th day of OCTOBER 1988

(h) Personal Signature  
of Declarant (c) (no seal)

---

**(12) PATENT ABRIDGMENT      (11) Document No. AU-B-20971/88**  
**(19) AUSTRALIAN PATENT OFFICE      (10) Acceptance No. 606197**

---

(54) Title  
EXPANDABLE COLLAPSIBLE PRODUCT AND METHOD AND APPARATUS FOR ITS  
MANUFACTURE

International Patent Classification(s)  
(51)<sup>4</sup> B31D 003/00

(21) Application No. : 20971/88

(22) Application Date : 12.08.88

(30) Priority Data

(31) Number      (32) Date      (33) Country  
090766              28.08.87              US UNITED STATES OF AMERICA

(43) Publication Date : 02.03.89

(44) Publication Date of Accepted Application : 31.01.91

(71) Applicant(s)  
HUNTER DOUGLAS INTERNATIONAL N.V.

(72) Inventor(s)  
CRAIG A. NEFF

(74) Attorney or Agent  
SHELSTON WATERS, 55 Clarence Street, SYDNEY NSW 2000

(56) Prior Art Documents  
AU 603854 83180/87 B31D 3/02 E04B 1/78 E06B 5/94 3/92  
US 4685986  
US 4625786

(57) Claim

1. A method of manufacturing an integral expandable, collapsible product having a row of parallelly arranged, transversely extending hollow cells therein, comprising the steps of folding a first and a second sheet of flexible material to provide a plurality of first transverse creased pleats therein, said first pleats projecting to one side of the first sheet and to one side of said second sheet respectively, folding the first sheet and the second sheet to provide a plurality of transverse continuous projections therein, each of said projections projecting to the other side of said first sheet and said second sheet respectively between two of said first transverse creased pleats, modifying at least certain of the projections of the first sheet by securing parts of said folded material together to form first legs, positioning said first and second sheets, so that the other side of said first sheet faces the other side of said second sheet, and combining said first and second sheets so that said first

(11) AU-B-20971/88  
(10) 606197

-2-

legs are each secured to a separate projection of said second sheet.

25. An expandable, collapsible product e.g. for forming a window covering and having an integral row of parallelly arranged, transverse, hollow, cross-sectionally closed cells, comprising a continuous first and second sheet, each sheet having a plurality of first transverse creased pleats on one side of the sheet and a plurality of transverse continuous projections on the other side of the sheet, said first and second sheets being fixedly secured together at the free edges of the projections of the first and second sheets along the length thereof, so that a portion of the circumference of a cell, invisible from the front or back of the finished product and common to two immediately adjoining cells, comprises a double layer of sheet material, formed by doubling said sheet material back on itself and securing it together.

31. Apparatus for manufacturing an integral expandable, collapsible product having a row of parallelly arranged, transversely extending hollow cells therein, said apparatus comprising means for folding a first and a second sheet of flexible material to provide a plurality of first transverse creased pleats therein, said first pleats projecting to one side of the first sheet and to one side of said second sheet respectively, means for folding the first sheet and the second sheet to provide a plurality of folds therein, each of said folds projecting to the other side of said first sheet and said second sheet respectively between two of said first transverse creased pleats, means for modifying at least certain of the folds of the first sheet by securing parts of said folded material together to form first legs, means for positioning said first and second sheets, so that the other side of said first sheet faces the other side of said second sheet, and means for combining said first and second sheets so that said first legs are each secured to a separate fold of said second sheet.

COMMONWEALTH OF AUSTRALIA

606197

FORM 10

PATENTS ACT 1952

C O M P L E T E      S P E C I F I C A T I O N

FOR OFFICE USE:

Class

Int.Class

Application Number:  
Lodged:

Complete Specification Lodged:  
Accepted:  
Published:

Priority:

Related Art:

This document contains the  
amendments made under  
Section 49 and is correct for  
printing.

Name of Applicant: HUNTER DOUGLAS INTERNATIONAL N.V.

Address of Applicant: Kaya Flamboyen 11, Rooi Catootje, Curacao,  
Netherlands Antilles.

Actual Inventor: Craig A. Neff

Address for Service: SHELSTON WATERS, 55 Clarence Street, Sydney

Complete Specification for the Invention entitled:

"EXPANDABLE COLLAPSIBLE PRODUCT AND METHOD AND  
APPARATUS FOR ITS MANUFACTURE"

The following statement is a full description of this invention,  
including the best method of performing it known to us:-

EXPANDABLE COLLAPSIBLE PRODUCT AND METHOD AND  
APPARATUS FOR ITS MANUFACTURE

This invention relates to an expandable, collapsible product for use as a window shade and methods and apparatus used in the manufacture thereof.

Known products of this type generally comprise  
5 folded sheets with selected folds connected to provide an elongated hollow channel. For example, US-A-4450027 shows a honeycomb material wherein a plurality of elongate tubes are stacked on top of each other and secured by adhesive to provide a hollow window covering.  
10 Similar products are shown in US-A-4603072 and 4631108. Another type of construction which produces a hollow article is shown in US-A-4685986 wherein two folded sheets are secured together at selected creases to produce the final product. Other disclosures of honeycomb structures may be  
15 found in US-A-4631217; 4676855; 4677012 and 4677013.

The structure of a honeycomb product is important with respect to the methods and apparatus required for its manufacture. US-A-4685986 describes a manufacturing technique wherein folded sheets of material are advanced  
20 toward each other while a centrally-located apparatus attaches selected creases of the two sheets to hold the sheets together and produce the product. US-A-4450027 shows another technique which is to produce a single elongate tube which is wound around itself after adhesive is applied to  
25 provide an oblong coil of the hollow tubular element. The ends of the coil are then cut off leaving the centre sections as the finished product.

According to one aspect of the present invention, there is provided a method of manufacturing an integral  
30 expandable, collapsible product having a row of parallelly arranged, transversely extending hollow cells therein,

comprising the steps of folding a first and a second sheet of flexible material to provide a plurality of first transverse creased pleats therein, said first pleats projecting to one side of the first sheet and to one side of said second sheet respectively, folding the first sheet and the second sheet to provide a plurality of transverse continuous projections therein, each of said projections projecting to the other side of said first sheet and said second sheet respectively between two of said first transverse creased pleats, modifying at least certain of the projections of the first sheet by securing parts of said folded material together to form first legs, positioning said first and second sheets, so that the other side of said first sheet faces the other side of said second sheet, and combining said first and second sheets so that said first legs are each secured to a separate projection of said second sheet.

Such a method can be far more economical to carry out and allows for great versatility in the final construction of the product.

Depending on the form of structure which it is intended to provide, each projection of the first sheet may be so modified as to form a first leg or certain of the folds of the first sheet may be creased to provide second transverse crease pleats between and alternating with the first leg in a preselected order. If this is done, the second pleats formed in the first sheet may be given a lesser height than the first legs formed in the first sheet and this may be used in one of two ways as will be explained below. At least certain of the projections of the second sheet may be creased to provide a plurality of second transverse creased pleats projecting to the other side of the second sheet. It will be appreciated that not all of the projections of the second sheet may be so creased but, in one construction, each projection of the second sheet is




creased to provide a second creased pleat.

In a similar way to the first sheet, at least certain of the projections of the second sheet may be modified by securing parts of the folded material together to form second legs and, when said first and second sheets are combined, said second legs may each be secured to a separate projection of the first sheet.

The second legs may be utilized in a number of different ways. For example, the second legs can be attached to the second transverse pleats in the first sheet. Alternatively, they can be attached to first legs of the first sheet, in either event forming the separation between two adjacent transverse cells. It will be appreciated that the free edge of a first leg or a second leg can contact the free edge of the second leg or a first leg respectively, or the free edge of a crease on the other sheet, or indeed simply an uncreased fold of the other sheet. In any of these arrangements, however, the separation between the two cells is formed by two thicknesses of sheet material only.

It is also contemplated that the second transverse pleats in the second legs of the second sheet are formed alternately in a predetermined order and that the second pleats should be given a lesser height than the second legs.

The projections may be modified to produce the legs, by placing the line of adhesive in the folds and pressing the parts together. The step of securing the legs may comprise placing a line of adhesive along the contact line of a first or second leg and/o along the relevant line of the other sheet and heating the line with adhesive. If the adhesive is a hot melt adhesive, the step of heating may comprise irradiating the adhesive with an electromagnetic radiation,

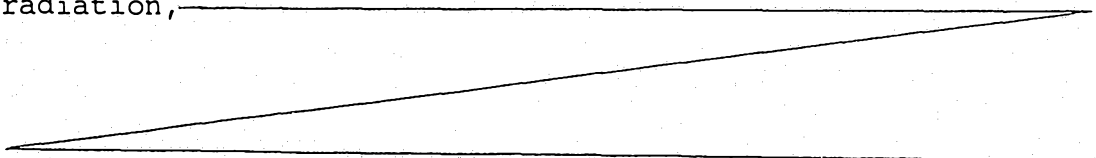



preferably with a laser beam forming a line of the adhesive. The first and second sheets may be identical and consist of pieces of one and the same sheet of material manufactured by the same machine or machines and it is also possible that,

5 while they are cut from one sheet, the first and second sheets are oppositely positioned in mirror-like fashion, with the first and second legs facing each other either in aligned or offset positions at the location where the first and second sheets combine and mutually secured.

According to another aspect of the present invention there is provided an expandable collapsible product e.g. for forming a window covering and having an integral row of parallelly arranged, transverse, hollow, cross-sectionally closed cells, comprising a continuous first and second sheet, each sheet having a plurality of first transverse creased pleats on one side of the sheet and a plurality of transverse continuous projections on the other side of the sheet, said first and second sheets being fixedly secured together at the free edges of the  
 10 projections of the first and second sheets along the length thereof, so that a portion of the circumference of a cell, invisible from the front or back of the finished product and common to two immediately adjoining cells, comprises a double layer of sheet material, formed by doubling said  
 15 sheet material back on itself and securing it together.  
 20  
 25

For the best visual effect, the first and second sheets are preferably made from an opaque or semi-opaque material.

The invention further contemplates apparatus for  
 30 manufacturing an integral expandable, collapsible product having a row of parallelly arranged, transversely extending hollow cells therein, said apparatus comprising means for folding a first and a second sheet of flexible material to provide a plurality of first transverse creased pleats  
 35 therein, said first pleats projecting to one side of the



first sheet and to one side of said second sheet respectively, means for folding the first sheet and the second sheet to provide a plurality of folds therein, each of said folds projecting to the other side of said first sheet and said second sheet respectively between two of said first transverse creased pleats, means for modifying at least certain of the folds of the first sheet by securing parts of said folded material together to form first legs, means for positioning said first and second sheets, so that the other side of said first sheet faces the other side of said second sheet, and means for combining said first and second sheets so that said first legs are each secured to a separate fold of said second sheet.

The means for controlling the motion of the pleat bar may comprise a cam having differently sized lobes thereon and heater means may be provided for heating the material, these including a bottom discharge heater for heating the lower surface of the material after it has been pleated and this may be in the form of a flat stone, e.g. of granite.

Advantageously said means for modifying at least certain of the folds of the first sheet by securing together two parts of a fold comprise means for advancing said piece of material, jaw means for receiving said fold and for pressing said parts together and adhesive applying means for pressing adhesive in said fold before said jaw means presses said parts together.

Preferably said means for combining said first and second sheets comprise means for advancing said first and second sheets towards each other, indexing means for engaging respective first pleats in each of said first and second sheets and for establishing a predetermined relative position between said first and second sheets, means for positioning respective second pleats in each of said first and second sheets in a predetermined relative position, and



5(a)

means for placing a line of adhesive on said second pleats to secure said first and second sheets together.

Desirably the means for controlling the feed of a sheet of material comprise, two laterally spaced support  
5 posts, a toothed rack on each post, first and second carriages each mounted on a respective post for movement along said posts, a shaft connecting said carriages, said shaft having pinions at opposite ends for



engaging respective ones of said racks, and roller means for engaging said material and applying tension thereto.

Also contemplated is apparatus for gluing two articles together comprising hot melt adhesive dispensing means, track means for carrying said dispensing means, and  
5 electromagnetic means for irradiating hot melt adhesive after it has been dispensed by said dispensing means, wherein said electromagnetic means is preferably in the form of a laser.

10 In order that the invention may more readily be understood, the following description is given, merely by way of example, reference being made to the accompanying drawings, in which:-

Figure 1 is a schematic view of one method for  
15 assembling one form of product in accordance with the invention;

Figure 2 is a schematic diagram of a mechanism for securing two sheets of pleated material to form a product in accordance with the invention;

20 Figure 3 is a side view of a material-feeding apparatus in accordance with the invention;

Figure 4 is a side view of a tensioning apparatus shown in Figure 3;

Figure 5 is a schematic diagram of a pleating  
25 machine in accordance with the invention;

Figure 6 is a schematic perspective of a portion of the pleating machine shown in Figure 5;

Figure 7 is an end view of a machine for modifying the pleated fabric in accordance with the invention;

30 Figure 8 is an end view of an adhesive applying apparatus for use with the apparatus of Figure 7;

Figure 9 is an end view of a machine for securing two sheets together using the process shown in Figure 2;

Figure 10 is a front view of a preferred glue-  
35 applying apparatus with the machine of Figure 9; and

Figures 11 to 13 are each a schematic cross-section

of several embodiments of expansible, collapsible product according to the invention.

Figure 1 is a schematic diagram of a method for forming an expansible, collapsible product 2 in accordance with the invention. The product is formed by the combination of two sheets of opaque or semi-opaque fabric, and these sheets are supplied from rolls 4 and 6 at opposite ends of an assembly for manufacture of the expansible collapsible product 2. A first sheet of fabric 8 from roll 4 and a second sheet of fabric 10 from roll 6 are preferably subjected to identical treatments so that two substantially identical sheets are combined to produce the product 2. It will be appreciated, however, that other products may be manufactured by subjecting sheets 8 and 10 to different treatments and that a product similar to the product produced by the method of Figure 1 may be made by combining two sheets which have been subjected to different treatments.

The first sheet 8 and the second sheet 10 are passed through pleating machines 22 and 12 respectively, these providing first pleats 14 on one side of each sheet, and second pleats 16, 17 on the other side of each sheet. The pleats 17 are formed to be longer than the pleats 16 (see Figure 11). Preferably, fabric 10 is a polyester which maintains a crease when folded in the presence of heat, and this process will be described more fully below. After the pleating operation, sheet 10 is passed through a modifier 18 and sheet 8 through a modifier 24, to modify the second pleats 17 to provide legs 20. The process for forming legs 20 will be described more fully below, but at this point it may be noted that legs 20 are formed by securing two parts of the larger pleats together.

The pleated and modified sheets 8 and 10 are combined in an indexing and joining machine 26, and the

finished product 2 exits downwardly.

Figures 12 to 13 show modified structures of the expansable collapsible product of the invention, which can be made by relatively minor alterations to the method and apparatus described. While in Figures 1, 2 and 11, alternate second creases 17 are made larger than the other second creases 16, for both of the sheets 8 and 10, in Figure 12, all of the second creases 17 of the first sheet 8 are made larger than all of the second creases 16 of the second sheet 10. These second creases 17 are modified to form first legs 20, as before, but none of the shorter creases 16 of the second sheet 10 are modified.

In the construction shown in Figure 13, all of the second creases 17 of the first sheet 8 and of the second sheet 10 are made longer than the first creases 14, but not as long as in Figures 11 and 12, and the longer second creases 17 are all modified to form first and second legs 20 which are of the same length as each other and abut in the centre.

It will be observed that in each of these constructions the separation between two adjacent cells formed by two thicknesses of sheet material over the full length of this separation.

Figure 2 is a schematic enlargement of the indexing and joining operation carried out in machine 26. Indexing jaws 28 and 30, shown only schematically, are placed on opposite sides of a gap into which modified sheets 8 and 10 are fed. Jaws 28 and 30 perform an indexing function whereby the creases in sheets 8 and 10 are aligned. Then, a plate which will be described more thoroughly with respect to Figure 9 engages a loose leg 20 and moves it into position adjacent a shorter second crease 16 such as shown at 32 in Figure 2, and a cementing operation takes place to join the end of leg 20 to the crease 32.

With reference to Figure 3, the preferred apparatus for supplying material will be described. A roll 6 of material 10 is supported on an axle 35 mounted on a stand 34. A movable carriage 36 is mounted on a post 38, and an identical laterally spaced structure is on an opposite side of the apparatus but cannot be seen in Figure 3, because they are directly behind the carriage 36 and the part 38 which can be seen. Material 10 is fed from roll 6 over a roller 40, under a roller 54 (Figure 4) mounted between the two carriages 36, and over a second roller 42. The material is then passed under a roller 44 for providing a repair walkway, and the material is then directed into a pleater which will be described with respect to Figures 5 and 6.

Rotation of roll 6 is controlled by a motor 45 which includes a geared shaft which engages a gear on the axle 35 supporting the roll of fabric. Carriage 36 is provided with a predetermined weight which will in turn place a predetermined tension on sheet 10. As the material is fed into the pleating machine, carriage 36 moves upwardly because motor 44 prevents rotation of roll 6 during this period. When carriage 36 reaches an uppermost position, a sensor 46 causes motor 44 to allow roll 6 to unwind, thus allowing movable carriage 36 to move downwardly. When carriage 36 reaches the bottom of post 38, sensor 48 is

activated, and motor 44 is instructed to secure roll 6 from further rotation. It will be appreciated that this operation maintains a constant tension on sheet 10 which allows the subsequent operations to be accurately

5 controlled.

A unique feature of the mechanism shown in Figure 3 is shown more clearly in Figure 4. The two carriages 36 have mounted thereon three rollers 50. These rollers engage the respective post 38 to allow smooth, even movement of carriage 36 along post 38. A shaft 52 extends across the width of the feeding apparatus to the other carriage and carries the roller 54, which is mounted for free rotation about shaft 52 and also extends substantially across the width of the feeding apparatus. Sheet 10 passes under roller 54 as shown in Figure 3. A gear (not illustrated) is fixed to each end of shaft 52 and engages a toothed rack 56 which is secured on each post 38; the racks are adjusted so that the teeth are in level alignment. Thus, carriage 36 on one side of the material feeding apparatus moves exactly in the same manner as does the similar carriage on the opposite side of the material feeding apparatus. This causes the material 10 to be fed evenly into the pleater.

The pleater 12 (which is a mirror image of pleater 22) will be described with respect to Figures 5 and 6.

25 Material 10 is directed into the pleating machine by passing over a roller 58, is fed under a pleating bar 60, and is held by a knife edge 62. The pleating bar 60 is caused to reciprocate by the motion of a plate 64 which is connected to the pleating bar 60 by a link 66. A slot 68 permits adjustment of the location of the link with respect to plate 64. The general use of a pleating bar 60 to cooperate with knife edge 62 to form pleats is known in the art, and the apparatus shown in Figure 5 is a modification of a pleating machine manufactured by Enguda of Taiwan.

35 Sheet 10 passes under pleating bar 60 and engages a part of the bar so that as the pleating bar moves forwardly



toward knife edge 62, sheet 10 is folded upwardly, such as at 70 to form a fold or pleat. As pleating bar 60 moves closer to knife edge 62, fold 70 becomes tightly compressed to make a straight crease. Then, knife edge 62 moves  
5 upwardly to allow the fold to move to the far side of knife edge 62, pleating bar 60 moves in a rearward direction and then moves toward knife edge 62 again to create a subsequent fold. As shown, the pleating machine provides folds of alternately varying heights so that legs 20, as described  
10 with respect to Figure 1, 2 and 11 may be provided.

The prior art machine is modified to include a cam 72 having lobes 74 and 76 thereon. When taller lobe 74 engages cam follower 78 on plate 64, pleating bar 60 is caused to make a large rearward motion, thus creating a large fold  
15 during the forward motion. When cam follower 78 engages a shorter lobe 76, pleating bar 60 moves a shorter distance rearwardly and thus forms a shorter fold during the forward motion.

It will be appreciated that cam plate 72 causes  
20 rearward motions of pleating bar 60 of different lengths to provide pleats of different heights.

The end product of the described motions of pleating bar 60 may be seen with more clarity in Figure 6. Folds 17 are taller than folds 16, the smaller folds 16 being formed  
25 by shorter rearward movements of pleating bar 60 and the taller folds 17 being formed by larger rearward movements of pleating bar 60.

The preferred material to be pleated is a polyester material which is capable of heat-setting. Thus, a front  
30 heater 80 is provided to heat the material 8 and 10 prior to being folded, and top discharge heater 82 and bottom discharge heater 84 are placed in the discharge region to provide additional heat at the locations of the creases to set thoroughly the folds in the material.

35 It is desirable that the folds have straight crease lines, and in the preferred embodiment, a plate 86 is used

between the bottom discharge heater and the lower surface of the folded material to transmit heat to the material. This plate is preferably a piece of granite approximately 25 mm thick which, it has been discovered, provides a flat, non-warping surface with a high heat capacity which delivers exceptional results in the pleating process.

After the material has been pleated as shown in Figure 6, it is subjected to a modifier 18, 24 which produces legs 20. A preferred form of a modifier is shown in Figure 7. Pleated material 8 or 10 is fed into the modifier by drive rollers 88, which have elongate plates 90 for engaging folds of the material being fed. This allows the material to be fed into the machine with great precision so that individual folds 17 may be modified. The passage of material 10 around rollers 88 is shown only schematically in Figure 7. After leaving rollers 88, the material 10 passes around rollers 92 and is then fed into a modifying apparatus 18, which, as shown in Figure 8, includes a vacuum box 96 and a pair of jaws 98 and 100. Material is fed into the gap between opened jaws 98 and 100 by the rollers, and when a large fold 17 is in location between the jaws 98 and 100, a vacuum is applied to the vacuum box 96 to pull the fold into the desired location between the jaws. Then, a glue dispenser 99 is activated to deposit a line of hot-melt adhesive 101 in a predetermined location inside the fold 17. After the glue has been deposited, and before it cools, jaw 100 is caused to pivot by actuator 102 whereby it presses two parts of fold 17 together until adhesive 101 cools. Then, rollers 88 and 92, and other rollers in the system, are activated to advance the sheet until a subsequent large fold 17 is placed in the gap between jaws 98 and 100, and the process continues. After this operation, legs 20 described with respect to Figures 1 and 2 have been formed.

Figure 7 shows a preferred orientation of glue dispenser 99 as being mounted on a mounting plate 104 which is in turn supported by bearings 106 which engage rails 108.

A motor is then activated to drive mounting plate 104 and glue dispenser 99 in a linear direction along the fold 17 to deposit the line of glue 101.

5 A preferred arrangement is shown in Figure 8 wherein the glue dispenser 97 is carried by a movable plate 110 of a linear motor 112, the use of which is highly advantageous because of its lack of vibration and its high speed. By the use of the apparatus shown in Figure 8, a straight line of adhesive 101 is rapidly placed in the desired location  
10 between the parts of fold 17.

After the sheet 10 has emerged from the gluing station, it passes around subsequent rollers 114 which direct it to an indexing and joining machine 26. As shown in Figure 8, the second sheet 10 is directed into the  
15 indexing and joining machine from the right, and the first sheet 8 is directed into the machine from the left. Arms 116 and 118, which are generally U-shaped in plan, are pivotally mounted for rotation about respective pivots 120 and 122. As the sheets 8 and 10 are advanced through the  
20 indexing and joining apparatus, arms 116 and 118 are raised to allow the material to be advanced. Indexing jaws 124 and 126 engage respective pleats of sheets 8 and 10 to position the sheets accurately with respect to each other whereby a leg 20 may be secured to a crease 32 as described above with  
25 respect to Figure 2. After the jaws 124 and 126 have accurately positioned the two sheets, one of the arms 116 or 118 is pivoted downwardly to a position as shown in Figure 9 whereby a leg 20 is engaged and held in a position wherein its remote end abuts a crease 32. During this operation,  
30 the other arm is in a raised position, the other arm being pivoted downwardly during the next operation in sequence, while the first arm is raised. In this manner, the alternate legs are alternately pressed into the proper position by arms 116 and 118 operating in sequence. The  
35 arms are preferably pneumatically operated, but other mechanisms may be employed.

Jaws 124 and 126 are controlled by cams 128 and 130, only one pair of the cams being shown in Figure 9. These cams operate two mechanisms, one of which carries a jaw 124 or 126. A first cam 130 causes a jaw mounting block 132 to  
5 move outwardly, while the second cam 128 causes the jaw to pivot with respect to the mounting block 132. Thus, the jaw 124 or 126 moves in a somewhat elliptical path so that it engages individual creases of the sheets 8 and 10 to bring the sheets into a desired alignment.

10 As noted, when the sheets are in the desired alignment, an arm 116 or 118 pivots downwardly to urge leg 20 into a position such that one end of leg 20 is immediately adjacent a crease 32. Then, a line of hot-melt adhesive is placed at the junction of the end of leg 20 and  
15 the crease 32 to provide a butt joint between the two. The glue is applied by an apparatus shown schematically at 134 of Figure 9, and the preferred gluing apparatus is shown in more detail in Figure 10.

With reference to Figure 10, a glue head 136  
20 includes a nozzle 138 for dispensing glue, and head 136 is carried by a movable plate 140 of a linear motor 142. A guide rail 144 of the linear motor extends across the machine shown in Figure 9, whereby glue nozzle 138 is caused to move along and directly above the joint between leg 20  
25 and crease 32. A line of adhesive is deposited at that connection to secure the two parts together.

A beam 146, preferably from a 2000 watt carbon dioxide laser is directed onto a mirror 148 which is carried by movable plate 140 along with glue head 136. Beam 146 is  
30 passed through an anamorphic lens system 150 to form a linear focal line 152 on the line of glue laid down by nozzle 138. By spreading the beam out along the glue line to a width of approximately 25 to 50 mm, a large amount of energy can be transmitted to the glue without damaging the  
35 material.

The heating caused by the irradiation of the glue line 'drives' it into the material, thus ensuring a secure attachment of leg 20 to crease 32.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A method of manufacturing an integral expandable, collapsible product having a row of parallelly arranged, transversely extending hollow cells therein, comprising the steps of folding a first and a second sheet of flexible material to provide a plurality of first transverse creased pleats therein, said first pleats projecting to one side of the first sheet and to one side of said second sheet respectively, folding the first sheet and the second sheet to provide a plurality of transverse continuous projections therein, each of said projections projecting to the other side of said first sheet and said second sheet respectively between two of said first transverse creased pleats, modifying at least certain of the projections of the first sheet by securing parts of said folded material together to form first legs, positioning said first and second sheets, so that the other side of said first sheet faces the other side of said second sheet, and combining said first and second sheets so that said first legs are each secured to a separate projection of said second sheet.

2. A method according to claim 1, wherein each projection of the first sheet is so modified as to form a first leg.

3. A method according to claim 1, wherein certain other of the projections of said first sheet are creased to provide second transverse creased pleats between and alternating with the first legs, in preselected order.

4. A method according to claim 3, wherein the second pleats formed in said first sheet are given a lesser height than the first legs formed in said first sheet.



5. A method according to any preceding claim, wherein at least certain of projections of the second sheet are creased to provide a plurality of second transverse creased pleats projecting to the other side of said second sheet.

6. A method according to claim 5, wherein each projection of the second sheet is creased to provide a second creased pleat.

7. A method according to any one of claims 1 to 5, wherein at least certain of the projections of the second sheet are modified by securing parts of said folded material together to form second legs and, when said first and second sheet are combined, said second legs being secured to a separate projection of said first sheet.

8. A method according to claim 7, wherein each projection of the second sheet is modified to form a second leg.

9. A method according to claim 7, when appended to claim 5, wherein the second transverse creased pleats and the second legs of the second sheet are formed alternately, in a preselected order.

10. A method according to claim 7, wherein the second pleats formed in said second sheet are given a lesser height than the second legs.

11. A method according to claim 3 or claim 5 or claim 7 or any claims dependent thereon, wherein each first or second leg is secured to the other sheet by securing the free edge of said first or second leg to the creased edge

of an opposite second pleat of said other sheet.

12. A method according to claim 7 or any claim dependent thereon, wherein each first or second leg is secured to the other sheet by securing the free edge of said first or second leg to the free edge of an opposing leg of said other sheet.

13. A method according to claim 7 or any claim dependent thereon, wherein the length of the first legs is different from that of the second legs.

14. A method according to any preceding claim, wherein said step or steps of modifying said projections comprises placing a line of adhesive on said projections and pressing said parts together.

15. A method according to any of the preceding claims, wherein the step of securing comprises placing a line of adhesive along the contact line of a first or second leg and/or along the relevant contact line of the other sheet and heating said line(s) of adhesive.

16. A method according to claim 15, wherein said adhesive is a hot-metal adhesive and said step of heating comprises irradiating said adhesive with electromagnetic radiation.

17. A method according to claim 16, wherein said step of irradiating is carried out with a laser beam forming a line on said adhesive.

18. A method according to any preceding claim, wherein the first and second sheets are identical and consist of pieces of one and the same sheet of material manufactured with the same machine or machines.



19. A method according to claim 7 or any claim appendant thereto, wherein the first and second sheet are both cut from one sheet of material, wherein the first and second sheet are oppositely positioned in mirror like fashion, with the first and second legs facing each other either in aligned or in offset-position at the location where the first and second sheets are combined and mutually secured.

20. A method according to any one of claims 1 to 19 further comprising the steps of placing hot-melt adhesive on at least one of said sheets and irradiating said adhesive with electromagnetic radiation.

21. A method according to claim 20, wherein said step of irradiating is carried out with a laser beam.

22. A method of manufacturing an expandable collapsible product, said method being substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

23. An expandable, collapsible product made by a method according to one or a combination of preceding claims.

24. A retractable shade comprising one or two end rails, operating means and expandable, collapsible product material according to claim 23.

25. An expandable, collapsible product e.g. for forming a window covering and having an integral row of parallelly arranged, transverse, hollow, cross-sectionally closed cells, comprising a continuous first and second





sheet, each sheet having a plurality of first transverse creased pleats on one side of the sheet and a plurality of transverse continuous projections on the other side of the sheet, said first and second sheets being fixedly secured  
 5 together at the free edges of the projections of the first and second sheets along the length thereof, so that a portion of the circumference of a cell, invisible from the front or back of the finished product and common to two immediately adjoining cells, comprises a double layer of  
 10 sheet material, formed by doubling said sheet material back on itself and securing it together.

26. An expandable collapsible product according to claim 25, wherein the projections of the first and second  
 15 sheets are in the form of folds with a fold situated between each pair of adjacent first pleats of each sheet, part of said folds being secured together to form legs, the free edge of each leg of the first sheet being secured to the free edge of a leg of the second sheet, the joined legs  
 20 forming the common portion of the circumference of two adjacent cells.

27. An expandable, collapsible product according to claim 25, wherein the projections of the first sheet are  
 25 in the form of folds, arranged alternately with the first pleats, part of said folds being secured together to form first legs and the projections of the second sheet are in the form of second transverse creased pleats arranged alternately with the first pleats, the free edges of the  
 30 legs of the first sheet being secured to the peaks of the second pleats of the second sheet, these legs forming the common portion of the circumferences of two adjacent cells.

28. An expandable, collapsible product according to claim 25, wherein the projections of the first and second



sheet are in the form of second transverse creased pleats and folds, said folds having a greater height than the second pleats and being alternately arranged with the second pleats in preselected order, part of said folds being

5 secured together to form second legs, the free ends of the first legs of the first sheet being secured to the peaks of the second pleats of the second sheet, the second legs of the second sheet being joined in the same way with the second pleats of the first sheet, the alternating first and  
10 second legs forming the portions of the circumference of the common cell.

29. An expandable, collapsible product according to any one of claims 25 to 28, wherein said first and second  
15 sheets are opaque or semi-opaque.

30. An expandable, collapsible product substantially as hereinbefore described with reference to and as illustrated in any one of figures 11 to 13 of the  
20 accompanying drawings.

31. Apparatus for manufacturing an integral expandable, collapsible product having a row of parallelly arranged, transversely extending hollow cells therein, said  
25 apparatus comprising means for folding a first and a second sheet of flexible material to provide a plurality of first transverse creased pleats therein, said first pleats projecting to one side of the first sheet and to one side of said second sheet respectively, means for folding the first  
30 sheet and the second sheet to provide a plurality of folds therein, each of said folds projecting to the other side of said first sheet and said second sheet respectively between two of said first transverse creased pleats, means for  
35 by securing parts of said folded material together to form

first legs, means for positioning said first and second sheets, so that the other side of said first sheet faces the other side of said second sheet, and means for combining said first and second sheets so that said first legs are each secured to a separate fold of said second sheet.

32. Apparatus according to claim 31, wherein said means for forming transverse creased pleats comprises knife edge means extending across said material, pleat bar means for engaging said material and urging said material against said knife edge means during a forward motion of said pleat bar means to form a pleat, and means for controlling the motion of said pleat bar means, to cause said pleat bar means to move alternatively first and second distances from said knife edge means during rearward motions whereby said pleats of two different heights are formed.

33. Apparatus according to claim 32, wherein said means for controlling the motion of said pleat bar means comprises a cam having differently sized lobes thereon.

34. Apparatus according to claim 31, 32 or 33, further comprising heater means for heating said material, said heater means including a bottom discharge heater for heating the lower surface of said material after it has been pleated, said bottom discharge heater comprising a flat stone.

35. Apparatus according to claim 34, wherein said stone is granite.

36. Apparatus according to any one of claims 31 to 35,



wherein said means for modifying at least certain of the folds of the first sheet by securing together two parts of a fold comprise means for advancing said material, jaw means for receiving said fold and for pressing said parts together and adhesive applying means for pressing adhesive in said fold before said jaw means presses said parts together.

37. Apparatus according to claim 36, wherein said jaw means comprises vacuum means for applying a pressure differential to said fold to urge said fold into said jaw means.

38. Apparatus according to claim 36 or 37, wherein said adhesive applying means comprises a nozzle mounted on a track means for laying a line of hot-metal adhesive, said track means comprising a linear motor.

39. Apparatus according to claim 36, 37 or 38 and further comprising track means for carrying said adhesive applying means, and electromagnetic means for irradiating hot melt adhesive after it has been dispensed by said applying means.

40. Apparatus according to claim 34, wherein said electromagnetic means is in the form of a laser.

41. Apparatus according to claim 39 or 40, wherein said electromagnetic means further comprises a mirror carried by said track means for directing a beam of radiation onto one of said parts, said track means comprising a linear motor.

42. Apparatus according to any one of claims 31 to 41,



wherein said means for combining said first and second sheets comprise means for advancing said first and second sheets towards each other, indexing means for engaging respective first pleats in each of said first and second sheets and for establishing a predetermined relative position between said first and second sheets, means for positioning respective second pleats in each of said first and second sheets in a predetermined relative position, and means for placing a line of adhesive on said second pleats to secure said first and second sheets together.

43. Apparatus according to claim 42, wherein said indexing means comprises first and second elongate plates adapted to be received in a respective pleat of said first and second sheets and control means, whereby each of said plates engages a respective said first pleat, moves said first pleat to said predetermined position, moves away from said first pleat to release said first pleat, and moves upwardly to engage a subsequent first pleat.

44. Apparatus according to claim 43, wherein said control means comprises two cams, for causing the outer edge of each of said plates to move in an arc.

45. Apparatus according to claim 43 or 44, wherein said means for positioning comprises two elongate, pivotally-mounted flaps for engaging the top of a said second pleat to position said second pleat.

46. Apparatus according to claim 43, 44 or 45, wherein said means for placing a line of adhesive comprises a hot-melt adhesive nozzle and track means.



47. Apparatus according to claim 46, wherein said nozzle and track means are operated by a linear motor for moving said nozzle across said first and second sheets.

48. Apparatus according to claim 46 or 47 and further comprising means for heating said adhesive after it has been dispatched from said nozzle.

49. Apparatus according to claim 48, wherein said heating means comprise means for directing a beam of radiation onto said adhesive.

50. Apparatus according to any one of claims 29 to 49 and including means for controlling the feed of each sheet of material, said means comprising two laterally spaced support posts, a toothed rack on each post, first and second carriages each mounted on a respective post for movement along said posts, a shaft connecting said carriages, said shaft having pinions at opposite ends for engaging respective ones of said racks, and roller means for engaging said material and applying tension thereto.

51. Apparatus for manufacturing an integral expandable collapsible product, said apparatus being substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

Dated this 29th Day of October, 1990

HUNTER DOUGLAS INTERNATIONAL N.V.

Attorney: PETER HEATHCOTE  
Fellow Institute of Patent Attorneys of Australia  
of SHELSTON WATERS



Fig. 1.

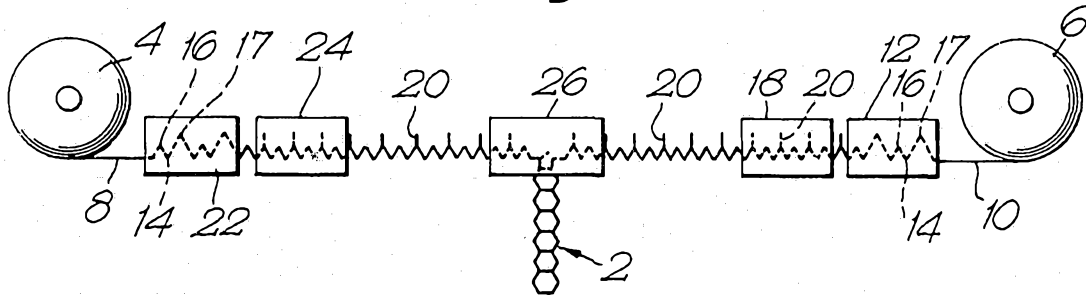
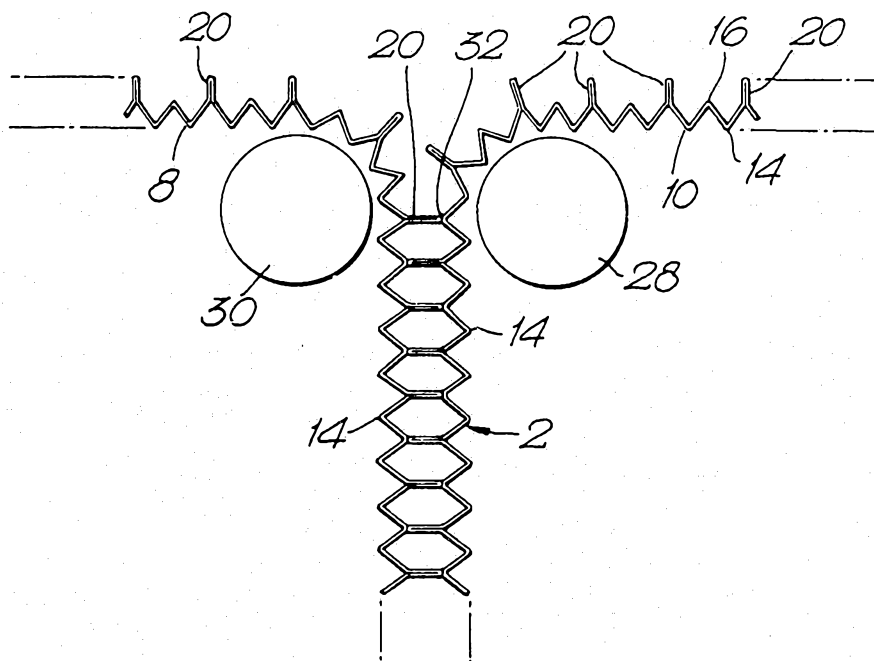


Fig. 2.



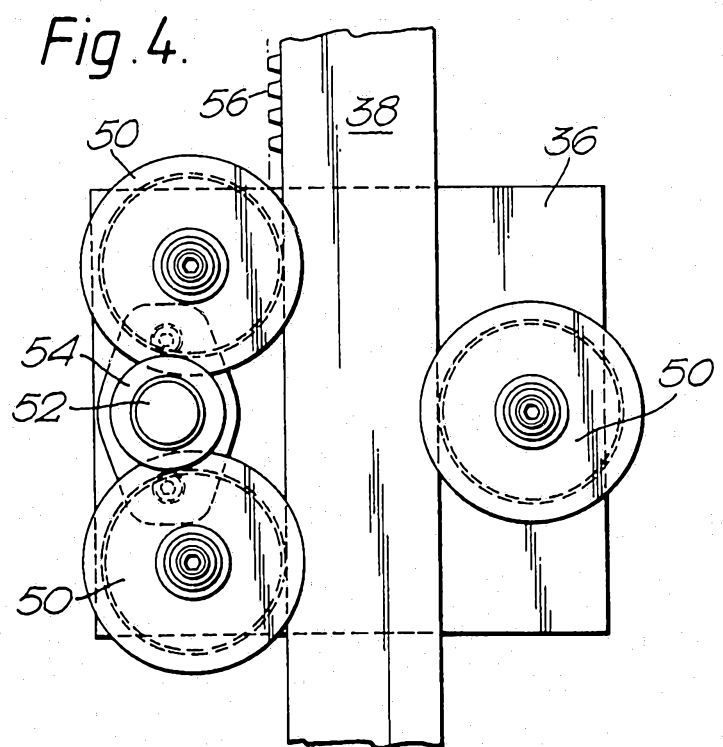
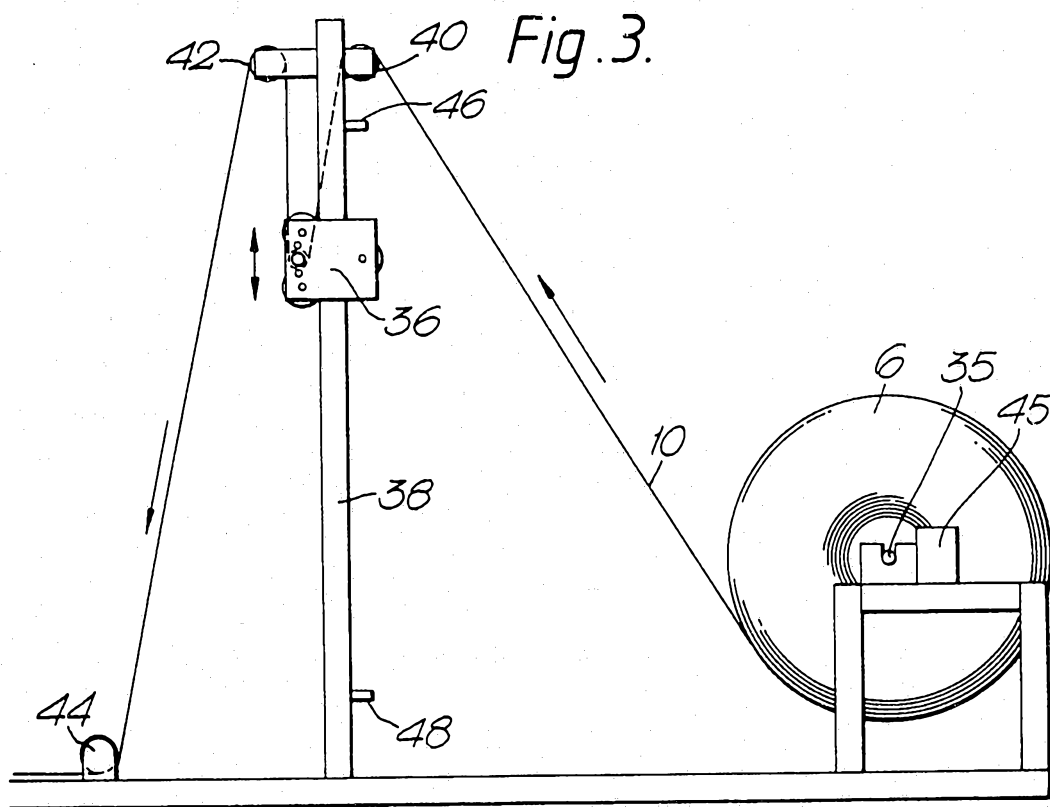




Fig. 5.

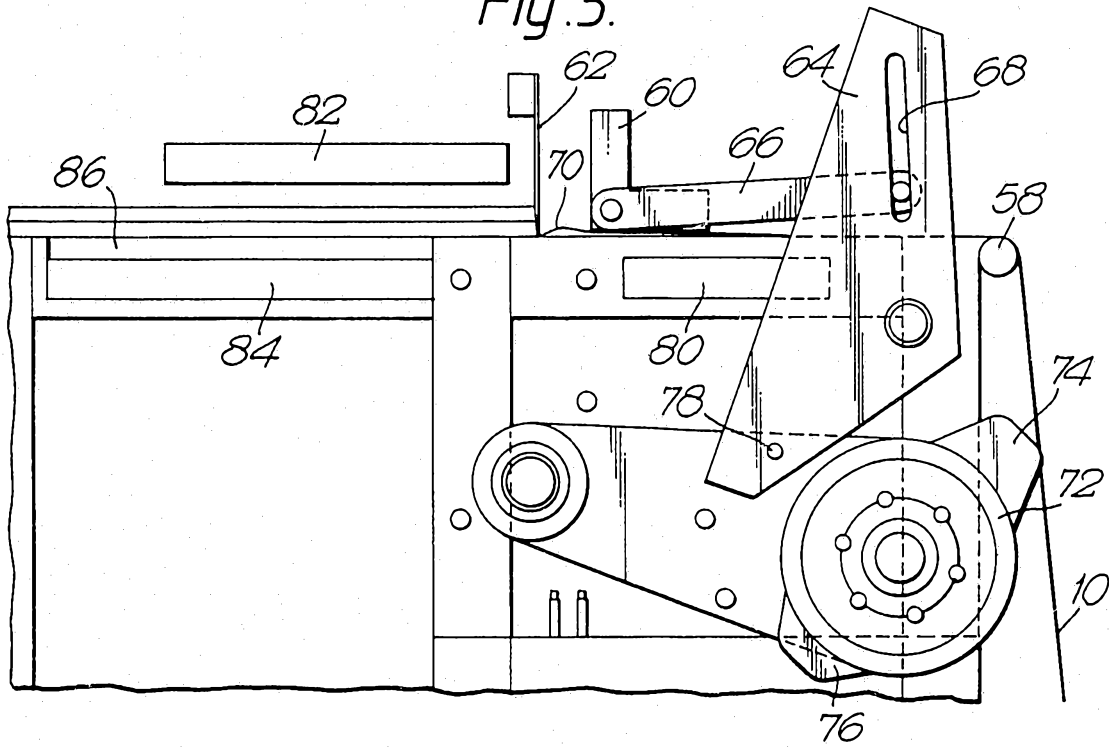


Fig. 6.

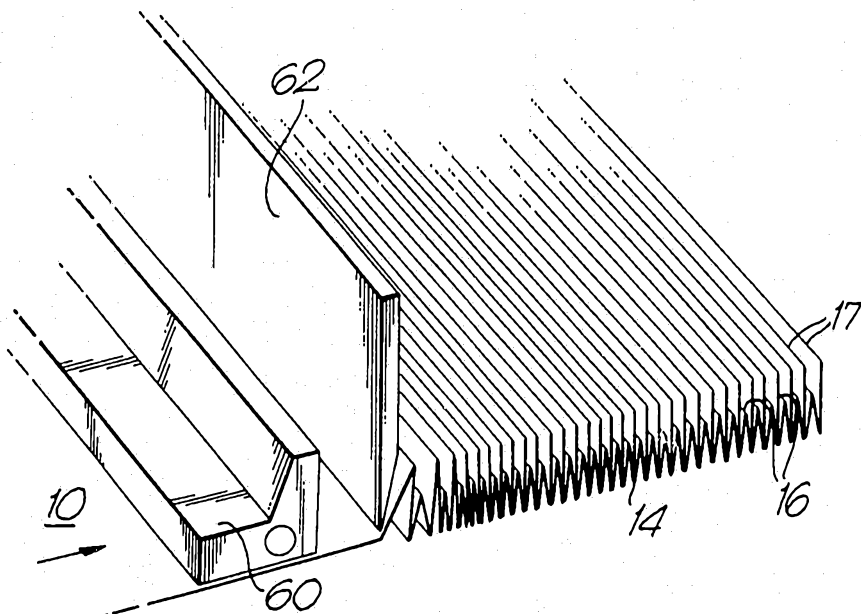


Fig. 7.

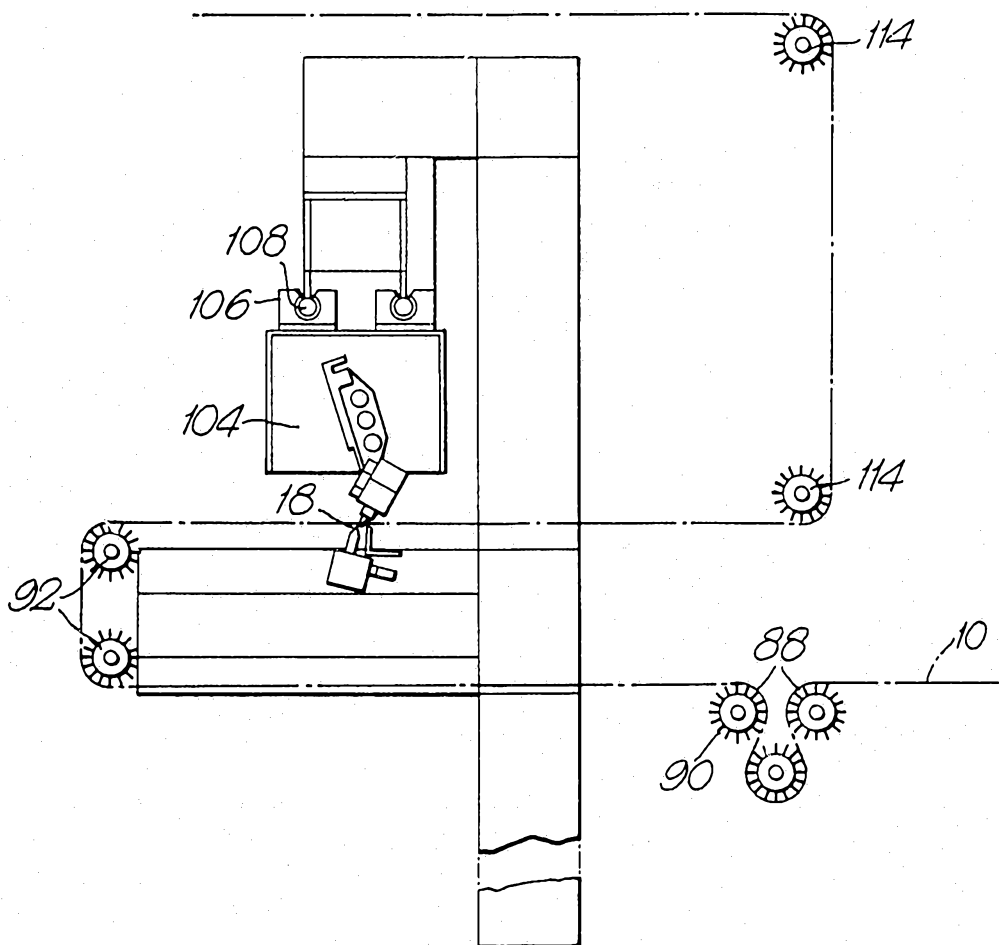


Fig. 8

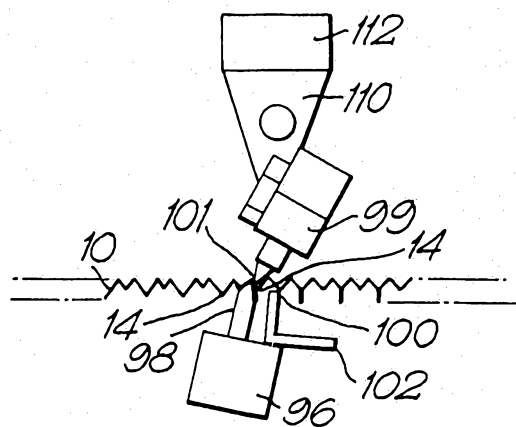


Fig. 9.

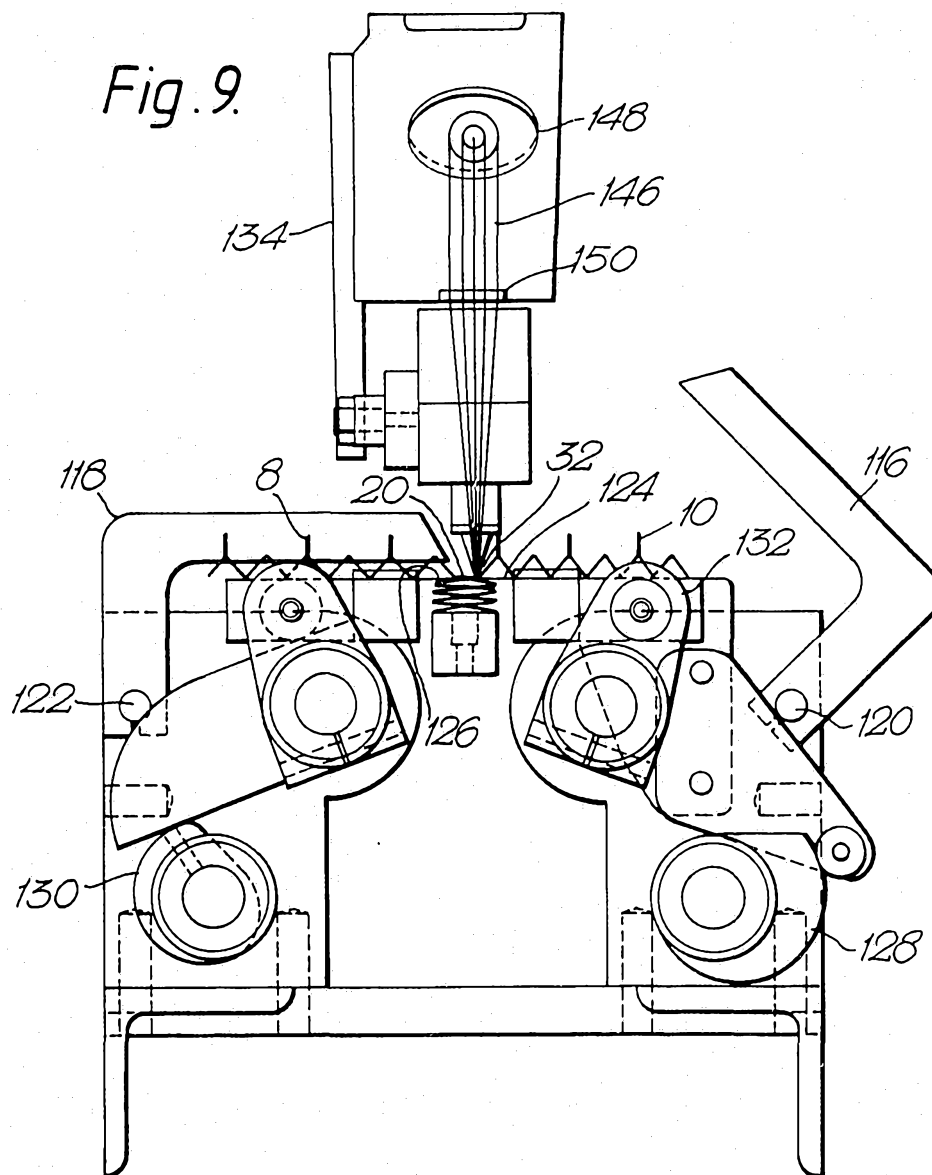


Fig. 10.

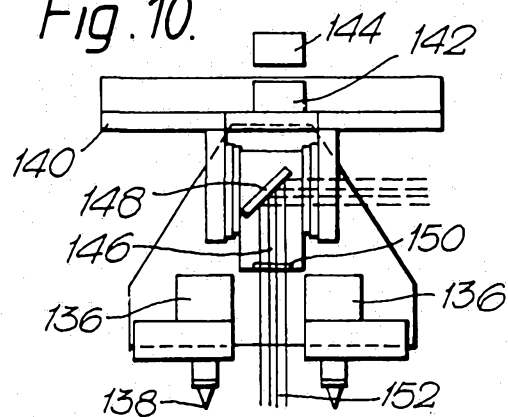


Fig. 11

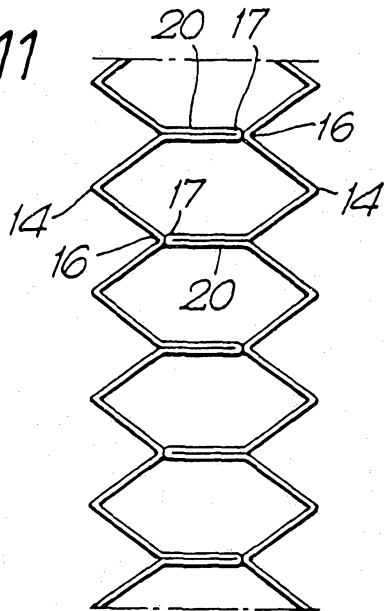


Fig. 12.

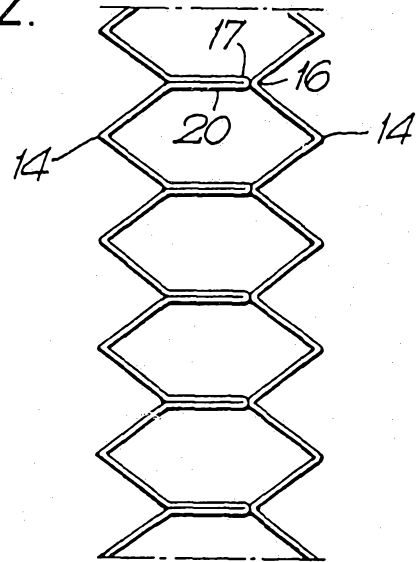


Fig. 13.

