




(86) Date de dépôt PCT/PCT Filing Date: 2006/06/05
 (87) Date publication PCT/PCT Publication Date: 2007/02/15
 (45) Date de délivrance/Issue Date: 2013/04/23
 (85) Entrée phase nationale/National Entry: 2008/01/17
 (86) N° demande PCT/PCT Application No.: US 2006/021792
 (87) N° publication PCT/PCT Publication No.: 2007/018704
 (30) Priorité/Priority: 2005/07/22 (US11/187,569)

(51) Cl.Int./Int.Cl. *B05C 17/10* (2006.01)
 (72) Inventeurs/Inventors:
 BRUNO, ROBERT, US;
 STERPKA, FRANK, US;
 MYERS, MATTHEW EARLE, US
 (73) Propriétaire/Owner:
 UNITED STATES GYPSUM COMPANY, US
 (74) Agent: MOFFAT & CO.

(54) Titre : COUTEAU DE DEPOT DE GALON SUR JOINT A POIGNEE DECALEE
 (54) Title: TAPING KNIFE WITH OFFSET HANDLE

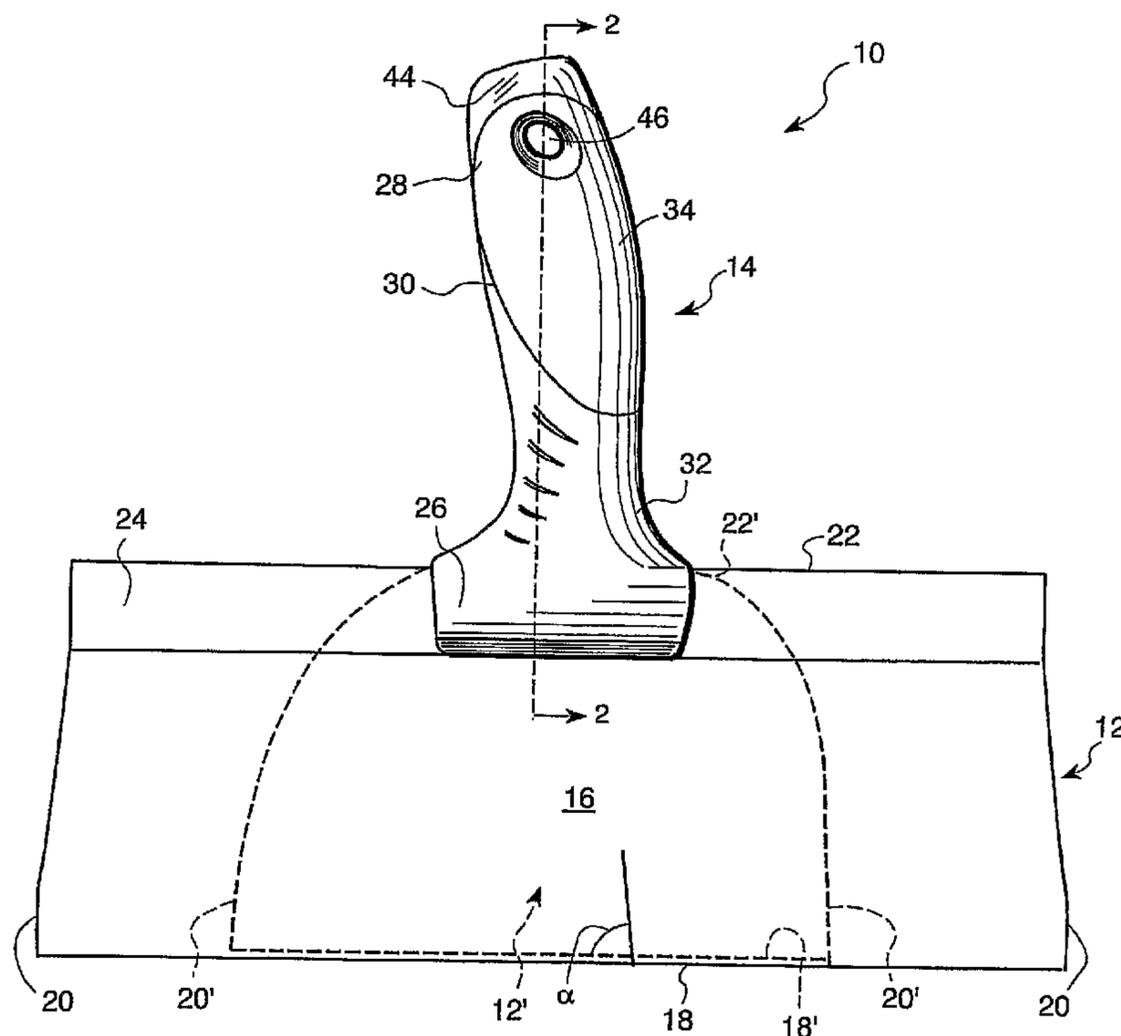

(57) Abrégé/Abstract:

A taping knife has a web, a working edge, two side edges, and a handle edge opposite the working edge. The handle is connected to the blade to have an angular orientation relative to the working edge of the blade such that the handle is neither parallel nor perpendicular to the blade working edge.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 February 2007 (15.02.2007)

PCT

(10) International Publication Number
WO 2007/018704 A1(51) International Patent Classification:
B05C 17/10 (2006.01)(21) International Application Number:
PCT/US2006/021792

(22) International Filing Date: 5 June 2006 (05.06.2006)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
11/187,569 22 July 2005 (22.07.2005) US(71) Applicant: UNITED STATES GYPSUM COMPANY
[US/US]; 125 South Franklin Street, Chicago, IL 60606
(US).(72) Inventors: BRUNO, Robert; 60 Buttonwood Hill Road,
Avon, CT 06001 (US). STERPKA, Frank; 153 Brace
Road, West Hartford, CT 06107 (US). MYERS, Matthew,
Earle; 4693 Haviland Court, Naperville, IL 60564 (US).(74) Agents: JANCI, David, F. et al.; USG CORPORATION,
125 South Franklin Street, Chicago, IL 60606 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE,
SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TAPING KNIFE WITH OFFSET HANDLE

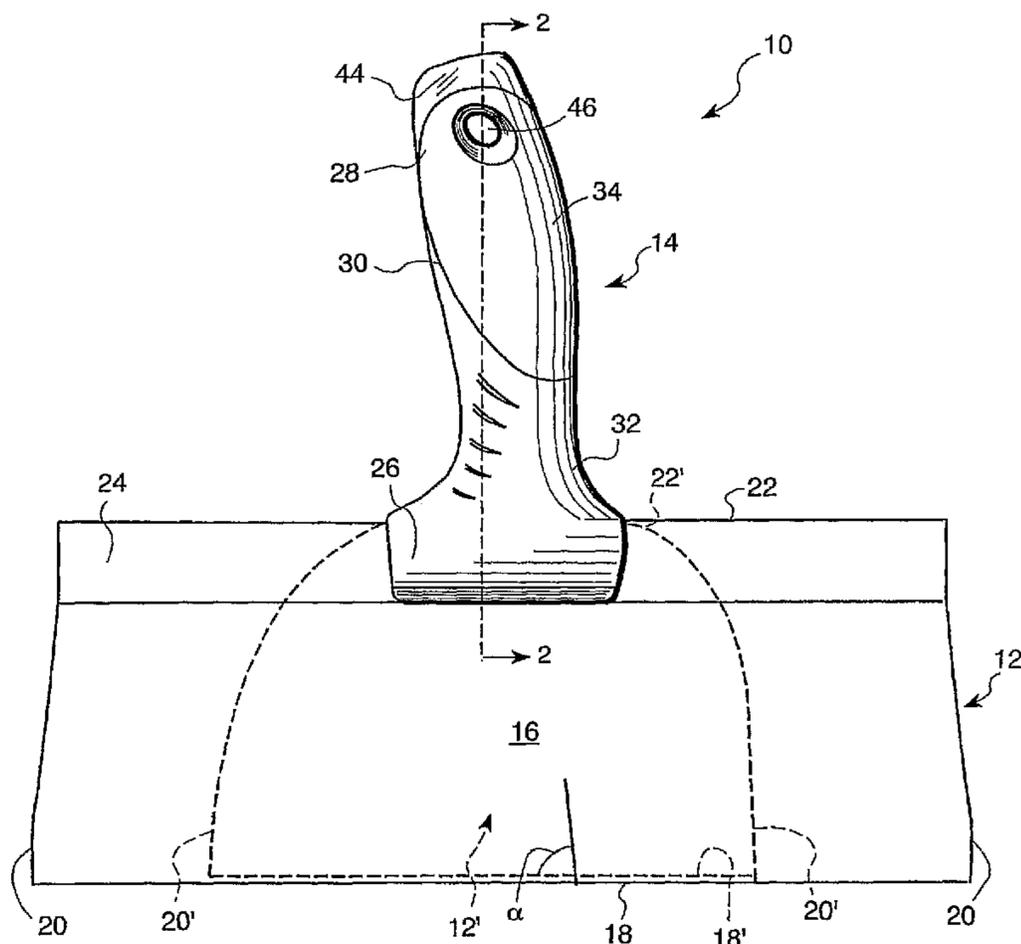

(57) Abstract: A taping knife has a web, a working edge, two side edges, and a handle edge opposite the working edge. The handle is connected to the blade to have an angular orientation relative to the working edge of the blade such that the handle is neither parallel nor perpendicular to the blade working edge.

WO 2007/018704 A1

TAPING KNIFE WITH OFFSET HANDLE

BACKGROUND OF THE INVENTION

The present invention relates generally to hand tools and hand tool
5 handles, and more specifically to taping knives for use in finishing wallboard construction.

Taping knives, which have varying blade widths, are used to finish
drywall or wallboard construction projects and create a smooth surface
between abutting drywall surfaces. In this application, the terms "taping knife"
10 and "taping tool" are considered interchangeable. After drywall boards are secured to the underlying wall supports, a smaller taping knife (e.g. four to six inches) is generally used to apply settable joint compound and drywall tape to the joints formed by the abutting drywall surfaces. At this stage, unseated nails may also be set into wallboard and supporting studs. After the joint
15 compound dries, progressively larger taping knives (e.g. eight to fourteen inches) are used to apply more compound to the joint areas. This step is repeated, with intermittent sanding steps, until the joint is sufficiently flat and smooth.

In the professional world, tools such as these are often used for
20 extended periods of time. Conventional taping knives are frequently designed with ease of manufacturing in mind, rather than ease of use. This design process can produce tools with light weight and hollow handles molded from a hard plastic. Such handles are difficult or uncomfortable to grip adequately and consequently allow the user's hand to slip on the tool, especially when
25 the hand or the knife handle becomes wet.

The handle is generally made to fit comfortably in the hand of an adult male user. Consequently, users with smaller hands may have difficulty maintaining a firm grip on the knife and controlling it as necessary. However, if the handle size of a traditional taping knife were simply reduced, those with
30 average sized hands would no longer be able to properly grip the knife.

Finally, when using conventional taping knives, their configuration requires the hand and wrist to bend at an uncomfortable angle and remain in a prone position for extended periods of time. Moreover, the wrist is forced into a particularly awkward position when using the end of the knife to strike

nails or screws protruding from the wall. Over long periods of time, the awkward grip configuration contributes to fatigue, cramping, and general user discomfort.

Consequently, the construction and home repair and home decorating industries, as well as do-it-yourself workers have long felt the need for a well-designed, durable, professional grade tool that reduces stress and fatigue of the user's hand and arm.

BRIEF SUMMARY OF THE INVENTION

The present taping knife responds to the above identified needs felt by construction, home decorating, and home repair professionals, as well as do-it-yourself workers. The present taping knife has a handle with an angular, non-perpendicular orientation relative to the working edge of the taping knife blade. This angular offset allows the knife to be held in a more comfortable position, reducing stress on the wrist and overall fatigue when using the knife to spread joint compound and joint tape and when using the end of the handle as a hammer. The knife also features a tapered handle to allow those with smaller hands to grip the knife more comfortably while still allowing those with average sized hands to maintain a secure grip. Further, the knife has a relatively soft one-piece outer coating. This coating helps to prevent the users hand from slipping while using the tool, even should the tool become wet. This grip provides another degree of comfort to the user, particularly when the tool is in use for an extended time.

More specifically, the present invention provides a taping knife comprising: a blade having a web, a working edge, two side edges, and a handle edge opposite said working edge; and a handle connected to said blade, said handle having a non-perpendicular, non-parallel, angular orientation relative to said working edge of said blade, said handle having a first side proximal to one of said side edges and a second side proximal to another of said side edges, said first side and said second side each having an arcuate shape, said first side and said second side being non-symmetrical about a central axis passing through said handle, said second side

having a greater radius of curvature than said first side, said handle including a first end and a second end separated by a middle portion, said first end extending laterally along said blade a greater distance from said first side than from said second side, said middle portion including a neck portion adjacent to said first end and a body portion adjacent to said second end, said neck portion defined by opposing concave surfaces and said body portion defined by opposing convex surfaces on said first and second sides, a central portion of said body portion having a width that is greater than a width of said neck portion and an end portion of said body portion adjacent said second end, said handle being arranged at an angle in a range of 3-10° relative to said working edge.

The present invention also provides a tapping knife comprising: a blade having a web, a working edge, two side edges, a handle edge opposite said working edge and a reinforcing backing along the handle edge that extends over a portion of said web of said blade; and a handle connected to said blade, said handle having a non-perpendicular, non-parallel, angular orientation relative to said working edge of said blade, said handle including a first side proximal to one of said side edges, having a first arcuate shape and a second opposing side proximal to another of said side edges, having a second arcuate shape, said first side and said second side being non-symmetrical about a central axis passing through said handle, said second side having a greater radius of curvature than said first side, said handle having a first end and a second end separated by a middle portion, said first end extending laterally along said blade a greater distance from said first side than from said second side, said first end being attachable to said blade to from a moisture-resistant barrier where said handle and said blade are joined and having a length that is substantially the same as a distance said reinforcing backing extends over said web of said blade, said second end including a hammer element made from a relatively harder material, said handle including a neck portion adjacent to said first end and a body portion adjacent to said second end, said neck portion defined by opposing concave surfaces and said body portion defined by opposing convex surfaces on said first and second sides, a central portion of said body portion having a width that is greater than a width of said neck portion and an end portion of said body portion adjacent said second end.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a front view of the preferred embodiment of the present taping knife;

The tool handle 14 includes a first end 26 and a second end 28, separated by a middle portion 30. In addition, the middle portion 30 is further subdivided into a neck portion 32 adjacent to the first end 26, and a body portion 34 adjacent to the second end 28. To complete the general structure of the tool, the handle 14 is preferably attachable to the blade 12 at the center of the handle edge 22.

In the preferred embodiment of the present knife 10, the handle 14 has a generally arcuate shape when viewed from the front or rear. Also, a radial cross section of the handle 14 is substantially elliptical. This overall handle shape is designed to mimic the hand's interior shape, and enhance ergonomic compatibility with the user's hand.

The handle 14 has an angular orientation relative to the working edge 18 meaning, when viewed from the front or rear, the handle 14 is neither perpendicular nor parallel to the working edge 18. An angle α is defined by the offset orientation of the handle 14 relative to the working edge 18. While a variety of angles are contemplated, the preferred angle α varies depending on the width of the blade. For blades that are one to six inches wide, an angular offset for α in the general range of 3° - 10° is preferred, and about 5° from perpendicular is most preferred. However, for wider blades, a larger angular offset α is preferable. Because the handle 14 still attaches to the blade 12 at the center of the handle edge 22, the handle's angular orientation causes the second end 28 to be closer to one of the side edges (20, 20') than to the other.

The first end 26 of the handle 14 is configured to be attachable to the blade 12. In the preferred tool 10, the first end 26 extends over at least a portion of the blade's handle edge 22, and onto the web 16. For blades eight to fourteen inches wide, the first end 26 preferably extends the same distance onto the web as the reinforcing backing 24. For blades one to six inches wide, the first end 26 covers only the portion of the blade 12 adjacent to the handle 14. The extension is preferably formed by injection molding the handle 14 about the blade 12 so that the plastic forms over the handle edge 22.

Also, in the preferred embodiment for all blade sizes, the first end 26 flares laterally outward. This flare causes the first end 26 to be wider than both the neck portion 32 and the body portion 34 of the handle. However, the amount of flare may vary with the width of the blade 12.

5 As is best seen in FIG. 2, the preferred knife 10 has a first end 26 that includes two lips 36 that narrow in thickness from the second end 28 to the first end 26. An advantage of this configuration is that these lips 36 provide a smooth transition from the handle 14 to the blade 12, and help provide a more comfortable grip for the user.

10 Another advantage of the configuration of the first end 26 is that it creates a moisture-resistant barrier around a joint 38. This barrier helps prevent water and joint compound from seeping into the joint 38 between the blade 12 and the handle 14. Retention of water, joint compound and the like around the joint 38 is known to lead to corrosion and an eventual weakening
15 of the blade 12 at that point. Thus, it is desirable to prevent as much seepage as possible in the preferred embodiment.

The middle portion 30 of the handle 14 is made up of an inner core 40 and an outer coating 42. In the preferred embodiment, the inner core 40 is made from a relatively hard material, for example a well-known hard
20 thermoplastic material such as polypropylene, polyolefin, or glass filled nylon. Other materials with the desired characteristics of environmental resistance, durability, affordability, and strength are contemplated as well. A solid inner core portion may be overmolded with at least one layer of plastic material to form the inner core 40. However, it is also contemplated that the handle 14 is
25 made of two mating hollow halves fastened to a blade shank, as is well known in the art.

Next, the inner core 40 is surrounded by a softer, more resilient outer coating 42 which makes the tool both easier to hold onto and more comfortable to grip. The softer outer coating 42 is preferably made from any
30 well-known soft, rubber-like thermoplastic material such as santoprene SEBS or polystyrene. These materials are preferred, but other embodiments could utilize various other plastics and rubbers in their construction to provide a resilient grip.

Returning to FIG. 1, the middle portion 30 of the handle 14 is designed for comfort when gripping the knife 10. While the body portion 34 remains wide to provide a grip for average-sized hands, the neck portion 32 tapers inward so that the radial cross-section of the neck portion has the same
5 general shape as that of the body portion, but is smaller in area. The tapered neck portion 32 also allows users with smaller hands to maintain a comfortable grip on the knife 10, and allows for enhanced control of the knife.

In the preferred knife 10, the second end 28 of the handle 14 is provided with a hammer element 44, preferably formed from a relatively
10 harder material to function as a hammer. The hammer element 44 is preferably formed from a metal, but may be made of any material that is hard enough to withstand repeated strikes against a nail or screw head. During manufacturing of the knife 10, the hammer element 44 is either and secured after the handle 14 has been formed, or the handle is molded around the
15 hammer element. The angular orientation of the handle 14 makes the hammer element 44 on the second end 28 easier and more comfortable to use.

In addition, the body portion 34 is provided with a hanger opening 46 to be used for hanging the tool from a hook, peg, or other apparatus when not in
20 use. This opening 46 preferably extends generally radially through the body portion 34 and perpendicular to the plane described by the blade 12. This configuration will allow for most efficient storage when hanging the tool on a wall.

While a particular embodiment of the present tapping knife has been
25 described herein, it will be appreciated by those skilled in the art that changes and modifications may be made thereto without departing from the invention in its broader aspects and as set forth in the following claims.

What is claimed is:

1. A taping knife comprising:

a blade having a web, a working edge, two side edges, and a handle edge opposite said working edge; and

a handle connected to said blade, said handle having a non-perpendicular, non-parallel, angular orientation relative to said working edge of said blade, said handle having a first side proximal to one of said side edges and a second side proximal to another of said side edges, said first side and said second side each having an arcuate shape, said first side and said second side being non-symmetrical about a central axis passing through said handle, said second side having a greater radius of curvature than said first side, said handle including a first end and a second end separated by a middle portion, said first end extending laterally along said blade a greater distance from said first side than from said second side, said middle portion including a neck portion adjacent to said first end and a body portion adjacent to said second end, said neck portion defined by opposing concave surfaces and said body portion defined by opposing convex surfaces on said first and second sides, a central portion of said body portion having a width that is greater than a width of said neck portion and an end portion of said body portion adjacent said second end, said handle being arranged at an angle in a range of 3-10° relative to said working edge.

2. The knife according to claim 1, wherein said second end of said handle is nearer to one side edge of said blade than to said other side edge of said blade.

3. The knife according to claim 1, wherein said first end includes two lips narrowing in thickness progressing from said second end to said first end.

4. The knife according to claim 1, wherein said second end is provided with a hammer element made from a relatively harder material.

5. The knife according to claim 1, wherein said handle is provided with a hanger opening to be used for hanging the tool.

6. The knife according to claim 5, wherein said hanger opening extends generally radially through said handle.

7. The knife according to claim 1, wherein said handle has an inner core made from a relatively strong, hard material to provide structural integrity to the tool, and a relatively softer outer coating applied over said inner core for facilitating gripping.

8. The knife according to claim 7, wherein said inner core is made of a relatively hard plastic, and said outer coating is made of a relatively softer plastic.

9. The knife according to claim 1, wherein said neck portion tapers so that a radial cross-section of said neck portion has a smaller area than a radial cross section of said body portion.

10. The knife according to claim 1, wherein said first end is attachable to said blade to form a moisture-resistant barrier where said handle and said blade are joined.


11. The knife according to claim 1, wherein said first end flares laterally outward such that said first end is wider than said neck portion and said body portion.

12. The knife according to claim 1, wherein said blade maintains a generally uniform thickness across all portions of the blade.

13. The knife according to claim 1, wherein said handle is attachable to said blade along said handle edge.

14. A taping knife comprising:
a blade having a web, a working edge, two side edges, a handle edge opposite said working edge and a reinforcing backing along the handle edge that extends over a portion of said web of said blade; and

a handle connected to said blade, said handle having a non-perpendicular, non-parallel, angular orientation relative to said working edge of said blade, said handle including a first side proximal to one of said side edges, having a first arcuate shape and a second opposing side proximal to another of said side edges, having a second arcuate shape, said first side and said second side being non-symmetrical about a central axis passing through said handle, said second side having a greater radius of curvature than said first side, said handle having a first end and a second end separated by a middle portion, said first end extending laterally along said blade a greater distance from said first side than from said second side, said first end being attachable to said blade to from a moisture-resistant barrier where said handle and said blade are joined and having a length that is substantially the same as a distance said reinforcing backing extends over said web of said blade, said second end including a hammer element made from a relatively harder material, said handle including a neck portion adjacent to said first end and a body portion adjacent to said second end, said neck portion defined by opposing concave surfaces and said body portion defined by opposing convex surfaces on said first and second sides, a central portion of said body portion having a width that is greater than a width of said neck portion and an end portion of said body portion adjacent said second end.

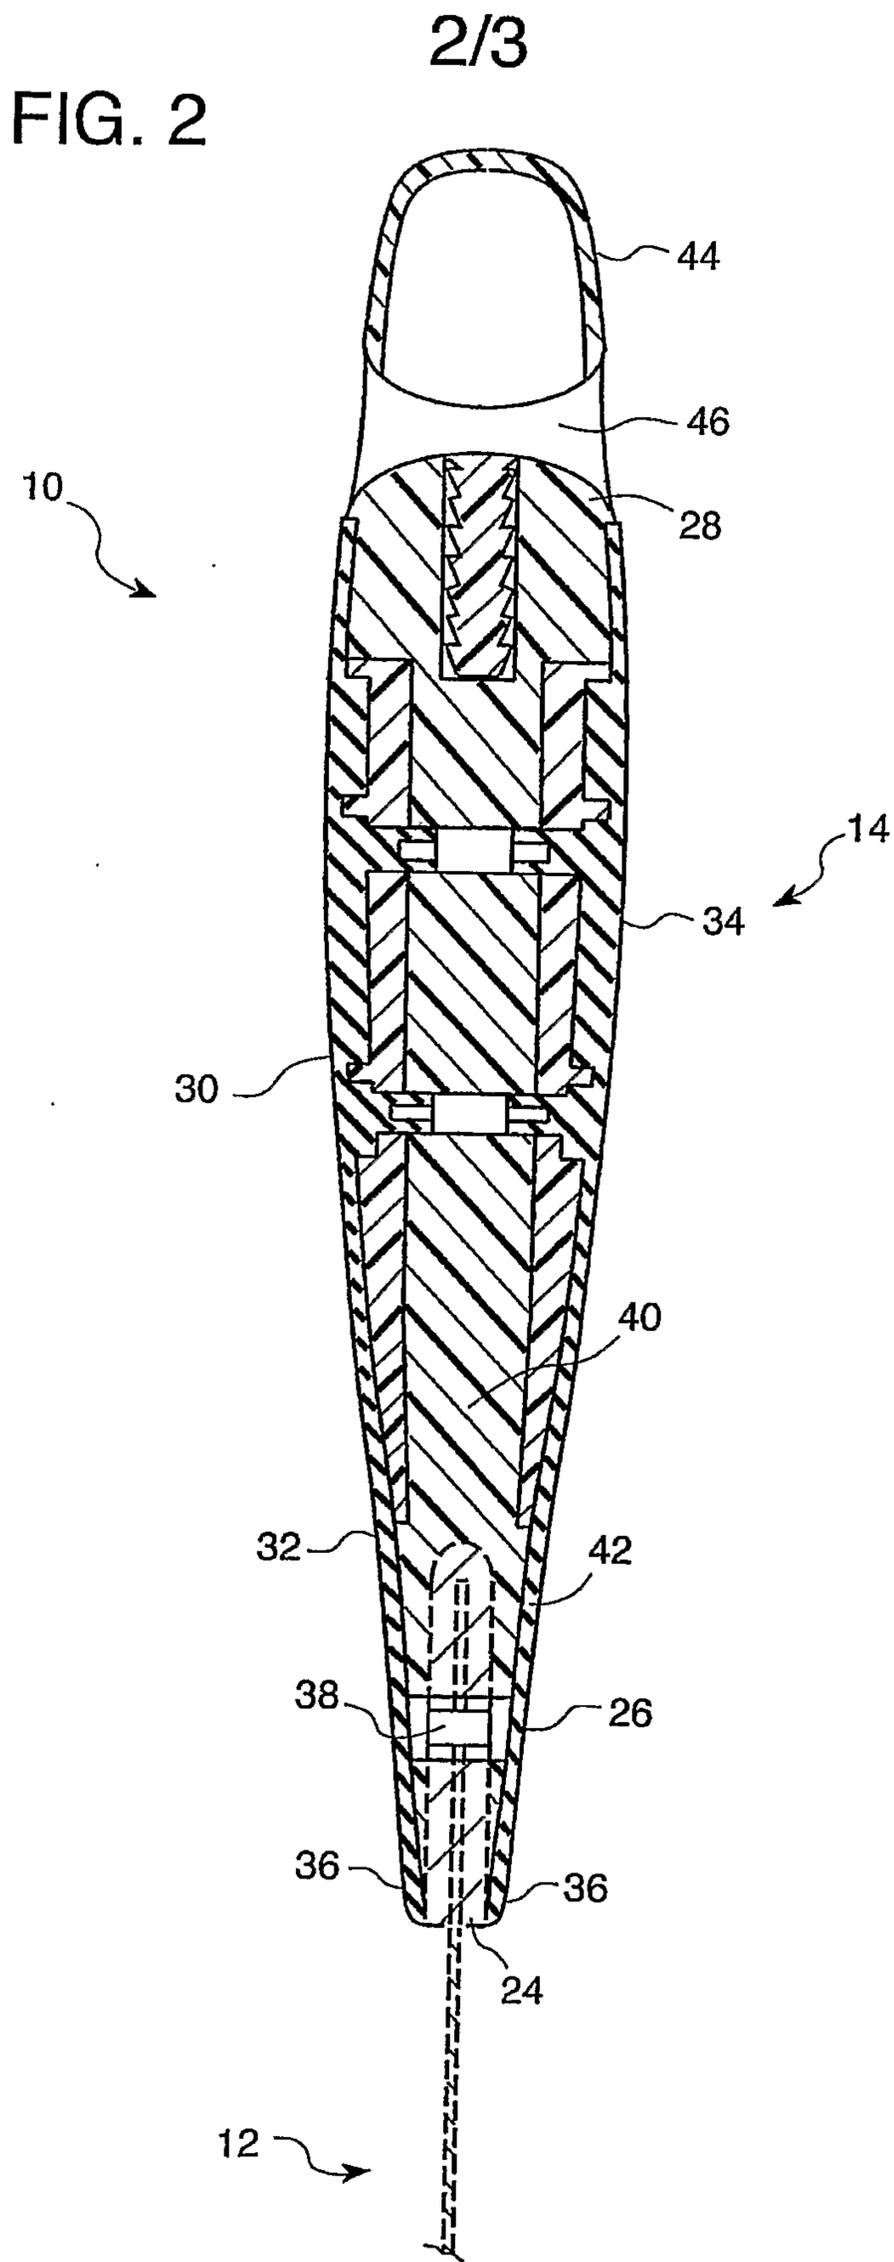

3/3

FIG. 3

