



- (51) International Patent Classification:
B23C 5/20 (2006.01) *B23C 5/22* (2006.01)
B23C 5/06 (2006.01)
- (21) International Application Number:
PCT/IL2014/051093
- (22) International Filing Date:
15 December 2014 (15.12.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/151,629 9 January 2014 (09.01.2014) US
- (71) Applicant: ISCAR LTD. [IL/IL]; P.O. Box 11, 24959 Tefen (IL).
- (72) Inventors: KOIFMAN, Alexander; 27 Ela Street, 25147 Kfar Vradim (IL). BRONSHTEYN, Alexander; 13 Hazamir Street, 22260 Nahariya (IL). PASSOV, Alexander; 13/25 Etzel Street, 35843 Haifa (IL). KUNITSA, Yanina; 116 Nesher Street, 2171009 Carmiel (IL).
- (74) Agents: EALE, Shirley et al.; ISCAR PATENT DEPARTMENT, P.O. Box 11, 24959 Tefen (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: DOUBLE-SIDED INDEXABLE CUTTING INSERT AND CUTTING TOOL THEREFOR

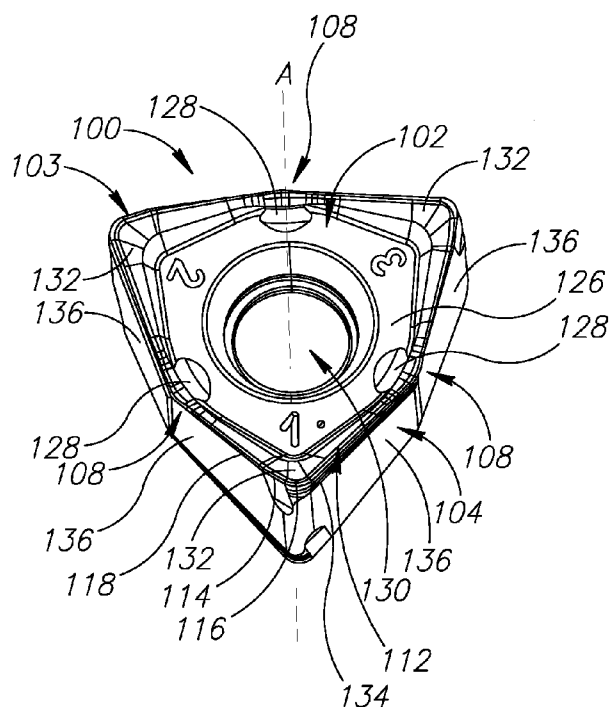


FIG. 9

(57) Abstract: A cutting insert (100) having two end surfaces (102) and a peripheral surface (104), the end surfaces (102) located on opposite sides of a mid-plane (P), each end surface (102) having three primary apices (106) and three secondary apices (108). Six cutting portions (110) are formed along the intersection of the peripheral surface (104) and the end surfaces (102). Each cutting portion (110) has a first cutting edge (112) and a second cutting edge (114) extending transversely thereto. A ramping cutting edge (118) extends between the second cutting edge (114) of each cutting portion (110) and the first cutting edge (112) of an adjacent cutting portion (110). The peripheral surface (104) has a clearance surface (120) extending from each of the second cutting edges (114) towards the mid-plane (P). The abutment planes (AP) of the insert (100) are parallel to the mid-plane (P). Each of the first cutting edges (112) lies between an adjacent abutment plane (AP) and adjacent primary apex (106).

WO 2015/104703 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

DOUBLE-SIDED INDEXABLE CUTTING INSERT AND CUTTING TOOL THEREFOR

FIELD OF THE INVENTION

The present invention relates to indexable cutting inserts and cutting tools therefor, in general, and to double-sided indexable cutting inserts with six cutting portions and cutting tools therefor, in particular.

BACKGROUND OF THE INVENTION

Metal cutting tools such as milling cutters, slotting cutters and saws have a plurality of cutting inserts retained on the peripheral surface of the tool body. The cutting inserts may have multiple cutting edges, and each insert may be reversible (i.e., double-sided) and indexable to use another cutting edge when a certain cutting edge is worn or damaged. The indexable cutting inserts may have a plurality of cutting corners on each side of the insert, adapted for cutting metal at predetermined positioning.

The cutting tool body has respective insert retaining pockets suitable for receiving the cutting inserts, and retaining them during metal cutting operations. Cutting inserts and cutting tools as described above are shown, for example, in US3229349, US4880338, US7455483, US8177460, WO2009/121459, WO2012/147924 and WO2012/147923.

It is an object of the present invention to provide a novel double sided indexable cutting insert and cutting tool, for milling operations, where the cutting insert having six cutting portions.

SUMMARY OF THE INVENTION

In accordance with the subject matter of the present application, there is provided a double sided indexable cutting insert having a central insert axis extending perpendicular to an insert mid-plane, and comprising:

two end surfaces and a peripheral surface extending therebetween, the end surfaces located on opposite sides of the mid-plane, each end surface having three primary apices and three secondary apices; and

six cutting portions, each formed along the intersection of the peripheral surface and one of the end surfaces at each primary apex, each cutting portion comprising a first cutting edge and a second cutting edge extending transversely to the first cutting edge, and a tip cutting edge extending therebetween;

wherein:

the peripheral surface has a plurality of clearance surfaces, each extending from one of the second cutting edges in the direction of the mid-plane,

each of the first cutting edges has a major portion extending from the respective tip cutting edge towards the mid-plane, and a curved portion extending from the major portion and curving away from the mid-plane,

each end surface has an insert abutment surface on an abutment plane, the abutment planes being parallel to the mid-plane and equidistant therefrom, and

each of the curved portions lies between an adjacent abutment plane and an adjacent primary apex, in a direction along the central insert axis.

In accordance with the subject matter of the present application, there is also provided a cutting tool having a rotation axis, and comprising:

a tool body having a plurality of insert pockets formed on the periphery thereof arranged symmetrically about the rotation axis; and

a plurality of cutting inserts as described above, retained in the insert pockets;

wherein:

the peripheral surface of each cutting insert has a plurality of side flanks, each extending between a pair of primary apexes located on opposite sides of the mid-plane, and an adjacent pair of secondary apexes located on opposite sides of the mid-plane, and

each insert pocket comprises a pocket abutment surface and a plurality of clamping walls extending transversely to the pocket abutment surface; and

wherein

for each cutting insert retained in a respective insert pocket the side flanks of the cutting insert abut respective clamping walls of the insert pocket, and one of the insert abutment surfaces abuts the pocket abutment surface.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention and to show how the same may be carried out in practice, reference will now be made to the accompanying drawings, in which:

Fig. 1 is a perspective view of a cutting tool according to an embodiment of the present invention;

Fig. 2 is a perspective view of the cutting tool of Figure 1, partially disassembled;

Fig. 3 is a side view of the cutting tool of Figure 1;

Fig. 4 is a bottom view of the cutting tool of Figure 1;

Fig. 5 is an enlarged view of a portion of the cutting tool of Figure 1;

Fig. 6 is an enlarged front view of an insert pocket of the cutting tool of Figure 1;

Fig. 7 is an enlarged perspective view of the insert pocket of Figure 6;

Fig. 8 is an end view of a cutting insert according to an embodiment of the present invention;

Fig. 9 is a first perspective view of the cutting insert of Figure 8;

Fig. 10 is a second perspective view of the cutting insert of Figure 8;

Fig. 11 is a first side view of the cutting insert of Figure 8;

Fig. 12 is a second side view of the cutting insert of Figure 8;

Fig. 13 is a cross section of the cutting insert of Figure 8 taken along the line XIII-XIII;
and

Fig. 14 is an enlarged view of a portion of the cutting insert of Figure 8.

It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity, or several physical components may be included in one functional block or element. Further, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

DETAILED DESCRIPTION OF THE INVENTION

In the following description, various aspects of the present invention will be described. For purposes of explanation, specific configurations and details are set forth in order to provide a thorough understanding of the present invention. However, it will also be apparent to one skilled in the art that the present invention may be practiced without the specific details presented herein. Furthermore, well-known features may be omitted or simplified in order not to obscure the present invention.

Reference is now made to Figures 1-4, depicting a cutting tool **150** according to an embodiment of the present invention. The cutting tool **150** has a tool body **152** with a rotation axis **R**. The tool body **152** has a plurality of insert pockets **154** formed on the periphery thereof, the insert pockets **154** are arranged symmetrically about the rotation axis **R**. A plurality of cutting inserts **100** in accordance with the present invention, are retained in the insert pockets **154**. Each cutting insert **100** is fastened to the respective insert pocket **154** with a clamping member **164** that passes through a clamping hole **130** in the cutting insert **100** and through a fastening hole **162** in the insert pocket **154**.

With further reference to Figures 5-7, each insert pocket **154** has a pocket abutment surface **156** and a plurality of clamping walls **158** extending transversely to the pocket abutment surface **156**. The fastening hole **162** extends transversely to the pocket abutment surface **156** and opens out thereto.

Reference is further made to Figures 8-14, depicting various views of the cutting insert **100** according to an embodiment of the present invention. The cutting insert **100** is a double sided indexable cutting insert **100** having a central insert axis **A**, and an insert mid-plane **P**, extending perpendicular to the insert axis **A**. The cutting insert **100** comprises two end surfaces **102** and a peripheral surface **104** extending therebetween. The intersection of the peripheral surface **104** with each of the two end surfaces **102**, forms a pair of peripheral edges **103**. The end surfaces **102** are located on opposite sides of the mid-plane **P** and rotationally symmetric to one another about the bisector **B** extending along the mid-plane **P**. Each end surface **102** has a trigon shape, with three primary apexes **106** and three secondary apexes **108**, arranged alternately. The clamping hole **130** extends along the insert axis **A**, and opens out at

least to one of the end surfaces **102**. In the embodiment shown in the Figures, the clamping hole **130** is a through hole, opening out to both of the end surfaces **102**.

The peripheral edges **103** of the cutting insert **100** define six cutting portions **110**, each formed between the peripheral surface **104** and one of the end surfaces **102** at one of its primary apexes **106**. Each cutting portion **110** comprises a first cutting edge **112** and a second cutting edge **114** extending transversely to the first cutting edge **112**. A tip cutting edge **116** (i.e., corner cutting edge), corresponding to the primary apex **106**, extends between the first and second cutting edges **112**, **114**, connecting the two edges. A ramping cutting edge **118** extends between the second cutting edge **114** of each cutting portion **110** and the first cutting edge **112** of an adjacent cutting portion **110**.

The peripheral surface **104** has a plurality of clearance surfaces **120**, each extending from one of the second cutting edges **114** in the direction of the mid-plane **P**. The clearance surfaces **120** typically terminate prior to the mid-plane **P**. Thus, each second cutting edge **114** is indented inwards from the peripheral surface **104**. The peripheral surface **104** also has a plurality of relief surfaces **134**, each extending along one of the cutting portions **110**. Each relief surface **134** extends along the respective first cutting edge **112** and the tip cutting edge **116** towards the mid-plane **P**.

The peripheral surface **104** has six side flanks **136** formed thereon. Each side flank **136** extends between a pair of primary apexes **106** located on opposite sides of the mid-plane **P**, and an adjacent pair of secondary apexes **108** located on opposite sides of the mid-plane **P**. The side flanks **136** are planar and parallel to the insert axis **A**. At each primary apex **106**, each pair of adjacent side flanks **136** forms a first acute angle α therebetween. This is indicated, for example, in the top view of Figure 8. In some embodiments, the first acute angle α is in the range of 82° - 86° , and in a particular embodiment, the first acute angle α is an 84° angle.

Each of the first cutting edges **112** has a major portion **122** extending from the respective tip cutting edge **116** towards the mid-plane **P**. In the embodiment shown in the accompanying figures, the major portion **122** extends substantially perpendicular to the second cutting edge **114** of the same cutting portion **110**, enabling metal cutting of a substantially perpendicular corner in a work piece. Typically, the major portion **122** may lie at an angle of between 89° - 91° to the second cutting edge **114** of the same cutting portion **110**, e.g., due to manufacturing tolerances. In the embodiment shown in the Figures, the major portion **122** of the

first cutting edge **112** is longer than the second cutting edge **114**. In some embodiments the major portion **122** of the first cutting edge **112** may be constructed as a linear cutting edge. A curved portion **124** extends from the major portion **122**, curving away from the mid-plane **P**. The ramping cutting edge **118** extends from the second cutting edge **114** of each cutting portion **110** towards the curved portion **124** of another cutting portion **110**.

Figure 11 depicts a side view of the cutting insert **100** taken along the mid-plane **P** and along a bisector **B** passing through one of the secondary apexes **108** and one of the primary apexes **106** (see Figure 8), and viewed from the secondary apex **108**. In this view, the major portion **122** of each of the first cutting edges **112** forms a second acute angle β with the mid-plane **P**. In some embodiments, the second acute angle β is in the range of 11° - 14° , and in a particular embodiment, the second acute angle β is a 13° angle. As further shown in this side view, the ramping cutting edge **118** forms a third acute angle γ with the mid-plane **P**. The third acute angle γ is similar to the second acute angle β . In some embodiments, the third acute angle γ is in the range of 11° - 14° , and in a particular embodiment, the third acute angle γ is a 13° angle. In addition, Figure 12 depicts another side view of the cutting insert **100** taken along the mid-plane **P** and along a bisector **B**, viewed from the primary apex **106**.

The ramping cutting edge **118** is operative during ramping operations on a metal work piece (e.g., ramp milling, helical interpolation, circular ramping, etc.), when the cutting tool **150** progresses along the rotation axis **R** (i.e., in the longitudinal direction, possibly in combination with other directions). The side flanks **136** thus place the respective ramping cutting edge **118** at a first acute angle α relative to the major portion **122** of the respective first cutting edge **112**. In this manner, when the cutting insert **100** is engaged in a ramping operation, the ramping cutting edge **118** has sufficient clearance to cut metal chips from the surface of the work piece. This allows the cutting insert **100** to perform ramping operations on the metal work piece involving the ramping cutting edge **118**, which would not have been possible if the angle α had been a non-acute angle. It would be appreciated that in non-ramping milling operations (e.g., face milling, shoulder milling, end milling, profile milling, turn milling, etc.), the ramping cutting edge **118** is non-operative, kept away from the work piece.

Each end surface **102** has an insert abutment surface **126** for abutting against the pocket abutment surface **156** of the insert pocket **154**. Each insert abutment surface **126** has a respective abutment plane **AP**. The abutment planes **AP** of the insert abutment surfaces **126** are parallel to

the mid-plane **P** and equidistant therefrom. Each abutment plane **AP** is located at a first distance **D1** from the mid-plane **P** (see Figure 11). As shown in particular in Figures 11 and 14, each abutment plane **AP** lies between the mid-plane **P** and the curved portions **124** of the respective first cutting edges **112**, i.e., the first cutting edges **112** which are located on the same side of the mid-plane **P** as the abutment plane **AP**. In the embodiment shown, the entirety of each peripheral edge **103** is further from the mid-plane **P** than the abutment plane **AP** on the associated, respective side of the mid-plane **P**. Thus, it would be appreciated that the extension of the first cutting edge **112** turns away from the mid-plane **P** and the respective abutment plane **AP**, and does not intersect with the abutment plane **AP**. In other words, each of the curved portions **124** (and thus the entire first cutting edge **112**), lies between an adjacent abutment plane **AP** and an adjacent primary apex **106**, in a direction parallel to the central insert axis **A**.

At points farthest from mid-plane **P**, the primary apexes **106** on each end surface **102** define a tip plane **TP** which is parallel to an associated adjacent abutment plane **AP** and spaced apart therefrom by a second distance **D2**. At points closest to the mid-plane **P**, the secondary apexes **108** on each end surface **102** define a corner plane **CP** which is parallel to an associated adjacent abutment plane **AP** and spaced apart therefrom by a third distance **D3**, with the third distance **D3** being smaller than the second distance **D2** (i.e., $D3 < D2$). The tip plane **TP** and the corner plane **CP** are both on the same side of their associated abutment plane **AP**. A ratio between the third distance **D3** and the second distance **D2** (i.e., $D3:D2$), is between 0.04 and 0.1. In a particularly preferred embodiment, the ratio **D3:D2** is about 0.06.

Figure 13 depicts a cross section view of the cutting insert **100** taken along the cutting line XIII-XIII noted in Figure 8, passing through one of the primary apexes **106** and the opposite secondary apex **108**. Each end surface **102** has three spaced apart abutment recesses **128**, each formed adjacent to one of the secondary apexes **108**, between the secondary apex **108** and the insert axis **A** (i.e., arranged symmetrically about the insert axis **A**).

Each cutting portion **110** of the cutting insert **100** includes a rake surface **132** extending along the respective first, second, tip and ramping cutting edges **112**, **114**, **116**, **118**, and sloping obliquely towards the mid-plane **P**. The rake surface **132** is the surface over which the chips removed from the work piece slide. In particular, the rake surface **132** extends along the major portion **122** and the curved portion **124** of the first cutting edge **112**, as well as along the ramping cutting edge **118** of the same cutting portion **110**. Each abutment recesses **128** is located

adjacent a respective curved portion **124**, allowing metal chips removed by the curved portion **124**, to flow thereon, thereby enabling better chip flow of the cutting portion **110**.

The cutting insert **100** is retained in the respective insert pocket **154**, with the insert abutment surface **126** abutting against (i.e., received by) the pocket abutment surface **156**. The side flanks **136** of the cutting insert **100** abut against (i.e., received by) the clamping walls **158** of the insert pocket **154**. The clamping walls **158** may be planar surfaces forming an acute angle with the plane of the pocket abutment surface **156**. This would ensure contact with the side flanks **136** of the cutting insert **100** in a predetermined desired location.

In order to ensure a tight abutment between the insert abutment surface **126** and the pocket abutment surface **156**, each pocket abutment surface **156** has three spaced apart pocket recesses **160** formed therein, spaced apart from the fastening hole **162**. As seen in figure 6, the pocket recesses **160** are also spaced from an exterior peripheral surface **153** of the tool body **152**. When the cutting insert **100** is placed in the insert pocket **154**, each pocket recess **160** overlaps, at least partially, with one of the abutment recesses **128** of the cutting insert **100**. This recess-to-recess overlap positioning forms three voids, resulting in three separate abutment regions between the insert abutment surface **126** and the pocket abutment surface **156**, ensuring tight abutment therebetween.

As depicted in Figures 1, 3 and 5, when the cutting insert **100** is mounted in the insert pocket **154**, one of the cutting portions **110** (i.e., the operative cutting portion **110**) extends outwards of the circumference of the tool body **152**, thus being ready to be employed in a metal cutting operation. A plurality of coolant channels are formed through the tool body **152**, each coolant channel opening out at a coolant outlet **166** towards one of the insert pockets **154**. In this manner, coolant fluid supplied through the coolant channels may be sprayed out towards the operative cutting portion **110**.

While the present invention has been described with reference to one or more specific embodiments, the description is intended to be illustrative as a whole and is not to be construed as limiting the invention to the embodiments shown. It is appreciated that various modifications may occur to those skilled in the art that, while not specifically shown herein, are nevertheless within the scope of the invention.

CLAIMS

1. A double sided indexable cutting insert (100) having a central insert axis (A) extending perpendicular to an insert mid-plane (P), and comprising:
 - two end surfaces (102) and a peripheral surface (104) extending therebetween, the end surfaces (102) located on opposite sides of the mid-plane (P), each end surface (102) having three primary apexes (106) and three secondary apexes (108); and
 - six cutting portions (110), each formed along the intersection of the peripheral surface (104) and one of the end surfaces (102), each cutting portion (110) comprising a first cutting edge (112) and a second cutting edge (114) extending transversely to the first cutting edge (112), and a tip cutting edge (116) extending therebetween at one of the primary apexes (106);
 - wherein:
 - the peripheral surface (104) has a plurality of clearance surfaces (120), each extending from one of the second cutting edges (114) in the direction of the mid-plane (P),
 - each of the first cutting edges (112) has a major portion (122) extending from the respective tip cutting edge (116) towards the mid-plane (P), and a curved portion (124) extending from the major portion (122) and curving away from the mid-plane (P),
 - each end surface (102) has an insert abutment surface (126) on an abutment plane (AP), the abutment planes (AP) being parallel to the mid-plane (P) and equidistant therefrom, and
 - each of the curved portions (124) lies between an adjacent abutment plane (AP) and an adjacent primary apex (106), in a direction parallel to the central insert axis (A).
2. The double sided indexable cutting insert (100) according to claim 1, wherein each of the end surfaces (102) has three abutment recesses (128), each formed adjacent one of the secondary apexes (108), between the secondary apex (108) and the insert axis (A).
3. The double sided indexable cutting insert (100) according to claim 1, wherein the peripheral surface (104) has a plurality of side flanks (136), each extending between a pair of primary apexes (106) located on opposite sides of the mid-plane (P), and an

adjacent pair of secondary apexes (108) located on opposite sides of the mid-plane (P), and at each primary apex (106), each pair of side flanks (136) forms a first acute angle (α) therebetween.

4. The double sided indexable cutting insert (100) according to claim 3, wherein the first acute angle (α) is in the range of 82° - 86° .
5. The double sided indexable cutting insert (100) according to claim 3, wherein the first acute angle (α) is an 84° angle.
6. The double sided indexable cutting insert (100) according to claim 3, wherein the side flanks (136) are planar and parallel to the insert axis (A).
7. The double sided indexable cutting insert (100) according to claim 1, wherein each of the major portions (122) forms a second acute angle (β) with the mid-plane (P), in a side view of the cutting insert (100) taken along the mid-plane (P) and along a bisector (B) and viewed from the secondary apex (108).
8. The double sided indexable cutting insert (100) according to claim 1, wherein each cutting portion (110) further comprises a ramping cutting edge (118) extending from the second cutting edge (114) towards the curved portion (124) of an adjacent cutting portion (110).
9. The double sided indexable cutting insert (100) according to claim 8, wherein the ramping cutting edge (118) forms a third acute angle (γ) with the mid-plane (P) in a side view of the cutting insert (100) taken along the mid-plane (P) and along a bisector (B) and viewed from the secondary apex (108).
10. The double sided indexable cutting insert (100) according to claim 1, wherein in each cutting portion (110), the major portion (122) of the first cutting edge (112) is longer than the second cutting edge (114).

11. The double sided indexable cutting insert (100) according to claim 1, further comprising a clamping hole (130) extending along the insert axis (A), and opening out at least to one of the end surfaces (102).
12. The double sided indexable cutting insert (100) according to claim 11, wherein the clamping hole (130) opens out to both of the end surfaces (102).
13. The double sided indexable cutting insert (100) according to claim 1, wherein each cutting portion (110) includes a rake surface (132) extending along the respective first cutting edge (112), second cutting edge (114), and tip cutting edge (116), obliquely towards the mid-plane (P).
14. The double sided indexable cutting insert (100) according to claim 13, wherein each rake surface (132) also extends along a respective ramping cutting edge (118) extending from the second cutting edge (114) towards the curved portion (124) of an adjacent cutting portion (110).
15. The double sided indexable cutting insert (100) according to claim 1, wherein the peripheral surface (104) has a plurality of relief surfaces (134), each extending along one of the cutting portions (110), from the first cutting edge (112) and the tip cutting edge (116) towards the mid-plane (P).
16. The double sided indexable cutting insert (100) according to claim 1, wherein in each cutting portion (110), the major portion (122) is substantially perpendicular to the second cutting edge (114).
17. A cutting tool (150) having a rotation axis (R), and comprising:
 - a tool body (152) having a plurality of insert pockets (154) formed on the periphery thereof arranged symmetrically about the rotation axis (R); and

a plurality of cutting inserts (100) according to claim 1, retained in the insert pockets (154), wherein:

the peripheral surface (104) of each cutting insert (100) has a plurality of side flanks (136), each extending between a pair of primary apexes (106) located on opposite sides of the mid-plane (P), and an adjacent pair of secondary apexes (108) located on opposite sides of the mid-plane (P), and

each insert pocket (154) comprises a pocket abutment surface (156) and a plurality of clamping walls (158) extending transversely to the pocket abutment surface (156), and wherein

for each cutting insert (100) retained in a respective insert pocket (154) the side flanks (136) of the cutting insert (100) abut respective clamping walls (158) of the insert pocket (154), and one of the insert abutment surfaces (126) abuts the pocket abutment surface (156).

18. The cutting tool (150) according to claim 17, wherein:

each of the end surfaces (102) of the cutting insert (100) has three abutment recesses (128), each formed adjacent one of the secondary apexes (108), between the secondary apex (108) and the insert axis (A), and

each pocket abutment surface (156) has three spaced apart pocket recesses (160) formed therein, each pocket recess (160) at least partially overlapping with one of the abutment recesses (128).

19. The cutting tool (150) according to claim 17, wherein a pocket fastening hole (162) opens out to a pocket abutment surface (156) of each insert pocket (154), and a clamping member (164) passes through a clamping hole (130) of the cutting insert (100) and the fastening hole (162) of the insert pocket (154), to fasten the cutting insert (100) to the insert pocket (154).

20. The cutting tool (150) according to claim 17, wherein a plurality of coolant channels pass through the tool body (152), each coolant channel opening out at a coolant outlet (166) towards one of the insert pockets (154).

1/5

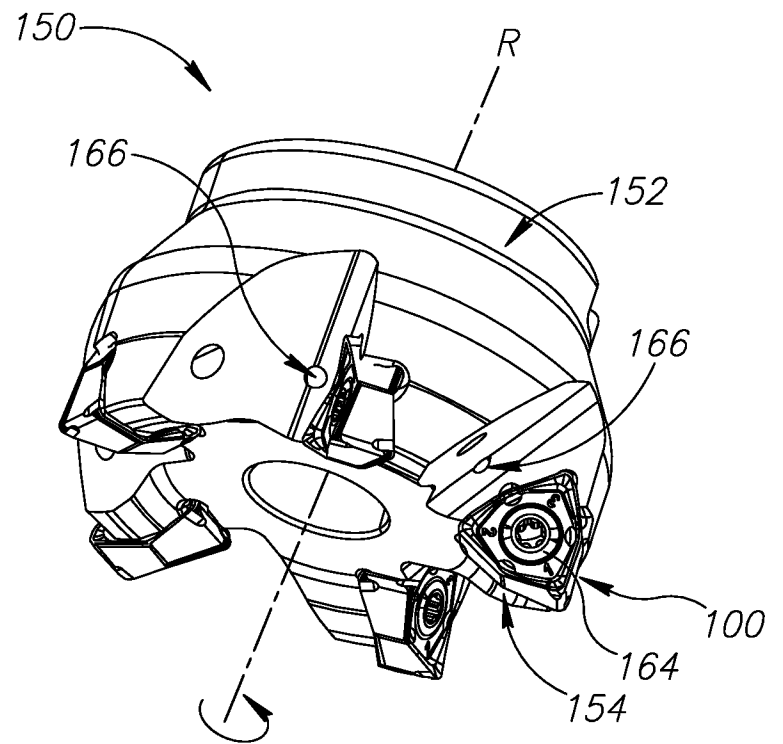


FIG.1

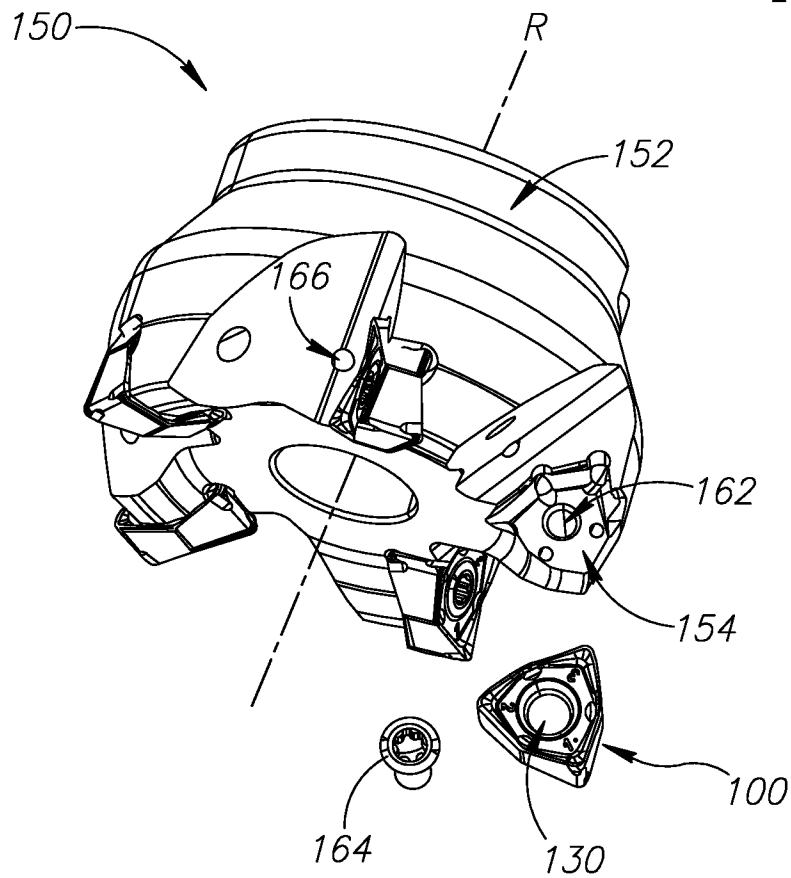


FIG.2

2/5

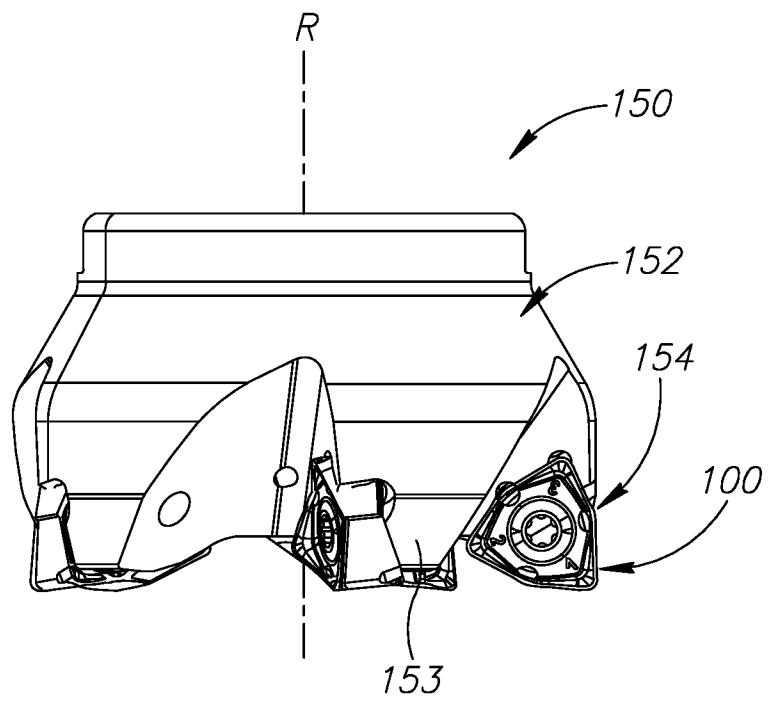


FIG.3

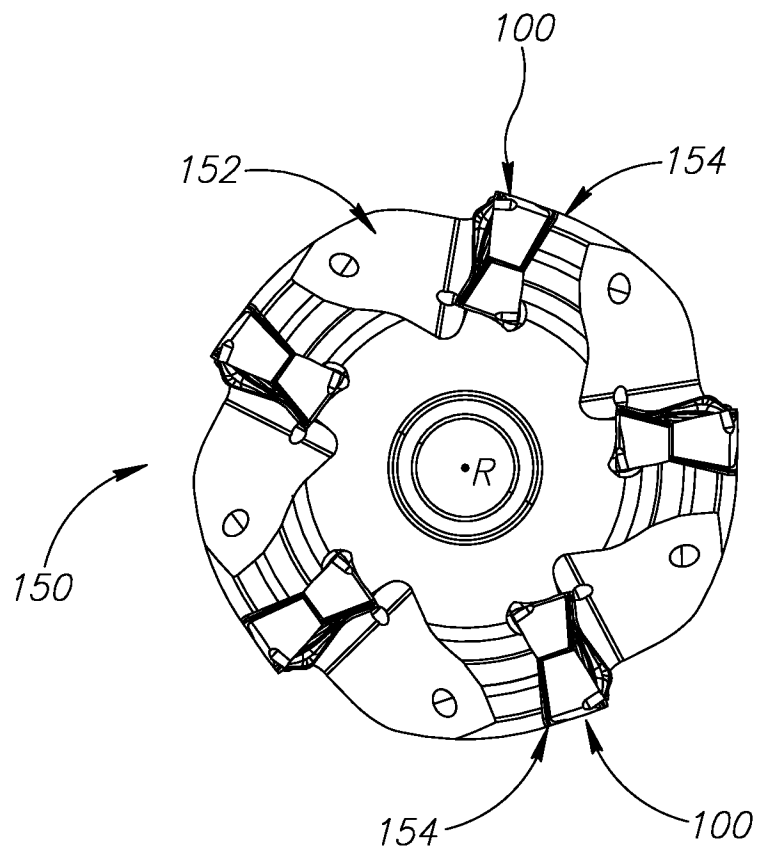


FIG.4

3/5

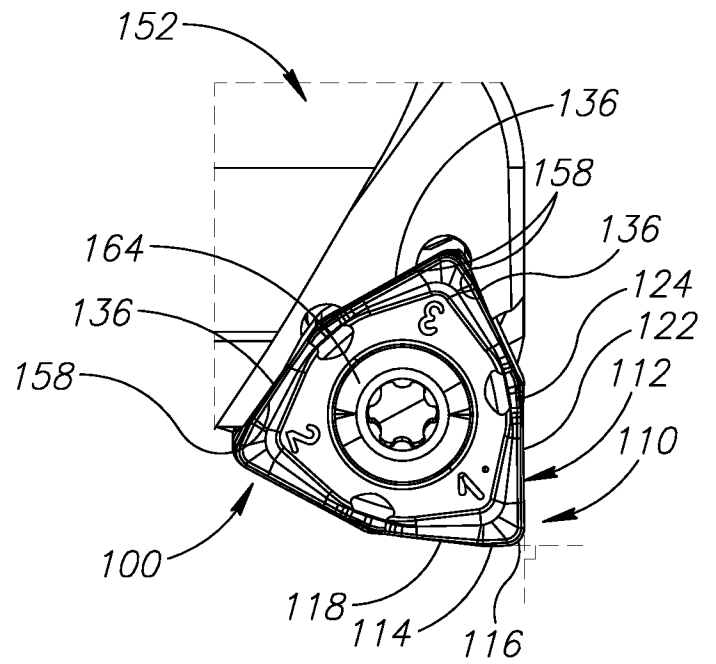


FIG. 5

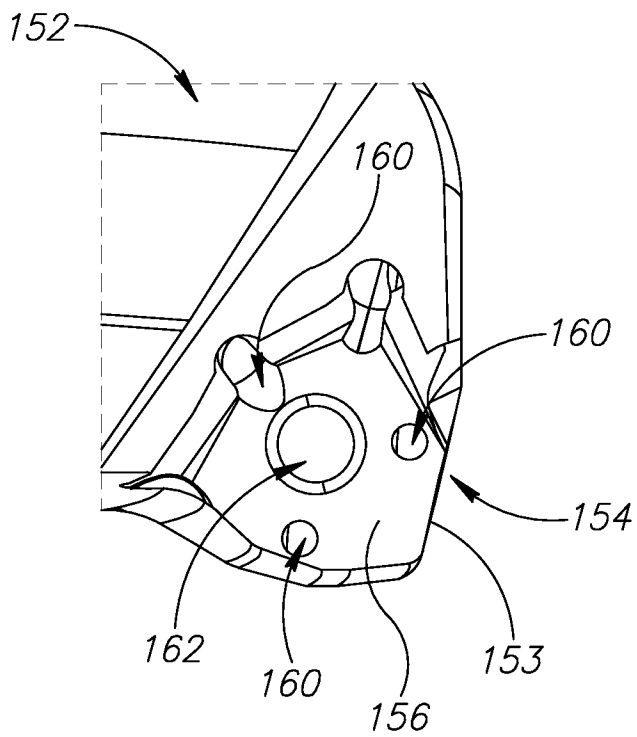


FIG. 6



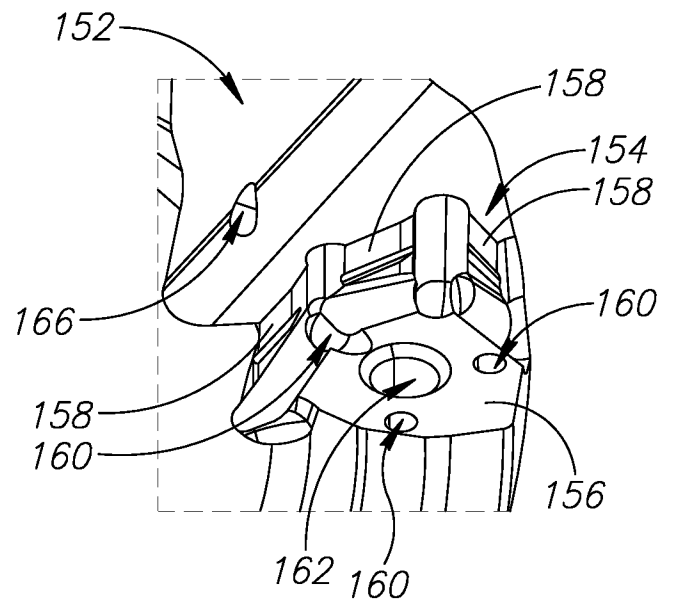


FIG. 7

4/5

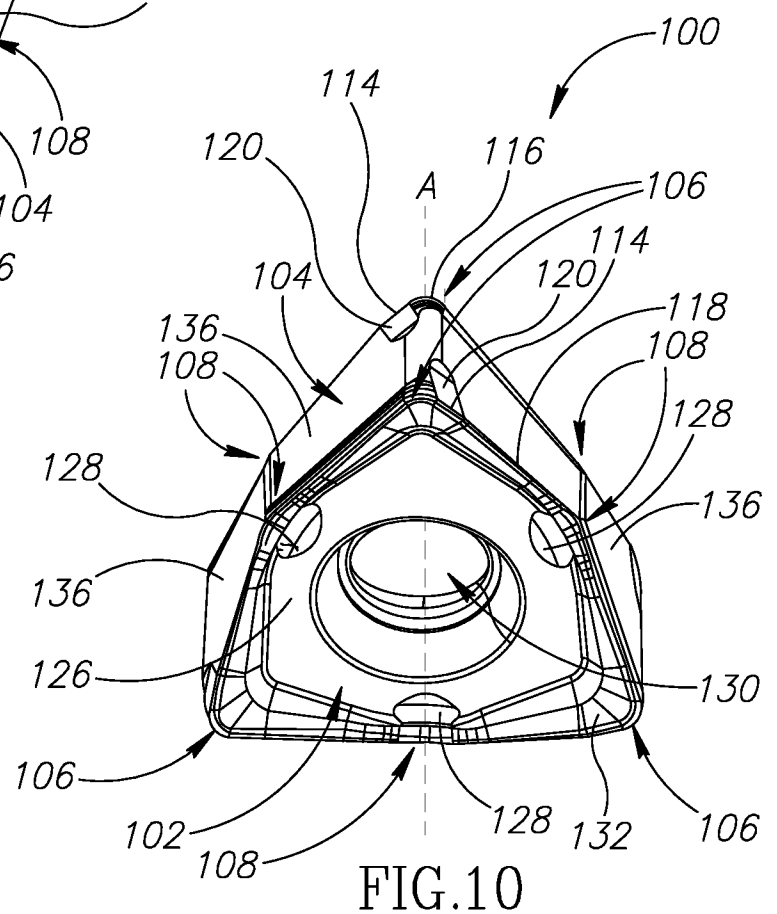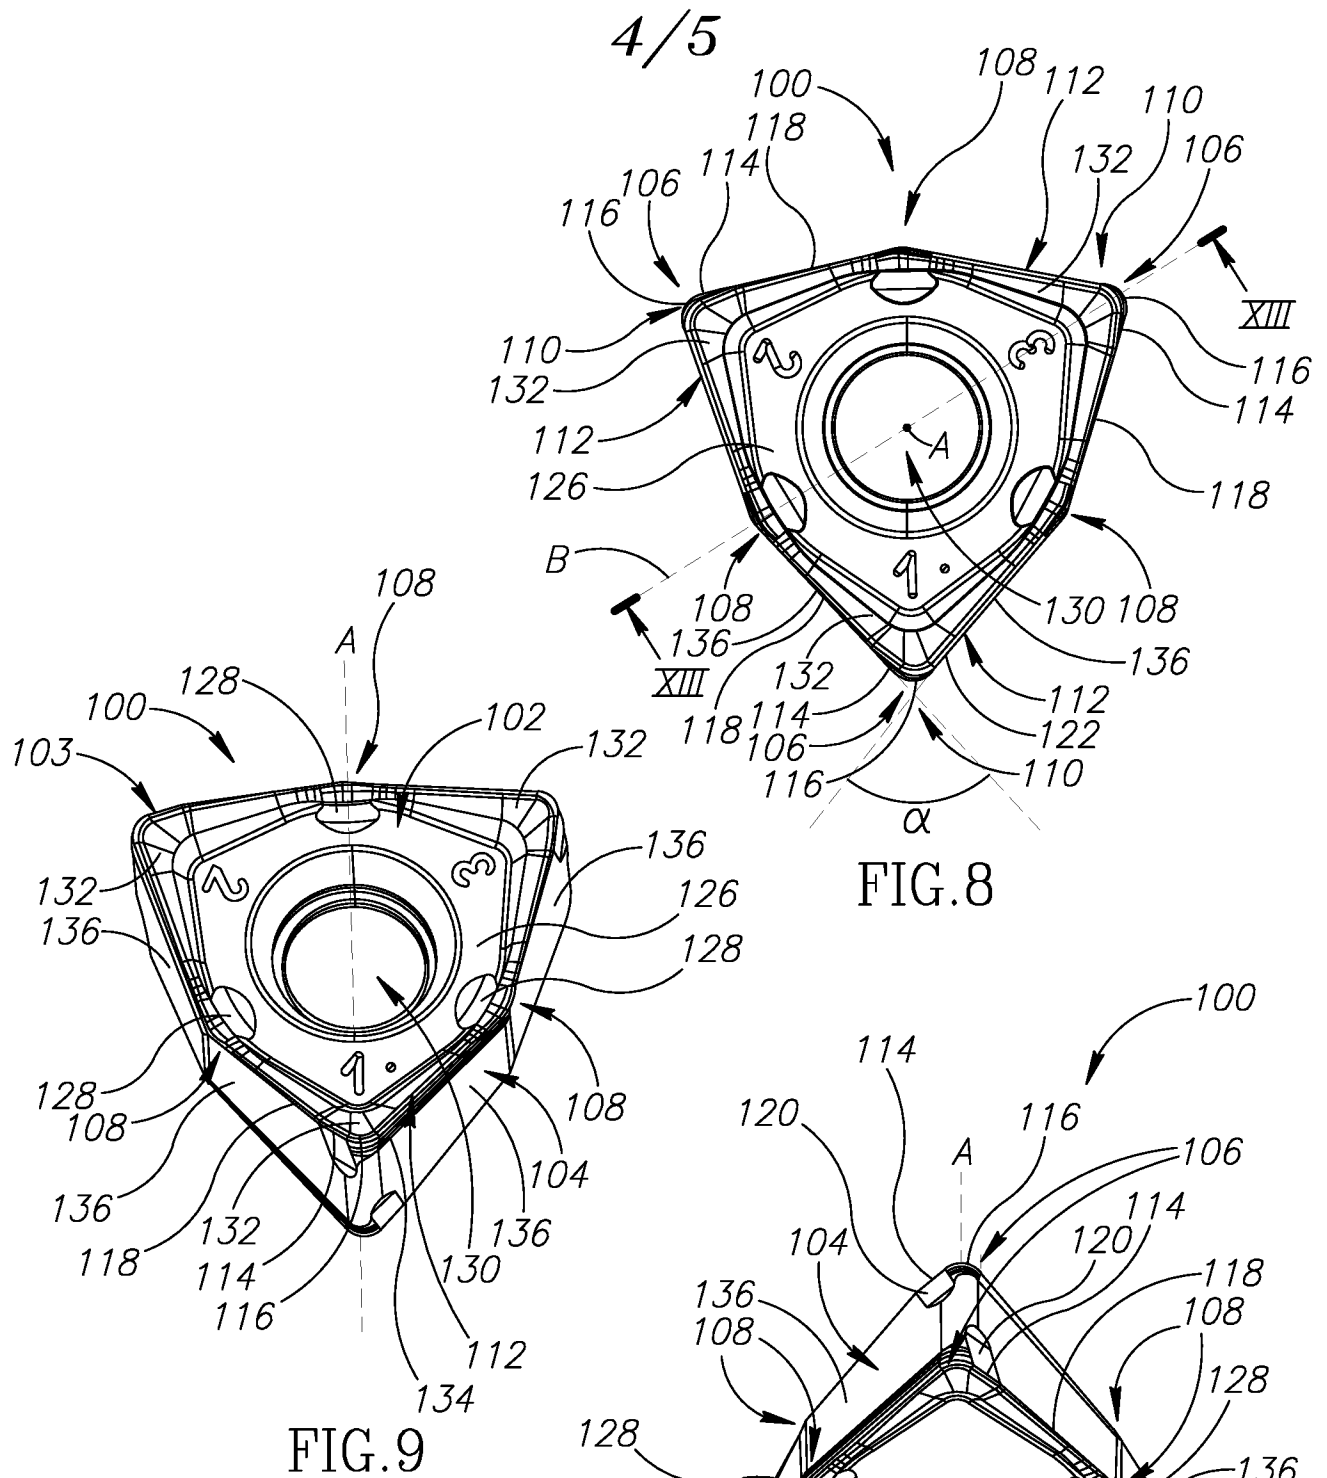

5/5

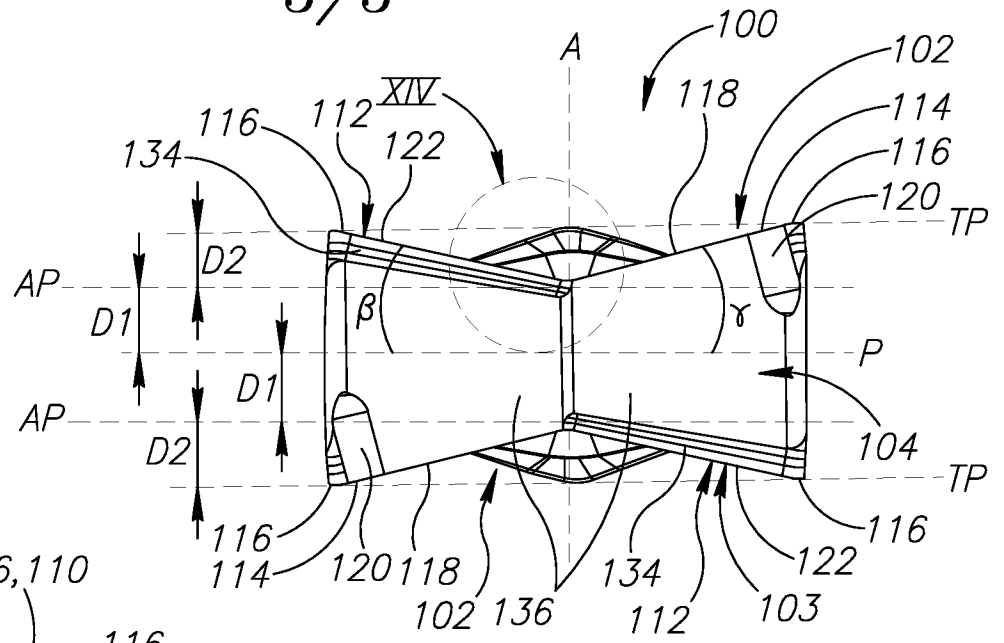


FIG.11

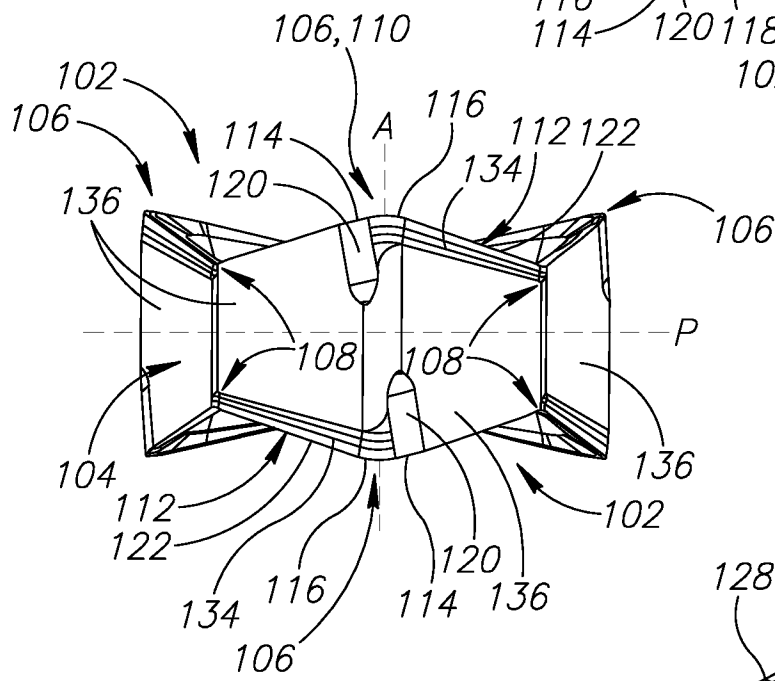


FIG.12

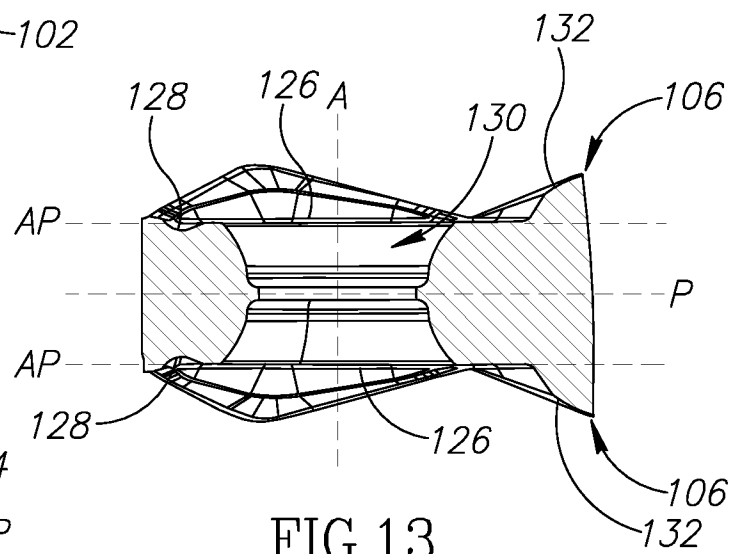


FIG.13

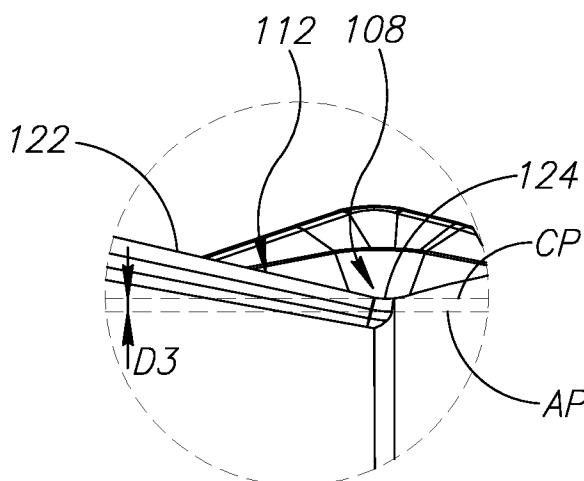


FIG.14

INTERNATIONAL SEARCH REPORT

International application No
PCT/IL2014/051093

A. CLASSIFICATION OF SUBJECT MATTER

INV. B23C5/20 B23C5/06 B23C5/22
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/065347 A1 (KYOCERA CORP [JP]; YAMAMICHI KAZUKI [JP]) 10 May 2013 (2013-05-10) paragraphs [0011] - [0095] figures 1-11 -----	1-20
X	WO 2013/001907 A1 (KYOCERA CORP [JP]; KOGA KENICHIROU [JP]) 3 January 2013 (2013-01-03) paragraph [0013] - paragraph [0100] figures 1-11 -----	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 April 2015

Date of mailing of the international search report

15/04/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Mioc, Marius

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IL2014/051093

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013065347 A1	10-05-2013	CN 103930228 A	16-07-2014
		EP 2774705 A1	10-09-2014
		US 2014314509 A1	23-10-2014
		WO 2013065347 A1	10-05-2013

WO 2013001907 A1	03-01-2013	CN 103619517 A	05-03-2014
		EP 2727672 A1	07-05-2014
		JP W02013001907 A1	23-02-2015
		US 2014126974 A1	08-05-2014
		WO 2013001907 A1	03-01-2013
