



(51) International Patent Classification:

E21B 49/02 (2006.01) *E21B 41/00* (2006.01)
E21B 47/26 (2012.01) *G06N 20/00* (2019.01)
G01V 3/08 (2006.01)

(21) International Application Number:

PCT/US2020/040898

(22) International Filing Date:

06 July 2020 (06.07.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/921,331 06 July 2020 (06.07.2020) US

(71) Applicant: **LANDMARK GRAPHICS CORPORATION** [US/US]; 3000 N. Sam Houston Parkway E., Houston, TX 77032 (US).

(72) Inventors: **RAMSAY, Travis St., George**; 31806 Sydney Creek Drive, Hockley, TX 77447 (US). **PRABHAKAR, Aravind**; 1262 W. 23rd St., Houston, TX 77008 (US).

(74) Agent: **GARDNER, Jason, D.** et al.; Kilpatrick Townsend & Stockton LLP, IP Docketing - 22nd Floor, 1100 Peachtree Street NE, Suite 2800, Atlanta, GA 30309 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: ESTIMATING RELATIVE PERMEABILITY AND CAPILLARY PRESSURES OF A GEOLOGICAL FORMATION BASED ON MULTIPHASE UPSCALING

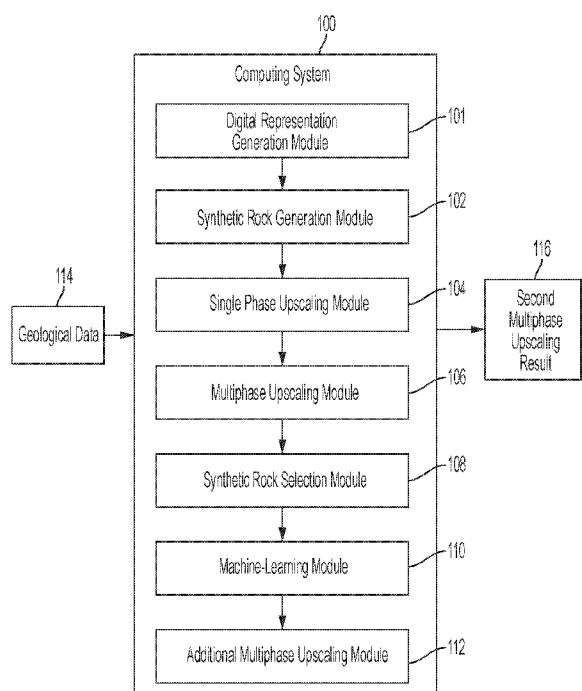


FIG. 1

(57) Abstract: A system can access geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir. The system can generate synthetic rock samples and execute single phase upscaling to compute absolute permeabilities for the physical rock sample and the synthetic rock samples. The system can execute a first multiphase upscaling based on the single phase upscaling to determine relative permeabilities for the physical rock sample and the synthetic rock samples. The system can compare the relative permeability of the physical rock sample to the relative permeabilities for the synthetic rock samples and select a synthetic rock sample that varies the least from the physical rock sample. The system can perform at least one additional multiphase upscaling on the physical rock sample and the synthetic rock samples to determine a second multiphase upscaling result and to develop a plan for drilling operations.

Published:

— *with international search report (Art. 21(3))*

ESTIMATING RELATIVE PERMEABILITY AND CAPILLARY PRESSURES OF A GEOLOGICAL FORMATION BASED ON MULTIPHASE UPSCALING

Technical Field

[0001] The present disclosure relates generally to oilfield operations and, more particularly, although not necessarily exclusively, to estimating flow unit properties of a geological formation based on multiphase upscaling.

Background

[0002] Hydrocarbon exploration is the search for hydrocarbons, such as oil or gas, within a subterranean formation. Properties such as relative permeability and capillary pressure of the rock types that make up the subterranean formation can influence hydrocarbon flow properties through the subterranean formation. Physical rock samples from the subterranean formation may be used to simulate properties for a reservoir. But the accuracy of simulations using current techniques may be limited. Inaccurate simulations of reservoirs can result in poor resource management.

[0003] Further, operators may resort to acquiring core samples to perform physical laboratory or digital rock technology experiments. These experiments may lead to the determination of multiphase rock-fluid interaction properties. However, information regarding flow unit descriptions proximal to the well where the physical samples were derived is often assumed. The remedy for this assumption may involve acquiring more core samples and performing additional experiments on those core samples. This remedy increases costs as additional core samples must be acquired from a formation.

Brief Description of the Drawings

[0004] FIG. 1 is a block diagram of a computing system for implementing multiphase upscaling to estimate relative permeability and capillary pressures of a geological formation according to one example of the present disclosure.

[0005] FIG. 2 is a schematic of a digital representation of a physical rock sample according to one example of the present disclosure.

[0006] FIGS. 3A-3D are schematics of synthetic rock samples according to one example of the present disclosure.

[0007] FIG. 4 is a graph of a comparison of the relative permeability and capillary pressures for a physical rock sample and synthetic rock samples according to one example of the present disclosure.

[0008] FIG. 5 is a block diagram of an example of a computing device for estimating of relative permeability and capillary pressures of a geological formation based on multiphase upscaling according to one example of the present disclosure.

[0009] FIG. 6 is a flowchart of a process for estimating of relative permeability and capillary pressures of a geological formation based on multiphase upscaling according to one example of the present disclosure.

Detailed Description

[0010] Certain aspects and examples of the present disclosure relate to estimating flow unit properties based on multiphase upscaling. Flow unit properties can include relative permeabilities and capillary pressures for various rock types in a reservoir. Substances with multiple fluids, water, oil, or other liquids, often flow through geological formations. Multiphase upscaling refers to upscaling flow data for a core sample to a reservoir scale. By using a system according to some examples, flow unit properties for the reservoir can be estimated for overall asset management of the reservoir. The techniques described in the present disclosure may reduce costs associated with acquiring and analyzing multiple physical core samples. Base geometric configurations can be used to mimic any core samples and machine learning can be leveraged to address intermediate base geometries that are not developed as a part of the synthetic cores.

[0011] The presently described techniques can execute relative permeability and capillary pressure upscaling from physical rock samples using physical laboratory or digital rock technology data. Then, multiphase upscaling can be performed on an ensemble of digital synthetic cores with rock types that have disparate volumetric distributions. The volumetric distributions can be assembled in series, parallel, diagonal, random, or any combination of these with respect to the direction of flow in the core samples. The resulting core-based multiphase upscaling can be upscaled to the scale of a reservoir for overall reservoir asset management.

[0012] The techniques can automate the upscaling process and use machine learning to expedite the multiple executions of multiphase upscaling and to model systematic changes in multiphase upscaling results determined by multiphase

simulations. In this case, machine learning can improve the performance of the overall workflow by determining multiphase upscaling results derived from intermediate rock type configurations of the synthetic cores. Machine learning can enable the system to estimate flow unit properties needed for reservoir simulation and management from the pore to the core scale in areas outside of where physical data is present.

[0013] Illustrative examples are given to introduce the reader to the general subject matter discussed herein and are not intended to limit the scope of the disclosed concepts. The following sections describe various additional features and examples with reference to the drawings in which like numerals indicate like elements, and directional descriptions are used to describe the illustrative aspects, but, like the illustrative aspects, should not be used to limit the present disclosure.

[0014] FIG. 1 is a block diagram of a computing system 100 for implementing multiphase upscaling to estimate relative permeability and capillary pressures of a geological formation according to one example of the present disclosure. Geological data, such as relative permeability and capillary pressures, can be accessed by the computing system 100. The computing system 100 can include modules for completing operations to estimate relative permeability and capillary pressures of a geological formation. The modules can include a synthetic rock generation module 102, a single phase upscaling module 104, a multiphase upscaling module 106, a synthetic rock selection module 108, a machine-learning module 110, and an additional multiphase upscaling module 112.

[0015] In some examples, an operator can obtain a physical rock sample from the geological formation. The physical rock sample can be a plug or core sample composed of multiple rock types. Measurements can be completed on the physical rock sample in a laboratory or using digital rock technology to create geological data 114 for the physical rock sample. The measurements can quantitatively define the rock types in the physical rock sample. For example, the measurements can determine there are two or more types of rock present in the physical rock sample. In some examples, the measurements can indicate the rock types in the physical rock sample and geometric information about the rock types in the physical sample. For example, the measurements can indicate Rock Type A and Rock Type B are present in the physical rock sample. The geometric information can indicate whether the rock types are arranged in parallel, series, diagonally, random, or any combination of these. The

measurements can also provide relative permeability and capillary pressures for the rock types in the physical rock sample.

[0016] The geological data 114 can include a set of curves corresponding to relative permeability and capillary pressures for the rock types in the physical rock sample. Each rock type in the physical rock sample can be assigned to a curve in the set of curves that corresponds to the relative permeability and capillary pressure of the rock type.

[0017] In some examples, the computing system 100 can access the geological data 114 containing the measurements of the physical rock sample. An operator may upload the geological data 114 to the computing system 100. Additionally or alternatively, the geological data 114 can be stored on an additional computing system that the computing system 100 can access.

[0018] In some examples, a photograph can be taken of the physical rock sample and the geological data 114 can be generated from the photograph. The computing system 100 can access the geological data 114 and execute the digital representation generation module 101 to generate a digital representation of the physical rock sample from the photograph of the physical rock sample.

[0019] In some examples, the computing system 100 can include the synthetic rock generation module 102. The synthetic rock generation module 102 can generate a plurality of synthetic rock samples with disparate volumetric distributions to each other and similar geometric configurations to the physical rock sample. For example, if the physical rock sample is composed of two rock types arranged in parallel, the synthetic rock generation module 102 can generate synthetic rock samples with rock types in parallel. Additionally, one synthetic rock sample can be composed 50% of Rock Type A and 50% of Rock Type B. Another synthetic rock sample can be composed 80% of Rock Type A and 20% of Rock Type B. Other arrangements and percentages of the synthetic rock samples may also be generated by the synthetic rock generation module 102.

[0020] In some examples, the computing system 100 can include the single phase upscaling module 104 to compute an absolute permeability for the physical rock sample and absolute permeabilities for the synthetic rock samples. The single phase upscaling module 104 may execute steady-state or unsteady-state upscaling. The absolute permeability can be calculated when a single phase (e.g., water) flows

through the rock. The single phase upscaling module 104 can execute operations on the physical rock sample or on a digital representation of the physical rock sample to determine the absolute permeability of the physical rock sample. The single phase upscaling module 104 can execute similar operations on the synthetic rock samples to determine absolute permeabilities of the synthetic rock samples.

[0021] The computing system 100 can include the multiphase upscaling module 106 to execute a first multiphase upscaling operation based on the absolute permeability of the physical rock sample and the absolute permeabilities of the synthetic rock samples. The multiphase upscaling module 106 may execute steady-state or unsteady-state upscaling. The multiphase upscaling module 106 can compute a relative permeability and capillary pressure for the physical rock sample and relative permeabilities and capillary pressures for the synthetic rock samples. The relative permeabilities and capillary pressures can be calculated using the absolute permeability and fractional flow information from two fluids flowing through a rock. For example, a combination of 50% water and 50% oil can be injected through the physical rock sample. In another example, a digital simulation can be used to determine the relative permeability and capillary pressure of the physical rock sample. The multiphase upscaling module 106 can execute similar operations for the synthetic rock samples to determine the relative permeabilities and capillary pressures of the synthetic rock samples. The relative permeabilities for the physical rock sample and the synthetic rock samples can be represented by curves showing relative permeability values at fractions of water saturation.

[0022] In some examples, the computing system 100 can include the synthetic rock selection module 108 to select a synthetic rock sample that best represents the physical rock sample. The synthetic rock selection module 108 can compare the relative permeability curve for the physical rock sample to the relative permeability curves for the synthetic rock samples to determine which synthetic rock sample varies the least from the physical rock sample. The synthetic rock selection module 108 can select the synthetic rock sample that varies the least from the physical rock sample as the synthetic rock sample that best represents the flow unit properties of the physical rock sample.

[0023] In some examples, the computing system 100 can execute the machine-learning module 110 to select the synthetic rock sample instead of executing the

synthetic rock selection module 108. Training data can be used to train a neural network for selecting a synthetic rock sample. In an example, the training data can be historical data associated with relative permeability and capillary pressure curves for physical rock samples and synthetic rock samples. The machine-learning module 110 can use results from the multiphase upscaling module 106 to select the synthetic rock sample that best represents the contents of the physical rock sample. Machine learning can enable the computing system 100 to estimate flow unit properties needed for reservoir simulation and management from the pore to the core scale in areas outside of where physical data is present.

[0024] The computing system 100 can execute the additional multiphase upscaling module 112 on the physical rock sample and the synthetic rock samples to determine the second multiphase upscaling result 116. The additional multiphase upscaling module 112 can upscale the results from the scale of the plug or core sample to a larger scale, such as a lithofacies scale. Additionally or alternatively, the additional multiphase upscaling module 112 can upscale the results from the lithofacies scale to a reservoir scale. The result of upscaling to the reservoir scale can be represented by a second multiphase upscaling result 116.

[0025] In some examples, the computing system 100 can output the second multiphase upscaling result 116. A user may use the second multiphase upscaling result 116 in a reservoir simulation. The reservoir simulation can allow the user to create a plan for operating and managing the reservoir. For example, the reservoir simulation may indicate locations suitable for drilling wells or provide other properties relating to extraction operations.

[0026] FIG. 2 is a schematic of a digital representation of a physical rock sample 200 according to one example of the present disclosure. The physical rock sample of a plug or core sample containing multiple rock types can be converted to a digital model. For example, a photograph can be taken of the physical rock sample and, from the photograph, a porosity fraction 202 and other properties of the physical rock sample can be determined throughout the physical rock sample. A computing system can generate the digital representation of the physical rock sample 200 based on the properties of the physical rock sample determined from the photograph. The computing system can use the porosity fraction 202 and other measurements to determine a relative permeability and capillary pressure for the physical rock sample.

[0027] FIGS. 3A-3D are schematics of synthetic rock samples according to one example of the present disclosure. A computing system can generate synthetic rock samples based on the digital representation of a physical rock sample 200. The computing system can generate synthetic core samples that are geometrically similar to the physical rock sample and volumetrically different from each other. The computing system can determine relative permeabilities and capillary pressures for the synthetic rock samples, which will vary based on their volumetric and geometric properties. A porosity fraction 202 can be shown throughout the synthetic core samples.

[0028] FIGS. 3A and 3B show a Synthetic Rock Sample A 302 and a Synthetic Rock Sample B 308 generated by the computing system based on the digital representation of the physical rock sample 200. For example, if the physical rock sample is made up of two types of rock that are arranged in series, the computing system can generate the Synthetic Rock Sample A 302 and the Synthetic Rock Sample B 308 that both contain Rock Type A 304 and Rock Type B 306 in series. The Synthetic Rock Sample A 302 can be composed of 50% Rock Type A 304 and 50% Rock Type B 306. Synthetic Rock Sample B 308 can be composed of 80% Rock Type A 304 and 20% Rock Type B 306.

[0029] FIGS. 3C and 3D show a Synthetic Rock Sample C 310 and a Synthetic Rock Sample D 312 generated by the computing system based on the digital representation of the physical rock sample. For example, if the physical rock sample is made up of two types of rock that are arranged in parallel, the computing system can generate the Synthetic Rock Sample C 310 and the Synthetic Rock Sample D 312 that both contain Rock Type A 304 and Rock Type B 306 in parallel. The Synthetic Rock Sample C 310 can be composed of 50% Rock Type A 304 and 50% Rock Type B 306. Synthetic Rock Sample D 312 can be composed of 80% Rock Type A 304 and 20% Rock Type B 306.

[0030] FIG. 4 is a graph 400 of relative permeabilities and capillary pressures for a physical rock sample 406 and synthetic rock samples according to one example of the present disclosure. A computing system can generate the graph 400 showing relative permeability 402 versus a water saturation fraction 404 for the physical rock sample 200 and a Synthetic Rock Sample A 302, a Synthetic Rock Sample B 308, a Synthetic Rock Sample C 310, and a Synthetic Rock Sample D 312. The graph 400

includes an increasing line and a decreasing line for each rock sample. The increasing line represents the relative permeability for the rock sample as water flows through the rock sample at an increasing fraction. The decreasing line represents the relative permeability for the rock sample as oil flows through the rock sample at a decreasing fraction. The lines intersect where the flow rate is the same for the water and oil flowing through the rock sample.

[0031] The computing system can compare the relative permeability of the physical rock sample 406 to the relative permeabilities of each of the synthetic rock samples. The computing system can determine which synthetic rock sample varies the least from the physical rock sample based on the comparison. For example, the computing system can determine physical rock sample 406 varies the least from the Synthetic Rock Sample C 310, so the relative permeability of the Synthetic Rock Sample C 310 best represents the flow unit properties of the physical rock sample 406.

[0032] FIG. 5 is a block diagram of an example of a computing device 500 for estimating relative permeability and capillary pressures of a geological formation based on multiphase upscaling according to one example of the present disclosure. The computing device 500 can include a processor 502, a bus 506, a memory 504, a display device 522, and an image capturing device 524. In some examples, the components shown in FIG. 5 can be integrated into a single structure. For example, the components can be within a single housing with a single processing device. In other examples, the components shown in FIG. 5 can be distributed (e.g., in separate housings) and in electrical communication with each other using various processors. It is also possible for the components to be distributed in a cloud computing system or grid computing system.

[0033] The processor 502 can execute one or more operations for estimating relative permeability and capillary pressures for a geological formation. The processor 502 can execute instructions stored in the memory 504 to perform the operations. The processor 502 can include one processing device or multiple processing devices. Non-limiting examples of the processor 502 include a field-programmable gate array ("FPGA"), an application-specific integrated circuit ("ASIC"), a processor, a microprocessor, etc.

[0034] The processor 502 is communicatively coupled to the memory 504 via the bus 506. The memory 504 may include any type of memory device that retains stored information when powered off. Non-limiting examples of the memory 504 include electrically erasable and programmable read-only memory ("EEPROM"), flash memory, or any other type of non-volatile memory. In some examples, at least some of the memory 504 can include a non-transitory medium from which the processor 502 can read instructions. A computer-readable medium can include electronic, optical, magnetic, or other storage devices capable of providing the processor 502 with computer-readable instructions or other program code. Non-limiting examples of a computer-readable medium include (but are not limited to) magnetic disk(s), memory chip(s), read-only memory (ROM), random-access memory ("RAM"), an ASIC, a configured processing device, optical storage, or any other medium from which a computer processing device can read instructions. The instructions can include processing device-specific instructions generated by a compiler or an interpreter from code written in any suitable computer-programming language, including, for example, C, C++, C#, etc.

[0035] In some examples, the computing device 500 includes a display device 522. The display device 522 can represent one or more components used to output data. Examples of the display device 522 can include a liquid-crystal display (LCD), a computer monitor, a touch-screen display, etc.

[0036] In some examples, the computing device 500 includes an image capturing device 524. The image capturing device 524 can be a camera or any other type of device capable of capturing an image of a physical rock sample.

[0037] The computing device 500 may include geological data 510 describing the physical rock sample. The computing device 500 can access the geological data 510 and generate synthetic rock samples 512 based on the number of rock types and the geometric arrangement of the rock types in the physical rock sample. The synthetic rock samples 512 can be geometrically similar to the physical rock sample and volumetrically different from each other. For example, if the computing device 500 determines the geological data 510 indicates that the physical rock sample has two rock types in parallel, the computing device 500 can generate synthetic rock samples 512 made of two rock types in parallel. Each of the synthetic rock samples 512 can have a different volumetric ratio of the two rock types.

[0038] The computing device 500 can execute single phase upscaling 514 on the physical rock sample and the synthetic rock samples 512 to determine absolute permeabilities of the physical rock and the synthetic rock samples 512. The computing device 500 can use the absolute permeabilities to execute multiphase upscaling 516 to determine relative permeabilities and capillary pressures for the physical rock sample and the synthetic rock samples 512. The computing device 500 can compare the relative permeability and capillary pressure of the physical rock sample to the relative permeabilities and capillary pressures of the synthetic rock samples 512 to determine which synthetic rock sample varies the least from the physical rock sample. The computing device 500 can select the synthetic rock sample that varies the least as the rock sample that best describes the properties of the physical rock sample. In some examples, computing device 500 can select the synthetic rock sample that best matches the physical rock sample using machine learning. Training data can be used to train a machine-learning model that can select the best synthetic rock sample.

[0039] The computing device 500 can perform the multiphase upscaling 516 multiple times to increase the scale from a plug or core sample level to a lithofacies or reservoir scale. The computing device 500 can generate an output 518 of the upscaled result. In some examples, the computing device 500 can include an action module 520 that can take the output 518 and apply it to some other process. For example, the computing device 500 can use the output 518 to control a well drilling operation or some other process relevant to the output 518. The action module 520 can apply the output 518 to develop a plan for drilling operations. The plan can include locations in the reservoir to drill wells to reduce the cost of production operations. Since the relative permeability and capillary pressure provide information about how fluids will flow in the rock, higher relative permeabilities in a location of the reservoir can indicate that fluids, such as oil, will flow more readily at that location. As a result, the plan for drilling can include a well at that location so the yield of extracted oil is greater.

[0040] In some examples, the computing device 500 can implement the process 600 shown in FIG. 6 for effectuating some aspects of the present disclosure. Other examples can involve more operations, fewer operations, different operations, or a different order of the operations shown in FIG. 6. The operations of FIG. 6 are described below with reference to the components shown in FIG. 5.

[0041] In block 602, the processor 502 can access geological data 510 describing a plurality of rock types in a physical rock sample from a geological formation. The physical rock sample can be a plug or core sample. The geological data 510 can indicate the number of rock types present in the physical rock sample as well as geometric information for the arrangement of the plurality of rock types.

[0042] In block 604, the processor 502 can generate a plurality of synthetic rock samples 512. The plurality of synthetic rock samples 512 can be geometrically similar to the physical rock sample. The processor 502 can generate synthetic rock samples 512 that are volumetrically different from each other.

[0043] In block 606, the processor 502 can execute single phase upscaling 514 to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples 512. The processor 502 can determine the absolute permeabilities by performing computer simulations for single-phase flow of a fluid through the physical rock sample and the plurality of synthetic rock samples 512.

[0044] In block 608, the processor 502 can execute a first multiphase upscaling 516 based on the single phase upscaling 514 to determine a relative permeability for the physical rock sample and a plurality of relative permeabilities for the plurality of synthetic rock samples 512. The processor 502 can perform additional operations using the absolute permeabilities to determine relative permeabilities for the physical rock sample and the plurality of synthetic rock samples 512.

[0045] In block 610, the processor 502 can compare the relative permeability of the physical rock sample to the plurality of relative permeabilities for the plurality of synthetic rock samples 512. The processor 502 can determine how much each of the synthetic rock samples 512 vary from the physical rock sample.

[0046] In block 612, the processor 502 can select a synthetic rock sample among the plurality of synthetic rock samples 512 that varies the least from the relative permeability for the physical rock sample. The synthetic rock sample that is selected can represent the flow unit properties of the physical rock sample. In some examples, the processor 502 can use machine learning to select the synthetic rock sample that varies the least from the relative permeability of the physical rock sample.

[0047] In block 614, the processor 502 can perform at least one additional multiphase upscaling 516 on the physical rock sample and the synthetic rock samples

to determine a second multiphase upscaling result. The at least one additional multiphase upscaling 516 can be from a plug or core sample to a lithofacies scale or a reservoir scale.

[0048] In block 616, the processor 502 can generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result. For example, the second multiphase upscaling result can be at the reservoir scale and can be used in reservoir simulations so a user can create a plan for managing the reservoir. The plan can include locations in the reservoir to drill wells based on lowering the cost of production operations of the wells.

[0049] In some aspects, a system, a method, or a non-transitory computer-readable medium for estimating relative permeability and capillary pressures of a geological formation by multiphase upscaling of synthetic rock samples according to one or more of the following examples:

[0050] As used below, any reference to a series of examples is to be understood as a reference to each of those examples disjunctively (e.g., "Examples 1-4" is to be understood as "Examples 1, 2, 3, or 4").

[0051] Example 1 is a system comprising: a processing device; and a memory device that includes instructions executable by the processing device for causing the processing device to: access geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir; generate a plurality of synthetic rock samples; execute single phase upscaling to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples; execute a first multiphase upscaling based on the single phase upscaling to determine a relative permeability and capillary pressure for the physical rock sample and a plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples; compare the relative permeability and capillary pressure of the physical rock sample to the plurality of relative permeabilities and capillary pressures of the plurality of synthetic rock samples; select a synthetic rock sample among the plurality of synthetic rock samples that varies the least from the relative permeability and capillary pressure for the physical rock sample; perform at least one additional multiphase upscaling on the physical rock sample and the plurality of synthetic rock samples to determine a second multiphase upscaling result;

and generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result.

[0052] Example 2 is the system of example 1, wherein the memory device further includes instructions executable by the processing device for causing the processing device to select the synthetic rock sample using a machine learning algorithm trained with historical data of relative permeabilities and capillary pressures of physical rock samples and synthetic rock samples.

[0053] Example 3 is the system of examples 1-2, wherein the geological data includes a set of curves corresponding to relative permeability and capillary pressures for the plurality of rock types in the physical rock sample and each rock type in the plurality of rock types is assigned to a curve in the set of curves.

[0054] Example 4 is the system of examples 1-3, wherein the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample.

[0055] Example 5 is the system of examples 1-4, wherein the physical rock sample is a plug or core sample from the reservoir.

[0056] 6. The system of examples 1-5, wherein the first multiphase upscaling is from a plug or core scale to a lithofacies scale, and wherein the at least one additional multiphase upscaling is from the lithofacies scale to a reservoir scale.

[0057] Example 7 is the system of examples 1-6, wherein: the physical rock sample and the plurality of synthetic rock samples are plug or core samples; the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample; the first multiphase upscaling and the at least one additional multiphase upscaling are based on a fluid combination of oil and water; the first multiphase upscaling is from a plug or core scale to a lithofacies scale; the at least one additional multiphase upscaling is from a lithofacies scale to a reservoir scale; and the memory device further includes instructions executable by the processing device for causing the processing device to output the second multiphase upscaling result to a user to allow the user to create a plan for extraction operations for the reservoir.

[0058] Example 8 is the system of examples 1-7, wherein the memory device further includes instructions executable by the processing device for causing the processing device to: control an image capturing device to capture an image of the

physical rock sample; and generate a digital representation of the physical rock sample from the image of the physical rock sample, the digital representation including geological data of the physical rock sample.

[0059] Example 9 is a method, comprising: accessing geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir; generating a plurality of synthetic rock samples; executing single phase upscaling to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples; executing a first multiphase upscaling based on the single phase upscaling to determine a relative permeability and capillary pressure for the physical rock sample and a plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples; comparing the relative permeability and capillary pressure of the physical rock sample to the plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples; selecting a synthetic rock sample among the plurality of synthetic rock samples that varies the least from the relative permeability and capillary pressure for the physical rock sample; performing at least one additional multiphase upscaling on the physical rock sample and the plurality of synthetic rock samples to determine a second multiphase upscaling result; and generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result.

[0060] Example 10 is the method of example 9, wherein selecting the rock sample comprises using a machine learning algorithm.

[0061] Example 11 is the method of examples 9-10, wherein the geological data includes a set of curves corresponding to relative permeability and capillary pressures for the plurality of rock types in the physical rock sample and each rock type in the plurality of rock types is assigned to a curve in the set of curves.

[0062] Example 12 is the method of examples 9-11, wherein the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample.

[0063] Example 13 is the method of examples 9-12, wherein the physical rock sample is a plug or core sample from the reservoir.

[0064] Example 14 is the method of examples 9-13, wherein the at least one additional multiphase upscaling is from a lithofacies scale to a reservoir scale.

[0065] Example 15 is the method of examples 9-14, further comprising outputting the second multiphase upscaling result to a user to allow the user to create a plan for extraction operations for the reservoir.

[0066] Example 16 is a non-transitory computer-readable medium comprising instructions that are executable by a processing device for causing the processing device to: access geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir; generate a plurality of synthetic rock samples; execute single phase upscaling to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples; execute a first multiphase upscaling based on the single phase upscaling to determine a relative permeability and capillary pressure for the physical rock sample and a plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples; compare the relative permeability and capillary pressure of the physical rock sample to the plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples; select a synthetic rock sample among the plurality of synthetic rock samples that varies the least from the relative permeability and capillary pressure for the physical rock sample; perform at least one additional multiphase upscaling on the physical rock sample and the plurality of synthetic rock samples to determine a second multiphase upscaling result; and generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result.

[0067] Example 17 is the non-transitory computer-readable medium of example 16, further comprising instructions that are executable by the processing device for causing the processing device to select the rock sample using a machine learning algorithm.

[0068] Example 18 is the non-transitory computer-readable medium of examples 16-17, wherein the geological data includes a set of curves corresponding to relative permeability and capillary pressures for the plurality of rock types in the physical rock sample and each rock type in the plurality of rock types is assigned to a curve in the set of curves.

[0069] Example 19 is the non-transitory computer-readable medium of examples 16-18, wherein the plurality of synthetic rock samples comprises synthetic

rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample.

[0070] Example 20 is the non-transitory computer-readable medium of examples 19, wherein the at least one additional multiphase upscaling is from a lithofacies scale to a reservoir scale.

[0071] The foregoing description of certain examples, including illustrated examples, has been presented only for the purpose of illustration and description and is not intended to be exhaustive or to limit the disclosure to the precise forms disclosed. Numerous modifications, adaptations, and uses thereof will be apparent to those skilled in the art without departing from the scope of the disclosure.

Claims

What is claimed is:

1. A system comprising:
 - a processing device; and
 - a memory device that includes instructions executable by the processing device for causing the processing device to:
 - access geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir;
 - generate a plurality of synthetic rock samples;
 - execute single phase upscaling to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples;
 - execute a first multiphase upscaling based on the single phase upscaling to determine a relative permeability and capillary pressure for the physical rock sample and a plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples;
 - compare the relative permeability and capillary pressure of the physical rock sample to the plurality of relative permeabilities and capillary pressures of the plurality of synthetic rock samples;
 - select a synthetic rock sample among the plurality of synthetic rock samples that varies the least from the relative permeability and capillary pressure for the physical rock sample;
 - perform at least one additional multiphase upscaling on the physical rock sample and the plurality of synthetic rock samples to determine a second multiphase upscaling result; and
 - generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result.
2. The system of claim 1, wherein the memory device further includes instructions executable by the processing device for causing the processing device to select the synthetic rock sample using a machine learning algorithm trained with historical data

of relative permeabilities and capillary pressures of physical rock samples and synthetic rock samples.

3. The system of claim 1, wherein the geological data includes a set of curves corresponding to relative permeability and capillary pressures for the plurality of rock types in the physical rock sample and each rock type in the plurality of rock types is assigned to a curve in the set of curves.

4. The system of claim 1, wherein the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample.

5. The system of claim 1, wherein the physical rock sample is a plug or core sample from the reservoir.

6. The system of claim 1, wherein the first multiphase upscaling is from a plug or core scale to a lithofacies scale, and wherein the at least one additional multiphase upscaling is from the lithofacies scale to a reservoir scale.

7. The system of claim 1, wherein:

the physical rock sample and the plurality of synthetic rock samples are plug or core samples;

the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample;

the first multiphase upscaling and the at least one additional multiphase upscaling are based on a fluid combination of oil and water;

the first multiphase upscaling is from a plug or core scale to a lithofacies scale;

the at least one additional multiphase upscaling is from a lithofacies scale to a reservoir scale; and

the memory device further includes instructions executable by the processing device for causing the processing device to output the second multiphase upscaling

result to a user to allow the user to create a plan for extraction operations for the reservoir.

8. The system of claim 1, wherein the memory device further includes instructions executable by the processing device for causing the processing device to:

control an image capturing device to capture an image of the physical rock sample; and

generate a digital representation of the physical rock sample from the image of the physical rock sample, the digital representation including geological data of the physical rock sample.

9. A method, comprising:

accessing geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir;

generating a plurality of synthetic rock samples;

executing single phase upscaling to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples;

executing a first multiphase upscaling based on the single phase upscaling to determine a relative permeability and capillary pressure for the physical rock sample and a plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples;

comparing the relative permeability and capillary pressure of the physical rock sample to the plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples;

selecting a synthetic rock sample among the plurality of synthetic rock samples that varies the least from the relative permeability and capillary pressure for the physical rock sample;

performing at least one additional multiphase upscaling on the physical rock sample and the plurality of synthetic rock samples to determine a second multiphase upscaling result; and

generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result.

10. The method of claim 9, wherein selecting the rock sample comprises using a machine learning algorithm.
11. The method of claim 9, wherein the geological data includes a set of curves corresponding to relative permeability and capillary pressures for the plurality of rock types in the physical rock sample and each rock type in the plurality of rock types is assigned to a curve in the set of curves.
12. The method of claim 9, wherein the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample.
13. The method of claim 9, wherein the physical rock sample is a plug or core sample from the reservoir.
14. The method of claim 9, wherein the at least one additional multiphase upscaling is from a lithofacies scale to a reservoir scale.
15. The method of claim 9, further comprising outputting the second multiphase upscaling result to a user to allow the user to create a plan for extraction operations for the reservoir.
16. A non-transitory computer-readable medium comprising instructions that are executable by a processing device for causing the processing device to:
 - access geological data describing a plurality of rock types in a physical rock sample drilled from a reservoir;
 - generate a plurality of synthetic rock samples;
 - execute single phase upscaling to compute an absolute permeability for the physical rock sample and a plurality of absolute permeabilities for the plurality of synthetic rock samples;
 - execute a first multiphase upscaling based on the single phase upscaling to determine a relative permeability and capillary pressure for the physical rock sample

and a plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples;

compare the relative permeability and capillary pressure of the physical rock sample to the plurality of relative permeabilities and capillary pressures for the plurality of synthetic rock samples;

select a synthetic rock sample among the plurality of synthetic rock samples that varies the least from the relative permeability and capillary pressure for the physical rock sample;

perform at least one additional multiphase upscaling on the physical rock sample and the plurality of synthetic rock samples to determine a second multiphase upscaling result; and

generate a plan for drilling operations at a scale of the second multiphase upscaling result using the second multiphase upscaling result.

17. The non-transitory computer-readable medium of claim 16, further comprising instructions that are executable by the processing device for causing the processing device to select the rock sample using a machine learning algorithm.

18. The non-transitory computer-readable medium of claim 16, wherein the geological data includes a set of curves corresponding to relative permeability and capillary pressures for the plurality of rock types in the physical rock sample and each rock type in the plurality of rock types is assigned to a curve in the set of curves.

19. The non-transitory computer-readable medium of claim 16, wherein the plurality of synthetic rock samples comprises synthetic rock samples that are volumetrically different from each other and geometrically similar to the physical rock sample.

20. The non-transitory computer-readable medium of claim 16, wherein the at least one additional multiphase upscaling is from a lithofacies scale to a reservoir scale.

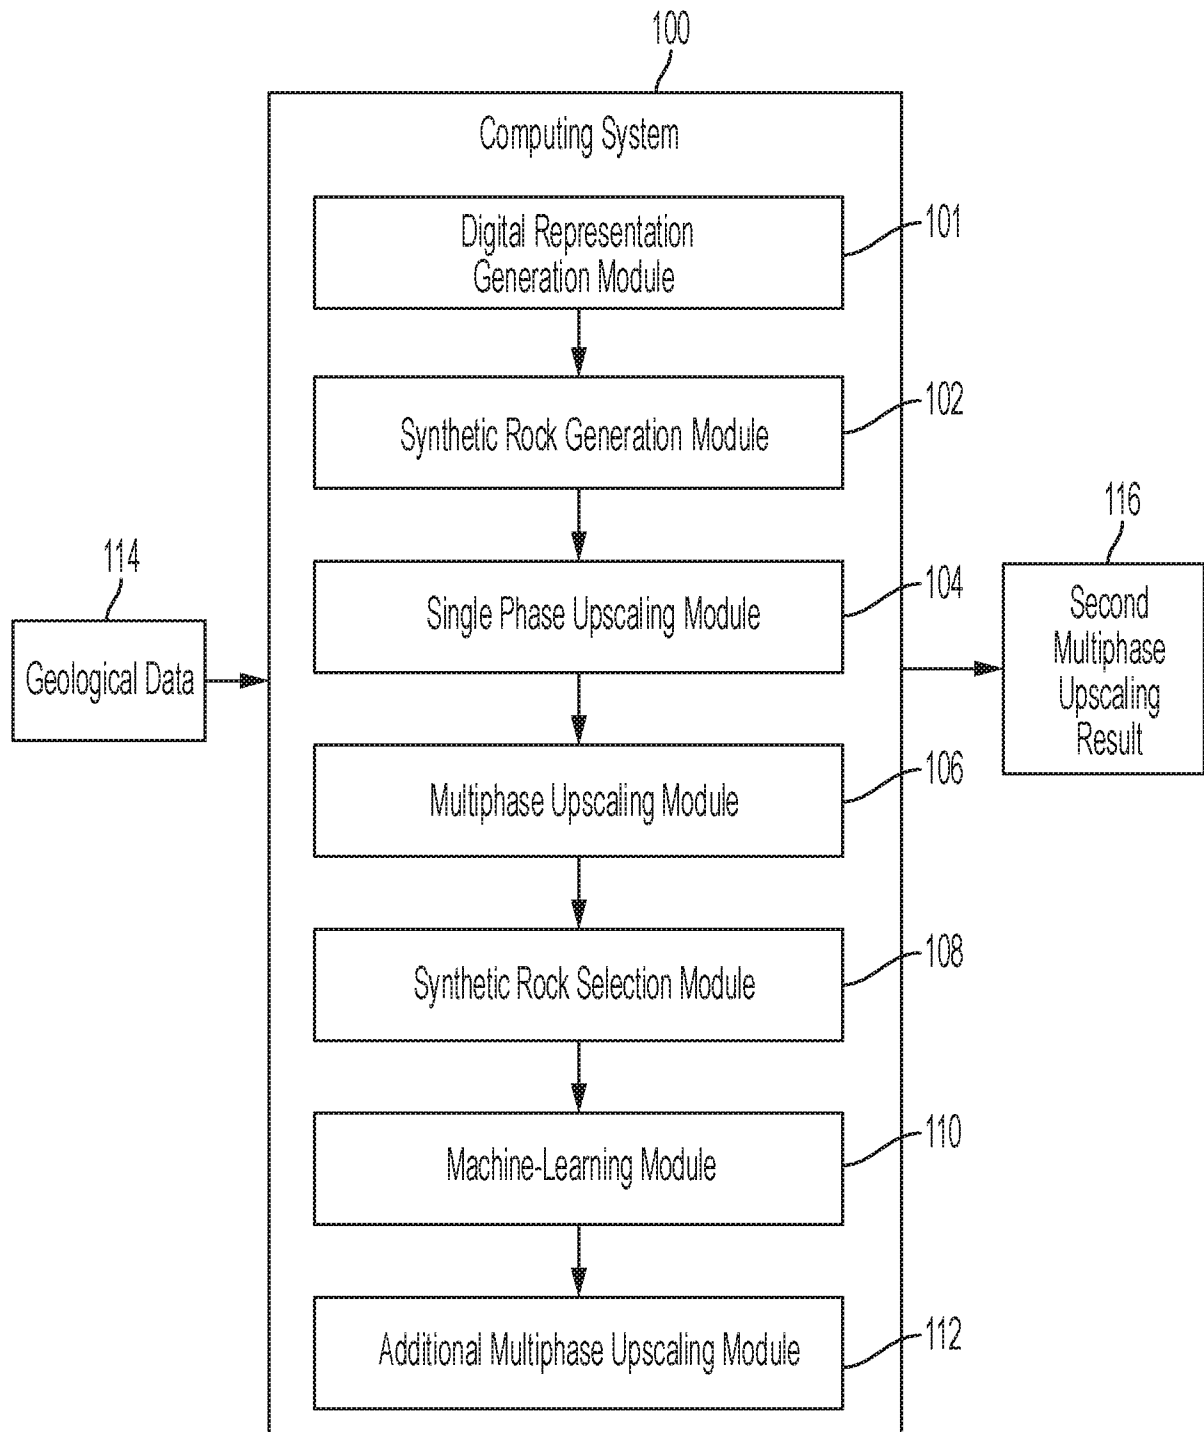


FIG. 1

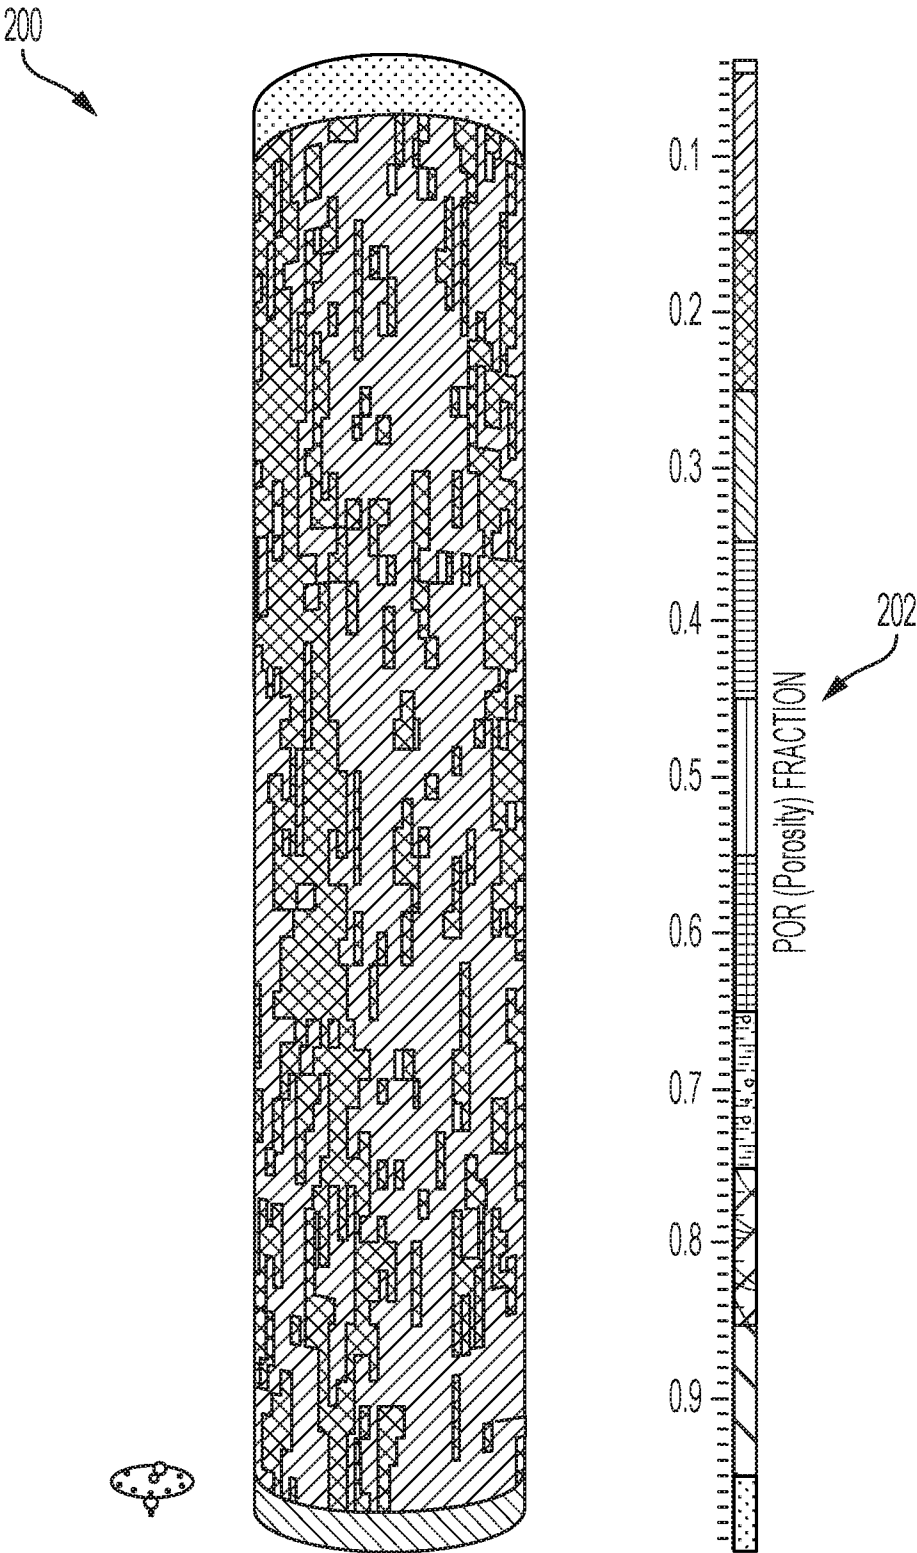


FIG. 2

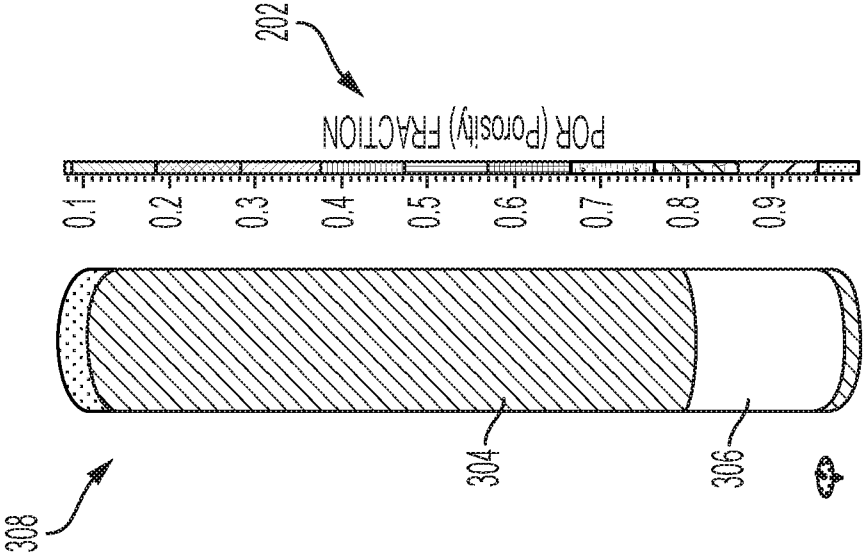


FIG. 3B

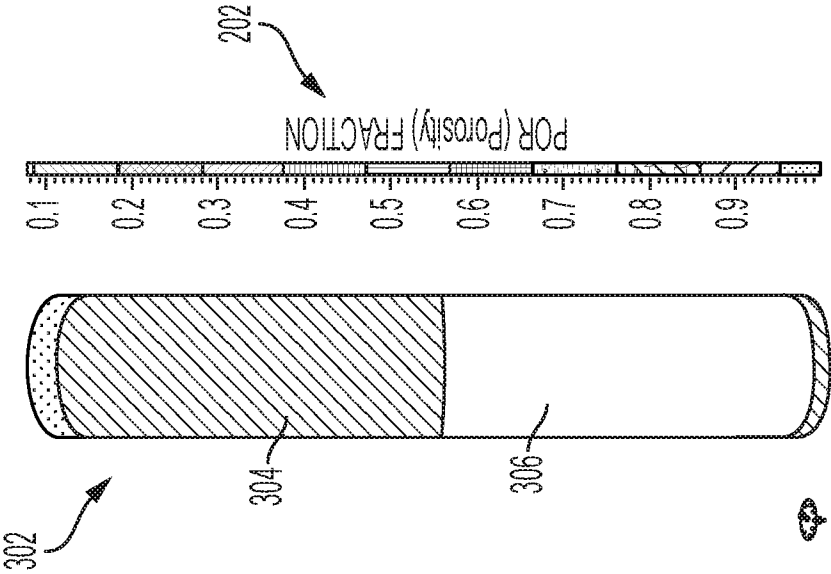


FIG. 3A

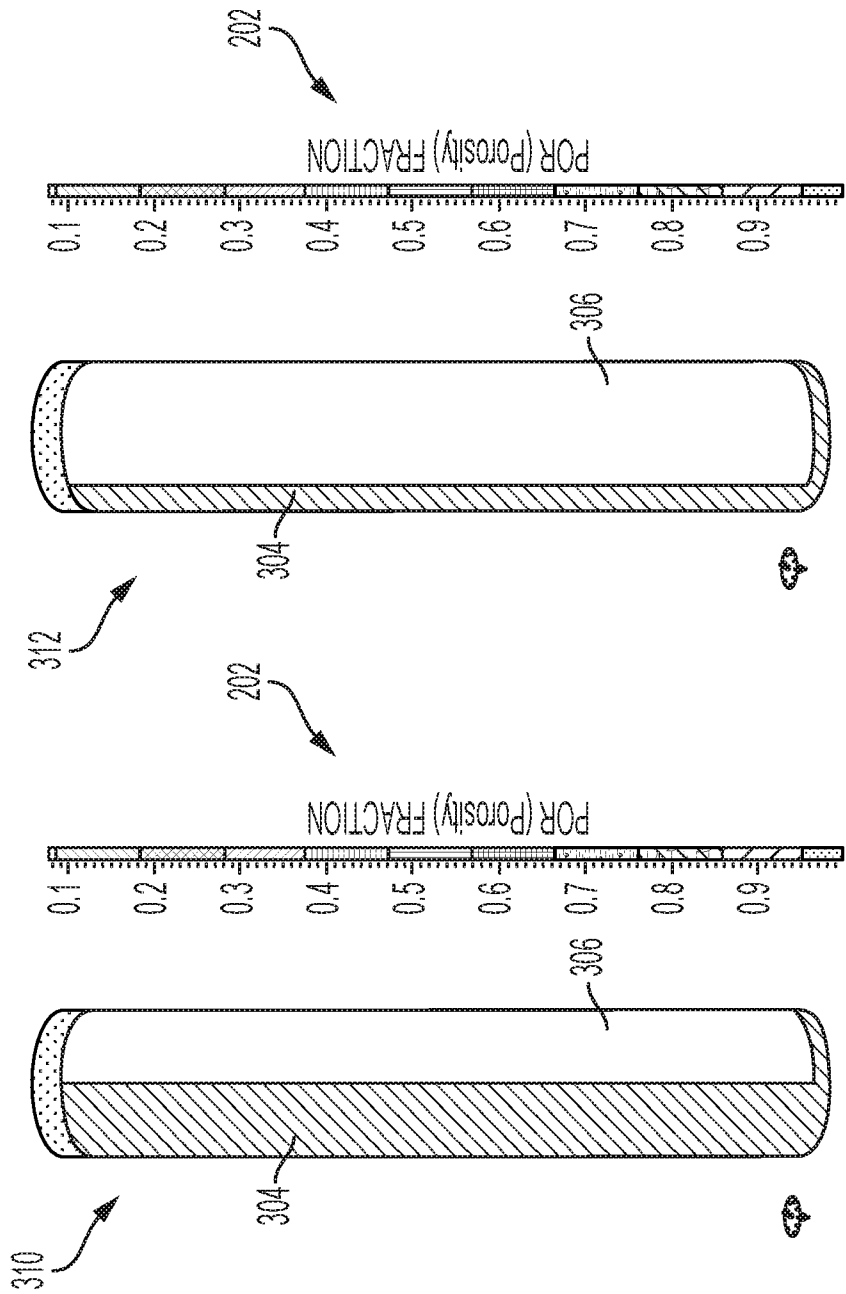
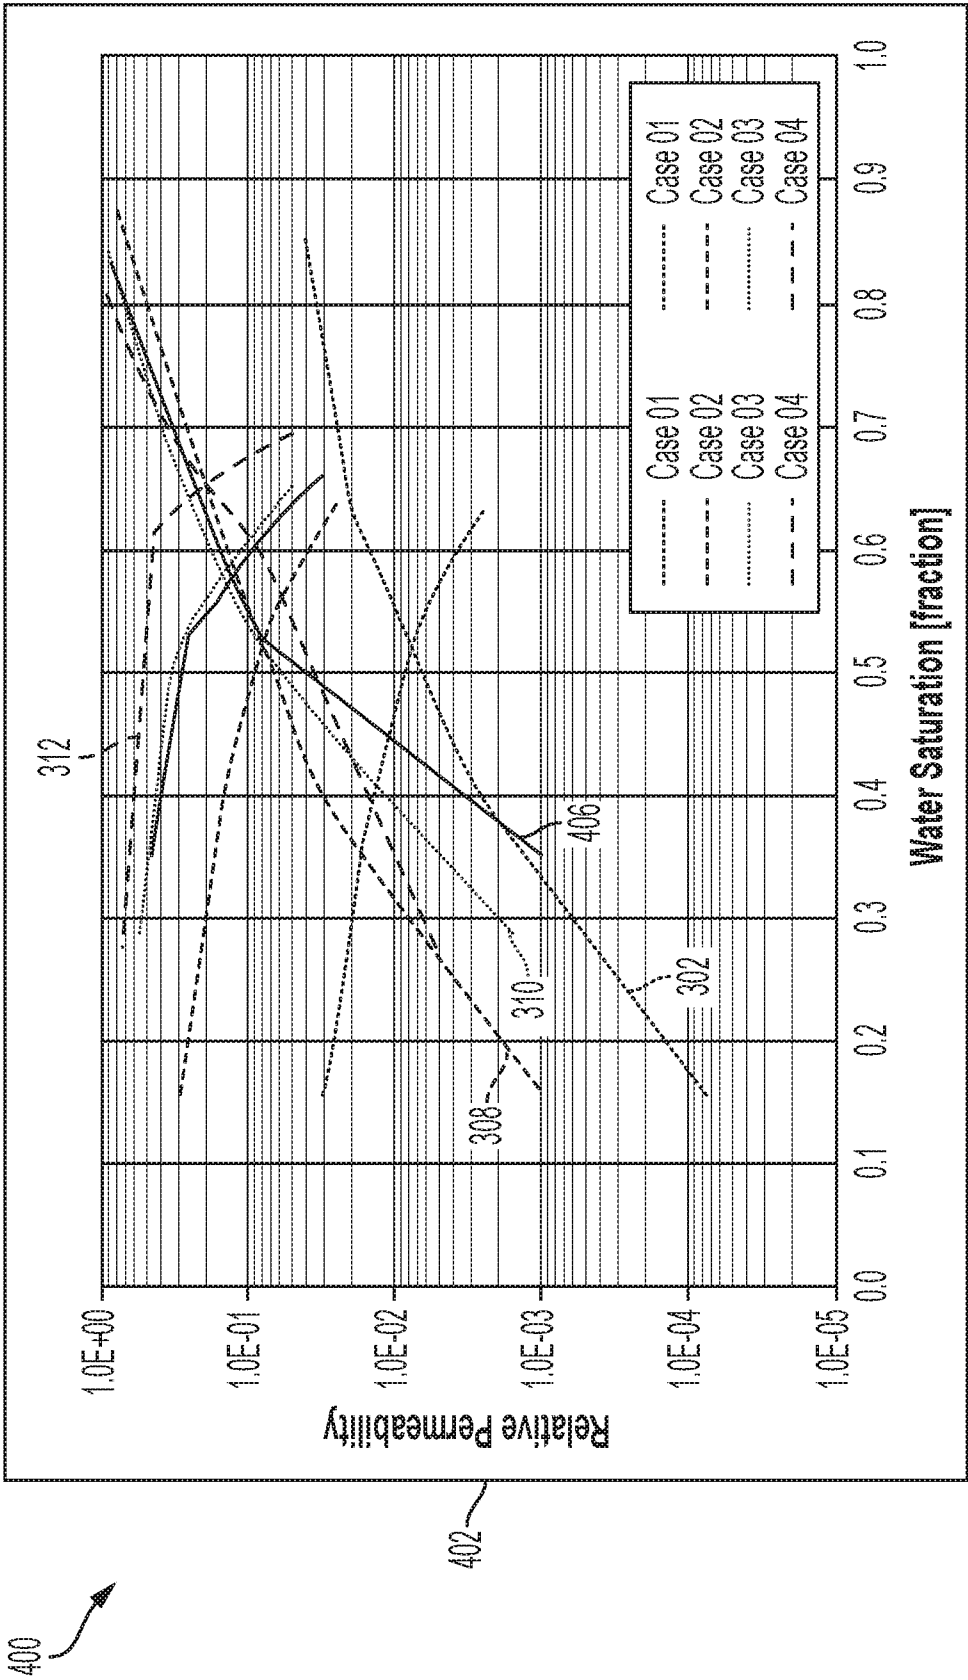


FIG. 3D

FIG. 3C



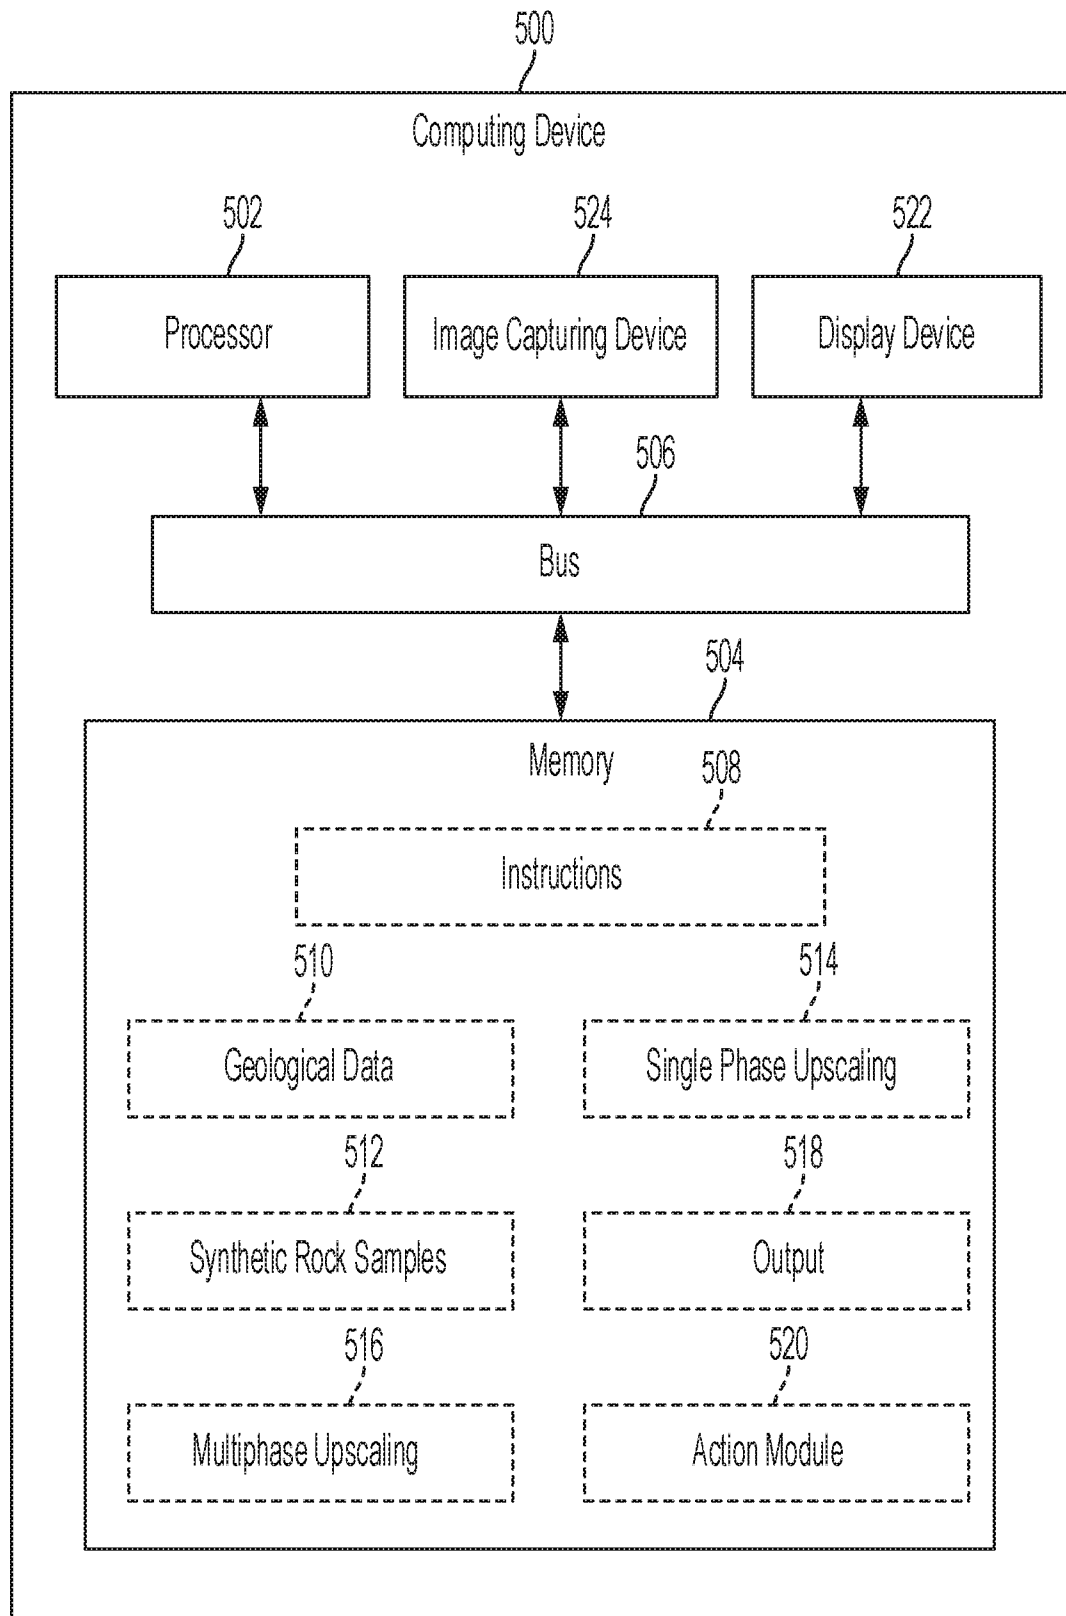


FIG. 5

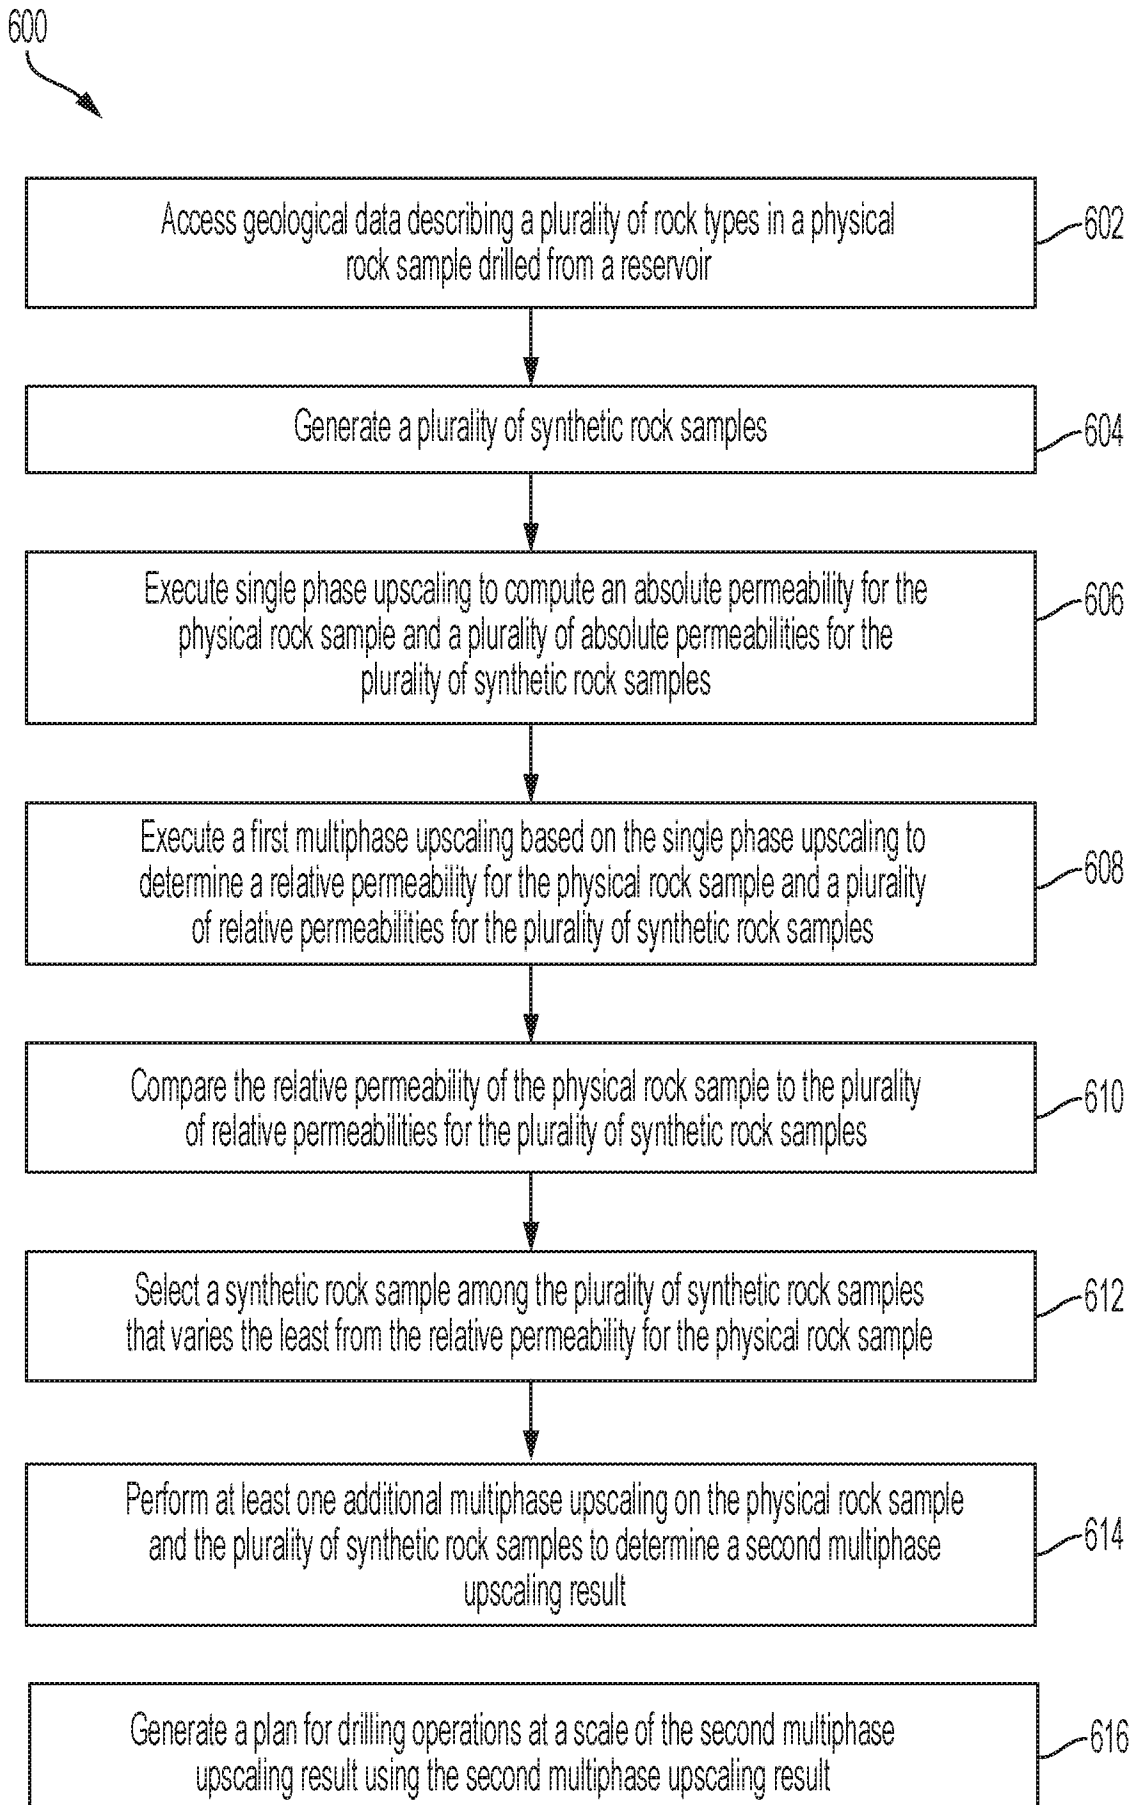


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2020/040898

A. CLASSIFICATION OF SUBJECT MATTER		
E21B 49/02(2006.01)i; E21B 47/26(2012.01)i; G01V 3/08(2006.01)i; E21B 41/00(2006.01)i; G06N 20/00(2019.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) E21B 49/02(2006.01); E21B 44/00(2006.01); G06F 17/50(2006.01); G06G 7/50(2006.01); G06T 7/00(2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: geological data, synthetic rock sample, single phase upscaling, multiphase upscaling, relative permeability, processing device, memory device		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2019-0003297 A1 (SCHLUMBERGER TECHNOLOGY CORPORATION) 03 January 2019 (2019-01-03) paragraphs [0035]-[0180]; claims 1-19; and figures 1-21	1-20
Y	US 2008-0234988 A1 (CHEN et al.) 25 September 2008 (2008-09-25) paragraphs [0008]-[0075]; and figure 2	1-20
Y	WO 2013-173540 A1 (INGRAIN, INC.) 21 November 2013 (2013-11-21) paragraphs [0006]-[0087]; and figure 4B	4,7-8,12,19
A	US 6826520 B1 (KHAN et al.) 30 November 2004 (2004-11-30) claim 1; and figures 3-6	1-20
A	US 8854430 B2 (VARSL0T et al.) 07 October 2014 column 20, line 40 - column 21, line 5; and figure 18	1-20
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 17 March 2021		Date of mailing of the international search report 18 March 2021
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer BAHNG, Seung Hoon Telephone No. +82-42-481-5560

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2020/040898

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2019-0003297	A1	03 January 2019	EP	3334897	A1	20 June 2018
				US	10900341	B2	26 January 2021
				WO	2017-030756	A1	23 February 2017
US	2008-0234988	A1	25 September 2008	US	9110193	B2	18 August 2015
				WO	2008-103986	A1	28 August 2008
				WO	2008-103986	B1	16 October 2008
WO	2013-173540	A1	21 November 2013	AU	2013-262735	A1	27 November 2014
				AU	2013-262735	B2	31 March 2016
				BR	112014028783	A2	27 June 2017
				CA	2871781	A1	21 November 2013
				CA	2871781	C	07 February 2017
				CN	104471614	A	25 March 2015
				CO	7131374	A2	01 December 2014
				EP	2850593	A1	25 March 2015
				EP	2850593	B1	28 December 2016
				MX	2014013970	A	12 February 2015
				MX	339064	B	09 May 2016
				RU	2014-151234	A	10 July 2016
				US	2013-0308831	A1	21 November 2013
				US	9046509	B2	02 June 2015
US	6826520	B1	30 November 2004	AU	6053400	A	09 January 2001
				AU	763537	B2	24 July 2003
				BR	0011886	A	05 March 2002
				CA	2375506	A1	28 December 2000
				CA	2375506	C	03 August 2010
				CN	1358289	A	10 July 2002
				EA	003438	B1	24 April 2003
				EA	200200077	A1	27 June 2002
				EP	1212696	A1	12 June 2002
				MX	PA01012736	A	12 August 2002
				NO	20016321	L	21 December 2001
				NO	321064	B1	06 March 2006
US	8854430	B2	07 October 2014	WO	00-79423	A1	28 December 2000
				AU	2009-250344	A1	26 November 2009
				AU	2009-250344	A8	30 October 2014
				AU	2009-250344	B2	15 May 2014
				AU	2009-250344	B8	30 October 2014
				CA	2724031	A1	26 November 2009
				CN	102037492	A	27 April 2011
				EP	2289046	A1	02 March 2011
				EP	2289046	A4	30 March 2016
				JP	2011-525271	A	15 September 2011
				MY	153811	A	24 March 2015
				RU	2010-152658	A	27 June 2012
				US	10043274	B2	07 August 2018
				US	2011-0181701	A1	28 July 2011
				US	2015-0104078	A1	16 April 2015
WO	2009-140738	A1	26 November 2009	WO	2009-140738	A1	26 November 2009
				WO	2009-140738	A8	25 March 2010