



(51) International Patent Classification:

G06F 8/61 (2018.01) H04L 41/0806 (2022.01)
G06F 9/50 (2006.01) H04L 41/0853 (2022.01)
G06F 16/93 (2019.01)

(21) International Application Number:

PCT/US2022/023078

(22) International Filing Date:

01 April 2022 (01.04.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/220,460 01 April 2021 (01.04.2021) US

(71) Applicant: SAUDI ARABIAN OIL COMPANY
[SA/SA]; P.O. Box 5000, Dhahran, 31311 (SA).

(71) Applicant (for AG only): ARAMCO SERVICES COM-
PANY [US/US]; 1200 Smith Street, Houston, TX 77002
(US).

(72) Inventors: AL-JARRASH, Mohammed, A.; P.O. Box
18606, Dhahran, 31311 (SA). ABUHALEEGAH, Mo-
hammed, S.; c/o Saudi Aramco, C-EC-431, Floor 4, East

Wing, Al-Midra Tower Building 3304, Dhahran, 31311
(SA).

(74) Agent: MEHTA, Seema, M. et al.; Osha Bergman Watan-
abe & Burton LLP, 909 Fannin Street, Suite 3500, Houston,
TX 77010 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH,
KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ALLOCATION OF NETWORK DEVICES FROM A GENERATED DEPLOYMENT DESCRIPTOR

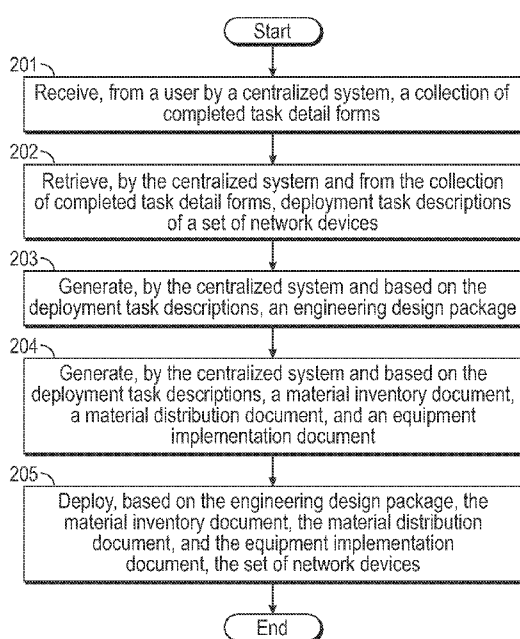


FIG. 2

(57) Abstract: A method for network deployment is disclosed. The method includes receiving (201), from a user by a centralized system (322), a plurality of completed task detail forms (102), retrieving (202), by the centralized system (322) and from the plurality of completed task detail forms (102), deployment task descriptions of a plurality of network devices, generating (203), by the centralized system (322) and based on the deployment task descriptions, an engineering design package (104) comprising a specification and associated configuration and connectivity information of each of the plurality of network devices, and deploying (205), based on the engineering design package (104), the plurality of network devices.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

ALLOCATION OF NETWORK DEVICES FROM A GENERATED DEPLOYMENT DESCRIPTOR**BACKGROUND**

[0001] Engineering design packages (EDPs) are documents with detailed information related to equipment specifications, their configurations and physical and logical connectivity. Developing these documents, traditionally done manually, is time consuming and require a dedicated team to oversee a huge scope such as developing thousands of EDPs for a replacement project. In addition, aggregating the required materials in terms of part numbers and quantities manually is a major pain area and prone to errors. Moreover, materials distribution, commissioning and progress tracking can be inaccurate and inefficient as a result of the lack of centralized management system.

SUMMARY

[0002] In general, in one aspect, the invention relates to a method for network deployment. The method includes receiving, from a user by a centralized system, a plurality of completed task detail forms, retrieving, by the centralized system and from the plurality of completed task detail forms, deployment task descriptions of a plurality of network devices, generating, by the centralized system and based on the deployment task descriptions, an engineering design package comprising a specification and associated configuration and connectivity information of each of the plurality of network devices, and deploying, based on the engineering design package, the plurality of network devices.

[0003] In general, in one aspect, the invention relates to a system for network deployment. The system includes a memory, and a computer processor connected to the memory and that receives, from a user, a plurality of

completed task detail forms, retrieves, from the plurality of completed task detail forms, deployment task descriptions of a plurality of network devices, generates, based on the deployment task descriptions, an engineering design package comprising a specification and associated configuration and connectivity information of each of the plurality of network devices, and deploys, based on the engineering design package, the plurality of network devices, wherein the plurality of completed task detail forms, the deployment task descriptions of the plurality of network devices, and the engineering design package are stored in the memory.

[0004] In general, in one aspect, the invention relates to a non-transitory computer readable medium (CRM) storing computer readable program code for network deployment. The computer readable program code, when executed by a computer, includes functionality for receiving, from a user, a plurality of completed task detail forms, retrieving, from the plurality of completed task detail forms, deployment task descriptions of a plurality of network devices, generating, based on the deployment task descriptions, an engineering design package comprising a specification and associated configuration and connectivity information of each of the plurality of network devices, and deploying, based on the engineering design package, the plurality of network devices.

[0005] Other aspects and advantages will be apparent from the following description and the appended claims.

BRIEF DESCRIPTION OF DRAWINGS

[0006] Specific embodiments of the disclosed technology will now be described in detail with reference to the accompanying figures. Like elements in the various figures are denoted by like reference numerals for consistency.

[0007] FIG. 1 shows a system in accordance with one or more embodiments.

[0008] FIG. 2 shows a flowchart in accordance with one or more embodiments.

[0009] FIGs. 3A-3F show an example in accordance with one or more embodiments.

[0010] FIGs. 4A and 4B show a computing system in accordance with one or more embodiments.

DETAILED DESCRIPTION

[0011] Specific embodiments of the disclosure will now be described in detail with reference to the accompanying figures. Like elements in the various figures are denoted by like reference numerals for consistency.

[0012] In the following detailed description of embodiments of the disclosure, numerous specific details are set forth in order to provide a more thorough understanding of the disclosure. However, it will be apparent to one of ordinary skill in the art that the disclosure may be practiced without these specific details. In other instances, well-known features have not been described in detail to avoid unnecessarily complicating the description.

[0013] Throughout the application, ordinal numbers (e.g., first, second, third, etc.) may be used as an adjective for an element (i.e., any noun in the application). The use of ordinal numbers is not to imply or create any particular ordering of the elements nor to limit any element to being only a single element unless expressly disclosed, such as using the terms “before”, “after”, “single”, and other such terminology. Rather, the use of ordinal numbers is to distinguish between the elements. By way of an example, a first element is distinct from a second element, and the first element may encompass more than one element and succeed (or precede) the second element in an ordering of elements.

[0014] Embodiments of the invention provide a method, a system, and a non-transitory computer readable medium for generating engineering design packages (EDPs) and tracking ongoing project inventory and progress to deploy or replace network equipment in the field. In one or more embodiments of the invention, a centralized system receives user input and generates the distribution

list for all equipment. In one or more example embodiments, the centralized system is based on virtual Basic integration (VBA) between Microsoft (MS) Access and MS Word. The user inputted parameters and value sets are organized/stored using MS Access, while the EDPs include documents generated using MS WORD. Those skilled in the art will appreciate that other suitable systems/applications may be used without departing from the scope herein.

[0015] FIG. 1 shows a schematic diagram in accordance with one or more embodiments. In one or more embodiments, one or more of the modules and/or elements shown in FIG. 1 may be omitted, repeated, and/or substituted. Accordingly, embodiments of the invention should not be considered limited to the specific arrangements of modules and/or elements shown in FIG. 1.

[0016] As shown in FIG. 1, the centralized EDP generation and management system (100) has multiple components, including, for example, a data repository (101), a database engine (108), and an analysis engine (109). Each of these components (101, 108, 109) may be implemented in hardware (*i.e.*, circuitry), firmware, software, or any combination thereof. Further, each of these components (101, 108, 109) may be located on the same computing device (*e.g.*, a computer) or on different computing devices connected by a network of any size having wired and/or wireless segments. In one or more embodiments, these components may be implemented using the computing system (400) described below in reference to FIGS. 4A and 4B. Each of these components of FIG. 1 is discussed below.

[0017] In one or more embodiments of the invention, the data repository (101) is configured to store data items such as completed task detail forms (*e.g.*, completed task detail form (102)), sets of aggregate task details (*e.g.*, aggregate task details (103)), engineering design packages (*e.g.*, engineering design package (104)), material inventory documents (*e.g.*, material inventory document (105)), material distribution documents (*e.g.*, material distribution document (106)), and equipment implementation documents (*e.g.*, equipment

implementation document (107)). Throughout this disclosure, the term “document” may refer to a text document or a collection of data elements representing a text document. In one or more embodiments, the data repository (101) further stores auxiliary data sets (e.g., auxiliary data set (110)) where each auxiliary data set includes predefined network equipment specification, deployment site information, and other related network deployment parameters of a network deployment project.

[0018] A completed task detail form (102) is a predefined template that is filled in with user inputted information regarding a particular task to be performed for a network deployment project. A network deployment project is a collection of actions to deploy or replace multiple pieces of network equipment in the field. Each piece of network equipment may correspond to a device or a set of related devices. A set of aggregate task details (103) is a collection of completed task detail forms that are related to the same network deployment project. In other words, multiple sets of aggregate task details (103) may be stored in the data repository that correspond to different network deployment projects.

[0019] An engineering design package (104) is a collection of documents for a network deployment project. Each document of the engineering design package (104) includes a specification and associated configuration and connectivity information of a corresponding piece of network equipment of the network deployment project. A material inventory document (105) includes a list of all network equipment to be deployed and/or replaced for a network deployment project. The material distribution document (105) includes a list of all network equipment with corresponding deployment locations for the network deployment project. An equipment implementation document (106) includes a timeline of deploying each piece of network equipment for the network deployment project.

[0020] In one or more embodiments of the invention, the database engine (108) is configured to receive completed task detail forms from a user, such as an

engineer implementing the network deployment project. Further, the database engine (108) is configured to organize and provide user access to the various data items stored in the data repository (101). In one or more embodiments, the database engine (108) is based on a third party database application, such as Microsoft Access.

[0021] In one or more embodiments of the invention, the analysis engine (109) is configured to retrieve deployment task descriptions from the completed task detail forms of a network deployment project. The deployment task descriptions are aggregated to form a set of aggregate task details of the network deployment project. In particular, the analysis engine (109) retrieves the deployment task descriptions from and stores the set of aggregate task details to the data repository (101) using the third party database application, such as Microsoft Access. The analysis engine (109) is further configured to generate an engineering design package based on the deployment task descriptions contained in the aggregate task details of the network deployment project. The engineering design package is used to facilitate deploying each piece of the network equipment of the network deployment project. The analysis engine (109) is further configured to generate the material inventory document, the material distribution document, and the equipment implementation document based on the engineering design package and the auxiliary data set of the network deployment project.

[0022] In one or more embodiments of the invention, deploying the network equipment of the network deployment project includes configuring and connecting each piece of the network equipment based on the specification and associated configuration and connectivity information contained in the engineering design package, facilitating the network deployment project based on the material inventory document, the material distribution document, and the equipment implementation document. In one or more embodiments, the analysis engine (109) generates the engineering documents, the material inventory

document, the material distribution document, and the equipment implementation document using an application software interface (e.g., Virtual Basic Integration) between the third party database application (e.g., Microsoft Access) and a third party document processing application (e.g., Microsoft WORD).

[0023] In one or more embodiments, the database engine (108) and the analysis engine (109) perform the functions described above using the method described in reference to FIG. 2 below. An example of automatically generating EDPs and associated equipment inventory/distribution/implementation documents is described in reference to FIGs. 3A-3F below.

[0024] Although the centralized EDP generation and management system (100) is shown as having three components (101, 108, 109), in one or more embodiments of the invention, the centralized EDP generation and management system (100) may have more or fewer components. Furthermore, the functions of each component described above may be split across components. Further still, each component (101, 108, 109) may be utilized multiple times to carry out an iterative operation.

[0025] FIG. 2 shows a flowchart in accordance with one or more embodiments. One or more blocks in FIG. 2 may be performed using one or more components as described in FIGS. 1A-1C. While the various blocks in FIG. 2 are presented and described sequentially, one of ordinary skill in the art will appreciate that some or all of the blocks may be executed in different orders, may be combined or omitted, and some or all of the blocks may be executed in parallel. Furthermore, the blocks may be performed actively or passively.

[0026] Initially in Block 201, a collection of completed task detail forms for a network deployment project are received from a user by a centralized system.

[0027] In Block 202, deployment task descriptions of the network deployment project are retrieved by the centralized system and from the collection of completed task detail forms.

- [0028] In Block 203, an engineering design package including a specification and associated configuration and connectivity information of each piece of network equipment of the network deployment project is generated by the centralized system based on the deployment task descriptions.
- [0029] In Block 204, a material inventory document, a material distribution document, and an equipment implementation document are generated by the centralized system based on the deployment task descriptions.
- [0030] In Block 205, each piece of the network equipment of the network deployment project is deployed based on the engineering design package. In one or more embodiments, each piece of the network equipment is configured and connected based on the corresponding specification and associated configuration and connectivity information. Further, the network deployment is facilitated using the material inventory document, the material distribution document, and the equipment implementation document. For example, a procurement instruction may be generated for each piece of the network equipment based on the material inventory document. In another example, a shipping/delivery instruction may be generated for each piece of the network equipment based on the material distribution document. In yet another example, a verification instruction may be generated for each piece of the network equipment based on the equipment implementation document. The verification instruction is an instruction to verify whether a particular piece of network equipment has been successfully deployed or replaced in the field. One or more of the procurement instruction, the shipping/delivery instruction, and the verification instruction may be generated in the electronic form or as a physical document.
- [0031] By way of the system and method of FIGs. 1 and 2, an application/process enhancement for developing Network Engineering designs, and tracking inventory is envisioned. This is done using VBA and integration with Microsoft Word document where an engineer only fills the required fields in the application with multiple parameters and then the application dynamically

selects the proper engineering design based on the engineer input. Finally, with a single click, the EDP is automatically generated as a Word document and routed for approval. Once centralized system is populated, all other functionalities such as materials inventory, distribution and progress tracking are dynamically and instantly ready for implementation. This centralized system is also integrated with BMC Remedy system and Ericson Network Engineer application to dynamically sync and reflect all changes.

[0032] FIGs. 3A-3F show an example in accordance with one or more embodiments. The example shown in FIGS. 3A-3F is based on the system and method described in reference to FIGS. 1 and 2 above.

[0033] As noted above, manually developing EDP documents is time consuming and require a dedicated team. In addition, manually aggregating the required materials and tracking material distribution, commissioning and progress can be inaccurate and inefficient. The example described below solves the described engineering and management pain areas and drawbacks while minimizes the required manpower to oversee such activities by introducing a new process where the MS Access application is used as frontend and a VBA program is used as backend integrated with MS Word templates. Once the centralized system is populated using user input, all other functionalities such as materials inventory, distribution and progress tracking are dynamically and instantly generated for implementation. This centralized system is also integrated with BMC Remedy system and Ericson Network Engineer application to dynamically synchronize and reflect on-going changes.

[0034] FIG. 3A shows a schematic diagram of an engineering design auto generation and configuration management system (310). As shown in FIG. 3A, the system (310) includes a design module (311), a material module (312), an implementation module (313), and a reporting module (314). The design module (311) receives user input regarding the engineering design packages, material list, and engineering work orders (EWOs). The material module (312) performs

various tasks relating to tracking, distribution, verification, and inventory. The implementation module (313) performs various tasks relating to change request (CRQ), coordination, and verification. In particular, the implementation module (313) is used to keep track of scheduled & status of each task, and verify if each task is implemented properly according to the engineering design packages. The report module (314) generates user reports regarding the phases, progress and optimization of the network design.

[0035] FIG. 3B shows a process diagram (320) for developing network engineering designs, and track inventory. The process is performed by setting multiple rules (325) where the user (e.g., engineer) only fills in multiple parameters (i.e., user input (321a)) for the required fields (322b-322f) in the input forms of the centralized system (322). Accordingly, the centralized system (322) dynamically selects the proper engineering design based on the user input (321a) as well as other information retrieved from a database, such as the network equipment specification (321b), site network information (321c), and network parameters (321d). For example the selected engineering design corresponds to one of the templates (331) depicted in FIG. 3C below. By applying the rules (325) according to the user selection (324), rule based output data (326), such as engineering designs (configurations of network devices), material list, distribution & inventory, progress & tracking, and other reports (ReportX), are automatically generated based on the selected engineering design (e.g., one of the templates (331)). In one or more embodiments, different set of rules results in different selection of template. For example if the user input field uplink type (322b) is set to "Fiber optic," then "Template 1" is selected from the templates (331).

[0036] FIG. 3C shows a chart (330) corresponding to an example of the process diagram (320) for developing network engineering designs, and track inventory. (Inventors, please explain how decisions (322a-322f) and templates (331) in FIG. 3C relate to blocks in FIG. 3B.)

[0037] FIG. 3D shows an example task detail form (340) of a database software application (e.g., MS Access) that the user fills out. The example task detail form (340) includes user input blocks (340a-340j). In particular, the information filled out by the user in the input blocks (340a-340j) correspond to the user input (321a)) for the fields (322b-322f) in FIGs. 3B-3C. For example, the input field uplink type (322b) in FIG. 3C may correspond to the user input block (340b) in FIG. 3D. User inputs are used to create a comprehensive repository for automatically creating network engineering designs, reports, and implementation, and automatically tracking inventory. TABLE 1 show examples of engineering designs package (EDP) that are developed using MS Access Database and Visual Basic for application (VBA) based on the EDP templates (331) depicted in FIG. 3C above. The entries listed in TABLE 1 are Microsoft Word documents where the engineer would only fill the required fields in the MS Access application with defined parameters and then the application will dynamically select the proper engineering design templates based on the engineer input. With a single click, an EDP containing device configuration is automatically generated as a Word document and routed for approval.

TABLE 1

EDP Template LAN Switch Replacement Home Internet (Direct)- 2019.docx
EDP Template LAN Switch Replacement Home Internet (Cascaded)- 2019.docx
EDP Template LAN Switch Replacement Home Internet (2-to-1 Direct)- 2019.docx
EDP Template LAN Switch Replacement Home Internet (2-to-1 Cascaded)- 2019.docx
EDP Template LAN Switch Replacement (Cascaded)- 2019.docx
EDP Template LAN Switch Replacement (2 to 1 Direct) 2019.docx
EDP Template LAN Switch Replacement (2 to 1 Cascaded)- 2019.docx
EDP Template LAN Switch Replacement (Direct)- 2019.docx

[0038] The EDP Templates listed in TABLE 1 above are generated from user inputs and dynamically stored in a central repository that is used to generate

reports, provide material inventory, material distribution, and equipment implementation plans. The system (310) may be integrated with a client-server trouble ticketing application (e.g., Remedy system) for tracking the overall implementation progress. For example, the overall implementation progress may be tracked as the example task list (350) shown in FIG. 3E. Each row in the task list (350) corresponds to a set of user input received using the task detail form (340). In particular, each column in the task list (350) corresponds to one data entry field in the task detail form (340). Based on the task list (350), queries may be created to retrieve information on materials distribution, status, generated EDPs, implementation phases, etc. from the central repository. FIG. 3F shows an example of retrieved list (361a) and retrieved table (361b) that contain information on materials distribution, status, generated EDPs, implementation phases, etc. The retrieve list (361a) is an example material inventory document. The retrieved table (361b) is an example material distribution document showing material distribution information for specific equipment for multiple regions. For example, “AITD” is Area IT support Unit for a specific region.

[0039] Embodiments may be implemented on a computing system. Any combination of mobile, desktop, server, router, switch, embedded device, or other types of hardware may be used. For example, as shown in FIG. 4A, the computing system (400) may include one or more computer processors (402), non-persistent storage (404) (e.g., volatile memory, such as random access memory (RAM), cache memory), persistent storage (406) (e.g., a hard disk, an optical drive such as a compact disk (CD) drive or digital versatile disk (DVD) drive, a flash memory, etc.), a communication interface (412) (e.g., Bluetooth interface, infrared interface, network interface, optical interface, etc.), and numerous other elements and functionalities.

[0040] The computer processor(s) (402) may be an integrated circuit for processing instructions. For example, the computer processor(s) may be one or more cores or micro-cores of a processor. The computing system (400) may also

include one or more input devices (410), such as a touchscreen, keyboard, mouse, microphone, touchpad, electronic pen, or any other type of input device.

[0041] The communication interface (412) may include an integrated circuit for connecting the computing system (400) to a network (not shown) (e.g., a local area network (LAN), a wide area network (WAN) such as the Internet, mobile network, or any other type of network) and/or to another device, such as another computing device.

[0042] Further, the computing system (400) may include one or more output devices (408), such as a screen (e.g., a liquid crystal display (LCD), a plasma display, touchscreen, cathode ray tube (CRT) monitor, projector, or other display device), a printer, external storage, or any other output device. One or more of the output devices may be the same or different from the input device(s). The input and output device(s) may be locally or remotely connected to the computer processor(s) (402), non-persistent storage (404), and persistent storage (406). Many different types of computing systems exist, and the aforementioned input and output device(s) may take other forms.

[0043] Software instructions in the form of computer readable program code to perform embodiments of the disclosure may be stored, in whole or in part, temporarily or permanently, on a non-transitory computer readable medium such as a CD, DVD, storage device, a diskette, a tape, flash memory, physical memory, or any other computer readable storage medium. Specifically, the software instructions may correspond to computer readable program code that, when executed by a processor(s), is configured to perform one or more embodiments of the disclosure.

[0044] The computing system (400) in FIG. 4A may be connected to or be a part of a network. For example, as shown in FIG. 4B, the network (420) may include multiple nodes (e.g., node X (422), node Y (424)). Each node may correspond to a computing system, such as the computing system shown in FIG. 4A, or a group of nodes combined may correspond to the computing system shown in

FIG. 4A. By way of an example, embodiments of the disclosure may be implemented on a node of a distributed system that is connected to other nodes. By way of another example, embodiments of the disclosure may be implemented on a distributed computing system having multiple nodes, where each portion of the disclosure may be located on a different node within the distributed computing system. Further, one or more elements of the aforementioned computing system (400) may be located at a remote location and connected to the other elements over a network.

[0045] Although not shown in FIG. 4B, the node may correspond to a blade in a server chassis that is connected to other nodes via a backplane. By way of another example, the node may correspond to a server in a data center. By way of another example, the node may correspond to a computer processor or micro-core of a computer processor with shared memory and/or resources.

[0046] The nodes (for example, node X (422), node Y (424)) in the network (420) may be configured to provide services for a client device (426). For example, the nodes may be part of a cloud computing system. The nodes may include functionality to receive requests from the client device (426) and transmit responses to the client device (426). The client device (426) may be a computing system, such as the computing system shown in FIG. 4A. Further, the client device (426) may include or perform all or a portion of one or more embodiments of the disclosure.

[0047] While the disclosure has been described with respect to a limited number of embodiments, those skilled in the art, having benefit of this disclosure, will appreciate that other embodiments can be devised which do not depart from the scope of the disclosure as disclosed herein. Accordingly, the scope of the disclosure should be limited only by the attached claims.

CLAIMS

What is claimed is:

1. A method for network deployment, comprising:
 - receiving, from a user by a centralized system, a plurality of completed task detail forms;
 - retrieving, by the centralized system and from the plurality of completed task detail forms, deployment task descriptions of a plurality of network devices;
 - generating, by the centralized system and based on the deployment task descriptions, an engineering design package comprising a specification and associated configuration and connectivity information of each of the plurality of network devices; and
 - deploying, based on the engineering design package, the plurality of network devices.
2. The method of claim 1, wherein deploying the plurality of network devices comprises:
 - configuring and connecting, based on the specification and associated configuration and connectivity information, the plurality of network devices.
3. The method of claim 1, comprising:
 - generating, by the centralized system and based on the deployment task descriptions, a material inventory document comprising a list of the plurality of network device; and
 - facilitating, based on the material inventory document, the network deployment of the plurality of network devices.
4. The method of claim 1, comprising:

generating, by the centralized system and based on the deployment task descriptions, a material distribution document comprising a list of the plurality of network device with corresponding deployment locations; and facilitating, based on the material distribution document, the network deployment of the plurality of network devices.

5. The method of claim 1, comprising:

generating, by the centralized system and based on the deployment task descriptions, an equipment implementation document comprising a timeline of deploying the plurality of network device; and facilitating, based on the equipment implementation document, the network deployment of the plurality of network devices.

6. The method of claim 1,

wherein said receiving and retrieving are performed using a third party database application, and
wherein said generating is performed using an application software interface between the third party database application and a third party document processing application.

7. The method of claim 6,

wherein the third party database application comprises Microsoft Access,
wherein the third party document processing application comprises Microsoft WORD, and
wherein the application software interface comprises Virtual Basic Integration.

8. A system for network deployment, comprising:

a memory; and

a computer processor connected to the memory and that:

receives, from a user, a plurality of completed task detail forms;

retrieves, from the plurality of completed task detail forms, deployment task descriptions of a plurality of network devices;

generates, based on the deployment task descriptions, an engineering design package comprising a specification and associated configuration and connectivity information of each of the plurality of network devices; and

deploys, based on the engineering design package, the plurality of network devices,

wherein the plurality of completed task detail forms, the deployment task descriptions of the plurality of network devices, and the engineering design package are stored in the memory.

9. The system of claim 8, wherein deploying the plurality of network devices comprises:

configuring and connecting, based on the specification and associated configuration and connectivity information, the plurality of network devices.

10. The system of claim 8, the computer processor further:

generates, based on the deployment task descriptions, a material inventory document comprising a list of the plurality of network device; and facilitates, based on the material inventory document, the network deployment of the plurality of network devices, wherein the material inventory document is stored in the memory.

11. The system of claim 8, the computer processor further:

generates, based on the deployment task descriptions, a material distribution document comprising a list of the plurality of network device with corresponding deployment locations; and facilitates, based on the material distribution document, the network deployment of the plurality of network devices, wherein the material distribution document is stored in the memory.

12. The system of claim 8, the computer processor further:

generates, based on the deployment task descriptions, an equipment implementation document comprising a timeline of deploying the plurality of network device; and
facilitates, based on the equipment implementation document, the network deployment of the plurality of network devices,
wherein the equipment implementation document is stored in the memory.

13. The system of claim 8,

wherein said receiving and retrieving are performed using a third party database application, and
wherein said generating is performed using an application software interface between the third party database application and a third party document processing application.

14. The system of claim 13,

wherein the third party database application comprises Microsoft Access,
wherein the third party document processing application comprises Microsoft WORD, and
wherein the application software interface is based on Virtual Basic Integration.

15. A computer readable medium storing instructions to carry out the method according to any of claims 1-7.

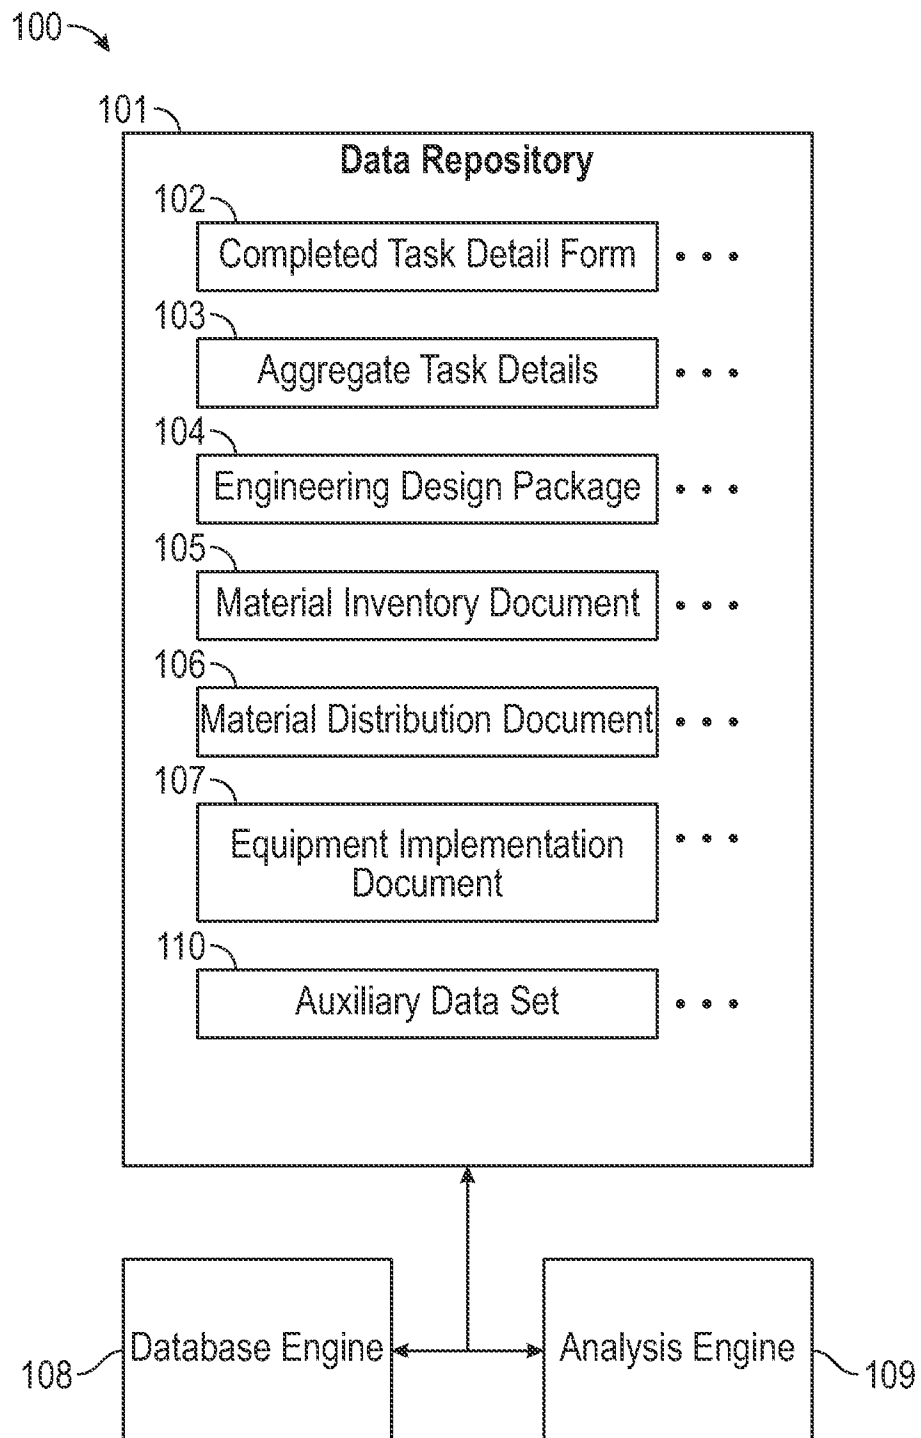


FIG. 1

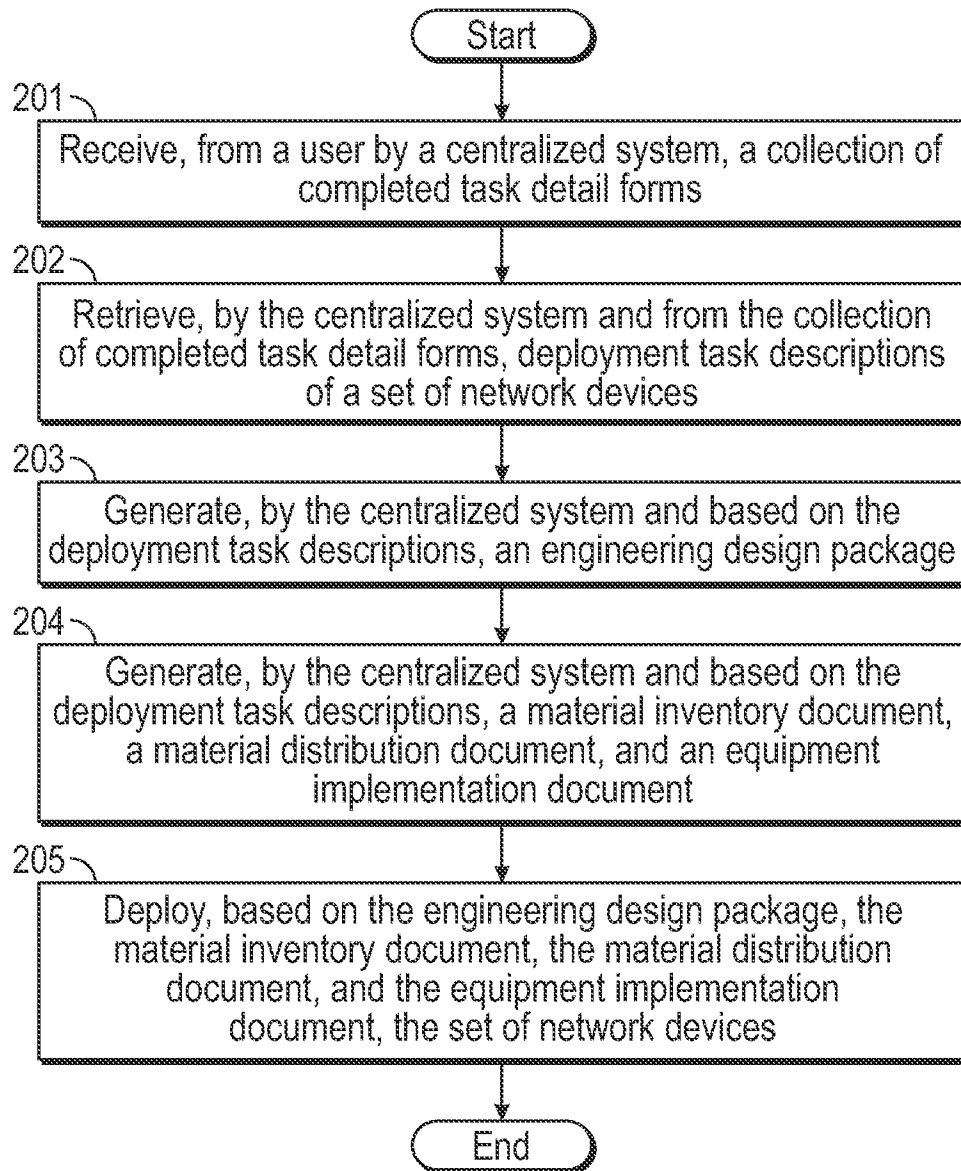


FIG. 2

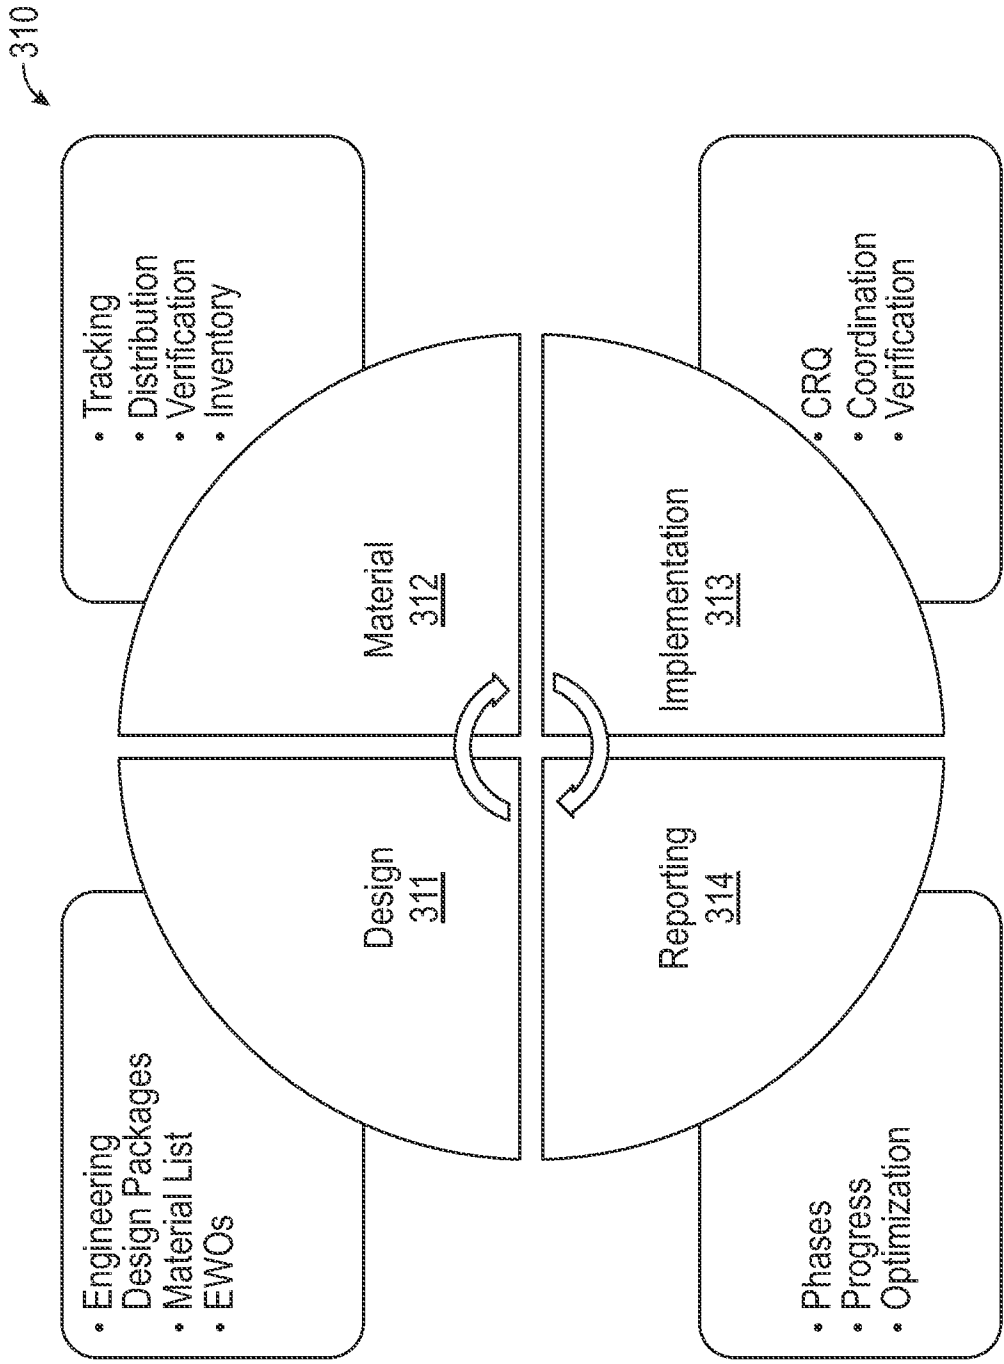


FIG. 3A

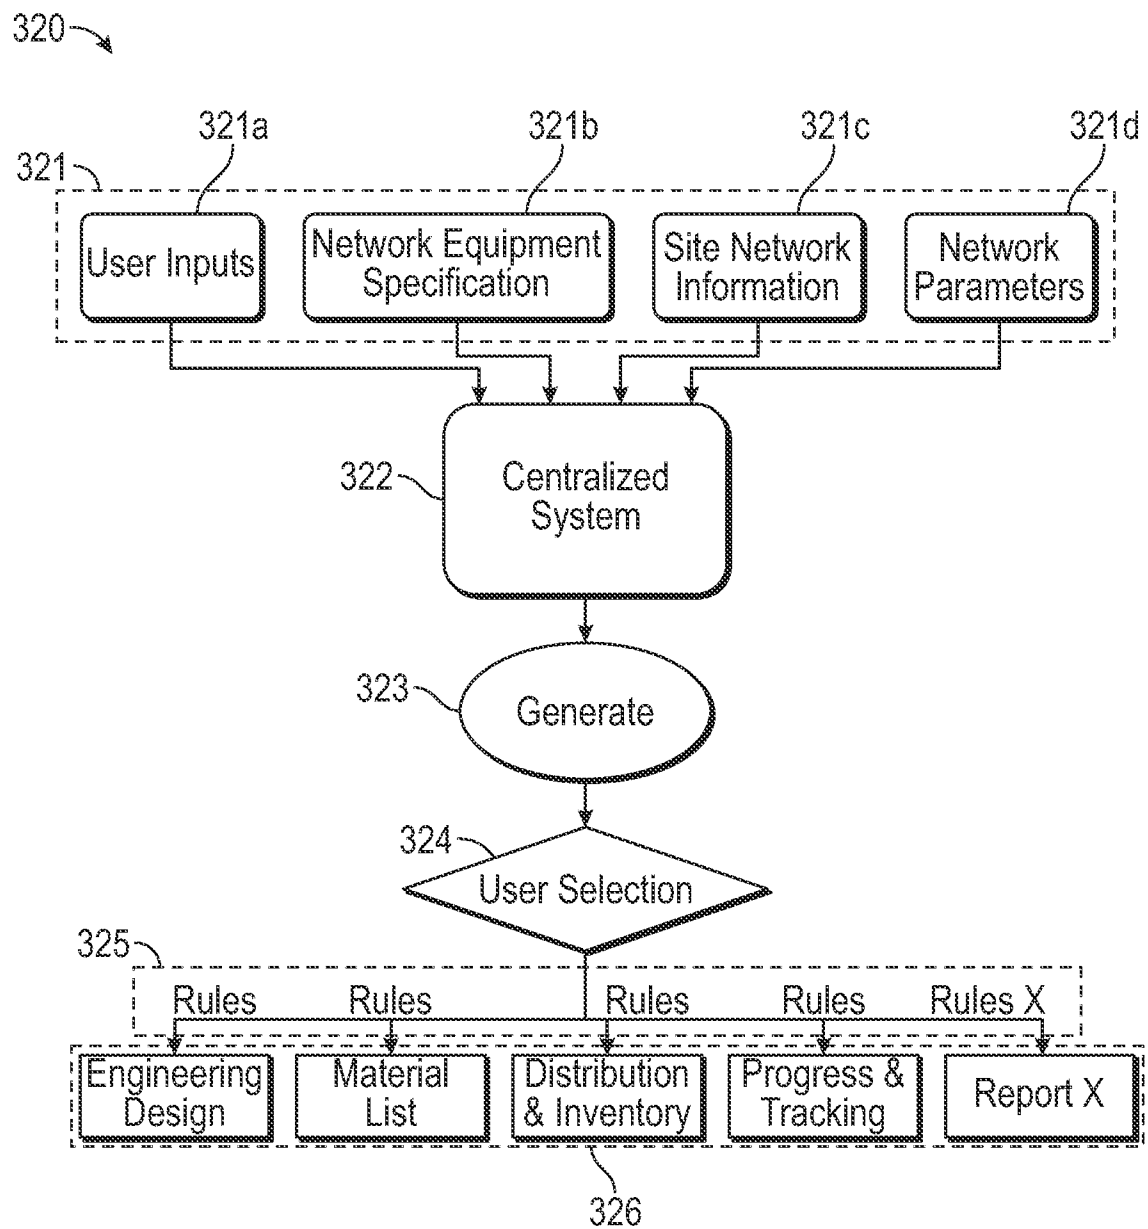


FIG. 3B

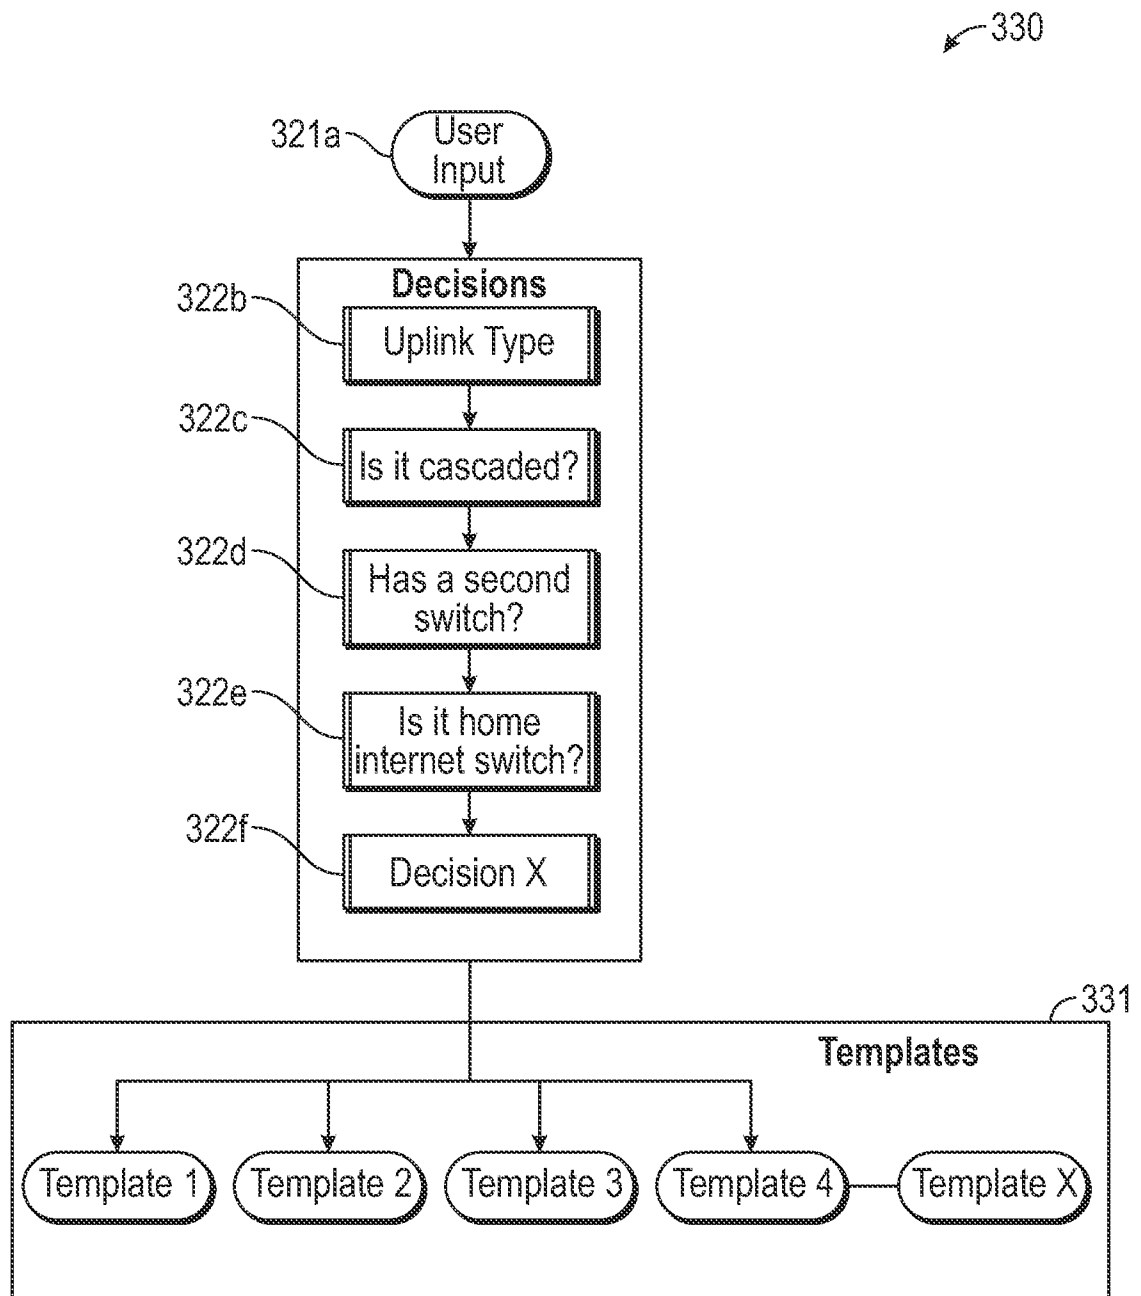


FIG. 3C

340

Task Details

Close

Task
Task Title
Assigned To
Reviewer
Status
% Complete
Priority
Start Date
Due Date
Completed Date
Note

(Attachment Preview)

Add or Remove Attachments

340d

Old Switch Details

Old S/N
Current Model
Switch Location
AITD
City
IP Address
Casecaded? ☐
Fiber Unlink? ☐
Home Internet ☐

PE Router

PE Router
IP Address
Location
Interface

2nd Old Switch (Stacked)

2nd Switch ☐
Switch Name
IP Address
S/N

Uplink Switch

Switch Name
IP Address
Switch Model
Upstream Port
Downstream Port
VLANs

Home Internet

VLAN Name

VLAN ID

New Switch

New S/N
New Hostname:
Physical ID:
Switch Model
Number of Slots
Uplink Port
Switch Ports

VLANs

MGMT GW
NAC GW
DATA GW
VOICE GW

NE

NE EWO
NE EWO Status
RU CRM
RU EWO:

Verify Implementation

CRQ
CRQ Date
Replaced? ☐ TWO MM ☐
All PS ☐ 4-SFP ☐
All Cards ☐

☐ Generate EDP

FIG. 3D

350

TASK LIST														
TASK TITLE SEARCH [] Y SAVE FILTER														
NEW TASK E-MAIL LIST ENGINEERS LIST SHOW/HIDE FIELDS REPORTS ?														
OPEN	TASK TITLE	STATUS	ASSIGNED TO	DESCRIPTION	NEW NO	CRO	CRO Date	OLD SN	PHASE	NEW ROSTNAME	NEWSN	PHYSICAL C	INSTRUCTIONS	AID
OPEN	DHA80175-AN2A2-01H	RU EWO SUBMITTED	MOHAMMED HAIDAN	5406 5 CARDS	1428888	CRC200000154 587	5/12/2019	SG2203Y1WD	PHASE 1	DHA80175-AN2A2-01A	SG204G-4800D	SW404376		CA
OPEN	DHA80175-AN2A3-01H	VERIFIED	MOHAMMED HAIDAN	NSV	1468887	CRC200000170 338	2/24/2020	SG450X72J6	2020 - PHASE 1	DHA80175-AN2A3-01A	SG38G-490U5		5406R	CA
OPEN	DHA80175-AN3A1-01H	VERIFIED	MOHAMMED HAIDAN	NSV	1468887	CRC200000170 338	2/24/2020	SG2203Y1YC	2020 - PHASE 1	DHA80175-AN3A1-01A	SG38G-490U7		5406R	CA
OPEN	DHA80175-AN3A2-01H	RU EWO SUBMITTED	MOHAMMED HAIDAN	5406 4 CARDS	1428888	CRC200000154 587	5/12/2019	SG408Y2DT	PHASE 1	DHA80175-AN3A2-01A	SG204G-4800U	SW404377		CA
OPEN	DHA80175-AN3A2-02H	NE EWO SUBMITTED	MOHAMMED HAIDAN	NSV	1467881			SG408Y2064	2020	DHA80175-AN3A2-02A	SG38GYW06M		3810M-24	CA
OPEN	DHA80175-AN3A3-01H	RU EWO SUBMITTED	MOHAMMED HAIDAN	5406 4 CARDS	1428888	CRC200000154 587	5/12/2019	SG2203Y2DS	PHASE 1	DHA80175-AN3A3-01A	SG204G-4800L	SW404378		CA
OPEN	DHA80176-RDA103-01H	RU EWO SUBMITTED	MOHAMMED HAIDAN	5406 4 CARDS	1428881	CRC200000154 587	5/12/2019	SG2203Y2L5	PHASE 1	DHA80176-RDA103-01A	SG204G-4800M	SW404379		CA
OPEN	DHA80176-RDA108-01H	RU EWO SUBMITTED	MOHAMMED HAIDAN	5406 4 CARDS DHA-JUD-BUS-1	1428882	CRC200000154 587	5/22/2019	SG2203Y2LM	PHASE 1	DHA80176-RDA108-01A	SG204G-4800N	SW404380		CA
OPEN	DHA80176-RDA203-01H	RU EWO SUBMITTED	MOHAMMED HAIDAN	5406 5 CARDS	1428886	CRC200000154 587	5/12/2019	SG2203Y2L7	PHASE 1	DHA80176-RDA203-01A	SG204G-4800P	SW404381		CA
OPEN	DHA80176-RDA207-01H	NE EWO SUBMITTED	MOHAMMED HAIDAN	NSV	1467881			SG2418Y3TD	2020	DHA80176-RDA207-01A	SG204G-4806Y		5406R	CA
OPEN	DHA80176-RDA207-01H	DEFERRED	MOHAMMED HAIDAN	5406 5 CARDS	DEFERRED			SG2418Y3TD		DHA80176-RDA207-01A				CA
OPEN	DHA80176-RDA301-01H	NE EWO SUBMITTED	MOHAMMED HAIDAN	NSV	1467881			SG450X72GM	2020	DHA80176-RDA301-01A	SG204G-4807D		5406R	CA
OPEN	DHA80176-RDA302-01H	NE EWO SUBMITTED	MOHAMMED HAIDAN	NSV	1467881			SG450X72GC	2020	DHA80176-RDA302-01A	SG204G-4807I		5406R	CA
OPEN	DHA80177-RMA119-01H	NE EWO SUBMITTED	MOHAMMED HAIDAN	AE2 1018	1468841			SG2408Y2DN	2020	DHA80177-RMA119-01A	SG204G-4807Z		5406R	CA
OPEN	DHA80177-RMA161-02H	VERIFIED	MOHAMMED HAIDAN	AE2 THIS SWITCH HAS 2 UPLINK	1468887	CRC200000170 575	2/28/2020	SG2408Y2DQ	2020 - PHASE 1	DHA80177-RMA161-02A	SG204G-4802M		5412R	CA
OPEN	DHA80177-RMA228-03H	VERIFIED	MOHAMMED HAIDAN	AE2 THIS SWITCH HAS 2 UPLINK	1468887	CRC200000170 575	2/28/2020	SG2408Y2FK	2020 - PHASE 1	DHA80177-RMA228-03A	SG204G-4802N		5412R	CA

FIG. 3E

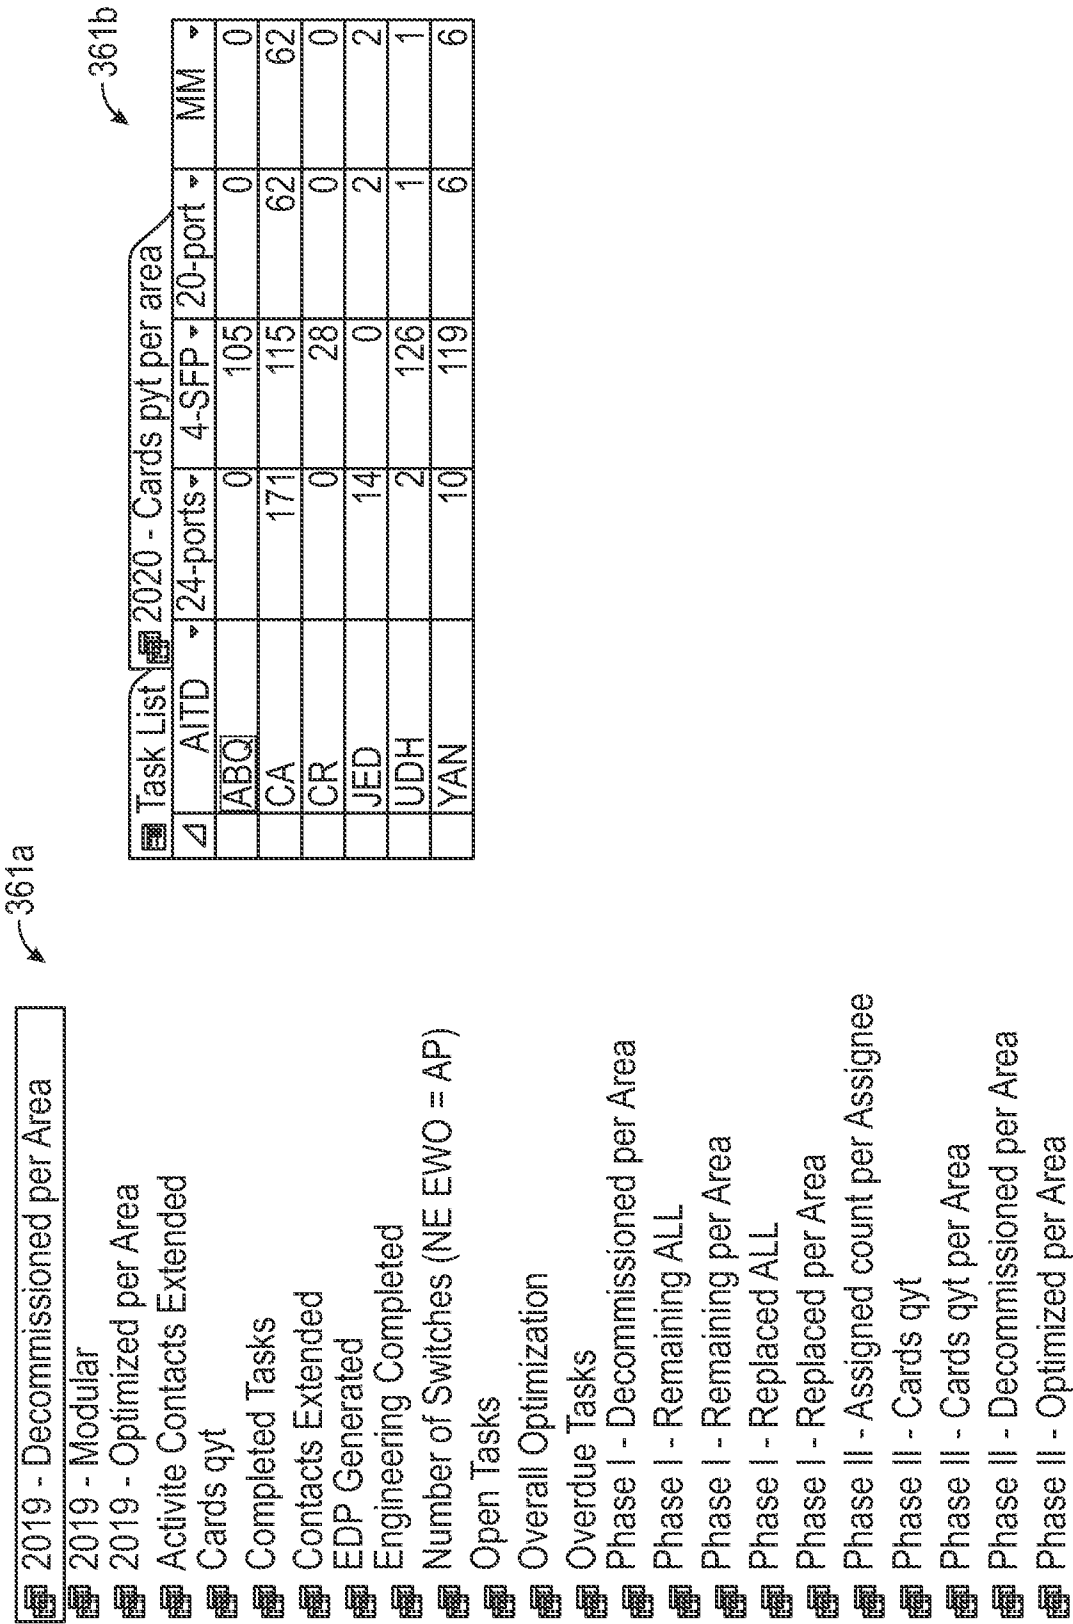


FIG. 3F

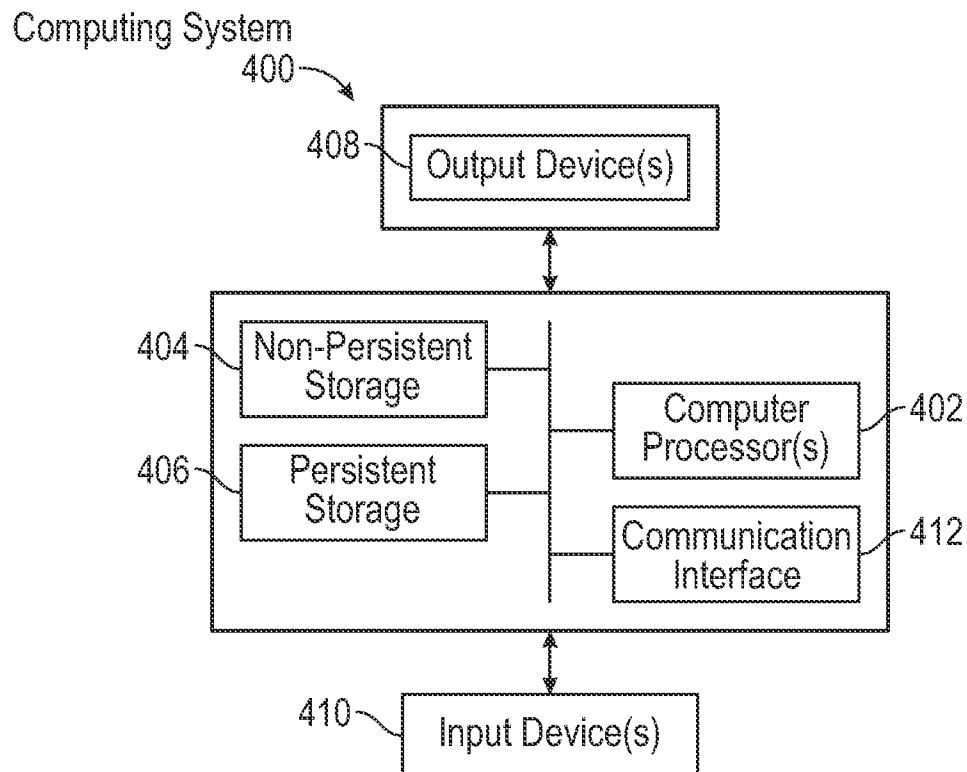


FIG. 4A

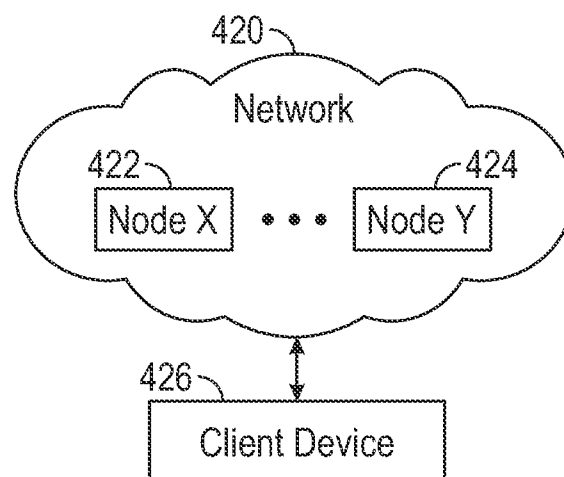


FIG. 4B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2022/023078

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F8/61 G06F9/50 G06F16/93 H04L41/0806 H04L41/0853
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2020/048504 A1 (ZTE CORP [CN]) 12 March 2020 (2020-03-12) Title Steps 303, 307 -----	1-15
A	US 2017/139695 A1 (GOVINDARAJU AGILA [IN] ET AL) 18 May 2017 (2017-05-18) paragraph [0039] - paragraph [0041]; figures 3,4 paragraphs [0028], [0049]; figure 7 -----	1-15
A	US 2016/188323 A1 (NAGARAJA VISHWAS [US] ET AL) 30 June 2016 (2016-06-30) abstract paragraph [0027] - paragraph [0028] paragraph [0039] - paragraph [0041] paragraph [0049]; figure 6A -----	1-15

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 2022

Date of mailing of the international search report

11/07/2022

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hoareau, Samuel

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2022/023078

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2020048504 A1	12-03-2020	CN 110620754 A	27-12-2019
		JP 2022500740 A	04-01-2022
		KR 20210044298 A	22-04-2021
		RU 2764288 C1	17-01-2022
		WO 2020048504 A1	12-03-2020
US 2017139695 A1	18-05-2017	US 2015378703 A1	31-12-2015
		US 2017139695 A1	18-05-2017
		US 2019243626 A1	08-08-2019
		US 2021132930 A1	06-05-2021
US 2016188323 A1	30-06-2016	US 2013232463 A1	05-09-2013
		US 2016188323 A1	30-06-2016