

(19)



(11)

EP 4 069 383 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

05.02.2025 Bulletin 2025/06

(51) International Patent Classification (IPC):

A63B 53/00 ^(2015.01) **A63B 53/04** ^(2015.01)

A63B 53/06 ^(2015.01)

(21) Application number: **20896732.3**

(52) Cooperative Patent Classification (CPC):

A63B 53/0466; A63B 53/0408; A63B 53/0412;

A63B 53/0433; A63B 53/0437; A63B 2053/0491

(22) Date of filing: **07.12.2020**

(86) International application number:

PCT/US2020/070874

(87) International publication number:

WO 2021/113877 (10.06.2021 Gazette 2021/23)

(54) **GOLF CLUB HEAD HAVING FACE REINFORCING STRUCTURE**

GOLFSCHLÄGERKOPF MIT FLÄCHENVERSTÄRKUNGSSTRUKTUR

TÊTE DE CLUB DE GOLF COMPRENANT UNE STRUCTURE DE RENFORCEMENT DE FACE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR**

• **MORALES, Eric J.**

Phoenix, Arizona 85029 (US)

• **STOKKE, Ryan M.**

Phoenix, Arizona 85029 (US)

(30) Priority: **06.12.2019 US 201962944968 P**

02.09.2020 US 202063073849 P

10.09.2020 US 202063076859 P

(74) Representative: **Mewburn Ellis LLP**

Aurora Building

Counterslip

Bristol BS1 6BX (GB)

(43) Date of publication of application:

12.10.2022 Bulletin 2022/41

(56) References cited:

JP-A- 2004 167 115 JP-A- 2004 167 115

US-A1- 2007 202 963 US-A1- 2007 202 963

US-A1- 2010 000 071 US-A1- 2010 000 071

US-A1- 2013 102 415 US-A1- 2013 102 415

US-A1- 2019 083 862 US-A1- 2019 083 862

US-A1- 2019 176 000 US-A1- 2019 201 754

US-A1- 2019 201 754

(60) Divisional application:

24207413.6 / 4 491 244

(73) Proprietor: **Karsten Manufacturing Corporation**

Phoenix, AZ 85029 (US)

(72) Inventors:

• **MILLEMAN, Travis D.**

Phoenix, Arizona 85029 (US)

EP 4 069 383 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF INVENTION

[0001] The present disclosure relates generally to golf clubs. In particular, the present disclosure relates to golf club heads having one or more thickened regions.

BACKGROUND

[0002] Golf can be played by a wide variety of individuals generally categorized by age, gender, physical strength, and flexibility. This diverse group of individuals (or golfers) often leads to golf club manufacturers designing golf clubs that accommodates the full spectrum of golfers, including ones having low, moderate, and high swing speeds. Therefore, often due to golf club manufacturers designing golf clubs that accommodate all individuals; individuals having low and moderate swings speeds may be using golf clubs that are less optimally suited for their specific swing signature. In return, leading to many golfers sacrificing impact efficiency, resulting in a less than maximized ball travel distance. Therefore, there is a need in the art for a golf club head, and more particularly, a driver-type golf club head designed to provide maximum performance to golfers with low and moderate swing speeds. US2013/102415A proposes a golf club head with reinforcing pieces. JP2004-167115 proposes a golf club head having ball hitting durability by enhancing the peripheral strength of a face part of the golf club head. US2007/202963 proposes a golf club head with a hollow shell structure.

SUMMARY OF THE INVENTION

[0003] The invention relates to a hollow golf club head as claimed in claim 1. The additional features are defined by the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004]

FIG. 1 illustrates an external heel and rear side perspective view of a golf club head.

FIG. 2 illustrates an external top or crown view of the golf club head of FIG. 1.

FIG. 3 illustrates an external bottom or sole view of the golf club head of FIG. 1.

FIG. 4 illustrates an external front view of the golf club head of FIG. 1 in an address position.

FIG. 5 illustrates a rear, internal view of the faceplate having a variable face thickness of FIG. 4 in an address position.

FIG. 6 illustrates a cross sectional view of the golf club head of FIG. 1 having a weight assembly affixed to the club head.

FIG. 7 illustrates a cross sectional view of the golf club head of FIG. 1 without a weight assembly affixed to the club head.

FIG. 8 illustrates a rear internal view of the golf club head of FIG. 1 with a sole-to-faceplate bridge and a crown-to-faceplate bridge.

FIG. 9 illustrates a close-up view of the crown-to-faceplate bridge of FIG. 8.

FIG. 10 illustrates a rear, internal view of the golf club head of FIG. 1 with a sole-to-faceplate bridge.

FIG. 11 illustrates a close-up view of the sole-to-faceplate bridge of FIG. 10.

[0005] Other aspects of the disclosure will become apparent by consideration of the detailed description and accompanying drawings.

[0006] For simplicity and clarity of illustration, the drawing figures illustrate the general manner of construction, and descriptions and details of well-known features and techniques may be omitted to avoid unnecessarily obscuring the present disclosure. Additionally, elements in the drawing figures are not necessarily drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help improve understanding of embodiments of the present disclosure. The same reference numerals in different figures denotes the same elements.

DETAILED DESCRIPTION

[0007] Presented herein are golf clubs, and in particular, lightweight wood-type golf clubs designed for golfers with swing speeds under 38 m/s (85 mph) (e.g., low and moderate swing speeds). Generally, the lightweight golf clubs described herein may comprise a thin crown, a thin sole, a mass efficient weight system, and/or a thin faceplate to maximize performance gains (e.g., ball travel distance, impact efficiency, and ball speed) targeted to individuals with swing speeds less than 38 m/s (85 mph). As will be further described below, in order to achieve a lightweight golf club (having a thin crown, a thin sole, a mass efficient weight system, and a thin faceplate), the golf club head further comprises a crown-to-faceplate bridge and a sole-to-faceplate bridge to control the characteristic time (CT) properties of the club head.

[0008] Creating golf clubs that are specifically targeted to specific swing speed demographics (*i.e.* low and moderate swing speeds) can allow these individuals to use golf clubs suited to their swing signature, rather than using golf clubs configured to accommodate the full

spectrum of golfers (*i.e.* low, moderate, and high swing speeds). Therefore, this reduces the need to create golf club heads that can withstand the ultimate loading (and/or ultimate stress) conditions imparted from high speed swing speeds for durability purposes. This allows the golf club heads described herein to have a decreased club head mass-to-volume ratio, improved mass placement, and a thinner faceplate.

[0009] The terms "first," "second," "third," "fourth," and the like in the description and in the claims, if any, are used for distinguishing between similar elements and not necessarily for describing a particular sequential or chronological order. It is to be understood that the terms so used are interchangeable under appropriate circumstances such that the embodiments described herein are, for example, capable of operation in sequences other than those illustrated or otherwise described herein. Furthermore, the terms "include," and "have," and any variations thereof, are intended to cover a non-exclusive inclusion, such that a process, method, system, article, device, or apparatus that comprises a list of elements is not necessarily limited to those elements, but may include other elements not expressly listed or inherent to such process, method, system, article, device, or apparatus.

[0010] The terms "left," "right," "front," "back," "top," "bottom," "over," "under," and the like in the description and in the claims, if any, are used for descriptive purposes and not necessarily for describing permanent relative positions. It is to be understood that the terms so used are interchangeable under appropriate circumstances such that the embodiments of the apparatus, methods, and/or articles of manufacture described herein are, for example, capable of operation in other orientations than those illustrated or otherwise described herein.

[0011] The golf club head described herein can be a driver-type club head, a fairway wood-type golf club, or a hybrid-type club head as described below. In many embodiments, the golf club head can be a wood-type golf club head (*i.e.* a driver-type golf club head, a fairway wood-type golf club head, or a hybrid-type golf club head). Driver-type golf club heads, fairway wood-type golf club heads, and hybrid-type golf club heads can be characterized by a loft angle, a head volume, and/or by a head weight as mentioned above.

1. Loft Angle - Driver

[0012] The term "driver-type golf club head" described herein can be defined by a loft angle.

[0013] In many embodiments, the loft angle of the driver-type club head can be less than approximately 16 degrees, less than approximately 15 degrees, less than approximately 14 degrees, less than approximately 13 degrees, less than approximately 12 degrees, less than approximately 11 degrees, less than approximately 10 degrees, less than approximately 9 degrees, less than approximately 8 degrees, or less than approximately 7

degrees.

2. Loft Angle - Fairway Wood

[0014] The term "fairway wood-type golf club head" described herein can be defined by one or more of a loft angle or a club head material.

[0015] In many embodiments, the loft angle of the fairway wood-type club head can be less than approximately 35 degrees, less than approximately 34 degrees, less than approximately 33 degrees, less than approximately 32 degrees, less than approximately 31 degrees, or less than approximately 30 degrees. Further, in many embodiments, the loft angle of the club head is greater than approximately 12 degrees, greater than approximately 13 degrees, greater than approximately 14 degrees, greater than approximately 15 degrees, greater than approximately 16 degrees, greater than approximately 17 degrees, greater than approximately 18 degrees, greater than approximately 19 degrees, or greater than approximately 20 degrees. For example, in some embodiments, the loft angle of the fairway wood-type club head can be between 12 degrees and 35 degrees, between 15 degrees and 35 degrees, between 20 degrees and 35 degrees, or between 12 degrees and 30 degrees.

3. Material - Fairway Wood

[0016] The material of the fairway wood-type golf club head can be constructed from any material used to construct a conventional golf club head. For example, the material of the fairway wood-type golf club head can be constructed from any one or combination of the following: 8620 alloy steel, S25C steel, carbon steel, maraging steel, 17-4 stainless steel, 1380 stainless steel, 303 stainless steel, stainless steel alloys, steel alloys, tungsten, aluminum, aluminum alloys, ADC-12, titanium, titanium alloys, steel alloys or any other known metal or composite material for creating a fairway wood-type golf club head. In many embodiments, the fairway wood-type golf club head is constructed from a titanium alloy and/or composite material.

4. Loft Angle - Hybrid

[0017] The term "hybrid-type golf club head" described herein can be defined by one or more of a loft angle or a club head material.

[0018] In many embodiments, the loft angle of the hybrid-type club head can be less than approximately 40 degrees, less than approximately 39 degrees, less than approximately 38 degrees, less than approximately 37 degrees, less than approximately 36 degrees, less than approximately 35 degrees, less than approximately 34 degrees, less than approximately 33 degrees, less than approximately 32 degrees, less than approximately 31 degrees, or less than approximately 30 degrees.

Further, in many embodiments, the loft angle of the hybrid-type club head is greater than approximately 16 degrees, greater than approximately 17 degrees, greater than approximately 18 degrees, greater than approximately 19 degrees, greater than approximately 20 degrees, greater than approximately 21 degrees, greater than approximately 22 degrees, greater than approximately 23 degrees, greater than approximately 24 degrees, or greater than approximately 25 degrees.

5. Material - Hybrid

[0019] The material of the hybrid-type golf club head can be constructed from any material used to construct a conventional golf club head. For example, the material of the hybrid-type golf club head can be constructed from any one or combination of the following: 8620 alloy steel, S25C steel, carbon steel, maraging steel, 17-4 stainless steel, 1380 stainless steel, 303 stainless steel, stainless steel alloys, steel alloys, tungsten, aluminum, aluminum alloys, ADC-12, titanium, titanium alloys, steel alloys or any other known metal or composite for creating a hybrid-type golf club head. In many embodiments, the hybrid-type golf club head can be constructed from a titanium alloy and/or composite material.

[0020] Before any embodiments of the disclosure are explained in detail, it is to be understood that the disclosure is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The disclosure is capable of other embodiments and of being practiced or of being carried out in various ways.

[0021] Described below are lightweight golf club heads having a mass conservative faceplate and a mass conservative body compared to golf club heads designed for swing speeds in excess of 44.7 m/s (100 miles per hour). The body and the faceplate together form the golf club head defining a hollow interior. The body comprises a crown, a sole, a toe, a heel, and a rear portion defining an inner cavity. The crown, sole, toe, and heel of the body define an opening configured to receive the faceplate.

[0022] As described above, in many embodiments, the faceplates described herein can be designed according to a specific swing speed demographic. By way of a non-limiting example, a first user demographic having swing speeds less than 38 m/s (85 miles per hour (mph)) can use golf clubs having a thinner faceplate (thereby a less mass intensive faceplate), than a second user demographic with swing speeds in excess of 44.7 m/s (100 miles per hour (mph)). This allows the first user demographic to experience greater ball speeds and increased ball travel distance (due to increased face flexure caused by thinning of the faceplate), in comparison, to using golf club heads designed for the second user demographic and both, maintaining their durability. In this specific scenario, a durability issue caused by thinning the faceplate is not readily present (to the first user demographic)

due to low-to-moderate impact speeds, however, thinning the thickness of the faceplate can result in an unconstrained increase in CT.

[0023] In many embodiments, to adequately control or modify CT across the faceplate (while maintaining a thin and lightweight faceplate), the faceplate can have a variable thickness profile, which tunes CT by allowing for thickening only desired regions. However, in contrast, to golf club heads designed for swing speeds greater than 44.7 m/s (100 miles per hour), simply implementing a variable face thickness profile would be insufficient to adequately control CT. Therefore, a crown-to-faceplate bridge and a sole-to-faceplate bridge are internally and integrally formed within the club head to further control, modify, and/or reduce the characteristic time properties (CT) of the club head.

[0024] The variable thickness of the faceplate can comprise a perimeter edge region, a toe region, a heel region, an upper transition region, a lower transition region, and a center region. The perimeter edge region can be substantially ellipsoidal and circumscribes the toe region, the heel region, the upper transition region, the lower transition region, and the center region. The toe region spans from the border of the perimeter edge, the upper transition region, and the lower transition region. The heel region spans from the border of the perimeter edge, the upper transition region, and the lower transition region. The center region spans from and bounded by the upper and lower transition region. In many embodiments, from the heel end of the golf club head to the center of the faceplate and from the toe end of the golf club head to the center of the faceplate, the variable thickness of the faceplate (VFT) can be defined as the perimeter edge being the outermost region, followed up the heel and toe portions, the upper and lower transition region, and lastly the center region.

[0025] Generally, portions of the golf club head having the greatest characteristic time measurements can typically be found (1) towards the geometric center of the faceplate, (2) offset from the geometric center of the faceplate towards the toe of the faceplate, (3) offset from the geometric center towards the top end of the faceplate, or combinations thereof. These areas can potentially have a characteristic time measurement that is at, near, or approaching a threshold CT value (i.e. a USGA and R&A CT limit). Therefore, in one or more thin faceplate embodiments, it may be desirable to reduce CT in the toe portion of the faceplate and increase CT in the heel portion of the faceplate. In these situations, the toe region of the VFT can have a greater thickness than the heel region of the VFT. This creates a faceplate this is stiffer within the toe portion and more flexible within the heel portion. Thereby, in part, creating a more uniform CT across the faceplate.

[0026] As mentioned above, having a faceplate with a variable face thickness profile facilitates in controlling (and/or decreasing) CT, however, due to the increased face flexure caused by a thin and lightweight faceplate,

solely implementing a VFT is insufficient to adequately controlling CT. Therefore, to further modulate CT, without adding mass intensive features, the golf club head can comprise a crown-to-faceplate bridge and/or a sole-to-faceplate bridge. The crown-to-faceplate bridge and/or the sole-to-faceplate bridge can be positioned in portions of the golf club head that are subjected to low displacement and/or low stress regions upon golf ball impact. This allows certain portions of a transition region between the faceplate and the crown and/or certain portions of the transition region between the faceplate and the sole to be reinforced/thicker to provide localized and/or custom stiffening to adjust the dynamic response properties of the golf club head (*i.e.* CT), while having a negligible effect on impact ball speeds.

Composition and Setup of Golf Club Head

[0027] As will be further described below, in order to achieve a lightweight golf club that satisfies a predetermined mass/volume ratio, the golf club head comprises a thin crown, a thin sole, a mass efficient weight system, and a thin faceplate when compared to a conventional club head designed for swing speeds over 44.7 m/s (100 miles per hour). Thinning these structural features (*i.e.* the thin crown, the thin sole, the mass efficient weight system, and the thin faceplate), increases the flexibility of the golf club head, which correlates to an increase in CT. Therefore, to limit (or offset) the increase in CT and ensure the club is in conformance with USGA, the golf club head further comprises a crown-to-faceplate bridge and/or a sole-to-faceplate bridge to control (or lower) the characteristic time (CT) properties of the club head without needing to increase the thickness of the faceplate (*i.e.* not limiting the flexibility of the faceplate). The club heads are achieving these characteristics with swing speeds less than 38 m/s (85 miles per hour).

[0028] In many embodiments, the golf club head comprises a club head body (may also be referred to as "body"). The club head body forms a toe (or toe portion), a heel (or heel portion), a crown (or crown portion), a sole (or sole portion), a rear portion and a faceplate opening configured to receive a faceplate. The faceplate can provide a surface adapted for impact with a golf ball. The rear portion is rearwardly spaced from the faceplate. The sole portion is defined as being between the faceplate and the rear portion, and resting on a ground plane (or playing surface) at an address position. The crown (or crown portion) can be formed opposite the sole (or sole portion). The faceplate can be defined by the sole, the crown, the heel, and the toe of the golf club head.

[0029] As previously mentioned, the golf club head can be configured to reside in the "address position". Unless otherwise described or stated, the golf club head is in an address position for all reference measurements, ratios, and/or descriptive parameters. The address position can be referred to as being in a state where (1) the sole of the golf club head rests on the ground plane, which contacts

and is parallel to a playing surface and (2) the faceplate can be substantially perpendicular to the ground plane.

[0030] The faceplate of the clubhead defines a geometric center. In some embodiments, the geometric center can be located at the geometric centerpoint of a faceplate perimeter, and at a midpoint of face height. In the same or other examples, the geometric center also can be centered with respect to an engineered impact zone, which can be defined by a region of grooves on the faceplate. As another approach, the geometric center of the faceplate can be located in accordance with the definition of a golf governing body such as the United States Golf Association (USGA). For example, the geometric center of the faceplate can be determined in accordance with Section 6.1 of the USGA's Procedure for Measuring the Flexibility of a Golf Clubhead (USGA-TPX3004, Rev. 1.0.0, May 1, 2008) (available at <http://www.usga.org/equipment/testing/protocols/Procedure-For-Measuring-The-Flexibility-Of-A-Golf-Club-Head/>) (the "Flexibility Procedure").

[0031] The club head further defines a loft plane tangent to the geometric center of the faceplate. The face height can be measured parallel to the loft plane between a top end of the faceplate perimeter near the crown and a bottom end of the faceplate perimeter near the sole. In these embodiments, the perimeter of the faceplate can be located along the outer edge of the faceplate where the curvature deviates from the bulge and/or roll of the faceplate.

[0032] The geometric center of the faceplate further defines a coordinate system having an origin located at the geometric center of the faceplate, the coordinate system having an X' axis, a Y' axis, and a Z' axis. The X' axis extends through the geometric center of the faceplate in a direction from the heel to the toe of the club head. The Y' axis extends through the geometric center of the faceplate in a direction from the crown to the sole of the club head and perpendicular to the X' axis, and the Z' axis extends through the geometric center of the faceplate in a direction from the front end (*e.g.*, faceplate) to the rear of the club head and perpendicular to the X' axis and the Y' axis.

[0033] The coordinate system defines an X'Y' plane extending through the X' axis and the Y' axis. The X'Y' plane extends parallel to a hosel axis (not shown) and is positioned at an angle corresponding to the loft angle of the club head from the loft plane **164**. Further, the X' axis can be positioned at a 60 degree angle to the hosel axis when viewed from a direction perpendicular to the X'Y' plane. In these or other embodiments, the club head can be viewed from a front view (FIG. 4) when the faceplate is viewed from a direction perpendicular to the X'Y' plane.

I. Embodiments

[0034] Many of the golf club head embodiments (FIGS. 1 - 11) described below, illustrate a driver-type golf club head **100** configured to increase performance for golfers

with swing speeds under 38 m/s (85 miles-per-hour (mph)). As will be further described below, increased performance can be at least in part attributed to the addition of a crown-to-faceplate bridge **106** and/or a sole-to-faceplate bridge **107**, a thin crown **102**, a thin sole **103**, a lightweight and flexible faceplate **105** with a variable thickness profile **111**, and a mass-efficient weight system **104**. As will be discussed below, the combination of these features and attributes aid in preventing durability and CT issues, while increasing club head performance to golfers with swing speeds under 38 m/s (85 miles per hour).

Mass Properties of the Golf Club Head

[0035] Referring to FIGS. 1-11, the body **101** of the golf club head **100**, and the faceplate **105** are coupled together to define a hollow interior cavity. The body **101** comprises a crown **102**, a sole **103**, a toe **108**, a heel **109**, and a rear portion **110** defining a hollow inner cavity. The crown **102**, the sole **103**, the toe **108**, and the heel **109** of the body define an opening configured to receive the faceplate **105**. The faceplate **105** can provide a surface adapted for impact with a golf ball. The rear portion **110** is rearwardly spaced from the faceplate **105**. The sole **103** is defined as being between the faceplate **105** and the rear portion **110** and resting on a ground plane **120** (or playing surface) at an address position. The crown **102** can be formed opposite the sole **103**.

[0036] Creating golf club heads used (only) by golfers with swing speeds under 38 m/s (85 miles per hour) permits reducing (or thinning) the structural mass of many features of the club head (*i.e.* the crown, the sole, the faceplate, etc.) then conventionally required by golf club heads used by golfers with swing speeds in excess of 44.7 m/s (100 miles per hour) (conventional golf clubs). This creates a golf club head that is significantly more flexible than conventional golf clubs, which consequently causes an increase in the CT properties of the club head. Therefore, implementing an integrally formed crown-to-faceplate bridge or a sole-to-faceplate bridge can locally thicken a region of the club head having inherently high CT without needing to add thickness (or mass) to the entire faceplate. In conventional clubheads, the primary option to decrease the CT properties of the club head is to thicken the entire face (and not just a face periphery portion). Therefore, the crown-to-faceplate bridge and the sole-to-faceplate bridge aid in creating a lightweight golf club head. In many embodiments, the golf club head **100** can be approximately 3 grams, approximately 4 grams, approximately 5 grams, approximately 6 grams, approximately 7 grams, approximately 8 grams, or approximately 9 grams lighter than the conventional golf club head.

Driver-Type Golf Club Head

[0037] To achieve a lightweight (but durable) golf club

head **100**, the combined mass of the golf club head **100** can be between approximately 190 grams and 200 grams. In many embodiments, the combined mass of the golf club head **100** can be between approximately 190 grams - 192 grams, approximately 192 grams - 194 grams, approximately 194 grams - 196 grams, approximately 196 grams - 198 grams, or approximately 198 grams - 200 grams. In further embodiments, the combined mass of the golf club head **100** can be less than 200 grams, less than 199 grams, less than 198 grams, less than 197 grams, less than 196 grams, less than 195 grams, less than 194 grams, less than 193 grams, less than 192 grams, or less than 191 grams. In other embodiments, the combined mass of the golf club head **100** can be approximately 190 grams, approximately 191 grams, approximately 192 grams, approximately 193 grams, approximately 194 grams, approximately 195 grams, approximately 196 grams, approximately 197 grams, approximately 198 grams, approximately 199 grams, or approximately 200 grams. In the illustrated embodiment of FIGS. 1-11, the combined club head mass (*i.e.* the club head body coupled to the faceplate) is approximately 194 grams. For comparison purposes, conventional golf club heads designed for swing speeds over 44.7 m/s (100 miles per hour) have a combined club head mass in excess of 203 grams.

[0038] Creating a lightweight golf club head **100** does not necessarily mean a tradeoff (or decrease) in the volume of the clubhead **100**. For example, the volume of the golf club head **100** can be between approximately 444 cc and approximately 460 cc. In many embodiments, the volume of the golf club head **100** can be between approximately 444 cc - approximately 448 cc, approximately 448 cc - approximately 450 cc, approximately 450 cc - approximately 452 cc, approximately 452 cc - approximately 454 cc, approximately 454 cc - approximately 456 cc, approximately 456 cc - approximately 458 cc, or approximately 458 cc - approximately 460 cc. In other embodiments, the volume of the golf club head **100** can be approximately 444 cc, approximately 445 cc, approximately 446 cc, approximately 447 cc, approximately 448 cc, approximately 449 cc, approximately 450 cc, approximately 451 cc, approximately 452 cc, approximately 453 cc, approximately 454 cc, approximately 455 cc, approximately 456 cc, approximately 457 cc, approximately 458 cc, approximately 459 cc, or approximately 460 cc. In the illustrated embodiment of FIGS. 1-11, the combined club head **100** volume is 460 cc.

[0039] In many embodiments, the golf club head **100** can be characterized by a mass-to-volume ratio that is defined as the ratio between the mass of the golf club head and the volume of the golf club head (

$$\frac{\text{Mass of the Golf Club Head (grams)}}{\text{Volume of the Golf Club Head (cubic centimeters)}}$$

). In many embodiments, the mass-to-volume ratio of the golf club head **100** can be between approximately

0.40 and approximately 0.44. In many embodiments, the mass-to-volume ratio of the golf club head **100** can be greater than approximately 0.40, greater than approximately 0.41, greater than approximately 0.42, or greater than approximately 0.43. In the same or other embodiments, the mass-to-volume ratio of the golf club head **100** can be less than approximately 0.44, less than approximately 0.43, less than approximately 0.42, or less than approximately 0.41. In alternative embodiments, the mass-to-volume ratio of the golf club head **100** can be approximately 0.40, approximately 0.41, approximately 0.42, approximately 0.43, or approximately 0.44. The mass-to-volume ratio is unitless as one gram is mathematically equivalent to one cubic centimeter.

[0040] Maintaining a golf club head **100** with a mass-to-volume ratio that is less than 0.44 enables individuals with lower swing speeds to swing freely and naturally without sacrificing forgiveness (MOI) typically associated with a larger volume club head. The ratio described above is achieved through various features that will be further detailed below.

Fairway Wood Golf Club Head

[0041] To achieve a lightweight (but durable) golf club head, the combined mass of the golf club head can be between approximately 180 grams and 198 grams. In many embodiments, the combined mass of the golf club head can be between approximately 180 grams - 182 grams, approximately 182 grams - 184 grams, approximately 184 grams - 186 grams, approximately 186 grams - 188 grams, approximately 188 grams - 190 grams, approximately 190 grams - approximately 192 grams, approximately 192 grams - approximately 194 grams, approximately 194 grams - approximately 196 grams, or approximately 196 grams - approximately 198 grams. In further embodiments, the combined mass of the golf club head can be less than 198 grams, less than 197 grams, less than 196 grams, less than 195 grams, less than 194 grams, less than 193 grams, less than 192 grams, less than 191 grams, less than 190 grams, less than 189 grams, less than 188 grams, less than 187 grams, less than 186 grams, less than 185 grams, less than 184 grams, less than 183 grams, less than 182 grams, or less than 181 grams. In other embodiments, the combined mass of the golf club head can be approximately 180 grams, approximately 181 grams, approximately 182 grams, approximately 183 grams, approximately 184 grams, approximately 185 grams, approximately 186 grams, approximately 187 grams, approximately 188 grams, approximately 189 grams, approximately 190 grams, approximately 191 grams, approximately 192 grams, approximately 193 grams, approximately 194 grams, approximately 195 grams, approximately 196 grams, approximately 197 grams, or approximately 198 grams. For comparison purposes, conventional fairway-wood type golf club heads designed for swing speeds over 44.7 m/s (100 miles per hour) have a com-

bined club head mass between 200 grams and 208 grams.

[0042] Creating a lightweight golf club head does not necessarily mean a tradeoff (or decrease) in the volume of the clubhead. For example, the volume of the golf club head can be between approximately 165 cc and approximately 180 cc. In many embodiments, the volume of the golf club head can be between approximately 165 cc - approximately 170 cc, approximately 170 cc - approximately 175 cc, or approximately 175 cc - approximately 180 cc. In other embodiments, the volume of the golf club head can be approximately 165 cc, approximately 166 cc, approximately 167 cc, approximately 168 cc, approximately 169 cc, approximately 170 cc, approximately 171 cc, approximately 172 cc, approximately 173 cc, approximately 174 cc, approximately 175 cc, approximately 176 cc, approximately 177 cc, approximately 178 cc, approximately 179 cc, or approximately 180 cc.

[0043] In many embodiments, the golf club head can be characterized by a mass-to-volume ratio that is defined as the ratio between the mass of the golf club head and the volume of the golf club head (

$$\frac{\text{Mass of the Golf Club Head (grams)}}{\text{Volume of the Golf Club Head (cubic centimeters)}}$$

). In many embodiments, the mass-to-volume ratio of the golf club head can be between approximately 1.04 and approximately 1.07. In many embodiments, the mass-to-volume ratio of the golf club head can be greater than approximately 1.04, greater than approximately 1.05, greater than approximately 1.06, or greater than approximately 1.07. In the same or other embodiments, the mass-to-volume ratio of the golf club head can be less than approximately 1.07, less than approximately 1.06, or less than approximately 1.05. In alternative embodiments, the mass-to-volume ratio of the golf club head can be approximately 1.04, approximately 1.05, approximately 1.06, or approximately 1.07. The mass-to-volume ratio is unitless as one gram is mathematically equivalent to one cubic centimeter.

[0044] Maintaining a golf club head with a mass-to-volume ratio that is less than 1.07 enables individuals with lower swing speeds to swing freely and naturally without sacrificing forgiveness (MOI) typically associated with a larger volume club head. The ratio described above is achieved through various features that will be further detailed below. Similar mass-to-volume ratio can be achieved with a hybrid-type golf club head.

Crown of the Golf Club Head

[0045] As described above, creating golf club heads used only by golfers with swing speeds only under 38 m/s (85 miles per hours) permits reducing (or thinning) the structural mass of many features of the club head (*i.e.* the crown, the sole, the faceplate, etc.) then conventionally constrained to (for durability purposes) by golf club heads configured used by golfers with swing speeds in excess of 44.7 m/s (100 miles per hour) (conventional golf clubs).

Thinning the crown of the golf club head provides a lower and deeper center of gravity position to help launch the golf ball into the air quicker upon impact. However, this can create a golf club head that has a thinner crown-to-face transition region than conventional golf clubs, which consequently can cause an increase in the CT properties of the club head. Therefore, locally implementing an integrally formed crown-to-faceplate bridge that is tangentially blended with some of surrounding areas of the club head can decrease CT, while negligibly increasing the club head mass and maintaining a thin crown.

[0046] In many embodiments, the golf club head **100** can have a crown **102** with a relatively lower thickness (than a standard club that must maintain durability over 44.7 m/s (100 mph) impacts) to achieve certain head mass and volume targets. As defined above, the crown **102** of the golf club **100** is the top surface of the club head and the portion of the club visible from an address position, when the individual or golfer (not shown) is looking down. The crown **102** can be segmented (or split) into three distinct length portions (*i.e.* a front portion **125**, a middle portion **126**, and a rear portion **127**), measured in a front-to-rear direction from the rear of the golf club head **110** to the faceplate **105**.

[0047] The front portion **125** of the crown **102** can be proximal to the faceplate **105** and defined as the forward 1/6th portion (and/or having a length that is 1/6th) of the crown length. The rear portion **127** of the crown **102** is proximal to the rear **110** of the golf club head **100** and defined as being the rearward 2/6th portion (and/or having a length that is 2/6th) of the crown length. The middle portion **126** of the crown **102** is between the front portion **125** and rear portion **127** and defined as being the middle 3/6th portion (and/or having a length that is 3/6th) of the crown length.

[0048] In this or other embodiments, the thickness of the crown **102** can vary from near the front portion **125** of the crown **102** to near the rear end **110** of the crown **102** and/or from near the heel portion of the crown **102** to near the toe portion of the crown **102**, or in any direction along the crown **102** of the golf club head. As illustrated by FIGS. 6 and 7, in many embodiments, the thickness of the crown **102** can decrease from near the front end towards the rear end of the golf club head **100**, measured from an inner crown surface **128** to an outer crown surface **129**.

[0049] For example, in many embodiments, the thickness of the front portion **125** of the crown **102** can be between 0.48 mm (0.019 inches) and 0.79 mm (0.031 inches). In other embodiments, the thickness of the front portion **125** of the crown **102** can be less than approximately 0.79 mm (0.031 inches), less than approximately 0.76 mm (0.030 inches), less than approximately 0.74 mm (0.029 inches), less than approximately 0.71 mm (0.028 inches), less than approximately 0.69 mm (0.027 inches), less than approximately 0.66 mm (0.026 inches), less than approximately 0.64 mm (0.025 inches), less than approximately 0.61 mm (0.024 inches), less than approximately 0.58 mm (0.023 inches), less than ap-

proximately 0.56 mm (0.022 inches), less than approximately 0.53 mm (0.021 inches), or less than approximately 0.51 mm (0.020 inches). In other embodiments, the thickness of the front portion **125** of the crown **102** can be approximately 0.48 mm (0.019 inches), approximately 0.51 mm (0.020 inches), approximately 0.53 mm (0.021 inches), approximately 0.56 mm (0.022 inches), approximately 0.58 mm (0.023 inch), approximately 0.61 mm (0.024 inch), approximately 0.64 mm (0.025 inch), approximately 0.66 mm (0.026 inch), approximately 0.69 mm (0.027 inch), approximately 0.71 mm (0.028 inches), approximately 0.74 mm (0.029 inches), approximately 0.76 mm (0.030 inches), or approximately 0.79 mm (0.031 inches).

[0050] In the same or an alternative embodiment, the thickness of the middle **126** and rear portion **127** of the crown **102** can be the same or substantially equivalent. For example, in many embodiments, the thickness of the middle portion **126** and rear portion **127** of the crown **102** can be between 0.36 mm (0.014 inches) and 0.51 mm (0.020 inches). In other embodiments, the thickness of the middle portion **126** and rear portion **127** of the crown **102** can be less than approximately 0.51 mm (0.020 inches), less than approximately 0.48 mm (0.019 inches), less than approximately 0.46 mm (0.018 inches), less than approximately 0.43 mm (0.017 inches), less than approximately 0.41 mm (0.016 inches), or less than approximately 0.38 mm (0.015 inches). In other embodiments, the thickness of the middle portion **126** and rear portion **127** of the crown **102** can be approximately 0.36 mm (0.014 inches), approximately 0.38 mm (0.015 inches), 0.41 mm (0.016 inches), 0.43 mm (0.017 inches), 0.46 mm (0.018 inches), 0.48 mm (0.019 inches), or 0.51 mm (0.020 inches). In alternative embodiments, the middle portion **126** of the crown can be a transition region from thickest front portion **125** to the thinnest rear portion **127** of the crown.

[0051] Stated another way, in many embodiments, approximately 85% of the crown **102** can have a thickness of approximately 0.43 mm (0.017 inches) and the remaining portion of the crown **102** can have a thickness of approximately 0.79 mm (0.031 inches). For comparison purposes, conventional golf club heads that maintains durability with swing speeds over 44.7 m/s (100 miles per hour) have an average thickness of 0.79 mm (0.031 inches) over the majority of the crown.

Sole of the Golf Club Head

[0052] As described above, creating golf club heads configured to be used by golfers with swing speeds under 38 m/s (85 miles per hours) permits reducing (or thinning) the structural mass of many features of the club head (*i.e.* the crown, the sole, the faceplate, etc.) then conventionally constrained to by golf club heads used by golfers with swing speeds in excess of 44.7 m/s (100 miles per hour) (conventional golf clubs). Thinning the sole of the golf club head allows the faceplate to deform and bend more

(i.e. more faceplate deflection yields greater ball speeds) than a conventional club head that maintains durability over 44.7 m/s (100 miles per hour). However, this can create a golf club head that has a thinner sole-to-face transition region than conventional golf clubs, which consequently can cause an increase in the CT properties of the club head. Therefore, locally implementing an integrally formed sole-to-faceplate bridge that is tangentially blended with the some surrounding areas of the club head can decrease (or control) CT, while negligibly increasing the club head mass and maintaining a thin sole.

[0053] In many embodiments, the golf club head **100** can have a sole **103** with a relatively lower thickness (than a standard club that must maintain durability over 44.7 m/s (100 mph) impacts) to achieve certain head mass and volume targets. As defined above, the sole **103** of the golf club head **100** is between the faceplate **105** and the rear portion **110** and resting on a ground plane **120** (or playing surface) at an address position. The sole **103** can be segmented (or split) into three distinct length portions (i.e. a front sole portion **130**, a middle sole portion **131**, and a rear sole portion **132**), measured in a front-to-rear direction from the faceplate-to-rear of the golf club head.

[0054] The front sole portion **130** of the sole **103** can be proximal to the faceplate **105** and the forward 1/3rd portion (and/or having a length that is 1/3rd) of the sole length. The rear sole portion **132** of the sole **103** is proximal to the rear **110** of the golf club head and defined as being the rearward 1/3rd portion (and/or having a length that is 1/3rd) of the sole length. The middle sole portion **131** of the sole is between the front sole portion **130** and rear sole portion **132** and defined as being the middle 1/3rd portion (and/or having a length is 1/3rd) of the sole length.

[0055] In this or other embodiments, the thickness of the sole **103**, measured from an inner sole surface **133** to an outer sole surface **134**, can vary from near the front portion of the sole to near the rear end of the sole and/or from near the heel portion of the sole to near the toe portion of the sole, or in any direction along the sole of the golf club head. In many embodiments, the thickness of the sole **103** can decrease from near the front end towards the rear end **110** of the golf club head **100**.

[0056] For example, in many embodiments, the thickness of the front portion **130** of the sole **103** can be between 0.48 mm (0.019 inches) and 0.79 mm (0.031 inches). In other embodiments, the thickness of the front portion **130** of the sole **103** can be less than approximately 0.79 mm (0.031 inches), less than approximately 0.76 mm (0.030 inches), less than approximately 0.74 mm (0.029 inches), less than approximately 0.71 mm (0.028 inches), less than approximately 0.69 mm (0.027 inches), less than approximately 0.66 mm (0.026 inches), less than approximately 0.64 mm (0.025 inches), less than approximately 0.61 mm (0.024 inches), less than approximately 0.58 mm (0.023 inches), less than approximately 0.56 mm (0.022 inches), less than approximately 0.53 mm (0.021 inches), or less than approxi-

mately 0.51 mm (0.020 inches). In other embodiments, the thickness of the front portion **130** of the sole **103** can be approximately 48 mm (0.019 inch), approximately 0.51 mm (0.020 inches), approximately 0.53 mm (0.021 inches), approximately 0.56 mm (0.022 inches), approximately 0.58 mm (0.023 inch), approximately 0.61 mm (0.024 inch), approximately 0.64 mm (0.025 inch), approximately 0.66 mm (0.026 inch), approximately 0.69 mm (0.027 inch), approximately 0.71 mm (0.028 inches), approximately 0.74 mm (0.029 inches), approximately 0.76 mm (0.030 inches), or approximately 0.79 mm (0.031 inches).

[0057] In the same or an alternative embodiment, the thickness of the middle **131** and rear portion **132** of the sole **103** can be the same or substantially equivalent. For example, in many embodiments, the thickness of the middle portion **131** and rear portion **132** of the sole **103** can be between 0.36 mm (0.014 inches) and 0.56 mm (0.022 inches). In other embodiments, the thickness of the middle portion **131** and rear portion **132** of the sole **103** can be less than approximately 0.56 mm (0.022 inches), less than approximately 0.53 mm (0.021 inches), less than approximately 0.51 mm (0.020 inches), less than approximately 0.48 mm (0.019 inches), less than approximately 0.46 mm (0.018 inches), less than approximately 0.43 mm (0.017 inches), less than approximately 0.41 mm (0.016 inches), or less than approximately 0.38 mm (0.015 inches). In other embodiments, the thickness of the middle portion **131** and rear portion **132** of the sole **103** can be approximately 0.36 mm (0.014 inches), approximately 0.38 mm (0.015 inches), approximately 0.41 mm (0.016 inches), approximately 0.43 mm (0.017 inches), approximately 0.46 mm (0.018 inches), approximately 0.48 mm (0.019 inches), approximately 0.51 mm (0.020 inches), approximately 0.53 mm (0.021 inches), or approximately 0.56 mm (0.022 inches). In alternative embodiments, the middle portion **131** of the sole can be a transition region from thickest front portion **130** to the thinnest rear portion **132**.

[0058] Stated another way, in many embodiments, the entire sole **103** can have a thickness less than approximately 0.76 mm (0.030 inches). In alternative embodiments, approximately 97% of the sole can have a thickness less than approximately 0.71 mm (0.028 inches). For comparison purposes, conventional golf club heads that maintains durability with swing speeds over 44.7 m/s (100 miles per hour) have an average sole thickness of 0.76 mm (0.030 inches) over the majority of the sole.

50 Faceplate Features

[0059] As shown by FIGS. 4, 5, and 6, to partially control CT across the faceplate **105** (while maintaining a thin faceplate, a thin crown **102**, and a thin sole **103**), the faceplate **105** can have a variable thickness profile **111**, which can tune CT by allowing for thickening only in desired regions. In the illustrated embodiment, the variable thickness profile **111** of the faceplate **105** can com-

prise a perimeter edge region **112**, a toe region **113**, a heel region **114**, an upper transition region **115**, a lower transition region **116**, and a center region **117**. The thickness of the faceplate **105** is approximately 5% to 7% thinner than conventional golf club heads that must maintain durability with swing speeds over 44.7 m/s (100 miles per hour). However, only implementing a variable face thickness profile to control CT, would be insufficient due to the greater bending/flexure characteristics caused by thin faceplate and lightweight clubhead. Therefore, a crown-to-faceplate bridge and a sole-to-faceplate bridge are integrally formed within the club head to control, modify, and/or reduce the characteristic time properties (CT) of the club head.

[0060] In many embodiments, the golf club head **100** can be viewed in a perpendicular direction to an XY' plane and the faceplate **105** as shown by FIGS. 4 and 5. When viewing the golf club head **100** in a generally perpendicular direction to the XY' plane and the faceplate **105**, the golf club head **100** can be defined by a coordinate system having an X' axis **122** that extends through the geometric center **121** of the faceplate **105** in a heel-to-toe direction and a Y' axis **123** that extends through the geometric center **121** in a top-to-bottom (or crown-to-sole) direction.

[0061] The X' axis **122** horizontally divides the golf club head **100** into an upper region and a lower region. The upper region of the golf club head is bounded by the X' axis **122**, the crown **102**, and the maximum heel-to-toe width of the club head **100**. The lower region of the golf club head is bounded by the X' axis **122**, the sole **103**, and the maximum heel to toe width of the golf club head **100**. The Y' axis **123** vertically separates the club head into a left region and a right region. The left region can be bounded by the Y' axis **123** and the toe end **108** of the golf club head **100**. The right region can be bounded by the Y' axis **123** and the heel **109** of the golf club head **100**. Further, the X' axis **122** and the Y' axis **123** is perpendicular to each other and form four faceplate quadrant regions.

[0062] The four faceplate quadrant regions can be defined as a center-to-high toe quadrant **135**, a center-to-low toe quadrant **136**, a center-to-high heel quadrant **137**, and a center-to-low heel quadrant **138** when the golf club head **100** is resting on the ground plane **120** at an address position. The center-to-high toe quadrant **135** extends from the geometric center **121** and spans the upper, left faceplate region. The center-to low toe quadrant **136** extends from the geometric center **121** and spans the lower, left faceplate region. The center-to-high heel quadrant **137** extends from the geometric center **121** and spans the upper, right faceplate region. The center-to-low heel quadrant **138** extends from the geometric center **121** and spans the lower, right faceplate region.

[0063] As described above, the variable thickness **111** of the faceplate **105** can comprise a perimeter edge region **112**, a toe region **113**, a heel region **114**, an upper transition region **115**, a lower transition region **116**, and a center region **117**. The perimeter edge region **112** can be

substantially ellipsoidal and circumscribes the toe region **113**, the heel region **114**, the upper transition region **115**, the lower transition region **116**, and the center region **117**. The toe region **113** can border the perimeter edge **112**, the upper transition region **115**, and the lower transition region **116**. The heel region **114** can border the perimeter edge **112**, the upper transition region **115**, and the lower transition region **116**. The center region **117** is bounded by the upper **115** and lower transition region **116**. In many embodiments, from the heel end of the golf club head to the center of the striking surface (or faceplate) and/or from the toe end of the golf club head to the center of the striking surface (or faceplate), the VFT can be defined as the perimeter edge **112** being the outermost region followed by the heel **114** and toe **113** portions, the upper **115** and lower transition region **116**, and lastly the center region **117**.

[0064] In many embodiments, the perimeter edge **112** can define the outermost region of the faceplate **105** and circumscribes the toe region **113**, the heel region **114**, the upper transition region **115**, the lower transition region **116**, and the center region **117**.

[0065] In many embodiments, the toe region **113** of the variable face thickness **111** can span only across the center-to-low toe quadrant **136** and the center-to-high toe quadrant **135** and not into the center-to-low heel quadrant **138** and the center-to-high toe quadrant **137**. In the same or an alternative embodiment, the toe region **113** can have a constant thickness. In other embodiments, the toe region **113** can have a variable thickness. The toe region **113** comprises a surface area on the back surface of the faceplate **105**. As illustrated in FIG. 8, the surface area of the toe region **113** is greater than the surface area of the heel region **114**.

[0066] Further, in many of the thin strike face (or faceplate **105**) embodiments, it is desirable to reduce CT in the toe portion **113** of the faceplate and increase CT in the heel portion **114** of the faceplate **115**. For exemplary purposes, the toe portion **113** of the variable face thickness **111** can have a greater thickness than the heel portion **114** of the variable face thickness **111**. Thereby, creating a faceplate **105** this is stiffer within the toe portion **113** and more flexible within the heel portion **114** (to create a more uniform CT response across the faceplate **105**).

[0067] In many embodiments, the toe portion **113** thickness of the VFT **111** can be between approximately 2.06 mm (0.081 inches) and approximately 2.21 mm (0.087 inches). In many embodiments, the toe portion **113** thickness of the variable face thickness **111** can be between approximately 2.06 mm (0.081 inches) - approximately 2.08 mm (0.082 inches), approximately 2.08 mm (0.082 inches) - approximately 2.11 mm (0.083 inches), approximately 2.13 mm (0.084 inches) - approximately 2.16 mm (0.085 inches), or approximately 2.18 mm (0.086 inches) - approximately 2.21 mm (0.087 inches). In alternative embodiments, the toe portion **113** thickness of the VFT **111** can be approximately 2.06 mm (0.081 inches), ap-

proximately 2.08 mm (0.082 inches), approximately 2.11 mm (0.083 inches), approximately 2.13 mm (0.084 inches), approximately 2.16 mm (0.085 inches), approximately 2.18 mm (0.086 inches), or approximately 2.21 mm (0.087 inches).

[0068] The heel region **114** of the variable face thickness **111** can span only across both the center-to-low heel quadrant **138** and the center-to-high heel quadrant **137** and not into the center-to-low toe quadrant **136** and the center-to-high toe quadrant **135**. In many embodiments, the heel region **114** can have a constant thickness. In other embodiments, the heel region **114** can have a variable thickness **111**. The heel region **114** comprises a surface area on the back surface of the faceplate **105**. As illustrated in FIG. 8, the surface area of the heel region **114** is less than the surface area of the toe region **113**.

[0069] As previously mentioned, to reduce CT in the toe portion of the faceplate and increase CT in the heel portion of the faceplate, the toe portion **113** of the variable face thickness can have a greater thickness than the heel portion **114**. Thereby, creating a faceplate **105** that is stiffer within the toe portion **113** and more flexible within the heel portion **114** (to create a more uniform CT response across the faceplate **105**).

[0070] In many embodiments, the heel portion **114** thickness of the VFT can be between approximately 1.91 mm (0.075 inches) and approximately 2.03 mm (0.080 inches). In many embodiments, the heel portion **114** thickness of the variable face thickness **111** can be between approximately 1.91 mm (0.075 inches) - approximately 1.93 mm (0.076 inches), approximately 1.93 mm (0.076 inches) - approximately 1.96 mm (0.077 inches), approximately 1.96 mm (0.077 inches) - approximately 1.98 mm (0.078 inches), approximately 1.98 mm (0.078 inches) - approximately 2.01 mm (0.079 inches), or approximately 2.01 mm (0.079 inches) - approximately 2.03 mm (0.080 inches). In alternative embodiments, the heel portion **114** thickness of the VFT **111** can be approximately 1.91 mm (0.075 inches), approximately 1.93 mm (0.076 inches), approximately 1.96 mm (0.077 inches), approximately 1.98 mm (0.078 inches), approximately 2.01 mm (0.079 inches), or approximately 2.03 mm (0.080 inches).

[0071] As further illustrated by FIG. 5, the majority of the upper-transition region **115** is bounded by at least one of the x-axis **122** (*i.e.* upper region), the toe portion, the heel portion, and/or the top perimeter of the faceplate. In many embodiments, the upper-transition region **115** abuts or contacts the heel portion, the toe portion, and the top of the faceplate and extends inward towards the central region **117**. The upper-transition region **115** comprises a transition thickness that varies in a direction from at least the toe portion and the heel portion towards the central region. In many embodiments, the upper-transition region thickness is greater than the thickness of the heel portion and/or the toe portion.

[0072] With continued reference to FIG. 8, the majority

of the lower-transition region **116** can be bounded by at least one of the x-axis **122** (*i.e.* lower region), the toe portion, the heel portion, and/or the bottom perimeter of the faceplate. In many embodiments, the lower-transition region **116** abuts or contacts the heel portion, the toe portion, and the bottom of the faceplate and extends inward towards the central region. The lower-transition region **116** comprises a transition thickness that varies in a direction from at least the toe portion and/or the heel portion towards the central region. In many embodiments, the lower-transition region **116** thickness is greater than the thickness of the heel portion and/or the toe portion.

[0073] In the illustrated embodiment, the central region **117** of the variable thickness profile **111** comprises an ellipse (or ellipse-like) shape. The shape of the central region defines a major axis extending in a general heel to toe direction and a minor axis extending generally in a top to bottom direction. The major axis and the minor axis intersect at a center of the central region. The major axis extends along a length of the central region, and the minor axis extends along a maximum width of the central region. In this particular embodiment, the major axis of the central region extends parallel (and/or non-angled) to the x-axis **122**.

[0074] In the illustrated embodiment, the central region **117** has a thickness of 3.38 mm (0.133 inch). In other embodiments, the thickness of the central region can vary from 1.78 mm to 6.35 mm (0.070 to 0.25 inches). For example, in some embodiments, the thickness of the central region can be from 1.78 to 2.54, 2.29 to 2.54, 2.41 to 2.67, 2.54 to 3.05, 2.67 to 2.92, 2.79 to 3.05, 2.92 to 3.18, 3.05 to 3.30, 3.18 to 3.4, 3.30 to 3.56, 3.43 to 3.68, 3.56 to 3.81, 3.68 to 3.94, 3.81 to 4.32, 4.06 to 4.57, 4.32 to 5.08, 4.83 to 5.59, or 5.33 to 6.35 mm (0.07 to 0.1, 0.09 to 0.1, 0.095 to 0.105, 0.1 to 0.12, 0.105 to 0.115, 0.11 to 0.12, 0.115 to 0.125, 0.12 to 0.13, 0.125 to 0.135, 0.13 to 0.14, 0.135 to 0.145, 0.14 to 0.15, 0.145 to 0.155, 0.15 to 0.17, 0.16 to 0.18, 0.17 to 0.2, 0.19 to 0.22, or 0.21 to 0.25 inches). In many embodiments, the central region can comprise less than 5%, less than 10%, less than 15%, less than 20%, less than 25%, or less than 30% of the total surface area of the face plate **320**. For example, the central region can comprise 2-10%, 5-10%, 2-15%, 5-15%, or 5-20% of the total surface area of the face plate.

[0075] In the illustrated embodiment, the center of the central region can be offset toward from the geometric center of the face plate. In alternative embodiments, the center of the central region can be located at the geometric center of the faceplate.

[0076] The central region comprises a first side or toe side and a second side or heel side. The first side and second side of the central region are separated by the minor axis. The first side is positioned between the minor axis and the toe portion, and the second side is positioned between the minor axis and the heel portion. The length of the first side, measured along the major axis, is equivalent

lent (or substantially similar) to the length of the second side.

[0077] In many embodiments, the combined length of the first side and the second side can be greater than approximately 19.05 mm (0.75 inch), greater than approximately 20.32 mm (0.80 inch), greater than approximately 21.59 mm (0.85 inch), greater than approximately 22.86 mm (0.90 inch), greater than approximately 24.13 mm (0.95 inch), or greater than approximately 25.4 mm (1.0 inch). In other embodiments, the combined length of the first side and the second side can be approximately 22.61 mm (0.89 inch), 25.4 mm (1.0 inch), 27.94 mm (1.1 inches), 30.48 mm (1.2 inches), 33.02 mm (1.3 inches), or 35.56mm (1.4 inches).

[0078] In the illustrated embodiment, the central region **117** further comprises a top-side length measured along the minor axis from the center of the central region toward the top, and a bottom-side length measured along the minor axis from the center of the central region toward the bottom. In this embodiment, the top-side length and the bottom-side length are equivalent (or substantially similar) in length.

[0079] In the illustrated embodiment, the top-side length and the bottom side length are approximately 6.35 mm (0.25 inches). In other embodiments, the top-side length and/or the bottom side length can be between 1.27 and 24.5 mm (0.05 and 1.0 inches). For example, in some embodiments, the top-side length and/or the bottom side length can be between 1.27 and 6.35, 3.81 and 8.89, 6.35 and 11.43, 8.89 and 13.97, 11.43 and 16.51, 13.97 and 19.05, 16.51 and 21.59, 19.05 and 25.4 mm (0.05 and 0.25, 0.15 and 0.35, 0.25 and 0.45, 0.35 and 0.55, 0.45 and 0.65, 0.55 and 0.75, 0.65 and 0.85, or 0.75 and 1.0 inches).

[0080] The total mass of the faceplate **105** can be between approximately 60 and 66 grams. In many embodiments, the mass of the faceplate can be between approximately 60 grams - approximately 61 grams, approximately 61 grams - approximately 62 grams, approximately 62 grams - approximately 63 grams, approximately 63 grams - approximately 64 grams, approximately 64 grams - approximately 65 grams, or approximately 65 grams - approximately 66 grams. In further embodiments, the total mass of the face plate can be less than 66 grams, less than 65 grams, less than 64 grams, less than 63 grams, less than 62 grams, or less than 61 grams. In other embodiments, the total mass of the faceplate can be approximately 60 grams, approximately 61 grams, approximately 62 grams, approximately 63 grams, approximately 64 grams, approximately 65 grams, or approximately 66 grams. In the embodiment illustrated in FIGS. 1-7, the total mass of the faceplate **105** is 62.8 grams. For comparison, the total mass of conventional faceplates that maintains durability with swing speeds over 44.7 m/s (100 miles per hour) is approximately 66.3 grams. In many embodiments, the faceplate **105** can be approximately 3 grams, approximately 4 grams, approximately 5 grams, approximately 6

grams, approximately 7 grams, approximately 8 grams, or approximately 9 grams lighter than the conventional faceplate.

5 *Weight System of the Golf Club Head*

[0081] In the illustrated embodiment, the golf club head **100** further forms a mass efficient adjustable weight system **104** designed for swing speeds under 38 m/s (85 miles per hour). In particular, the mass efficient adjustable weight system **104** described below only has a central weight position **140** and a heel weight position **141**, and not a toe weight position (not shown). This is because golfers with swing speeds under 38 m/s (85 mph) typically struggle with a right miss tendency, therefore introducing a heel bias weight position is unnecessary and increases the structural mass of the golf club head **100**. The weight system described below offers approximately eight and ten yards of slice shot correction.

[0082] Referring to FIGS. 1, 3, 6, and 7, the golf club head forms a single slot **142** proximal the rear end **110** of the golf club **100**. In many embodiments, the single slot **142** can be used as a receiving geometry for a weight assembly **143**. The single slot **142** can be defined by a slot interior surface **144** that is approximately perpendicular to the sole **103**. The slot interior surface **144** can be defined by a slot length **145**. The single slot **142** is further defined by a slot bottom surface **146** that is perpendicular to the slot interior surface **144** and approximately parallel to the sole **103**. The slot **142** is further defined by a top surface **147** that is perpendicular to the slot interior surface **144** and approximately parallel to the sole **103**. In many embodiments, the slot bottom surface **146** does not extend as far towards the rear of the golf club head as the slot top surface **147**. The slot further comprises at least two sidewalls at a heelward end **148** and a central portion **149** of the golf club head. The slot interior surface **144**, bottom surface **146**, top surface **147**, and two sidewalls **148**, **149** defines a channel that is open to the rear and bottom of the golf clubhead, such that when the slot **142** receives the weight assembly **143** at least a portion of the outer and lower surfaces of the weight assembly are exposed.

[0083] In the illustrated embodiment, the slot interior surface **144** can define two apertures (i.e. a central aperture (also can be referred to as a central weight position **140**) and a heel side aperture (also can be referred to as a heel weight position **141**). Each of the apertures comprise weight assembly attachment points within the single slot **142**. In many embodiments, the central aperture **140** and the heel side aperture **141** are threaded to receive a threaded fastener **150**.

[0084] In many embodiments, the golf club head **100** can further comprise a shroud **151**, wherein the shroud **151** is a portion of the sole **103** of the golf club head **100** that can extend to span over the slot **142**. The shroud **151** can comprise a portion or all of the bottom surface **146**.

[0085] In many embodiments, the slot length **145** of the slot interior surface can vary between 50.8 mm (2.0 inches) and 101.6 mm (4.0 inches). For example, the slot length **145** can be greater than 50.8 mm (2.0 inches), greater than 63.5 mm (2.5 inches), greater than 76.2 mm (3.0 inches), or greater than 88.9 mm (3.5 inches). The slot length of the slot interior surface **144** is no shorter than 50.8 mm (2.0 inches).

[0086] Furthermore, the slot **144** can comprise an asymmetric shape, wherein the cross-sectional shape of the slot varies non-uniformly in a heel-to-toe direction. This asymmetric shape aids in securely fastening the weight assembly **143** within the channel defined by the slot **144**. Due to the asymmetric shape of the slot **144**, the weight assembly **143** is unable to slide throughout the channel. Rather, the weight assembly **143** must be removed and placed in one of the two distinct positions **140, 141**.

[0087] Furthermore, the slot **144** can comprise a height **152** measured from the top surface **147** of the slot to the bottom surface **146** of the slot, wherein the height **152** of the slot is the height **152** of the channel. In most embodiments, the slot **144** can comprise a variable height, wherein the height is inconsistent in the heel to toe direction. The non-uniform height of the slot **144** is imperative to the security of the weight assembly within the slot **144**, since the variable height **152** of the channel enables only two weight positions to align the weight assembly with one of the heel-side aperture **141** or the central aperture **140**. Due to the non-uniform height **152** of the slot **144** the weight assembly **143** is unable to slide laterally throughout the channel. Rather, the weight assembly **143** must be removed and placed in one of the two distinct positions **140, 141**. This prevents the golfer from being provided unlimited position choices that create confusion in determining shot shape of the golf ball and flight.

[0088] The variable height **152** of the slot **144** may vary in a range between 5.08 and 15.24 mm (0.2 and 0.6 inch). The variable height **152** of the slot **144** may be 5.08 mm (0.2 inch), 7.62 mm (0.3 inch), 10.16 mm (0.4 inch), 12.7 mm (0.5 inch), or 15.24 mm (0.6 inch).

[0089] In some embodiments, the golf club head **100** can comprise a shroud **151**, such that a portion of the sole **103** of the golf club head **100** can span over the slot **144**. The shroud **151** functions to increase the aerodynamics of the channel and assist in properly inserting the weight member **153** within the slot **144**. The shroud **151** can have any desired geometry to cover a specific portion(s) of the slot **144** or the entire slot **144**. In some embodiments, the shroud **151** can cover 5%-10% of the slot, 10%-15% of the slot, 15%-20% of the slot, 20%-25% of the slot, 25%-30% of the slot, 30%-35% of the slot, 35%-40% of the slot, 40%-45% of the slot, 45%-50% of the slot, 50%-55% of the slot, 55%-60% of the slot, 60%-65% of the slot, 65%-70% of the slot, 70%-75% of the slot, 75%-80% of the slot, 80%-85% of the slot, 85%-90% of the slot, 90%-95% of the slot, or

95%-100% of the slot. The less coverage that the shroud provides over the slot directly correlates to a lighter weight club head and vice versa.

[0090] Referring to FIGS. 1, 6, and 7, the weight assembly **143** is affixed to the golf club head **100** by threadably attaching the weight member **153** with fastener **150** (i.e. weight assembly) to one of the heel-side threaded aperture **141** or the central threaded aperture **140**.

[0091] With continued reference to FIGS. 1, 6, and 7, the variable weight assembly (also referred to as the weight assembly **143**) comprises a single weight member **153** and a single mechanical fastener (or fastener **150**). The weight member **153** is configured to be positioned within the slot **144** of the golf club head **100**. The weight member **153** comprises an outer surface, an inner surface, side walls extending between the outer surface and an interior surface, an upper surface, a lower surface, and an aperture extending through the weight member from the outer surface to the inner surface. The aperture further comprises an aperture thread on an interior portion of the aperture. The fastener **150** is retained within the weight member **153** when the weight assembly **143** is detached from the slot **144** by means of the aperture thread within the weight member aperture. The lower surface of the weight member further comprises an indent configured to receive the slot bottom surface formed by an extension of the sole. Wherein the extension of the sole comprises the shroud. The shroud provides additional stability to the weight assembly when it is threadably affixed to the slot.

[0092] Due to the limited size of the slot structure, the mass of the slot structure **144** is very small in comparison to the total mass of the golf club head **100**. The mass of the slot structure **144** may be less than 10.0% of the total mass of the golf club head **100**.

[0093] In many embodiments, the mass of the weight member **153** ranges between 12 grams and 18 grams. In some embodiments, the mass of the weight member **153** ranges from 12 g-13g, 13 g-14 g, 14 g- 15 g, 15.0 g- 16.0 g, 16.0 g- 17.0 g, or 17.0 g- 18.0 g, The mass of the weight assembly **143** can be 12 g, 13 g, 14 g, 15 g, 16 g, 17 g, or 18 g, In many embodiments, the mass of the weight assembly **143** (weight member **153** and fastener **150**) ranges between 12 grams and 20 grams. In some embodiments, the mass of the backweight assembly ranges from 12 g - 14 g, 14 g - 16 g, 16 g- 18 g, or 18.0 g- 20.0 g. The mass of the weight assembly can be 12 g, 13 g, 14 g, 15 g, 16 g, 17 g, 18 g, 19 g, or 20 g.

[0094] Due to the efficient placement of the weight system caused by only having a central weight position and heel weight position, and not a toe weight position along with the mass of the adjustable weight system **104**, a lighter weight golf club head **100** can be achieved, while still achieving a deep club head center of gravity position **163** greater than 43 mm. The deep club head center of gravity **163** can be measured parallel to the ground plane **120**, from the geometric center **121** of the faceplate **105** to the center of gravity **163** of the club head. In many

embodiments, the club head center of gravity **163** can be greater than 44 mm, greater than 45 mm, greater than 46 mm, greater than 47 mm, greater than 48 mm, greater than 49 mm, or greater than 50 mm. Having a lightweight golf club head **100**, while maintaining a deep club head center of gravity position **163**, beneficially assist in creating a high MOI golf club head, while maintaining a high launching ball flight during the course of the flight of the golf ball.

[0095] In many embodiments, the club head **100** comprises a crown-to-sole moment of inertia I_{xx} greater than approximately 2250 g·cm², greater than approximately 2500 g·cm², greater than approximately 2750 g·cm², greater than approximately 3000 g·cm², greater than approximately 3250 g·cm², greater than approximately 3500 g·cm², greater than approximately 3750 g·cm², greater than approximately 4000 g·cm², greater than approximately 4250 g·cm², greater than approximately 4500 g·cm², greater than approximately 4750 g·cm², greater than approximately 5000 g·cm², greater than approximately 5250 g·cm², greater than approximately 5500 g·cm², greater than approximately 5750 g·cm², greater than approximately 6000 g·cm², greater than approximately 6250 g·cm², greater than approximately 6500 g·cm², greater than approximately 6750 g·cm², or greater than approximately 7000 g·cm².

[0096] In many embodiments, the club head **100** comprises a heel-to-toe moment of inertia I_{yy} greater than approximately 4500 g·cm², greater than approximately 4750 g·cm², greater than approximately 5000 g·cm², greater than approximately 5250 g·cm², greater than approximately 5500 g·cm², greater than approximately 5750 g·cm², greater than approximately 6000 g·cm², greater than approximately 6250 g·cm², greater than approximately 6500 g·cm², greater than approximately 6750 g·cm², or greater than approximately 7000 g·cm².

[0097] In many embodiments, the club head **100** comprises a combined moment of inertia (i.e. the sum of the crown-to-sole moment of inertia I_{xx} and the heel-to-toe moment of inertia I_{yy}) greater than approximately 7000 g·cm², greater than approximately 7250 g·cm², greater than approximately 7500 g·cm², greater than approximately 7750 g·cm², greater than 8000 g·cm², greater than 8500 g·cm², greater than 8750 g·cm², greater than 9000 g·cm², greater than 9250 g·cm², greater than 9500 g·cm², greater than 9750 g·cm², greater than 10000 g·cm², greater than 10250 g·cm², greater than 10500 g·cm², greater than 10750 g·cm², greater than 11000 g·cm², greater than 11250 g·cm², greater than 11500 g·cm², greater than 11750 g·cm², or greater than 12000 g·cm², greater than 12500 g·cm², greater than 1300 g·cm², greater than 13500 g·cm², or greater than 14000 g·cm².

Crown-to-Faceplate Bridge

[0098] Many of the aforementioned features of the golf club head are able to be designed into a golf club head

100 because of implementing a crown-to-faceplate bridge **106**. The crown-to-faceplate bridge **106** can be placed in a low stress and/or low displacement region of the clubhead **100** to locally reinforce a specific crown portion **102** and faceplate **105** portion without impacting the performance of the clubhead **100** (i.e. ball speed). Locally reinforcing a crown portion and a faceplate portion through a crown-to-faceplate bridge **106** can decrease areas of high CT properties (without increasing the entire face thickness), while having a negligible effect on impact ball speeds. In many embodiments, the crown-to-faceplate bridge **106** can mimic a gusset-like structure in strengthening/enlarging a specific portion of the transition region **118**.

[0099] In many embodiments, the crown-to-faceplate bridge **106** extends from an inner surface **128** of the crown to an inner rear surface of the faceplate **105**. As illustrated by FIGS 6, 7, 8, and 9, the crown-to-faceplate bridge **106** is only present within the front portion **125** of the crown. Stated another way, the crown-to-faceplate bridge **106** is not present within the middle portion **126** or rear portion **127** of the crown **102** and exists only in the front portion of the crown **102**.

[0100] With continued reference to FIG. 6, 7, 8, and 9, the golf club head **100** further comprises a continuous transition region spanning between the sole and the crown. The continuous transition region **118** comprises a crown transition region **154** and a sole transition region **155**. The crown transition region **154** can extend entirely or partially from the heel end to the toe end, spanning between the faceplate **105** and the crown **102**. In many embodiments, the continuous transition region **118** surrounds the strike face entirely and disposed between the strike face and the crown. The continuous transition region **118** comprises at least one crown-to-faceplate bridge **106**. The continuous transition region is curved and devoid of any sharp angles or points. In many embodiments, the radius of curvature of the continuous transition region **118** is between 3.81 mm (0.15 inches) and 20.32 mm (0.80 inches). In some embodiments, the radius of curvature of the crown transition region **154** is between 7.62 mm (0.30 inches) and 20.32 mm (0.80 inches). The portion of the crown-to-faceplate bridge **106** that is within the transition region **118** comprises a radius of curvature or variable radius of curvature to match that of the transition region **118**.

[0101] The club head **100** can further comprise at least one crown-to-faceplate bridge **106** located near the strike face **105**, entirely internally within the hollow body. The crown-to-faceplate bridge **106** is placed in locations between the heel **109** and toe **108**, near to or abutting the strike face **105** to provide the strike face **105** with rigidity near regions of highest CT. In many embodiments, the strike face **105** experiences greatest CT characteristics between the mid-plane **156** and the toe end nearest the crown **102**, and between the mid-plane **156** and the heel end nearest the sole **103**. The crown-to-faceplate bridge **106** can be placed accordingly based on the golf club

head's structure to decrease CT properties only within the necessary regions. The crown-to-faceplate bridge **106** can mimic a gusset like structure in strengthening/enlarging (or thickening) a specific portion of the transition region.

[0102] In many embodiments, the golf club head **100** can have a heel-side plane and a toe-side plane that are parallel to the mid-plane **156**. For example, the heel-side plane can be located in a direction toward the heel of the golf club head **100** and away from the mid-plane **156** and the toe-side plane can be located in a direction toward the toe of the golf club head **100** and away from the mid-plane **156**. In many embodiments, the heel-side plane can be located a distance of 13.97 mm (0.55 inch) to 20.32 mm (0.80 inch) from the mid-plane in a heelward direction and the toe-side plane can be located a distance of 13.97 mm (0.55 inch) to 20.32 mm (0.80 inch) from the mid-plane in a toward direction. For example, the heel-side plane can be located a distance of 13.97 mm (0.55 inch), 14.22 mm (0.56 inch), 14.48 mm (0.57 inch), 14.73 mm (0.58 inch), 14.99 mm (0.59 inch), 15.24 mm (0.60 inch), 15.49 mm (0.61 inch), 15.75 mm (0.62 inch), 16 mm (0.63 inch), 16.26 mm (0.64 inch), 16.51 mm (0.65 inch), 16.76 mm (0.66 inch), 17.02 mm (0.67 inch), 17.27 mm (0.68 inch), 17.53 mm (0.69 inch), 17.78 mm (0.70 inch), 18.03 mm (0.71 inch), 18.29 mm (0.72 inch), 18.54 mm (0.73 inch), 18.8 mm (0.74 inch), 19.05 mm (0.75 inch), 19.30 mm (0.76 inch), 19.56 mm (0.77 inch), 19.81 mm (0.78 inch), 20.07 mm (0.79 inch), or 20.32 mm (0.80 inch) from the mid-plane **156**. By way of example, the toe-side plane can be located a distance of 13.97 mm (0.55 inch), 14.22 mm (0.56 inch), 14.48 mm (0.57 inch), 14.73 mm (0.58 inch), 14.99 mm (0.59 inch), 15.24 mm (0.60 inch), 15.49 mm (0.61 inch), 15.75 mm (0.62 inch), 16 mm (0.63 inch), 16.26 mm (0.64 inch), 16.51 mm (0.65 inch), 16.76 mm (0.66 inch), 17.02 mm (0.67 inch), 17.27 mm (0.68 inch), 17.53 mm (0.69 inch), 17.78 mm (0.70 inch), 18.03 mm (0.71 inch), 18.29 mm (0.72 inch), 18.54 mm (0.73 inch), 18.8 mm (0.74 inch), 19.05 mm (0.75 inch), 19.30 mm (0.76 inch), 19.56 mm (0.77 inch), 19.81 mm (0.78 inch), 20.07 mm (0.79 inch), or 20.32 mm (0.80 inch) from the mid-plane. In further embodiments, the crown-to-faceplate bridge **106** can be bounded and entirely between the heel-side plane and the toe-side plane, but extending through the midplane **156**.

[0103] The crown-to-faceplate bridge **106** is integral with the internal continuous transition region **118**, crown **102**, and/or sole **103**. The crown-to-faceplate bridge **106** is devoid of weld beads, adhesives, or any other known join method.

[0104] The crown-to-faceplate bridge **106** can be used to locally thicken a specific region of the club head **100**. The club head with the crown-to-faceplate bridge **106** can have mass removed from other parts of the club head **100**, allowing for an optimized mass-to-volume ratio (described above) to accommodate slow swing speeds. A reduction in the mass-to-volume ratio can lead to improvements in ball speed, trajectory, and distance.

[0105] In many embodiments, the mass of the crown-to-faceplate bridge **106** can be no greater than three grams. Minimizing the weight of the crown-to-faceplate bridge **106** ensures that the above described mass/volume relationship is satisfied to improve club head characteristics, while reducing the likelihood of a golf club head having a CT value falling outside a designed threshold value. In alternative embodiments, the mass of the crown-to-faceplate bridge **106** can be between approximately 0.5 gram - approximately 1 gram, approximately 1 gram - approximately 2 grams, or approximately 2 grams - approximately 3 grams. In other embodiments, the mass of the crown-to-faceplate bridge can be approximately 0.5 grams, approximately 1 gram, approximately 2 grams, or approximately 3 grams.

[0106] In the embodiment illustrated in FIG. 8 and 9, the golf club head **100** comprises at least one crown-to-faceplate bridge **106** that intersects and extends beyond a midplane **156** (of the golf club head) in a direction toward the heel and/or the toe of the golf club head. The midplane **156** divides the golf club head heel-to-toe width in two equal parts. The crown-to-faceplate bridge **106** can be defined by at least a length, a width, and a thickness. The crown-to-faceplate bridge length is measured in a heel-to-toe direction, perpendicular to the mid-plane **156**. The crown-to-faceplate bridge width is measured in a front-to-rear direction, parallel to the mid-plane. In many embodiments, the crown-to-faceplate bridge **106** comprises a heel-to-toe center **157** that divides its length into two equal parts. In the same or another embodiment, the crown-to-faceplate bridge comprises a front-to-rear center that divides its width into two equal parts. Stated another way, at least one heel end **158** and/or toe end **159** of the crown-to-faceplate bridge **106** is partially distal to and/or spaced from the mid-plane intersection line. In alternative embodiments, the entire crown-to-faceplate bridge **106** can be located between the mid-plane **156** and the heel end or the toe end, but not intersecting the mid-plane.

[0107] In some embodiments, the crown-to-faceplate bridge **106** is aligned such that the heel-to-toe center is coplanar with the club head mid-plane **156**. In other embodiments, the crown-to-faceplate bridge **106** is offset from the mid-plane **156**. In some of these embodiments, the crown-to-faceplate bridge center is offset from the mid-plane by between 12.7 mm (0.5 inch) and 25.4 mm (1.0 inch). For example, the crown-to-faceplate bridge center can be offset from the mid-plane **156** by 12.7 mm (0.5 inch), 15.24 mm (0.6 inch), 17.78 mm (0.7 inch), 20.32 mm (0.8 inch), 22.86 mm (0.9 inch), or 25.4 mm (1.0 inch). In other embodiments, the reinforcement region center is offset from the mid-plane by between 25.4 mm (1.0 inch) and 50.8 mm (2.0 inches). For example, the reinforcement center can be offset from the mid-plane by 25.4 mm (1.0 inch), 27.9 mm (1.1 inch), 30.5 mm (1.2 inch), 33 mm (1.3 inch), 35.6 mm (1.4 inch), 38.1 mm (1.5 inch), 40.6 mm (1.6 inch), 43.2 mm (1.7 inch), 45.7 mm (1.8 inch), 48.3 mm (1.9 inch), or 50.8 mm (2.0 inch).

[0108] The crown-to-faceplate bridge length does not extend entirely from heel end to toe end of the golf club head. The crown-to-faceplate bridge length extends along a portion of the heel-to-toe length of the transition region in which it lies. In many embodiments, the crown-to-faceplate bridge length can be between 19.05 mm (0.75 inch) and 101.6 mm (4 inches). For example, the crown-to-faceplate bridge length can be between 19.05 mm (0.75 inch) and 25.4 mm (1 inch), 25.4 mm (1 inch) and 31.8 mm (1.25 inches), 31.8 mm (1.25 inches) and 38.1 mm (1.50 inches), 38.1 mm (1.50 inches) and 44.5 mm (1.75 inches), 44.5 mm (1.75 inches) and 50.8 mm (2 inches), 50.8 mm (2 inches) and 57.2 mm (2.25 inches), 57.2 mm (2.25 inches) and 63.5 mm (2.5 inches), 63.5 mm (2.5 inches) and 69.9 mm (2.75 inches), 69.9 mm (2.75 inches) and 76.2 mm (3 inches), 76.2 mm (3 inches) and 82.6 mm (3.25 inches), 82.6 mm (3.25 inches) and 88.9 mm (3.5 inches), 88.9 mm (3.5 inches) and 95.3 mm (3.75 inches), or 95.3 mm (3.75 inches) and 101.6 mm (4 inches). In alternative embodiments, the crown-to-faceplate bridge length can be 19.05 mm (0.75 inch), 25.4 mm (1.0 inch), 31.8 mm (1.25 inches), 38.1 mm (1.50 inches), 44.5 mm (1.75 inches), 50.8 mm (2.0 inches), 57.2 mm (2.25 inches), 63.5 mm (2.5 inches), 76.2 mm (3.0 inches), 82.6 mm (3.25 inches), 88.9 mm (3.5 inches), 95.3 mm (3.75 inches), or 101.6 mm (4.0 inches). In some embodiments, the crown-to-faceplate bridge length can be between 15% and 85% of the length of the transition region from the heel end to the toe end.

[0109] As described above, the crown-to-faceplate bridge **106** lies at least partially within the transition region **118**. In some embodiments, the crown-to-faceplate bridge width extends across the entire transition region front-to-rear width. In some embodiments, the crown-to-faceplate bridge width extends across only a portion of the transition region front-to-rear width. In some of these embodiments and others, the crown-to-faceplate bridge width extends beyond the transition region and onto either the crown or the sole. The crown-to-faceplate bridge width can be between 50% and 100% of the transition region width. In some embodiments wherein the crown-to-faceplate bridge extends beyond the transition region, the crown-to-faceplate bridge width can be greater than the transition region width. In these embodiments, the crown-to-faceplate bridge width can be up to 150% of crown-to-faceplate bridge width.

[0110] The crown-to-faceplate bridge width does not extend entirely from the faceplate **105** to rear of the golf club head. In many embodiments, the crown-to-faceplate bridge width can be between 10.16 mm (0.40 inch) and 20.32 mm (0.80 inches). For example, the crown-to-faceplate bridge width can be between 10.16 mm (0.40 inch) and 12.7 mm (0.50 inch), 12.7 mm (0.50 inch) and 15.24 mm (0.6 inches), 15.24 mm (0.6 inches) and 17.78 mm (0.7 inches), or 17.78 mm (0.7 inches) and 20.32 mm (0.80 inches). In some embodiments, the crown-to-faceplate bridge width can be approximately 10.16 mm (0.40 inch), approximately 11.43 mm (0.45 inch), approxi-

mately 12.70 mm (0.50 inch), approximately 13.97 mm (0.55 inch), approximately 15.24 mm (0.60 inch), approximately 16.51 mm (0.65 inch), approximately 17.78 mm (0.70 inch), approximately 19.05 mm (0.75 inch), or approximately 20.32 mm (0.80 inch).

[0111] In many embodiments, the crown-to-faceplate bridge **106** is integrally formed with at least the portion of the club head which it contacts (*i.e.* devoid of weld beads, adhesives, etc). Stated another way, the crown-to-faceplate bridge **106**, the transition region, and the portion of the crown which the crown-to-faceplate bridge **106** is coupled to comprise the same material or combination of materials.

[0112] In many embodiments, the crown-to-faceplate bridge **106** has a generally projected rectangular shape when viewed from a top plane. In other embodiments, the crown-to-faceplate bridge **106** can have one of the following shapes: oval, circle, trapezoidal, rounded rectangle, square, rounded square, or another polygon. In many embodiments, the crown-to-faceplate bridge **106** is substantially parallel with respect to its length. In many embodiments, the crown-to-faceplate bridge **106** is substantially parallel with respect to its width.

[0113] The crown-to-faceplate bridge **106** can have a variable or constant thickness across the width and/or length. In some of these embodiments, the crown-to-faceplate bridge **106** comprises a non-tapered, constant thickness across both of its width and length. In other embodiments, the crown-to-faceplate bridge **106** comprises a constant thickness across only one of the width or length, and a variable (or tapered) thickness across the other of the width or length.

[0114] In many embodiments, the crown-to-faceplate bridge **106** is thickest at its center. In these embodiments, the crown-to-faceplate bridge thickness tapers circumferentially (or radially) from the center and the center of the reinforcement region comprises a rounded or pointed peak. In other words, the crown-to-faceplate bridge thickness reduces linearly or curvedly away from the center (of both the width and the length) in all directions. The taper rate will vary in some directions relative to others based on the crown-to-faceplate bridge dimensions, such that the crown-to-faceplate bridge thickness is the same at all edges of the crown-to-faceplate bridge. The thickness can taper linearly, curvedly, or in a stepped formation toward its edges in a direction away from the center and toward the front, rear, heel end, and toe end. The front, rear, heel end **158**, and toe end **159** edges of the crown-to-faceplate bridge are tapered such that they transition substantially seamlessly with the surrounding golf club head. In other words, the thickness of the crown-to-faceplate bridge reduces to that of the surrounding golf club head at its perimeter edges so as to prevent the existence of a substantial lip or step that differentiates the reinforcement region from the surrounding club head.

[0115] In some embodiments, the crown-to-faceplate bridge front-to-rear cross-sectional shape differs from the crown-to-faceplate bridge heel-to-toe cross-sectional

shape. In others of these embodiments, the crown-to-faceplate bridge front-to-rear cross-sectional shape is similar to the crown-to-faceplate bridge heel-to-toe cross-sectional shape. In some embodiments, the reinforcement region comprises a slightly curved cross-sectional shape.

Sole-to-Faceplate Bridge

[0116] Many of the aforementioned features of the golf club head **100** are able to be designed into a golf club head **100** because of implementing at least one sole-to-faceplate bridge **107**. The sole-to-faceplate bridge **107** can be placed in a low stress and/or low displacement region of the clubhead to locally reinforce a specific sole portion **103** and faceplate portion without impacting the performance of the clubhead (*i.e.* ball speed). Locally reinforcing a sole portion and a faceplate portion through a sole-to-faceplate bridge **107** can decrease areas of high CT characteristics (without increasing the entire face thickness), while having a negligible effect on impact ball speeds. In many embodiments, the crown-to-faceplate bridge **107** can mimic a gusset like structure in strengthening/enlarging a specific portion of the club head.

[0117] In many embodiments, the sole-to-faceplate bridge **107** extends from an inner surface **133** of the sole to an inner rear surface of the faceplate **105**. As illustrated by FIGS. 10 and 11, the sole-to-faceplate bridge **107** is only present within the front portion of the sole **103**. Stated another way, the sole-to-faceplate bridge **107** is not present within the middle portion **131** or rear portion **132** of the sole **103** and exists only in the front portion **130** of the sole **103**.

[0118] As described above, the golf club head **100** further comprises a continuous transition region spanning **118** between the sole **103** and the crown **102**. The continuous transition region **118** comprises a crown transition region **154** and a sole transition region **155**. The sole transition region **155** can extend entirely or partially from the heel end to the toe end, spanning between the faceplate **105** and the sole **103**. In many embodiments, the continuous transition region **118** surrounds the strike face **105** entirely and disposed between the strike face **105** and the sole **103**. The continuous transition region **118** comprises at least one sole-to-faceplate bridge **107**. The continuous transition region **118** is curved and devoid of any sharp angles or points. In many embodiments, the radius of curvature of the continuous transition region **118** is between 3.81 mm (0.15 inches) and 20.32 mm (0.80 inches). In many embodiments, the radius of curvature of the continuous transition region **118** is approximately 3.81 mm (0.15 inch), 4.06 mm (0.16 inch), 4.32 mm (0.17 inch), 4.57 mm (0.18 inch), 4.83 mm (0.19 inch), 5.08 mm (0.20 inch), 5.33 mm (0.21 inch), 5.59 mm (0.22 inch), 5.84 mm (0.23 inch), 6.10 mm (0.24 inch), 6.35 mm (0.25 inch), 6.60 mm (0.26 inch), 6.86 mm (0.27 inch), 7.11 mm (0.28 inch), 7.37 mm (0.29 inch), 7.62 mm (0.30 inch), 7.87 mm (0.31 inch), 8.13 mm (0.32

inch), 8.38 mm (0.33 inch), 8.64 mm (0.34 inch), 8.89 mm (0.35 inch), 9.14 mm (0.36 inch), 9.4 mm (0.37 inch), 9.65 mm (0.38 inch), 9.91 mm (0.39 inch), 10.16 mm (0.40 inch), 10.41 mm (0.41 inch), 10.67 mm (0.42 inch), 10.92 mm (0.43 inch), 11.18 mm (0.44 inch), 11.43 mm (0.45 inch), 11.68 mm (0.46 inch), 11.94 mm (0.47 inch), 12.19 mm (0.48 inch), 12.45 mm (0.49 inch), 12.70 mm (0.50 inch), 12.95 mm (0.51 inch), 13.21 mm (0.52 inch), 13.46 mm (0.53 inch), 13.72 mm (0.54 inch), 13.97 mm (0.55 inch), 14.22 mm (0.56 inch), 14.48 mm (0.57 inch), 14.73 mm (0.58 inch), 14.99 mm (0.59 inch), 15.24 mm (0.60 inch), 15.49 mm (0.61 inch), 15.75 mm (0.62 inch), 16 mm (0.63 inch), 16.26 mm (0.64 inch), 16.51 mm (0.65 inch), 16.76 mm (0.66 inch), 17.02 mm (0.67 inch), 17.27 mm (0.68 inch), 17.53 mm (0.69 inch), 17.78 mm (0.70 inch), 18.03 mm (0.71 inch), 18.29 mm (0.72 inch), 18.54 mm (0.73 inch), 18.8 mm (0.74 inch), 19.05 mm (0.75 inch), 19.30 mm (0.76 inch), 19.56 mm (0.77 inch), 19.81 mm (0.78 inch), 20.07 mm (0.79 inch), or 20.32 mm (0.80 inch). In some embodiments, the radius of curvature of the sole transition region **155** is between 7.62 mm (0.30 inches) and 20.32 mm (0.80 inches). In many embodiments, the radius of curvature of the sole transition region **155** is approximately 7.62 mm (0.30 inch), 7.87 mm (0.31 inch), 8.13 mm (0.32 inch), 8.38 mm (0.33 inch), 8.64 mm (0.34 inch), 8.89 mm (0.35 inch), 9.14 mm (0.36 inch), 9.4 mm (0.37 inch), 9.65 mm (0.38 inch), 9.91 mm (0.39 inch), 10.16 mm (0.40 inch), 10.41 mm (0.41 inch), 10.67 mm (0.42 inch), 10.92 mm (0.43 inch), 11.18 mm (0.44 inch), 11.43 mm (0.45 inch), 11.68 mm (0.46 inch), 11.94 mm (0.47 inch), 12.19 mm (0.48 inch), 12.45 mm (0.49 inch), 12.70 mm (0.50 inch), 12.95 mm (0.51 inch), 13.21 mm (0.52 inch), 13.46 mm (0.53 inch), 13.72 mm (0.54 inch), 13.97 mm (0.55 inch), 14.22 mm (0.56 inch), 14.48 mm (0.57 inch), 14.73 mm (0.58 inch), 14.99 mm (0.59 inch), 15.24 mm (0.60 inch), 15.49 mm (0.61 inch), 15.75 mm (0.62 inch), 16 mm (0.63 inch), 16.26 mm (0.64 inch), 16.51 mm (0.65 inch), 16.76 mm (0.66 inch), 17.02 mm (0.67 inch), 17.27 mm (0.68 inch), 17.53 mm (0.69 inch), 17.78 mm (0.70 inch), 18.03 mm (0.71 inch), 18.29 mm (0.72 inch), 18.54 mm (0.73 inch), 18.8 mm (0.74 inch), 19.05 mm (0.75 inch), 19.30 mm (0.76 inch), 19.56 mm (0.77 inch), 19.81 mm (0.78 inch), 20.07 mm (0.79 inch), or 20.32 mm (0.80 inch). The portion of the sole-to-faceplate bridge **107** that is within the continuous transition region **118** comprises a radius of curvature or variable radius of curvature to match that of the transition region **118**.

[0119] The club head **100** can further comprise at least one sole-to-faceplate bridge **107** located near the strike face **105**, internally within the hollow body. The sole-to-faceplate bridge **107** is placed in locations between the heel and toe, near to or abutting the strike face **105** to provide the strike face **105** with rigidity near regions of highest CT. In many embodiments, the strike face **105** experiences greatest CT characteristics between the mid-plane **156** and the toe end nearest the sole **103**, and between the mid-plane **156** and the heel end nearest

the sole **103**. The sole-to-faceplate bridge **107** are placed accordingly based on the golf club head's structure to decrease CT properties only within the necessary regions.

[0120] In many embodiments, the golf club head **100** can have a heel-side plane and a toe-side plane that are parallel to the mid-plane **156**. For example, the heel-side plane can be located in a direction toward the heel of the golf club head **100** and away from the mid-plane **156** and the toe-side plane can be located in a direction toward the toe of the golf club head **100** and away from the mid-plane **156**. In many embodiments, the heel-side plane can be located a distance of 13.97 mm (0.55 inch) to 20.32 mm (0.80 inch) from the mid-plane in a heelward direction and the toe-side plane can be located a distance of 13.97 mm (0.55 inch) to 20.32 mm (0.80 inch) from the mid-plane in a toward direction. For example, the heel-side plane and/or the toe-side plane can be located a distance of 13.97 mm (0.55 inch), 14.22 mm (0.56 inch), 14.48 mm (0.57 inch), 14.73 mm (0.58 inch), 14.99 mm (0.59 inch), 15.24 mm (0.60 inch), 15.49 mm (0.61 inch), 15.75 mm (0.62 inch), 16 mm (0.63 inch), 16.26 mm (0.64 inch), 16.51 mm (0.65 inch), 16.76 mm (0.66 inch), 17.02 mm (0.67 inch), 17.27 mm (0.68 inch), 17.53 mm (0.69 inch), 17.78 mm (0.70 inch), 18.03 mm (0.71 inch), 18.29 mm (0.72 inch), 18.54 mm (0.73 inch), 18.8 mm (0.74 inch), 19.05 mm (0.75 inch), 19.30 mm (0.76 inch), 19.56 mm (0.77 inch), 19.81 mm (0.78 inch), 20.07 mm (0.79 inch), or 20.32 mm (0.80 inch) from the mid-plane **156**. In further embodiments, the sole-to-faceplate bridge **107** can be bounded and between the heel-side plane and the toe-side plane, but extending through the midplane **156**.

[0121] In many embodiments, the sole-to-faceplate bridge **107** is integrally formed with at least the portion of the club head which it contacts (*i.e.* devoid of weld beads, adhesives, etc). Stated another way, the sole-to-faceplate bridge **107**, the transition region, and the portion of the sole which the sole-to-faceplate bridge **107** is coupled to comprises the same material or combination of materials.

[0122] The sole-to-faceplate bridge **107** can be used to locally thicken the club head. The club head with the sole-to-faceplate bridge **107** can have mass removed from other parts of the club head **100**, allowing for an optimized mass-to-volume ratio to accommodate slow swing speeds. A reduction in the mass-to-volume ratio can lead to improvements in ball speed, trajectory, and distance.

[0123] In many embodiments, the mass of the sole-to-faceplate bridge **107** can be no greater than three grams. Minimizing the weight of the sole-to-faceplate bridge **107** ensures that above described mass/volume relationship is satisfied to improve club head characteristics, while reducing the likelihood of a golf club head having a CT value falling outside a designed threshold value. In alternative embodiments, the mass of the sole-to-faceplate bridge **107** can be between approximately 0.5 gram - approximately 1 gram, approximately 1 gram - approximately 2 grams, or approximately 2 grams - approxi-

mately 3 grams. In other embodiments, the mass of the sole-to-faceplate bridge can be approximately 0.5 grams, approximately 1 gram, approximately 2 grams, or approximately 3 grams.

[0124] In the embodiment illustrated in FIGS. 10 and 11, the golf club head **100** comprises at least one sole-to-faceplate bridge **107** that intersects and extends beyond the midplane **156** in a direction toward the heel and/or the toe of the golf club head. The sole-to-faceplate bridge **107** can be defined by at least a length, a width, and a thickness. The sole-to-faceplate bridge length is measured in a heel-to-toe direction, perpendicular to the mid-plane **156**. The sole-to-faceplate bridge width is measured in a front-to-rear direction, parallel to the mid-plane. In many embodiments, the sole-to-faceplate bridge **107** comprises a heel-to-toe center that divides its length into two equal parts. In the same or another embodiment, the sole-to-faceplate bridge **107** comprises a front-to-rear center that divides its width into two equal parts. Stated another way, at least one end of the sole-to-faceplate bridge is partially distal to the mid-plane **156** intersection line. In alternative embodiments, the entire sole-to-faceplate bridge can be located between the mid-plane and the heel end or the toe end, but not intersecting the mid-plane.

[0125] In some embodiments, the sole-to-faceplate bridge **107** is aligned such that the heel-to-toe center **160** is coplanar with the club head mid-plane **156**. In other embodiments, the sole-to-faceplate bridge **107** is offset from the mid-plane **156**. In some of these embodiments, the sole-to-faceplate bridge center is offset from the mid-plane **156** by between 12.7 mm (0.5 inch) and 25.4 mm (1.0 inch). In other embodiments, the sole-to-faceplate bridge center is offset from the mid-plane by between 25.4 mm (1.0 inch) and 50.8 mm (2.0 inches).

[0126] The sole-to-faceplate bridge length does not extend entirely from heel end to toe end. The sole-to-faceplate bridge length extends along a portion of the heel-to-toe length of the transition region in which it lies. In many embodiments, the sole-to-faceplate bridge length can be between 19.05 mm (0.75 inch) and 101.6 mm (4 inches). For example, the sole-to-faceplate bridge length can be between 19.05 mm (0.75 inch) and 25.4 mm (1 inch), 25.4 mm (1 inch) and 31.8 mm (1.25 inches), 31.8 mm (1.25 inches) and 38.1 mm (1.50 inches), 38.1 mm (1.50 inches) and 44.5 mm (1.75 inches), 44.5 mm (1.75 inches) and 50.8 mm (2 inches), 50.8 mm (2 inches) and 57.2 mm (2.25 inches), 57.2 mm (2.25 inches) and 63.5 mm (2.5 inches), 63.5 mm (2.5 inches) and 69.9 mm (2.75 inches), 69.9 mm (2.75 inches) and 76.2 mm (3 inches), 76.2 mm (3 inches) and 82.6 mm (3.25 inches), 82.6 mm (3.25 inches) and 88.9 mm (3.5 inches), 88.9 mm (3.5 inches) and 95.3 mm (3.75 inches), or 95.3 mm (3.75 inches) and 101.6 mm (4 inches). In some embodiments, the sole-to-faceplate bridge length can be between 15% and 85% of the length of the transition region from the heel end to the toe end.

[0127] As described above, the sole-to-faceplate

bridge **107** lies at least partially within the transition region **118**. In some embodiments, the sole-to-faceplate bridge width extends across the entire transition region front-to-rear width. In some embodiments, the sole-to-faceplate bridge width extends across only a portion of the transition region front-to-rear width. In some of these embodiments and others, the sole-to-faceplate bridge width extends beyond the transition region **118** and onto the sole **103**. The sole-to-faceplate bridge width can be between 50% and 100% of the transition region width. In some embodiments wherein the sole-to-faceplate bridge extends beyond the transition region, the sole-to-faceplate bridge width can be greater than the transition region width. In these embodiments, the sole-to-faceplate bridge width can be up to 150% of sole-to-faceplate bridge width.

[0128] The sole-to-faceplate bridge width does not extend entirely from the faceplate **105** to rear of the golf club head **100**. In many embodiments, the sole-to-faceplate bridge width can be between 10.16 mm (0.40 inch) and 20.32 mm (0.80 inches). For example, the sole-to-faceplate bridge width can be between approximately 10.16 mm (0.40 inch) and approximately 12.70 mm (0.50 inch), approximately 12.70 mm (0.50 inch) and approximately 15.24 mm (0.6 inches), approximately 15.24 mm (0.6 inches) and approximately 17.78 mm (0.7 inches), or approximately 17.78 mm (0.7 inches) and approximately 20.32 mm (0.80 inches). In other embodiments, the sole-to-faceplate bridge width can be approximately 10.16 mm (0.40 inch), approximately 11.43 mm (0.45 inch), approximately 12.70 mm (0.50 inch), approximately 13.97 mm (0.55 inch), approximately 15.24 mm (0.60 inch), approximately 16.51 mm (0.65 inch), approximately 17.78 mm (0.70 inch), approximately 19.05 mm (0.75 inch), or approximately 20.32 mm (0.80 inch).

[0129] In many embodiments, the sole-to-faceplate bridge is integrally formed with at least the portion of the club head which it contacts. The sole-to-faceplate bridge, the transition region, and the portion of the sole which the sole-to-faceplate bridge lies comprise the same material or combination of materials.

[0130] In many embodiments, the sole-to-faceplate bridge **107** has a generally projected rectangular shape when viewed from a top plane. In other embodiments, the sole-to-faceplate bridge **107** can have one of the following shapes: oval, circle, trapezoidal, rounded rectangle, square, rounded square, or another polygon. In many embodiments, the sole-to-faceplate bridge **107** is substantially parallel with respect to its length. In many embodiments, the sole-to-faceplate bridge **107** is substantially parallel with respect to its width.

[0131] The sole-to-faceplate bridge **107** can have a variable or constant thickness across the width and/or length. In some of these embodiments, the sole-to-faceplate bridge **107** comprises a non-tapered, constant thickness across both of its width and length. In other embodiments, the sole-to-faceplate bridge **107** comprises a constant thickness across only one of the width

or length, and a variable (or tapered) thickness across the other of the width or length.

[0132] In many embodiments, the sole-to-faceplate bridge **107** is thickest at its center. In these embodiments, the sole-to-faceplate bridge thickness tapers circumferentially (or radially) from the center and the center of the reinforcement region comprises a rounded or pointed peak. In other words, the sole-to-faceplate bridge **107** thickness reduces linearly or curvedly away from the center (of both the width and the length) in all directions. The taper rate will vary in some directions relative to others based on the sole-to-faceplate bridge dimensions, such that the sole-to-faceplate bridge thickness is the same at all edges of the sole-to-faceplate bridge. The thickness tapers linearly, curvedly, or in a stepped formation toward its edges in a direction away from the center and toward the front, rear, heel end, and toe end. The front, rear, heel end **161**, and toe end **162** edges of the sole-to-faceplate bridge are tapered such that they transition substantially seamlessly with the surrounding golf club head. In other words, the thickness of the sole-to-faceplate bridge **107** reduces to that of the surrounding golf club head at its edges so as to prevent the existence of a substantial lip or step that differentiates the sole-to-faceplate bridge from the surrounding club head.

[0133] In some embodiments, the sole-to-faceplate bridge front-to-rear cross-sectional shape differs from the sole-to-faceplate bridge heel-to-toe cross-sectional shape. In others of these embodiments, the sole-to-faceplate bridge front-to-rear cross-sectional shape is similar to the sole-to-faceplate bridge heel-to-toe cross-sectional shape. In some embodiments, the sole-to-faceplate bridge comprises a slightly curved cross-sectional shape.

EXAMPLE 1

[0134] A two-club player test experiment was conducted to analyze the effectiveness of the golf club head embodiment of FIGS. 1-11 to obtain quantifiable information with regards to ball speed, launch angle, and spin rate properties. Specifically, the embodiment of FIGS. 1-11 was benchmarked against a control club that maintains durability with swing speeds over 44.7 m/s (100 miles per hours).

[0135] The two-club player test procedure was conducted across twenty-two golfers with each golfer hitting a total of twenty shots. Each player would hit five shots with the experimental club head and then five shots with the control club and rotate until a total of twenty shots were taken. After each swing, the ball speed, launch angle, and spin rate properties was recorded and logged.

[0136] The tested golf club head (or experimental club) of FIGS 1-11 was a driver-type golf club head with a loft angle of approximately 10.5 degrees, a swing weight of C8, a head weight of 191.1 grams, and a head volume of 460 cc. The control club was a driver-type golf club head with a loft angle of approximately 10.5 degrees, a swing

weight of D3.0, a head weight of 201 grams, and a volume of 460 cc.

[0137] Typically, with all things being equal (*i.e.* same swing speed, etc.), a decrease in the mass of the clubhead results in decreased ball speeds, because the amount of momentum possessed by a moving object (*i.e.* a golf ball) is the product of the mass of the golf club head and the velocity of the golf club head. Therefore, typically increasing the mass of a clubhead colliding with a golf ball generates greater ball speeds. However, this was not the case. Specifically, the experimental club weighed 8.1 grams lighter but produced 0.5% greater ball speeds over the control club, while achieving similar launch angles. Therefore, it was concluded that the increased flexure of the golf club head caused by thinning many of the club head structural elements described above can outperform and/or match performance gains typically associated with heavier weighted golf clubs. This is particularly important as an increase in distance can compensate strokes lost by an increase in a player's dispersion.

EXAMPLE 2

[0138] An FEA experiment was conducted to analyze the effectiveness of the golf club head embodiments described herein to obtain quantifiable information with regards to the change in CT, ball speed loss, and added mass to the clubhead by implementing one or more of a crown-to-faceplate bridge or a sole-to-faceplate bridge. Specifically, the positioning of the crown-to-faceplate bridge and/or the sole-to-faceplate bridge illustrated by FIGS. 8 - 11 were simulated individually and together to determine the effectiveness of each feature individually (and together) with respect to the change in club head CT, ball speed loss, and the added structural mass to the club head. The control club is the golf club head of FIGS. 1-11 with a thin crown, a thin sole, a thin faceplate, and a mass efficient weight system without a crown-to-faceplate bridge nor a sole-to-faceplate bridge.

[0139] The FEA experiment was a virtual study ran to simulate the physical USGA CT test. In the virtual FEA experiment, a steel hammer is impacted at three specified speeds determined by the USGA test protocols. During impact, the rigid body acceleration and the rigid body velocity of the hammer is plotted. After, the data from all three impacts are collected and plotted on a new curve, the Y-axis intercept is the calculated CT values.

[0140] The only differences between the tested golf club heads and the control club is the addition of either one or both of a crown-to-faceplate bridge or a sole-to-faceplate bridge. The first simulated golf club head included only a sole-to-faceplate bridge that weighed approximately one gram and devoid of a crown-to-faceplate bridge. This first simulated golf club head reduced CT by 2.7 microseconds and decreased ball speeds by approximately 0.13 m/s (0.3 miles per hour) compared to the control club. The second simulated golf club head in-

cluded only a sole-to-faceplate bridge that weighed approximately two grams and devoid of a crown-to-faceplate bridge. The second simulated golf club head reduced CT by 12.5 microseconds and decreased ball speeds by approximately 0.227 m/s (0.5 miles per hour) compared to the control club. The third simulated golf club head included only a crown-to-faceplate bridge that weighed approximately two grams and devoid of a sole-to-faceplate bridge. This third simulated golf club head reduced CT by 12.3 microseconds and decreased ball speeds by approximately 0.15 m/s (0.33 miles per hour) compared to the control club. The fourth simulated golf club head included both a sole-to-faceplate bridge that weighed approximately one gram and a crown-to-faceplate bridge that weighed approximately one gram. This fourth simulated golf club head reduced CT by 6.6 microseconds and decreased ball speeds by approximately 0.228 m/s (0.51 miles per hour) compared to the control club. These results illustrate the effectiveness of controlling CT across the faceplate (with a crown-to-faceplate bridge and/or a sole-to-faceplate bridge) without increasing the perimeter thickness of the faceplate, while minimizing added mass to the clubhead to maintain a lightweight club head.

Claims

1. A hollow golf club head (100) comprising:

a crown (102), a sole (103), a strike face (105), a toe end (108), a heel end (109), and a rear portion (110); wherein the crown, sole, strike face, and rear combine to form an interior cavity; wherein the strike face is opposite the rear, and adjacent the crown and the sole; wherein the sole is resting on a ground plane (120) when the golf club head is at an address position; wherein the toe end is opposite the heel end, and the sole is opposite the crown; and wherein the crown comprises a crown front portion (125), a crown middle portion (126), and a crown rear portion (127); wherein the crown front portion comprises a thickness between 0.48 mm (0.019 inch) and 0.79 mm (0.031 inch), and the crown middle portion and the crown rear portion comprise a thickness less than 0.46 mm (0.018 inch); wherein the sole comprises a sole front portion (130), a sole middle portion (131), and a sole rear portion (132); wherein the sole front portion comprises a thickness between 0.48 mm (0.019 inch) and 0.79 mm (0.031 inch), and the sole middle portion and the sole rear portion comprise a thickness less than 0.46 mm (0.018 inch); wherein the strike face further comprises a geo-

- metric center point and a mid-plane (156) extending through the geometric center point in a direction from the strike face to rear of the golf club head;
 wherein the mid-plane is perpendicular to the ground plane;
 wherein the golf club head further comprises a crown transition region (154) and a sole transition region (155);
 wherein the crown transition region is formed between the strike face and the crown;
 wherein the sole transition region is formed between the strike face and the sole;
 wherein the crown transition region comprises a first transition region thickness;
 wherein the sole transition region comprises a second transition region thickness;
 wherein the golf club head further comprises a crown-to-faceplate bridge (106) and a sole-to-faceplate bridge (107); wherein the crown-to-faceplate bridge is located entirely within the crown transition region and the sole-to-faceplate bridge is located within the sole transition region;
 wherein the crown-to-faceplate bridge is integrally formed within the crown transition region and extends from an inner surface (128) of the crown to an inner rear surface of the strike face;
 wherein the sole-to-faceplate bridge is integrally formed within the sole transition region and extends from an inner surface (133) of the sole to the inner rear surface of the strike face;
 wherein the crown-to-faceplate bridge comprises a first reinforcement region thickness;
 and the sole-to-faceplate bridge comprises a second reinforcement region thickness;
 wherein the first reinforcement region thickness is greater than the first transition region thickness;
 the second reinforcement region thickness is greater than the second transition region thickness;
 wherein a club head mass-to-volume ratio is between 0.40 and 0.44; and
 wherein a club head center of gravity is greater than 45 mm, measured from the geometric center point of the strike face and parallel to the ground plane.
2. The hollow golf club head (100) of claim 1, wherein the crown-to-faceplate bridge (106) further comprises a first reinforcement region width measured in a heel-to-toe direction and a first reinforcement region length measured in a front-to-rear direction; and
 the sole-to-faceplate bridge (107) further comprises a second reinforcement region width measured in a heel-to-toe direction and a second reinforcement
- region length measured in a front-to-rear direction; wherein
 the first reinforcement region width varies along the first reinforcement region length; and the second reinforcement region width varies along the second reinforcement region length.
3. The hollow golf club head (100) of claim 2, wherein the first reinforcement region length varies along the first reinforcement region width; and the second reinforcement region length varies along the second reinforcement region width.
4. The hollow golf club head (100) of claim 2, further comprising a heel-side plane and a toe-side plane; wherein the heel-side plane and the toe-side plane are parallel to the mid-plane (156); and wherein the heel-side plane is located in a direction toward the heel end (109) of the golf club head and spaced from the mid-plane and the toe-side plane is located in a direction toward the toe end (108) of the golf club head and spaced from the mid-plane; wherein the heel-side plane is located a distance of 0.55" to 0.80" from the mid-plane; and the toe-side plane is located a distance of 0.75" to 0.80" from the mid-plane; and wherein the first reinforcement region width and the second reinforcement region width are bounded by and between the heel-side plane and the toe-side plane.
5. The hollow golf club head (100) of claim 1, further comprising a first intersection point defined by the intersection of the mid-plane (156) with the crown-to-faceplate bridge (106) and a second intersection point defined by the intersection of the mid-plane with the sole-to-faceplate bridge (107); wherein the crown-to-faceplate bridge contacts the first intersection point and extends beyond the first intersection point in both a heel and a toe direction; and the sole-to-faceplate bridge contacts the second intersection point and extends beyond the second intersection point in both the heel and the toe direction.
6. The hollow golf club head (100) of claim 1, wherein the rear portion (110) of the golf club head further comprises a single slot (142); wherein the single slot defines: a slot interior surface (144), a slot bottom surface (146), a slot top surface (147), and two slot sidewalls (148, 149); wherein the slot interior surface, slot bottom surface, slot top surface, and two slot sidewalls cooperate to form a slot channel opening to an exterior, rear, and sole of the golf club head; wherein the slot interior surface further comprises only a central weight position (140) and a heel weight position (141) and devoid of a toe weight position; wherein the central weight position and the heel weight position comprise weight assembly attachment points; wherein the golf club head further com-

prises a moveable weight assembly (143); and wherein the moveable weight assembly is only detachably affixed to one of the central weight position and the heel weight position.

7. The hollow golf club head (100) of claim 1, wherein the mass of the strike face (105) is less than 63 grams.
8. The hollow golf club head (100) of claim 7, wherein the crown-to-faceplate bridge (106) further comprises a first reinforcement region width measured in a heel-to-toe direction and a first reinforcement region length measured in a front-to-rear direction; and the sole-to-faceplate bridge (107) further comprises a second reinforcement region width measured in a heel-to-toe direction and a second reinforcement region length measured in a front-to-rear direction; wherein

the first reinforcement region width varies along the first reinforcement region length; and the second reinforcement region width varies along the second reinforcement region length.
9. The hollow golf club head (100) of claim 8, wherein the first reinforcement region length varies along the first reinforcement region width; and the second reinforcement region length varies along the second reinforcement region width.
10. The hollow golf club head (100) of claim 8, further comprising a heel-side plane and a toe-side plane; wherein the heel-side plane and the toe-side plane are parallel to the mid-plane (156); and wherein the heel-side plane is located in a direction toward the heel end (109) of the golf club head and spaced from the mid-plane and the toe-side plane is located in a direction toward the toe end (108) of the golf club head and spaced from the mid-plane; wherein the heel-side plane is located a distance of 0.55" to 0.80" from the mid-plane; and the toe-side plane is located a distance of 0.75" to 0.80" from the mid-plane; and wherein the first reinforcement region width and the second reinforcement region width are bounded by and between the heel-side plane and the toe-side plane.
11. The hollow golf club head (100) of claim 7, further comprising a first intersection point defined by the intersection of the mid-plane (156) with the crown-to-faceplate bridge (106) and a second intersection point defined by the intersection of the mid-plane with the sole-to-faceplate bridge (107); wherein the crown-to-faceplate bridge contacts the first intersection point and extends beyond the first intersection point in both a heel and a toe direction; and the sole-

to-faceplate bridge contacts the second intersection point and extends beyond the second intersection point in both the heel and the toe direction.

- 5 12. The hollow golf club head (100) of claim 7, wherein the rear portion (110) of the golf club head further comprises a single slot (142); wherein the single slot defines: a slot interior surface (144), a slot bottom surface (146), a slot top surface (147), and two slot sidewalls (148, 149); wherein the slot interior surface, slot bottom surface, slot top surface, and two slot sidewalls cooperate to form a slot channel opening to an exterior, rear, and sole of the golf club head; wherein the slot interior surface further comprises only a central weight position (140) and a heel weight position (141) and devoid of a toe weight position; wherein the central weight position and the heel weight position comprise weight assembly attachment points; wherein the golf club head further comprises a moveable weight assembly (143); and wherein the moveable weight assembly is only detachably affixed to one of the central weight position and the heel weight position.
- 10 13. The hollow golf club head (100) of claim 7, wherein the mass of the strike face (105) is between approximately 61 grams and 62 grams.
- 15 14. The hollow golf club head (100) of claim 7, wherein the mass of the strike face (105) is 62.8 grams.
- 20
- 25
- 30

Patentansprüche

- 35 1. Hohler Golfschlägerkopf (100), umfassend:

eine Krone (102), eine Sohle (103), eine Schlagfläche (105), ein Zehenende (108), ein Fersenende (109) und einen hinteren Abschnitt (110), wobei die Krone, die Sohle, die Schlagfläche und der hintere Abschnitt vereinigt sind, um einen Innenhohlraum auszubilden;
wobei die Schlagfläche entgegengesetzt zum hinteren Abschnitt und benachbart zur Krone und zur Sohle angeordnet ist;
wobei die Sohle auf einer Bodenebene (120) aufliegt, wenn sich der Golfschlägerkopf in einer Ansprechposition befindet;
wobei das Zehenende entgegengesetzt zum Fersenende angeordnet ist und die Sohle entgegengesetzt zur Krone angeordnet ist; und
wobei die Krone einen vorderen Kronenabschnitt (125), einen mittleren Kronenabschnitt (126) und einen hinteren Kronenabschnitt (127) umfasst;
wobei der vordere Kronenabschnitt eine Dicke zwischen 0,48 mm (0,019 Zoll) und 0,79 mm (0,031 Zoll) umfasst und der mittlere Kronenab-
- 40
- 45
- 50
- 55

schnitt und der hintere Kronenabschnitt eine Dicke von weniger als 0,46 mm (0,018 Zoll) umfassen;

wobei die Sohle einen vorderen Sohlenabschnitt (130), einen mittleren Sohlenabschnitt (131) und einen hinteren Sohlenabschnitt (132) umfasst;

wobei der vordere Sohlenabschnitt eine Dicke zwischen 0,48 mm (0,019 Zoll) und 0,79 mm (0,031 Zoll) umfasst und der mittlere Sohlenabschnitt und der hintere Sohlenabschnitt eine Dicke von weniger als 0,46 mm (0,018 Zoll) umfassen;

wobei die Schlagfläche ferner einen geometrischen Mittelpunkt und eine Mittelebene (156) umfasst, die sich durch den geometrischen Mittelpunkt in eine Richtung von der Schlagfläche bis zum hinteren Abschnitt des Golfschlägerkopfs erstrecken;

wobei die Mittelebene normal auf die Bodenebene steht;

wobei der Golfschlägerkopf ferner einen Kronenübergangsbereich (154) und einen Sohlenübergangsbereich (155) umfasst;

wobei der Kronenübergangsbereich zwischen der Schlagfläche und der Krone ausgebildet ist;

wobei der Sohlenübergangsbereich zwischen der Schlagfläche und der Sohle ausgebildet ist;

wobei der Kronenübergangsbereich eine erste Übergangsbereichsdicke umfasst;

wobei der Sohlenübergangsbereich eine zweite Übergangsbereichsdicke umfasst;

wobei der Golfschlägerkopf ferner eine Brücke (106) zwischen Krone und Flächenplatte und eine Brücke (107) zwischen Sohle und Flächenplatte umfasst; wobei die Brücke zwischen Krone und Flächenplatte vollständig innerhalb des Kronenübergangsbereichs angeordnet ist und die Brücke zwischen Sohle und Flächenplatte innerhalb des Sohlenübergangsbereichs angeordnet ist;

wobei die Brücke zwischen Krone und Flächenplatte einstückig innerhalb des Kronenübergangsbereichs ausgebildet ist und sich von einer Innenfläche (128) der Krone bis zu einer hinteren Innenfläche der Schlagfläche erstreckt;

wobei die Brücke zwischen Sohle und Flächenplatte einstückig innerhalb des Sohlenübergangsbereichs ausgebildet ist und sich von einer Innenfläche (133) der Sohle bis zu einer hinteren Innenfläche der Schlagfläche erstreckt;

wobei die Brücke zwischen Krone und Flächenplatte eine erste Verstärkungsbereichsdicke umfasst; und die Brücke zwischen Sohle und Flächenplatte eine zweite Verstärkungsbereichsdicke umfasst;

wobei die erste Verstärkungsbereichsdicke größer ist als die erste Übergangsbereichsdicke;

wobei die zweite Verstärkungsbereichsdicke größer ist als die zweite Übergangsbereichsdicke;

wobei ein Massen-Volumen-Verhältnis eines Schlägerkopfs zwischen 0,40 und 0,44 liegt; und

wobei ein Schlägerkopfschwerpunkt größer als 45 mm ist, gemessen ab dem geometrischen Mittelpunkt der Schlagfläche und parallel zur Bodenebene.

2. Hohler Golfschlägerkopf (100) nach Anspruch 1, wobei die Brücke (106) zwischen Krone und Flächenplatte ferner eine erste Breite des Verstärkungsbereichs umfasst, die in eine Ferse-Zehen-Richtung gemessen wird, und eine erste Länge des Verstärkungsbereichs umfasst, die in eine Vorne-Hinten-Richtung gemessen wird; und

wobei die Brücke (107) zwischen Sohle und Flächenplatte ferner eine zweite Breite des Verstärkungsbereichs umfasst, die in eine Ferse-Zehen-Richtung gemessen wird, und eine zweite Länge des Verstärkungsbereichs umfasst, die in eine Vorne-Hinten-Richtung gemessen wird; wobei

die erste Breite des Verstärkungsbereichs entlang der ersten Länge des Verstärkungsbereichs variiert; und

die zweite Breite des Verstärkungsbereichs entlang der zweiten Länge des Verstärkungsbereichs variiert.

3. Hohler Golfschlägerkopf (100) nach Anspruch 2, wobei die erste Länge des Verstärkungsbereichs entlang der ersten Breite des Verstärkungsbereichs variiert; und die zweite Länge des Verstärkungsbereichs entlang der zweiten Breite des Verstärkungsbereichs variiert.

4. Hohler Golfschlägerkopf (100) nach Anspruch 2, ferner umfassend eine fersenseitige Ebene und eine zehenseitige Ebene; wobei die fersenseitige Ebene und die zehenseitige Ebene parallel zur Mittelebene (156) sind; und wobei die fersenseitige Ebene in eine Richtung hin zum Fersenende (109) des Golfschlägerkopfs und beabstandet von der Mittelebene angeordnet ist und die zehenseitige Ebene in eine Richtung hin zum Zehenende (108) des Golfschlägerkopfs und beabstandet von der Mittelebene angeordnet ist; wobei die fersenseitige Ebene in einem Abstand von 0,55" bis 0,80" von der Mittelebene angeordnet ist; und wobei die zehenseitige Ebene in einem Abstand von 0,75" bis 0,80" von der Mittelebene angeordnet ist; und wobei die erste Breite des Verstärkungsbereichs und die zweite Breite des Verstärkungsbereichs von und zwischen der fersenseitigen Ebene und der zehenseitigen Ebene flankiert

sind bzw. werden.

5. Hohler Golfschlägerkopf (100) nach Anspruch 1, ferner umfassend einen ersten Schnittpunkt, definiert durch das Schneiden der Mittelebene (156) mit der Brücke (106) zwischen Krone und Flächenplatte, und einen zweiten Schnittpunkt, definiert durch das Schneiden der Mittelebene mit der Brücke (107) zwischen der Sohle und der Flächenplatte; wobei die Brücke zwischen Krone und Flächenplatte den ersten Schnittpunkt berührt und sich sowohl in eine Fersen- als auch in eine Zehenrichtung über den ersten Schnittpunkt hinaus erstreckt; und wobei die Brücke zwischen Sohle und Flächenplatte den zweiten Schnittpunkt berührt und sich sowohl in der Fersen- als auch in der Zehenrichtung über den Schnittpunkt hinaus erstreckt. 5

6. Hohler Golfschlägerkopf (100) nach Anspruch 1, wobei der hintere Abschnitt (110) des Golfschlägerkopfs ferner einen einzelnen Schlitz (142) umfasst; wobei der einzelne Schlitz Folgendes definiert: eine innere Schlitzoberfläche (144), eine untere Schlitzoberfläche (146), eine obere Schlitzoberfläche (147) und zwei Schlitzseitenwände (148, 149); wobei die innere Schlitzoberfläche, die untere Schlitzoberfläche, die obere Schlitzoberfläche und zwei Schlitzseitenwände zusammenwirken, um einen Schlitzkanal auszubilden, der sich nach außen, hinten und zur Sohle des Golfschlägerkopfs hin öffnet; wobei die innere Schlitzoberfläche ferner nur eine mittlere Gewichtposition (140) und eine Fersen-Gewichtposition (141) und keine Zehen-Gewichtposition umfasst; wobei die mittlere Gewichtposition und die Fersen-Gewichtposition Gewichtsanordnungsanbringungspunkte umfassen; wobei der Golfschlägerkopf ferner eine bewegbare Gewichtsanordnung (143) umfasst; und wobei die bewegbare Gewichtsanordnung nur abnehmbar an einer aus der mittleren Gewichtposition und der Fersen-Gewichtposition befestigt ist. 10 15 20 25 30 35 40

7. Hohler Golfschlägerkopf (100) nach Anspruch 1, wobei die Masse der Schlagfläche (105) größer als 63 g ist. 45

8. Hohler Golfschlägerkopf (100) nach Anspruch 7, wobei die Brücke (106) zwischen Krone und Flächenplatte ferner eine erste Breite des Verstärkungsbereichs, die in eine Fersen-Zehen-Richtung gemessen wird, und eine erste Länge des Verstärkungsbereichs umfasst, die in eine Vorne-Hinten-Richtung gemessen wird; und 50

die Brücke (107) zwischen Sohle und Flächenplatte ferner eine zweite Breite des Verstärkungsbereichs, die in eine Fersen-Zehen-Richtung gemessen wird, und eine zweite Länge des 55

Verstärkungsbereichs umfasst, die in eine Vorne-Hinten-Richtung gemessen wird; wobei die erste Breite des Verstärkungsbereichs entlang der ersten Länge des Verstärkungsbereichs variiert; und
 die zweite Breite des Verstärkungsbereichs entlang der zweiten Länge des Verstärkungsbereichs variiert.

9. Hohler Golfschlägerkopf (100) nach Anspruch 8, wobei die erste Länge des Verstärkungsbereichs entlang der ersten Breite des Verstärkungsbereichs variiert; und wobei die zweite Länge des Verstärkungsbereichs entlang der zweiten Breite des Verstärkungsbereichs variiert. 10 15

10. Hohler Golfschlägerkopf (100) nach Anspruch 8, ferner umfassend eine fersenseitige Ebene und eine zehenseitige Ebene; wobei die fersenseitige Ebene und die zehenseitige Ebene parallel zur Mittelebene (156) sind; und wobei die fersenseitige Ebene in eine Richtung hin zum Fersenende (109) des Golfschlägerkopfs und beabstandet von der Mittelebene angeordnet ist, und die zehenseitige Ebene in eine Richtung hin zum Zehenende (108) des Golfschlägerkopfs und beabstandet von der Mittelebene angeordnet ist; wobei die fersenseitige Ebene in einem Abstand von 0,55" bis 0,80" von der Mittelebene angeordnet ist; und wobei die zehenseitige Ebene in einem Abstand von 0,75" bis 0,80" von der Mittelebene angeordnet ist; und wobei die erste Breite des Verstärkungsbereichs und die zweite Breite des Verstärkungsbereichs von und zwischen der fersenseitigen Ebene und der zehenseitigen Ebene flankiert sind bzw. werden. 20 25 30 35 40

11. Hohler Golfschlägerkopf (100) nach Anspruch 7, ferner umfassend einen ersten Schnittpunkt, definiert durch das Schneiden der Mittelebene (156) mit der Brücke (106) zwischen Krone und Flächenplatte, und einen zweiten Schnittpunkt, definiert durch das Schneiden der Mittelebene mit der Brücke (107) zwischen der Sohle und der Flächenplatte; wobei die Brücke zwischen Krone und Flächenplatte den ersten Schnittpunkt berührt und sich sowohl in eine Fersen- als auch in eine Zehenrichtung über den ersten Schnittpunkt hinaus erstreckt; und wobei die Brücke zwischen Sohle und Flächenplatte den zweiten Schnittpunkt berührt und sich sowohl in der Fersen- als auch in der Zehenrichtung über den Schnittpunkt hinaus erstreckt. 45 50

12. Hohler Golfschlägerkopf (100) nach Anspruch 7, wobei der hintere Abschnitt (110) des Golfschlägerkopfs ferner einen einzelnen Schlitz (142) umfasst; wobei der einzelne Schlitz Folgendes definiert: eine innere Schlitzoberfläche (144), eine untere Schlitzoberfläche (146), eine obere Schlitzoberfläche (147) 55

und zwei Schlitzseitenwände (148, 149); wobei die innere Schlitzoberfläche, die untere Schlitzoberfläche, die obere Schlitzoberfläche und zwei Schlitzseitenwände zusammenwirken, um einen Schlitzkanal auszubilden, der sich nach außen, hinten und zur Sohle des Golfschlägerkopfs hin öffnet; wobei die innere Schlitzoberfläche ferner nur eine mittlere Gewichtsposition (140) und eine Fersen-Gewichtsposition (141) und keine Zehen-Gewichtsposition umfasst; wobei die mittlere Gewichtsposition und die Fersen-Gewichtsposition Gewichtsanordnungsanbringungspunkte umfassen; wobei der Golfschlägerkopf ferner eine bewegbare Gewichtsanordnung (143) umfasst; und wobei die bewegbare Gewichtsanordnung nur abnehmbar an einer aus der mittleren Gewichtsposition und der Fersen-Gewichtsposition befestigt ist.

13. Hohler Golfschlägerkopf (100) nach Anspruch 7, wobei die Masse der Schlagfläche (105) zwischen etwa 61 g und 62 g liegt.

14. Hohler Golfschlägerkopf (100) nach Anspruch 7, wobei die Masse der Schlagfläche (105) 62,8 g beträgt.

Revendications

1. Tête de club de golf creuse (100), comprenant :

- une couronne (102), une semelle (103), une face de frappe (105), une extrémité de pointe (108), une extrémité de talon (109) et une partie arrière (110) ; dans laquelle la couronne , la semelle, la face de frappe et l'arrière se combinent pour former une cavité intérieure ;
- dans laquelle la face de frappe est opposée à l'arrière, et adjacente à la couronne et à la semelle ;
- dans laquelle la semelle repose sur un plan de sol (120) lorsque la tête de club de golf est dans une position d'adresse ;
- dans laquelle l'extrémité de pointe est opposée à l'extrémité de talon, et la semelle est opposée à la couronne ; et
- dans laquelle la couronne comprend une partie avant de couronne (125), une partie médiane de couronne (126), et une partie arrière de couronne (127) ;
- dans laquelle la partie avant de couronne comprend une épaisseur comprise entre 0,48 mm (0,019 pouce) et 0,79 mm (0,031 pouce), et la partie médiane de couronne et la partie arrière de couronne comprennent une épaisseur inférieure à 0,46 mm (0,018 pouce) ;
- dans laquelle la semelle comprend une partie avant de semelle (130), une partie médiane de

semelle (131) et une partie arrière de semelle (132) ;

dans laquelle la partie avant de semelle comprend une épaisseur comprise entre 0,48 mm (0,019 pouce) et 0,79 mm (0,031 pouce), et la partie médiane de semelle et la partie arrière de semelle comprennent une épaisseur inférieure à 0,46 mm (0,018 pouce) ;

dans laquelle la face de frappe comprend en outre un point central géométrique et un plan médian (156) s'étendant à travers le point central géométrique dans une direction allant de la face de frappe à l'arrière de la tête de club de golf ;

dans laquelle le plan médian est perpendiculaire au plan de sol ;

dans laquelle la tête de club de golf comprend en outre une région de transition de couronne (154) et une région de transition de semelle (155) ;

dans laquelle la région de transition de couronne est formée entre la face de frappe et la couronne ;

dans laquelle la région de transition de semelle est formée entre la face de frappe et la semelle ;

dans laquelle la région de transition de couronne comprend une première épaisseur de région de transition ;

dans laquelle la région de transition semelle comprend une seconde épaisseur de région de transition ;

dans laquelle la tête de club de golf comprend en outre un pont de couronne à plaque frontale (106) et un pont de semelle à plaque frontale (107) ;

dans laquelle le pont de couronne à plaque frontale est situé entièrement à l'intérieur de la région de transition de couronne et le pont de semelle à face frontale est situé à l'intérieur de la région de transition de semelle ;

dans laquelle le pont de couronne à plaque frontale est formé d'un seul tenant à l'intérieur de la région de transition de couronne et s'étend depuis une surface interne (128) de la couronne vers une surface arrière interne de la face de frappe ;


dans laquelle le pont de semelle à plaque frontale est formé d'un seul tenant à l'intérieur de la région de transition de semelle et s'étend depuis une surface interne (133) de la semelle vers la surface arrière interne de la face de frappe ;

dans laquelle le pont de couronne à plaque frontale comprend une première épaisseur de région de renforcement ; et le pont de semelle à plaque frontale comprend une seconde épaisseur de région de renforcement ;

dans laquelle la première épaisseur de région de renforcement est supérieure à la première épaisseur de région de transition ;

- la seconde épaisseur de région de renforcement est supérieure à la seconde épaisseur de région de transition ;
 dans laquelle un rapport masse/volume de tête de club est compris entre 0,40 et 0,44 ; et
 dans laquelle un centre de gravité de tête de club est supérieur à 45 mm, mesuré à partir du point central géométrique de la face de frappe et parallèlement par rapport au plan de sol.
2. Tête de club de golf creuse (100) selon la revendication 1, dans laquelle le pont de couronne à plaque frontale (106) comprend en outre une première largeur de région de renforcement mesurée dans une direction du talon à la pointe et une première longueur de région de renforcement mesurée dans une direction d'avant en arrière ; et
- le pont de semelle à plaque frontale (107) comprend en outre une seconde largeur de région de renforcement mesurée dans une direction talon-pointe et une seconde longueur de région de renforcement mesurée dans une direction avantarrière ; dans laquelle la première largeur de région de renforcement varie le long de la première longueur de région de renforcement ; et la seconde largeur de région de renforcement varie le long de la seconde longueur de région de renforcement.
3. Tête de club de golf creuse (100) selon la revendication 2, dans laquelle la première longueur de région de renforcement varie le long de la première largeur de région de renforcement ; et la seconde longueur de région de renforcement varie le long de la seconde largeur de région de renforcement.
4. Tête de club de golf creuse (100) selon la revendication 2, comprenant en outre un plan côté talon et un plan côté pointe ; dans laquelle le plan côté talon et le plan côté pointe sont parallèles au plan médian (156) ; et dans laquelle le plan côté talon est situé dans une direction vers l'extrémité de talon (109) de la tête de club de golf et espacé du plan médian et le plan côté pointe est situé dans une direction vers l'extrémité de pointe (108) de la tête de club de golf et espacé du plan médian ; dans laquelle le plan côté talon est situé à une distance de 0,55" à 0,80" à partir du plan médian ; et le plan côté pointe est situé à une distance de 0,75" à 0,80" à partir du plan médian ; et dans laquelle la première largeur de région de renforcement et la seconde largeur de région de renforcement sont liées par et entre le plan côté talon et le plan côté pointe.
5. Tête de club de golf creuse (100) selon la revendication 1, comprenant en outre un premier point d'intersection défini par l'intersection du plan médian (156) avec le pont de couronne à plaque frontale (106) et un second point d'intersection défini par l'intersection du plan médian avec le pont de semelle à plaque frontale (107) ; dans laquelle le pont de couronne à plaque frontale vient en contact avec le premier point d'intersection et s'étend au-delà du premier point d'intersection à la fois dans une direction de talon et une direction pointe ; et le pont de semelle à plaque frontale vient en contact avec le second point d'intersection et s'étend au-delà du second point d'intersection à la fois dans la direction de talon et la direction de pointe.
6. Tête de club de golf creuse (100) selon la revendication 1, dans laquelle la partie arrière (110) de la tête de club de golf comprend en outre une fente unique (142) ; dans laquelle la fente unique définit : une surface intérieure de fente (144), une surface inférieure de fente (146), une surface supérieure de fente (147) et deux parois latérales de fente (148, 149) ; dans laquelle la surface intérieure de fente, la surface inférieure de fente, la surface supérieure de fente et les deux parois latérales de fente coopèrent pour former une ouverture de canal de fente vers l'extérieur, l'arrière et la semelle de la tête de club de golf ; dans laquelle la surface intérieure de fente comprend en outre uniquement une position de poids centrale (140) et une position de poids de talon (141) et est dépourvue d'une position de poids de pointe ; dans laquelle la position de poids centrale et la position de poids de talon comprennent des points de fixation d'ensemble de poids ; dans laquelle la tête de club de golf comprend en outre un ensemble de poids mobile (143) ; et dans laquelle l'ensemble de poids mobile est fixé uniquement de manière amovible à l'une de la position de poids centrale et de la position de poids de talon.
7. Tête de club de golf creuse (100) selon la revendication 1, dans laquelle la masse de la face de frappe (105) est inférieure à 63 grammes.
8. Tête de club de golf creuse (100) selon la revendication 7, dans laquelle le pont de couronne à plaque frontale (106) comprend en outre une première largeur de région de renforcement mesurée dans une direction du talon à la pointe et une première longueur de région de renforcement mesurée dans une direction d'avant en arrière ; et
- le pont de semelle à plaque frontale (107) comprend en outre une seconde largeur de région de renforcement mesurée dans une direction talon-pointe et une seconde longueur de région de renforcement mesurée dans une direction avantarrière ; dans laquelle

- la première largeur de région de renforcement varie le long de la première longueur de région de renforcement ; et
la seconde largeur de région de renforcement varie le long de la seconde longueur de région de renforcement. 5
9. Tête de club de golf creuse (100) selon la revendication 8, dans laquelle la première longueur de région de renforcement varie le long de la première largeur de région de renforcement ; et la seconde longueur de région de renforcement varie le long de la seconde largeur de région de renforcement. 10
10. Tête de club de golf creuse (100) selon la revendication 8, comprenant en outre un plan côté talon et un plan côté pointe ; dans laquelle le plan côté talon et le plan côté pointe sont parallèles au plan médian (156) ; et dans laquelle le plan côté talon est situé dans une direction vers l'extrémité de talon (109) de la tête de club de golf et espacé du plan médian et le plan côté pointe est situé dans une direction vers l'extrémité de pointe (108) de la tête de club de golf et espacé du plan médian ; dans laquelle le plan côté talon est situé à une distance de 0,55" à 0,80" à partir du plan médian ; et le plan côté pointe est situé à une distance de 0,75" à 0,80" à partir du plan médian ; et dans laquelle la première largeur de région de renforcement et la seconde largeur de région de renforcement sont liées par et entre le plan côté talon et le plan côté pointe. 20 25 30
11. Tête de club de golf creuse (100) selon la revendication 7, comprenant en outre un premier point d'intersection défini par l'intersection du plan médian (156) avec le pont de couronne à plaque frontale (106) et un second point d'intersection défini par l'intersection du plan médian avec le pont de semelle à plaque frontale (107) ; dans laquelle le pont de couronne à plaque frontale vient en contact avec le premier point d'intersection et s'étend au-delà du premier point d'intersection à la fois dans une direction de talon et une direction pointe ; et le pont de semelle à plaque frontale vient en contact avec le second point d'intersection et s'étend au-delà du second point d'intersection à la fois dans la direction de talon et la direction de pointe. 35 40 45
12. Tête de club de golf creuse (100) selon la revendication 7, dans laquelle la partie arrière (110) de la tête de club de golf comprend en outre une fente unique (142) ; dans laquelle la fente unique définit : une surface intérieure de fente (144), une surface inférieure de fente (146), une surface supérieure de fente (147) et deux parois latérales de fente (148, 149) ; dans laquelle la surface intérieure de fente, la surface inférieure de fente, la surface supérieure de fente et les deux parois latérales de fente coopèrent 50 55
- pour former une ouverture de canal de fente vers l'extérieur, l'arrière et la semelle de la tête de club de golf ; dans laquelle la surface intérieure de fente comprend en outre uniquement une position de poids centrale (140) et une position de poids de talon (141) et est dépourvue d'une position de poids de pointe ; dans laquelle la position de poids centrale et la position de poids de talon comprennent des points de fixation d'ensemble de poids ; dans laquelle la tête de club de golf comprend en outre un ensemble de poids mobile (143) ; et dans laquelle l'ensemble de poids mobile est fixé uniquement de manière amovible à l'une de la position de poids centrale et de la position de poids de talon.
13. Tête de club de golf creuse (100) selon la revendication 7, dans laquelle la masse de la face de frappe (105) est comprise entre environ 61 grammes et 62 grammes.
14. Tête de club de golf creuse (100) selon la revendication 7, dans laquelle la masse de la face de frappe (105) est de 62,8 grammes.

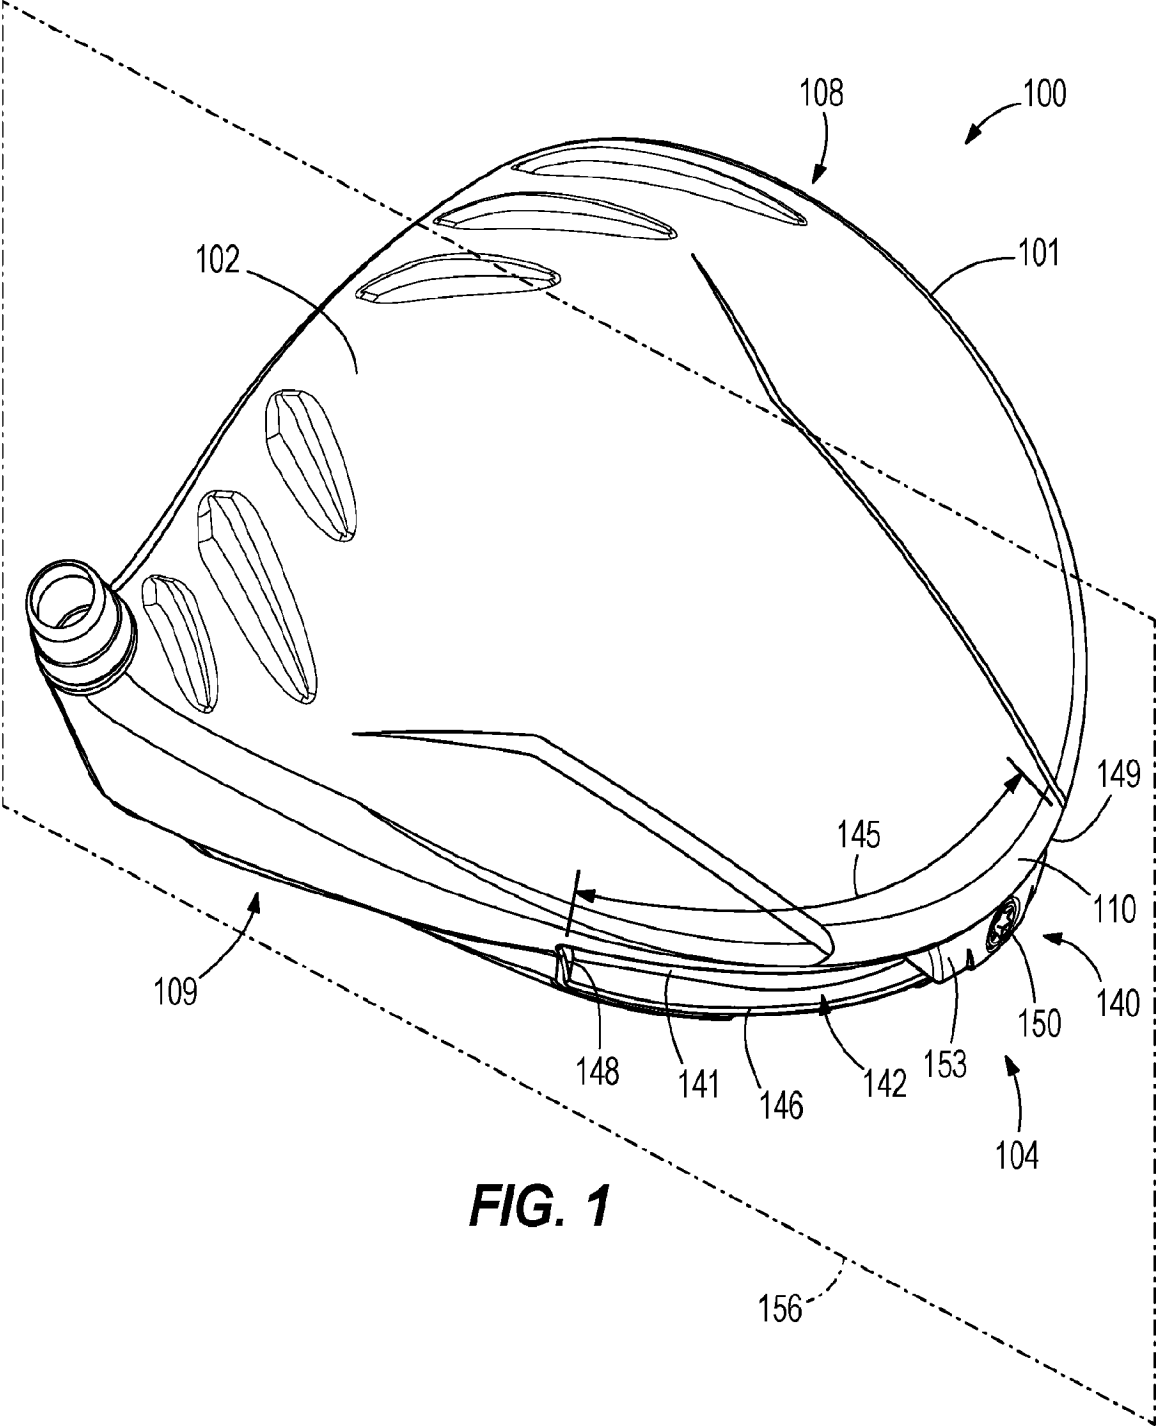

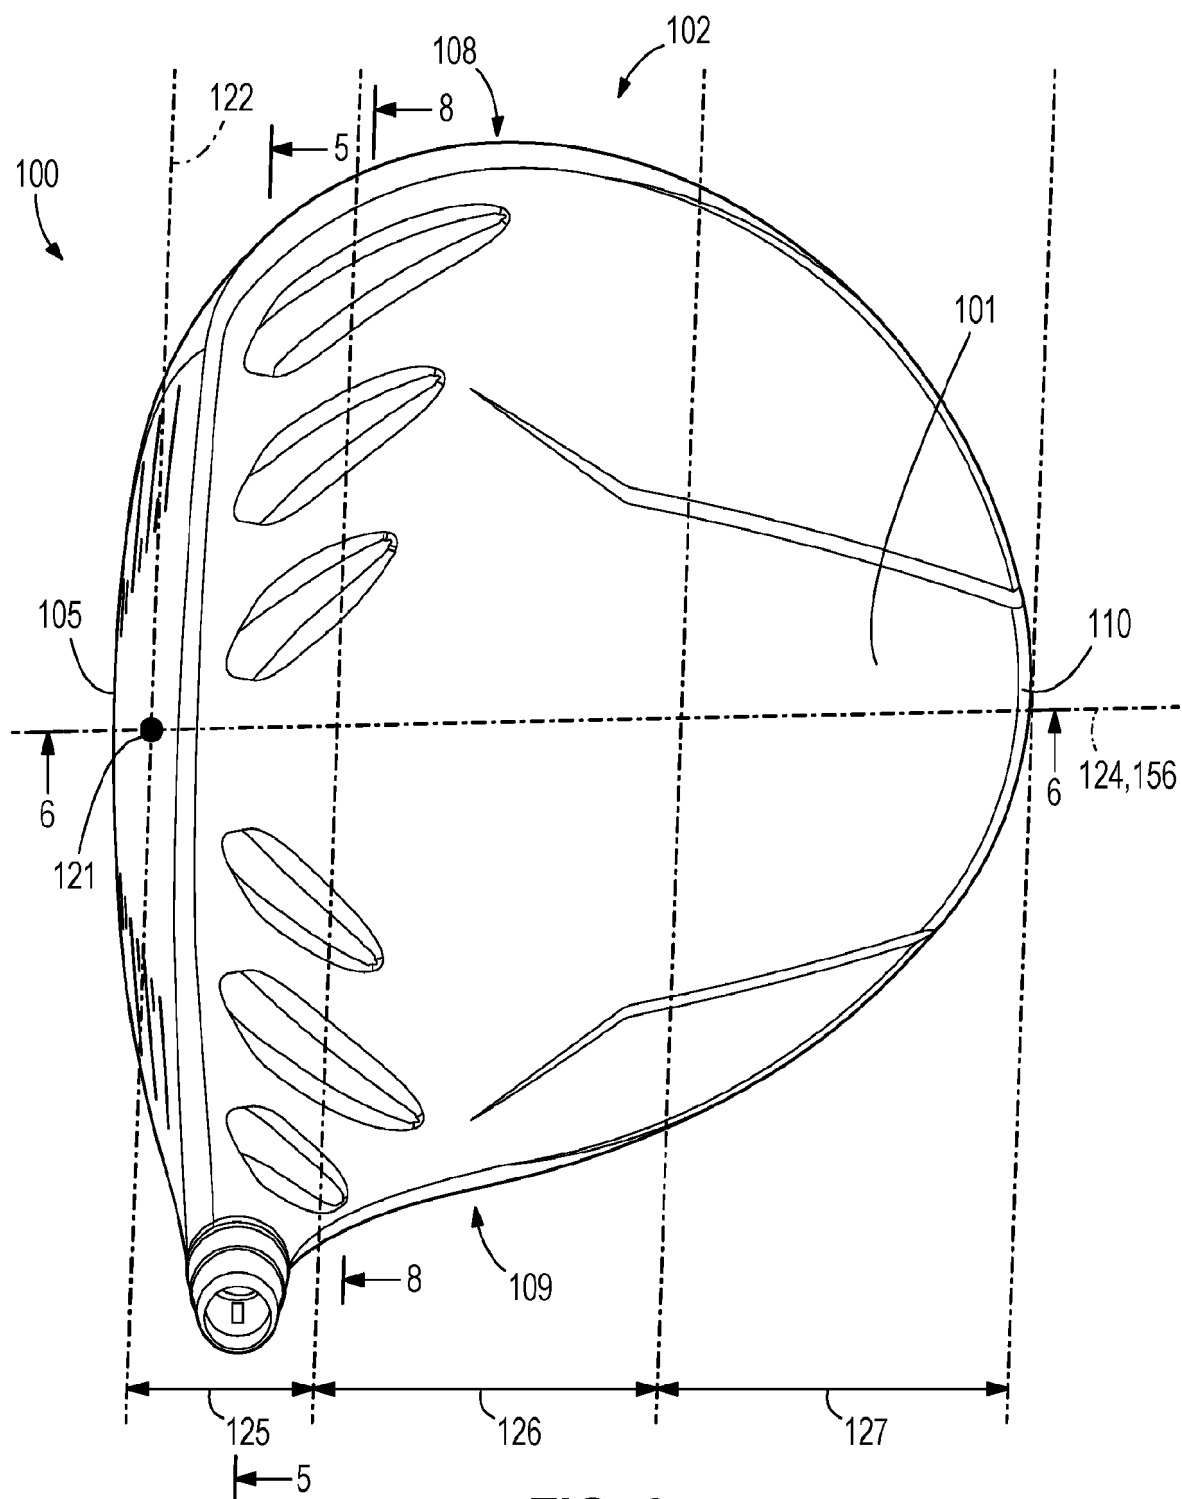


FIG. 2

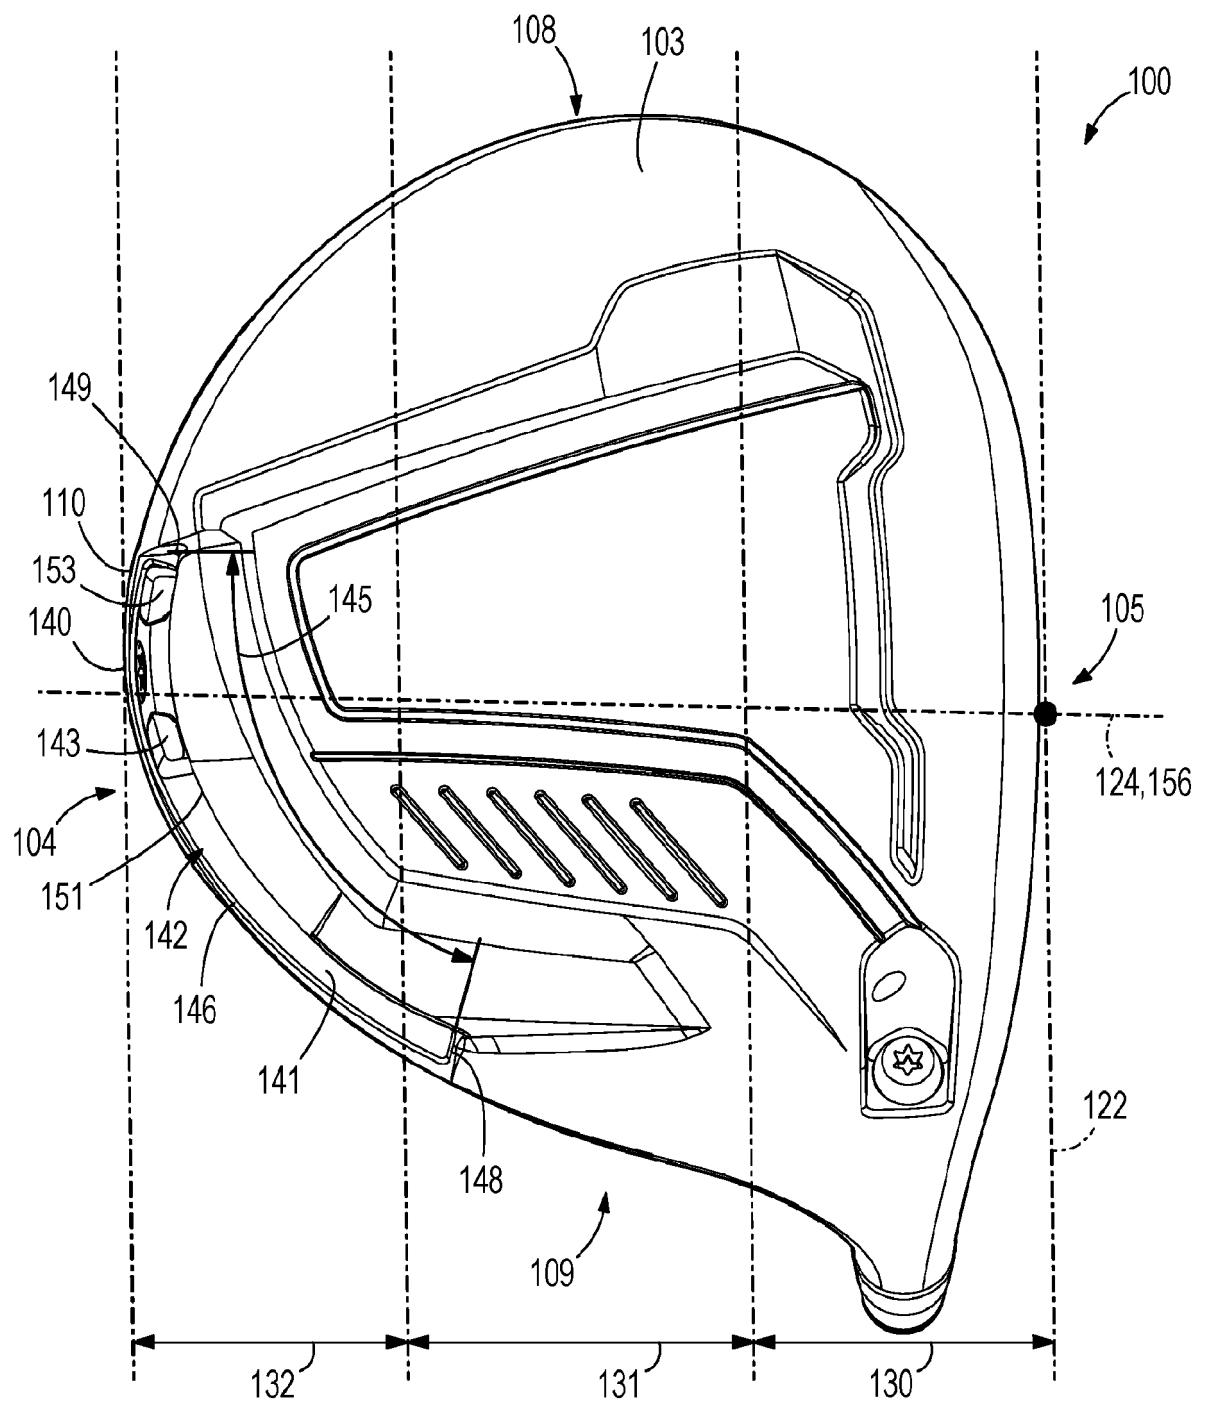


FIG. 3

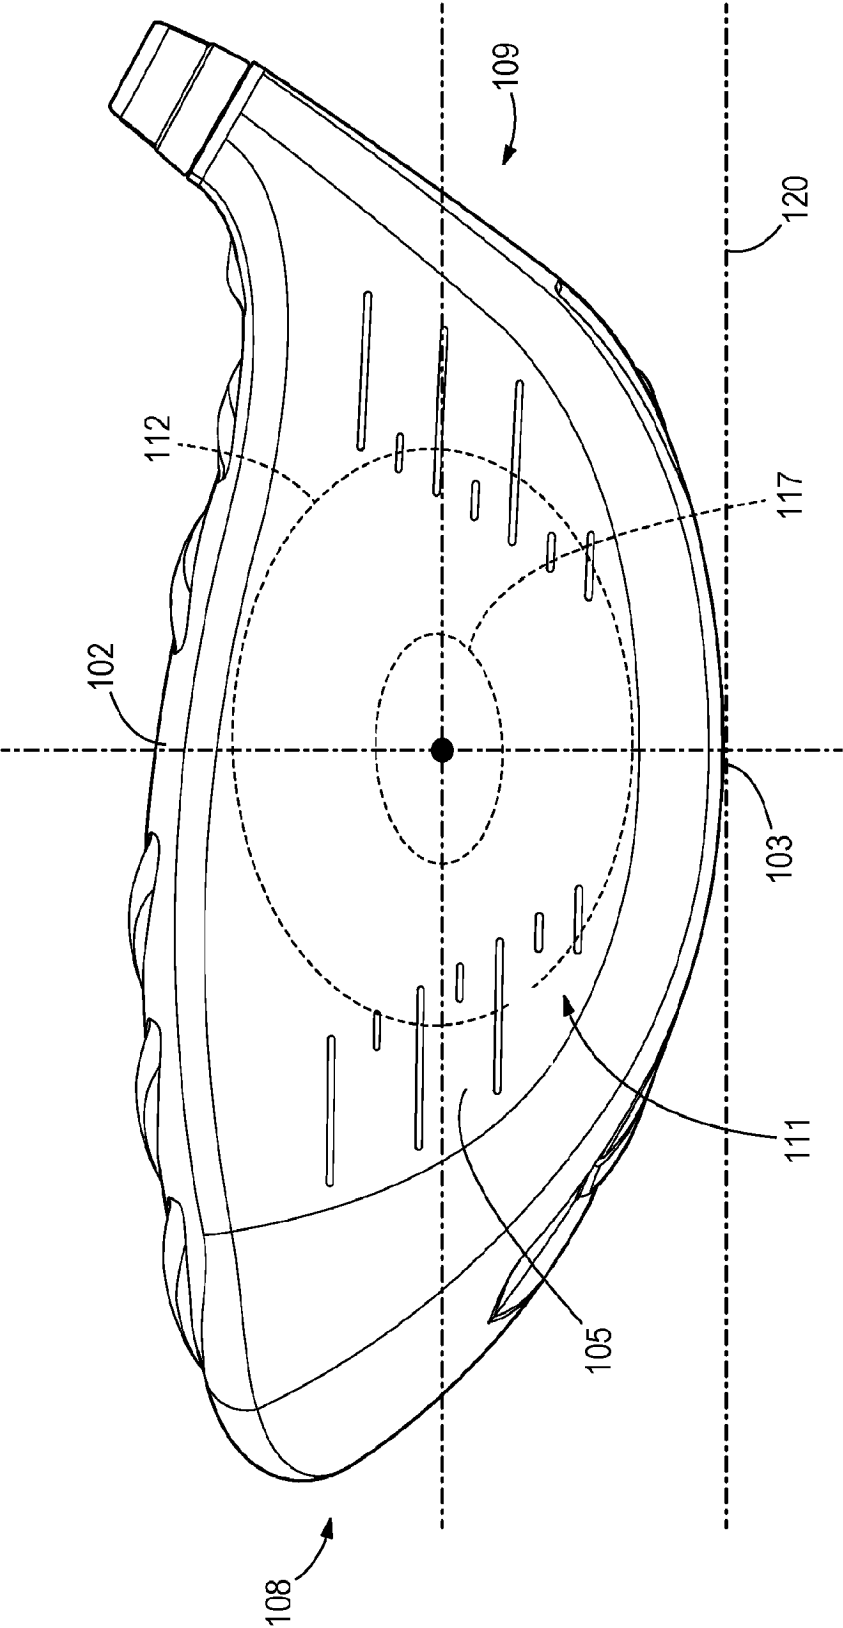


FIG. 4

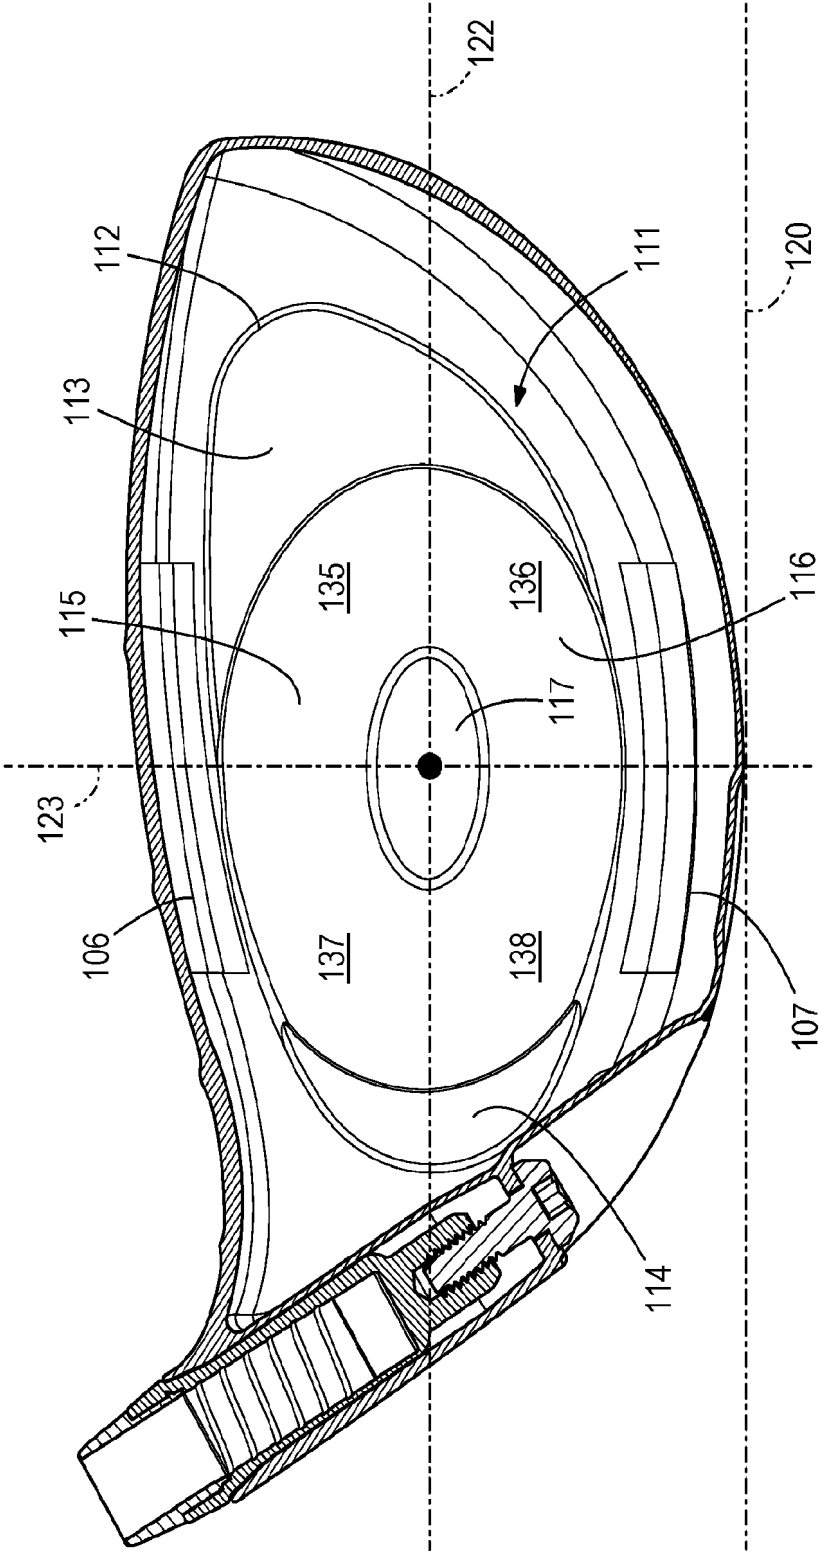
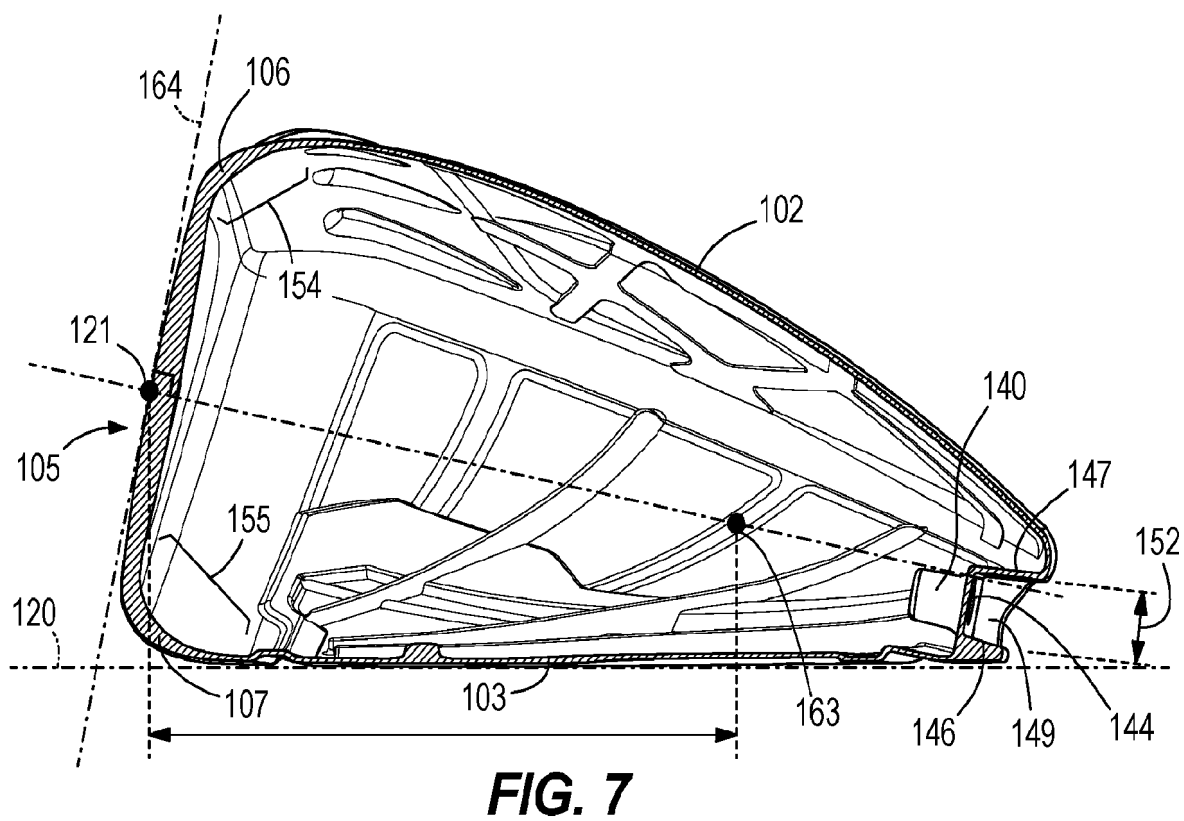
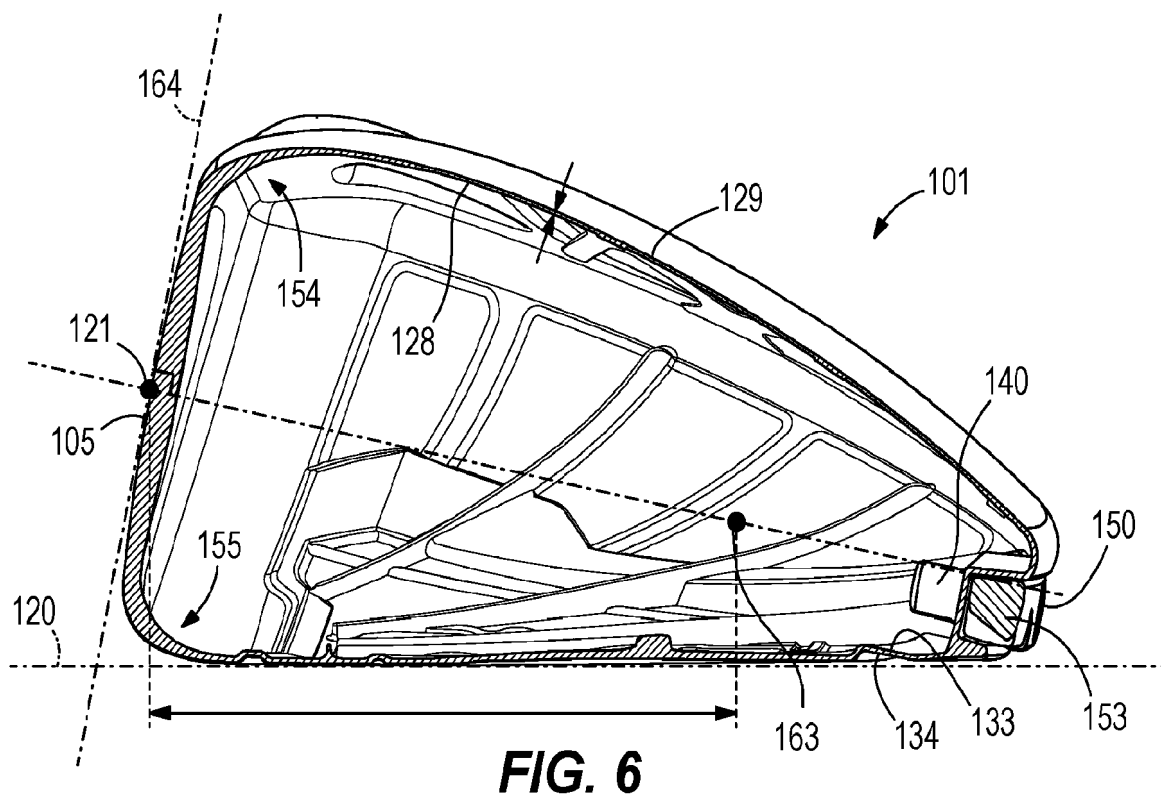
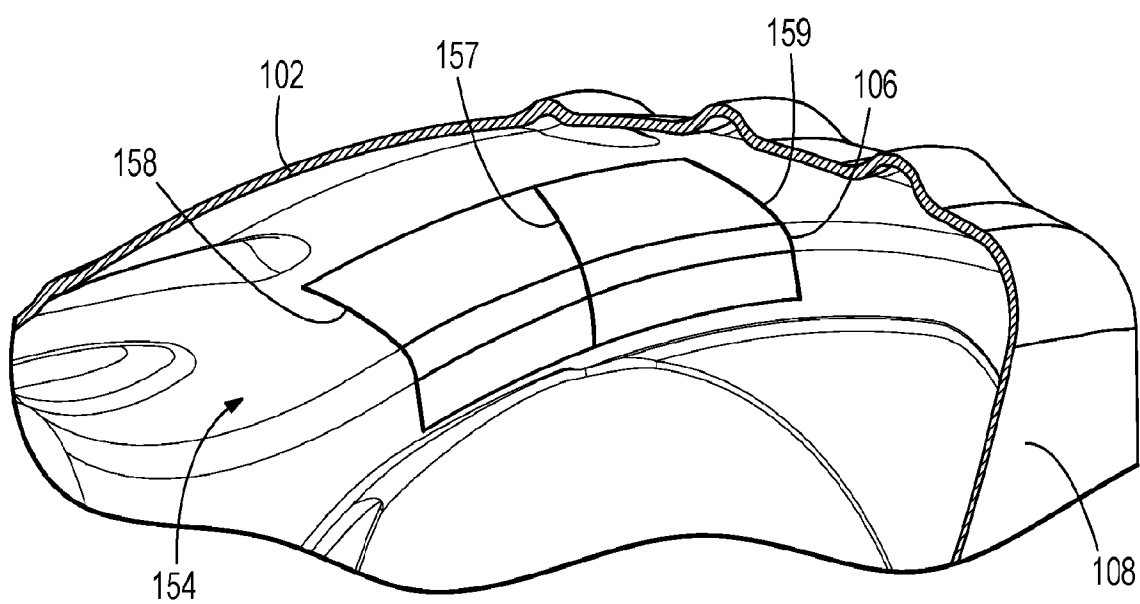
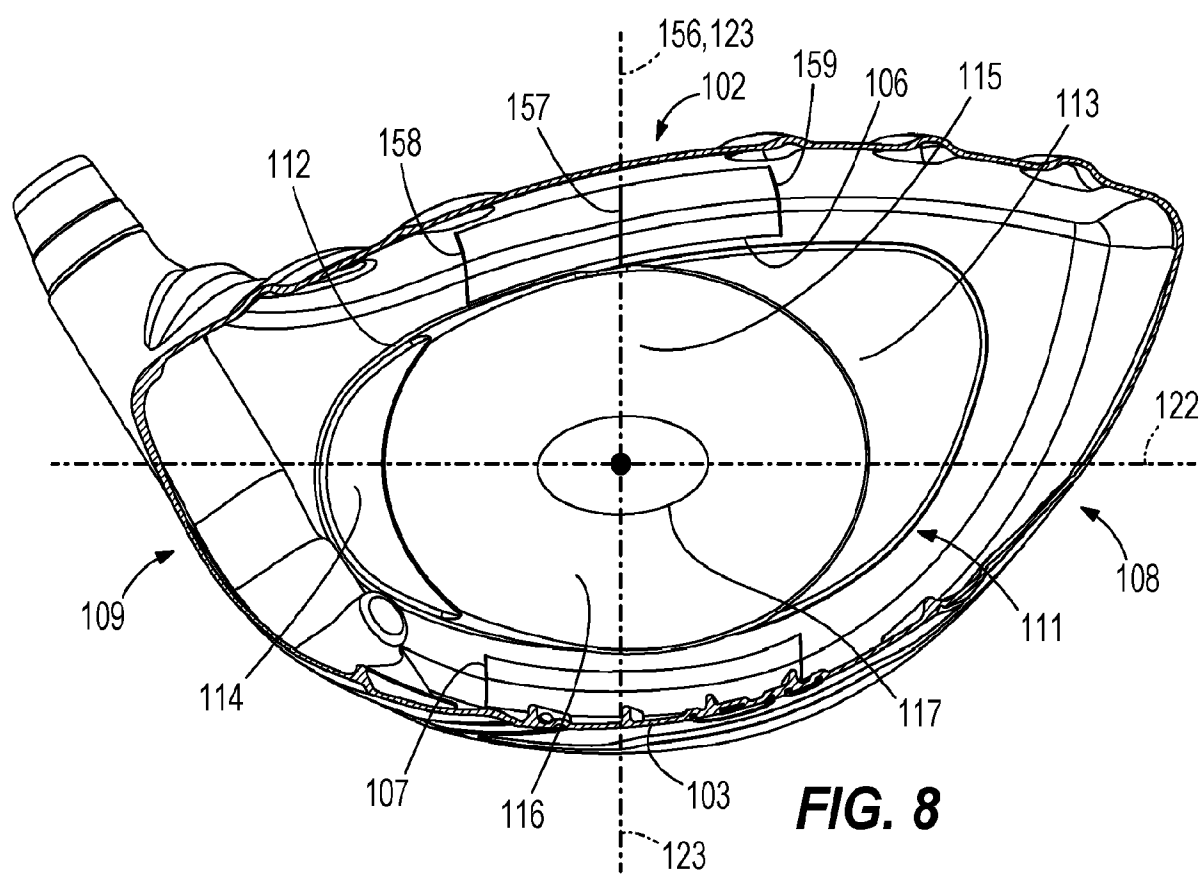


FIG. 5





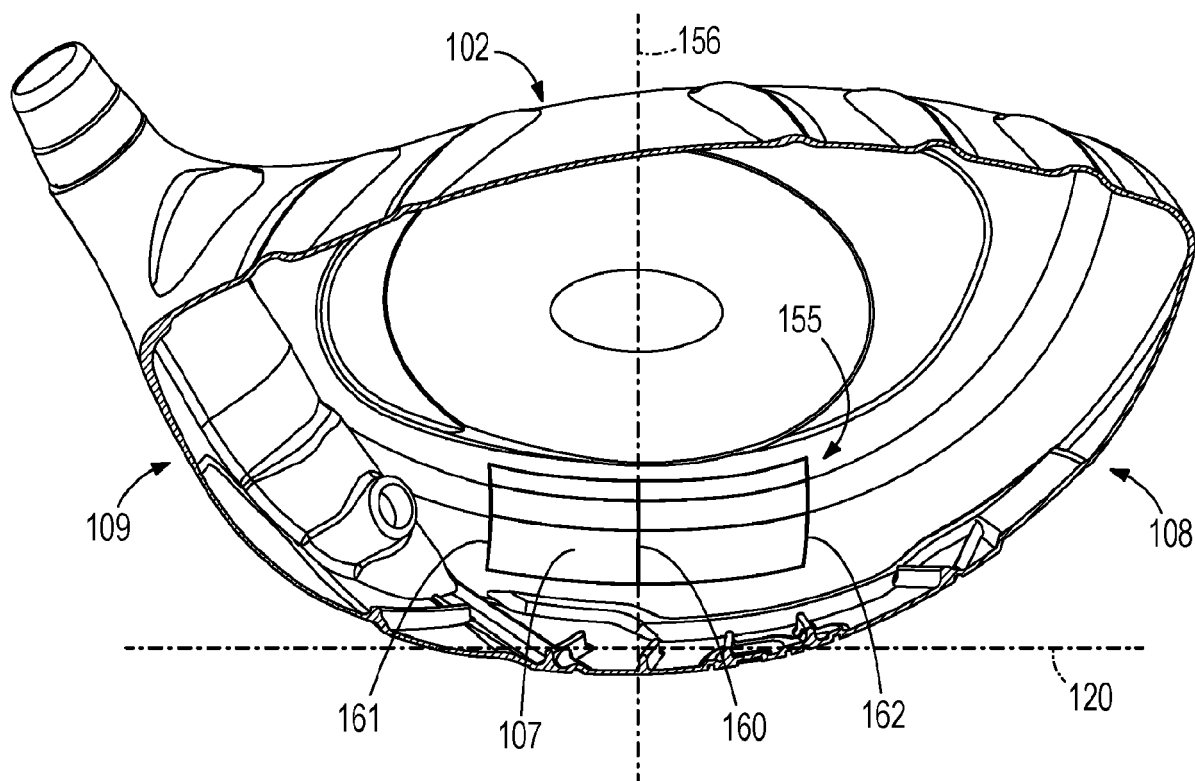


FIG. 10

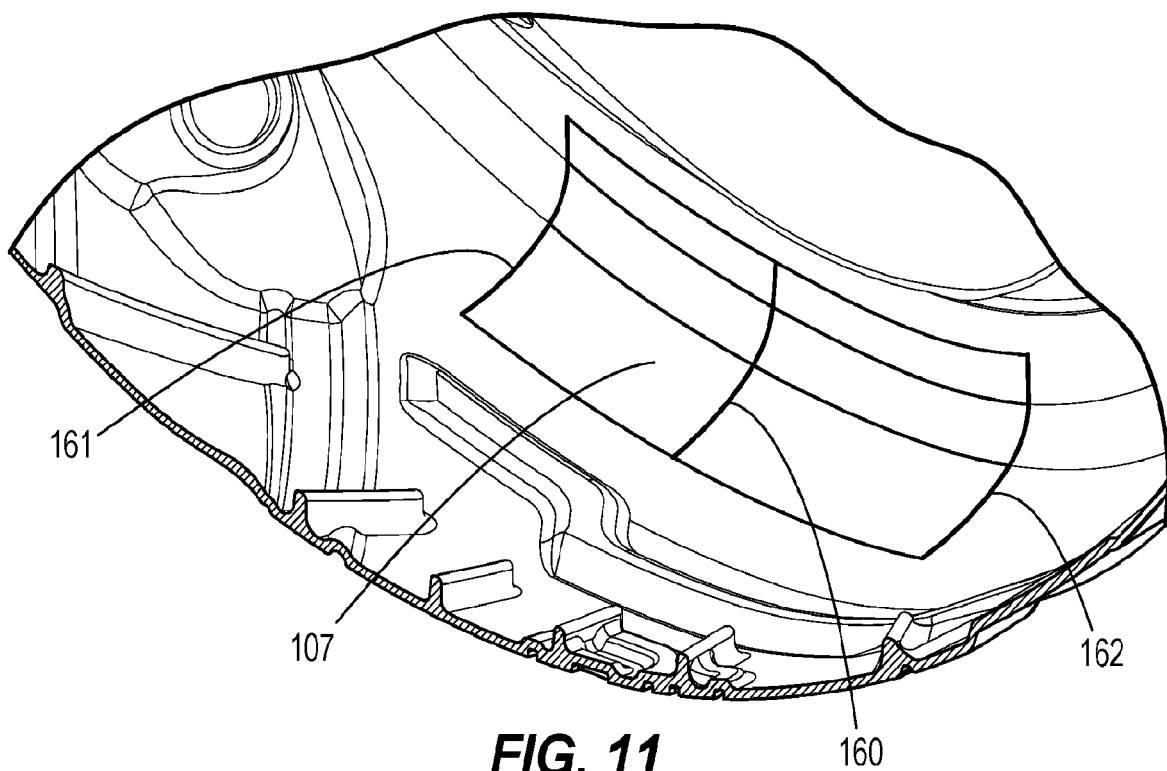


FIG. 11

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2013102415 A [0002]
- JP 2004167115 A [0002]
- US 2007202963 A [0002]