PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : D07B 1/06	A1	(11) International Publication Number: **WO 99/06628**
		(43) International Publication Date: 11 February 1999 (11.02.99)

(21) International Application Number: PCT/EP98/04184

(22) International Filing Date: 30 June 1998 (30.06.98)

(30) Priority Data:
97202329.5 29 July 1997 (29.07.97) BE

(71) Applicant *(for all designated States except US)*: N.V. BEKAERT S.A. [BE/BE]; Bekaertstraat 2, B–8550 Zwevegem (BE).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: D'HAENE, Urbain [BE/BE]; Ingooigemstraat 79, B–8570 Ingooigem (BE). EGGERMONT, Marc [BE/BE]; Grote Ganzeplas 54, B–9880 Aalter (BE). LIPPENS, Yvan [BE/BE]; A. Rodenbachstraat 2, B–8570 Vichte (BE). MEERSSCHAUT, Dirk [BE/BE]; Hernieuwenstraat 4, B–8710 Wielsbeke (BE).

(74) Agents: MESSELY, Marc et al.; N.V. Bekaert S.A., Bekaertstraat 2, B–8550 Zwevegem (BE).


(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published
With international search report.

(54) Title: STEEL CORD FOR PROTECTION PLIES OF PNEUMATIC TYRES

(57) Abstract

A steel cord (10) particularly adapted for reinforcement of a protection ply in a tire has under compression in rubber a deformation Wk at instability of at least 3 % and is stress–relieved so that its total elongation at rupture in rubber exceeds 3.5 %. The steel cord (10) comprises steel filaments (12) having a pearlitic structure.



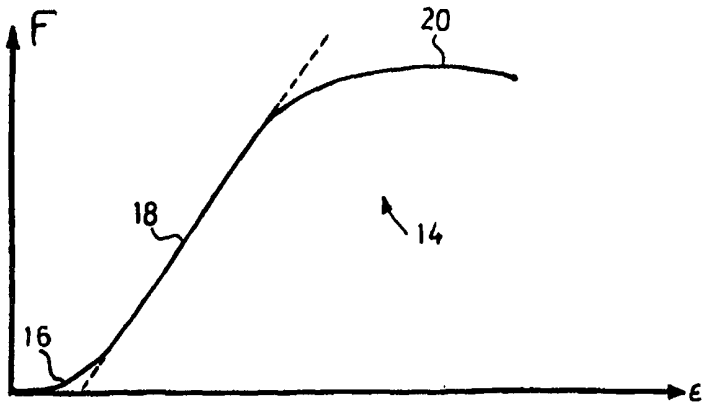

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

STEEL CORD FOR PROTECTION PLIES OF PNEUMATIC TYRES

Field of the invention.

The present invention relates to a steel cord adapted for reinforcement of a protection ply in a tire. Conveniently only one protection ply is provided per tire, but tires with more than one protection ply are not excluded.

Background of the invention.

The protection ply in a tire is the outermost ply in a tire and is the ply which lies closest to the tread and thus to the surface. As a direct result of its position in a tire and as its name says, a protection ply fulfills a front line function in the protection of a tire : every unevenness and every roughness on the roads are first felt and taken up by the protection ply. Consequently particular requirements are put on cords reinforcing these protection plies.

First of all, the cords must have a high corrosion resistance, since moisture that is able to penetrate via cracks in the tread is most likely to arrive first at the protection ply. Full rubber penetration is a way to slow down the corrosion attack on steel cords.

Secondly, the cords must have a high elongation in rubber before they break.

Thirdly, since the cords are not only subjected to elongation but also to compression, they must have a good compression behavior, which means that their deformation at the buckling point or at the point of instability must be relatively high, e.g. above 3 %, or preferably above 4 %.

As a fourth requirement, the cords must be low-cost.

The prior art has already provided a number of steel cords specially adapted for the reinforcement of protection plies, but no such cord fulfilled the above four requirements to a sufficient degree.

A first type of known steel cords for the reinforcement of protection plies are the so-called high-elongation (HE) cords, such as a 3x7x0.22 or a 4x4x0.22. These are cords comprising a number of strands which are

arranged in a Lang's lay configuration, which means that the direction of twist is the same in the strands as in the cord (SS or ZZ). The strands are loosely associated and movable relative to each other in order to give the final cord a high elongation at fracture (e.g. above 5 %). This elongation is an elongation measured on the cord as such, not embedded in rubber. Due to the fact, however, that this elongation is mainly of a structural nature, a main part of this elongation gets lost once the cord is embedded in rubber : a sharp drop from above 6 % to below 3 % is not an exception. These cords have also other drawbacks : they do not allow rubber to penetrate inside the cord and they are not low-cost due to their relatively thin filaments and to their multi-strand character which necessitates two separate twisting steps.

A second type of known steel cords for the reinforcement of protection plies are the so-called elongation (E) cords. An example of an elongation cord is a 4x2x0.35 cord. Just as a high-elongation cord, an elongation cord is also a cord with multiple strands arranged in a Lang's lay configuration (SS or ZZ). The elongation at fracture of the cord as such, i.e. not embedded in rubber, ranges from 4 % to 6 %. Here again, however, the elongation at fracture falls down to about 2 % to 3 % once embedded in rubber. An elongation cord also still necessitates two separate twisting steps.

Summary of the invention.

It is an object of the present invention to provide a steel cord which is suitable for the reinforcement of a protection ply of a tire, i.e. a steel cord with a full rubber penetration, a good compression behavior, a high elongation in rubber and which is low cost.

According to the invention there is provided a steel cord adapted for reinforcement of a protection ply in a tire. The steel cord has under compression in rubber a deformation w_k at instability of at least 3 %, preferably at least 4 %. The steel cord comprises steel filaments of a pearlitic structure. The steel cord is stress-relieved so that its total

elongation at rupture in rubber exceeds 3.5 %, preferably at least 4 % and most preferably at least 5 %.

Preferably the steel cord has such a cord structure that when it is subjected to an increasing tensile load only linear contacts are produced between the individual steel filaments. The reason is that with such steel cords the above-mentioned stress-relieving increases the total elongation at rupture in rubber relatively easily above 3.5 % and even above 4 %, whereas for other steel cords where tensile loads create point contacts between the individual steel filaments, it is more difficult or in some cases even impossible to reach the 4 % level.

For reason of obtaining a determined level of breaking load, the diameter of the individual filaments preferably exceeds 0.30 mm, most preferably 0.35 mm, e.g. 0.38 mm or 0.40 mm. A supplemental advantage is that the cutting resistance, an important property for steel cords lying in a protection ply, is increased with thicker filaments.

Brief description of the drawings.

The invention will now be described into more detail with reference to the accompanying drawings wherein

- FIGURE 1 shows a transversal cross-section of an open steel cord according to the invention ;
- FIGURE 2 shows a transversal cross-section of a corresponding closed steel cord ;
- FIGURE 3 shows a load-elongation curve of a steel cord according to the invention.

Description of the preferred embodiments of the invention.

As a matter of example, a way of manufacturing a 5x0.38 open cord will now be explained.

Steel filaments with a pearlitic structure and with a composition having a carbon content of 0.80 %, a manganese content of 0.50 %, a silicon content of 0.25 %, a maximum sulphur content of 0.03 %, a maximum

phosphorous content of 0.03 %, the remainder being iron and unavoidable traces of copper, chromium nickel and/or aluminium and plated with a thin coating of brass are wet drawn until a final diameter 0.38 mm and a tensile strength R_m of about 2700 MPa and are wound on spools.

Five drawn filaments are unwound from spools and are preformed, which means that they are plastically deformed, more particularly bent to a radius of curvature which is less than that is necessary to keep the filaments once twisted in a closed compact configuration, i.e. in reciprocal line contact. The preformed filaments are further twisted by means of a common double-twisting device.

The result is a 5x0.38 open cord, a transversal cross-section of which has been shown in FIGURE 1. The steel cord 10 comprises five steel filaments 12 with a diameter of 0.38 mm. A transversal cross-section of a corresponding closed compact cord is shown in FIGURE 2. D_o is the optical diameter of the open cord. D_c is the diameter of the corresponding closed configuration. D_o must be substantially greater than D_c. Conveniently following relationship exists :

$$1.02 \times D_c \leq D_o \leq 1.15 \times D_c$$

In case the transversal cross-section of the 5x0.38 cord is oval or elliptical, the optical diameter D_o is equal to the average of the diameter measured along the long axis and of the diameter measured along the short axis.

The thus formed cord 5x0.38 open cord is subjected to a stress-relieving treatment. The cord is passed through a high-frequency or mid-frequency induction coil of a length that is adapted to the speed of the cord. It is hereby observed that a heat treatment at a specified temperature of about 300 °C and for a certain period of time brings about a reduction of tensile strength of about 10% without any increase in plastic elongation at break. By slightly increasing the temperature, however, to more than 400 °C, a further decrease of the tensile strength is observed and at the same time an increase in the plastic elongation at break. In this way the plastic elongation alone, i.e. without adding the amount of structural elongation and the amount of elastic elongation,

can - dependent upon the particular type of cord construction - be increased to more than 6%, while the tensile strength decreases e.g. from 2700 MPa to about 2300 MPa for this cord with a filament diameter of 0.38 mm.

It has been observed by the inventors that with micro-alloyed compositions, e.g. steel compositions comprising 0.85 to 1.1 % C, 0.10 to 1.2 % Mn and up to 0.40 % of chromium, cobalt, molybdenum, nickel, and/or vanadium, or with steel compositions with a higher silicon content (Si up to 1.5 %), the decrease in tensile strength due to the stress-relieving treatment is limited.

With respect to the different kinds of elongation, a distinction must be made between "structural elongation", "elastic elongation", and "plastic elongation". Reference is hereby made to FIGURE 3, where a load-elongation curve 14 of a 5x0.38 open cord according to the present invention is schematically shown.
The structural part of the elongation is designated by reference number 16. The structural elongation is a result of the cord structure or of the preforming given to the steel filaments. It can be characterized by the ratio D_o/D_c or by the PLE or part load elongation, which expresses the elongation at very small loads below 50 Newton. Indeed the structural part 16 of curve 14 is characterized by a very small slope, much smaller than the E-modulus, and by relatively large elongations for small loads.
The elastic part of the elongation is designated by reference number 18 and follows Hook's linear law : $\sigma = E \times \varepsilon$.
The plastic part of the elongation is designated by reference number 20 and starts where curve 14 leaves the straight line with as slope the E-modulus. The plastic part 20 occurs mainly above 85 % to 90 % of the breaking load of the steel cord.

Embedding the 5x0.38 open cord in the rubber of a protection ply will cause the tensile strength of the cord to increase from about 2300 MPa to above 2400 MPa.

A 5x0.38 open steel cord according to the present invention has been compared with various other prior art cords with respect to the requirements put on steel cords for the reinforcement of protection plies. Table 1 summarizes these results.

The following comments can be given with respect to the compression test. Due to their high length-to-diameter ratio steel cords as such have no resistance to compression. Once embedded in rubber, however, a steel cord can build up a considerable compression resistance. A cylinder test has been developed, which provides information on the compression properties of rubber-embedded steel cords. A rubber cylinder with a diameter of 30 mm and a height of 48.25 mm is reinforced exactly in the center with a test steel cord. By means of a precision mold and by tensioning the steel cord during curing, the cord is kept straight and exactly in the axis of the cylinder. The compression test records a force versus deformation diagram. w_k is the deformation at instability or at the buckling point. Further details about the compression test may be read from L. BOURGOIS, Survey of Mechanical Properties of Steel Cord and Related Test Methods, Special Technical Publication 694, ASTM, 1980. A steel cord for protection plies is said to have a good compression behavior if w_k exceeds 3 %.

Table 1

		3x7x0.22 HE	4x2x0.35 E	5x0.38 open cord	5x0.38 WO-A-95/18259	**5x0.38 invention**
Lay lengths		4.5/8 SS	3.9/10 SS	12.5 S	12.5 S	**12.5 S**
Rubber penetration (%)		0	100	100	100	**100**
Tensile test as such						
F_m	(N)	1811	1512	1540	1490	**1317**
R_m	(MPa)	2074	1854	2686	2601	**2301**
A_t	(%)	6.0	4.4	3.8	5.5	**6.8**
Tensile test embedded						
F_m	(N)	1939	1634	1667	1564	**1400**
R_m	(MPa)	2220	2004	2908	2729	**2446**
A_t	(%)	2.68	2.16	2.09	4.6	**5.83**
Compression test						
w_k	(%)	> 5	> 5	4.23	1.7	**4.3**

F_m = breaking load expressed in N (Newton) ; R_m = tensile strength expressed in MPa (MegaPascal

A_t = total elongation at fracture expressed in per cent ;

w_k = deformation at instability (buckling) expressed in per cent

WO-A-95/18259 = with helicoidally preformed filaments

Following conclusions can be drawn from Table 1.

A 3x7 HE construction, commonly used for the reinforcement for protection plies, scores good for compression behavior and elongation as such, but this elongation falls down to a poor 2.68 % once embedded in rubber. Moreover rubber penetration is not existent.

A 4x2 E cord, also commonly used for the reinforcement of protection plies, scores good for rubber penetration, compression behavior and relatively good for elongation as such, but here again, the elongation decreases to 2.16 % once embedded in rubber.

A 5x0.38 open cord as such, this is without any further supplementary treatment, scores good with respect to rubber penetration and compression behavior. The inferior points are the elongation both as such and in rubber.

A 5x0.38 open cord helicoidally preformed according to WO-A-95/18259 has also been tested. The helicoidal preformation, however, has here a negative influence on the compression behavior since it decreases the deformation at instability w_k to 1.7 %.

Only a 5x0.38 open invention cord, i.e. stress-relieved as described hereabove, scores good with respect to rubber penetration, elongation as such and embedded and compression.

The invention cord has also been compared with another type of cord not belonging to the prior art, more particularly with an existing 2+6 cord construction where the stress-relieving treatment has been applied. Table 2 summarizes the results of this comparison.

Table 2

		2+6x0.33 NT not stress-relieved	2+6x0.33 HT stress-relieved	**4x2x0.35 E stress-relieved invention**	**5x0.38 invention**
Lay lengths		9/18 SS	9/18 SS	**3.9/10 SS**	**12 S**
Rubber penetration (%)		100	100	**100**	**100**
Tensile test as such					
F_m	(N)	1683	1652	**1553**	**1317**
R_m	(MPa)	2461	2448	**1851**	**2301**
A_t	(%)	2.81	5.64	**4.5**	**6.8**
Tensile test embedded					
F_m	(N)	1819	1705	**1662**	**1400**
R_m	(MPa)	2659	2527	**1982**	**2446**
A_t	(%)	1.69	5.51	**3.76**	**5.83**
Compression test					
w_k	(%)	0.73	0.62	**> 5**	**4.3**

F_m = breaking load expressed in N (Newton) ;

R_m = tensile strength expressed in MPa (MegaPascal ;

A_t = total elongation at fracture expressed in per cent ;

w_k = deformation at instability (buckling) expressed in per cent

HT = high tensile strength = Rm > 2250 - 1130xlogd before stress-relieving

NT = normal tensile strength = Rm > 2250 - 1130xlogd

A stress-relieved 2+6 cord scores good with respect to rubber penetration, elongation as such and embedded, but the stress-relieving treatment does not improve the rather poor compression behavior.

A stress-relieved 4x2 E cord scores good with respect to rubber penetration, elongation as such and embedded and compression behavior. The elongation as such and embedded, however, is smaller than the corresponding values of a 5x0.38 open invention cord.

According to the inventors, this is due to the point contacts created between the filaments of a 4x2 E cord when this cord is subjected to a tensile load.

A supplemental advantage of a steel cord according to the present invention is as follows. In particular tire designs the protection ply is reinforced by a single steel cord that is wound helically in several windings at an angle ranging from -5° to +5° with respect to the equatorial plane (this in distinction with a normal belt or breaker ply where the steel cords lie in separate limited lengths next to each other and form an angle of about 15° to 30°). When vulcanising this protection ply a substantial deformation may occur particular at the edges of the protection ply. This deformation can be easily taken up by a steel cord with the necessary elongation in rubber, just as a steel cord according to the invention.

With steel filaments of a martensitic structure instead of steel filaments of a pearlitic structure, the inventors have experienced that a total elongation at break of at least 5 % is difficult to reach, and that, even if a high elongation at break is reached for a non-embedded steel cord, this elongation falls down considerably once the cord has been vulcanized in an elastomer.

CLAIMS

1. A steel cord (10) adapted for reinforcement of a protection ply in a tire,
said steel cord having under compression in rubber a deformation w_k at instability of at least 3 %, said steel cord comprising steel filaments having a pearlitic structure,
characterized in that said steel cord is stress-relieved so that its total elongation at rupture in rubber exceeds 3.5 %.

2. A steel cord according to claim 1,
said steel cord comprising steel filaments and
wherein said steel cord has such a cord structure that when it is subjected to an increasing tensile load only linear contacts are produced between the individual steel filaments.

3. A steel cord according to claim 1 or 2
wherein said steel cord consists of three to six steel filaments, preformed so that the optical diameter of the steel cord is substantially greater than the (optical) diameter of the corresponding compact cord where all the steel filaments have linear contact with each other along the cord length.

4. A steel cord according to any one of claims 2 to 3
wherein the filament diameter is greater than 0.30 mm.

5. A steel cord according to any one of claims 2 to 4
wherein the steel cord consists of five filaments.

6. A steel cord according to any one of claims 2 to 5
wherein the steel cord has a twisting pitch above 10 mm.

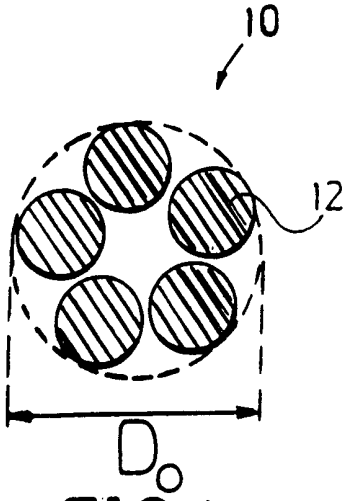


FIG. 1

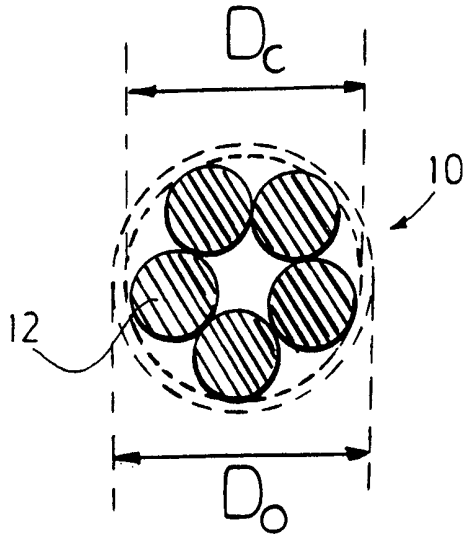


FIG. 2

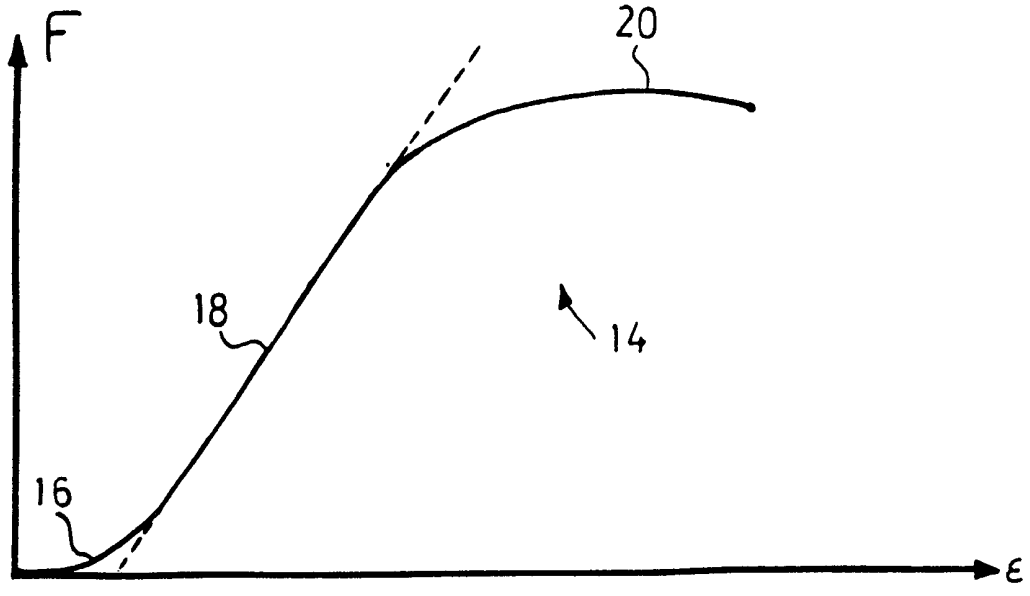


FIG. 3

INTERNATIONAL SEARCH REPORT

Inter ›nal Application No
PCT/EP 98/04184

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D07B1/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 D07B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 342 644 A (TOYO TIRE & RUBBER CO. LTD.) 23 November 1989 see page 2, line 54 - page 3, line 18	1
A	---	2-5
Y	GB 1 427 999 A (MONSANTO COMPANY) 10 March 1976 see page 1, line 59 - line 84 see page 3, line 83 - line 95 see page 5, line 27 - line 64	1

A	EP 0 363 893 A (TOKUSEN KOGYO CO. LTD.) 18 April 1990 see page 6, line 25 - page 7, line 23	1-5

A	LU 65 981 A (N.V. BEKAERT S.A.) 15 January 1973 see page 5, line 6 - line 40	1

	-/--	

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
3 November 1998	13/11/1998

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Goodall, C

1

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inter ɔnal Application No
PCT/EP 98/04184

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 157 045 A (BRIDGESTONE CORPORATION) 9 October 1985	

1

INTERNATIONAL SEARCH REPORT

information on patent family members

Inte onal Application No
PCT/EP 98/04184

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0342644 A	23-11-1989	JP 1952954 C	28-07-1995
		JP 2229289 A	12-09-1990
		JP 6072371 B	14-09-1994
		JP 1298288 A	01-12-1989
		JP 3044922 B	09-07-1991
		DE 68926978 D	26-09-1996
		DE 68926978 T	03-04-1997
GB 1427999 A	10-03-1976	US 4087295 A	02-05-1978
		AR 195831 A	09-11-1973
		AT 325994 B	25-11-1975
		AT 169473 A	15-01-1975
		AU 476452 B	23-09-1976
		AU 5258173 A	29-08-1974
		BE 795955 A	27-08-1973
		CA 1025336 A	31-01-1978
		CH 571115 A	31-12-1975
		DE 2309524 A	30-08-1973
		FR 2173628 A	05-10-1973
		IE 38301 B	15-02-1978
		LU 67100 A	03-05-1973
		NL 7302637 A	28-08-1973
		SE 387381 B	06-09-1976
		ZA 7301302 A	28-11-1973
EP 0363893 A	18-04-1990	JP 2007597 C	11-01-1996
		JP 2104783 A	17-04-1990
		JP 3025557 B	08-04-1991
		DE 68928580 D	26-03-1998
		DE 68928580 T	10-09-1998
		KR 9507827 B	20-07-1995
		US 5162067 A	10-11-1992
LU 65981 A	15-01-1973	GB 1400708 A	09-07-1975
		AU 466693 B	06-11-1975
		AU 4556172 A	21-02-1974
		BE 787985 A	18-12-1972
		CS 158733 B	25-11-1974
		DE 2242416 A	08-03-1973
		FR 2152078 A	20-04-1973

INTERNATIONAL SEARCH REPORT

...formation on patent family members

Inte... ...nal Application No
PCT/EP 98/04184

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
LU 65981 A		IE 36872 B	16-03-1977
		JP 48035157 A	23-05-1973
		US 4106957 A	15-08-1978
EP 0157045 A	09-10-1985	JP 2009793 C	02-02-1996
		JP 7017126 B	01-03-1995
		JP 60183202 A	18-09-1985
		AU 555330 B	18-09-1986
		AU 3483884 A	05-09-1985
		CA 1218588 A	03-03-1987
		DE 3470701 A	01-06-1988
		US 4628977 A	16-12-1986