

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/092409 A1

(51) International Patent Classification⁷: **A61M 5/145**,
A61B 17/43, A61D 19/02, A61K 35/52

(21) International Application Number:
PCT/IL2005/000349

(22) International Filing Date: 28 March 2005 (28.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/810,686 29 March 2004 (29.03.2004) US

(71) Applicant (for all designated States except US): **FERTIL-
IGENT LTD.** [IL/IL]; PO Box 73, 10550 Migdal HaEmek
(IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KLEIN, Ronnie**
[IL/IL]; 5A Shimkin Street, 34750 Haifa (IL). **WEICH-
SELBAUM, Amnon** [IL/IL]; 3 Yehezkel Street, 32207
Haifa (IL).

(74) Agent: **KLEIN, David**; Beit HaRofim, 18 Menuha VeNa-
hala Street, Room 27, 76209 Rehovot (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SYRINGE PUMP

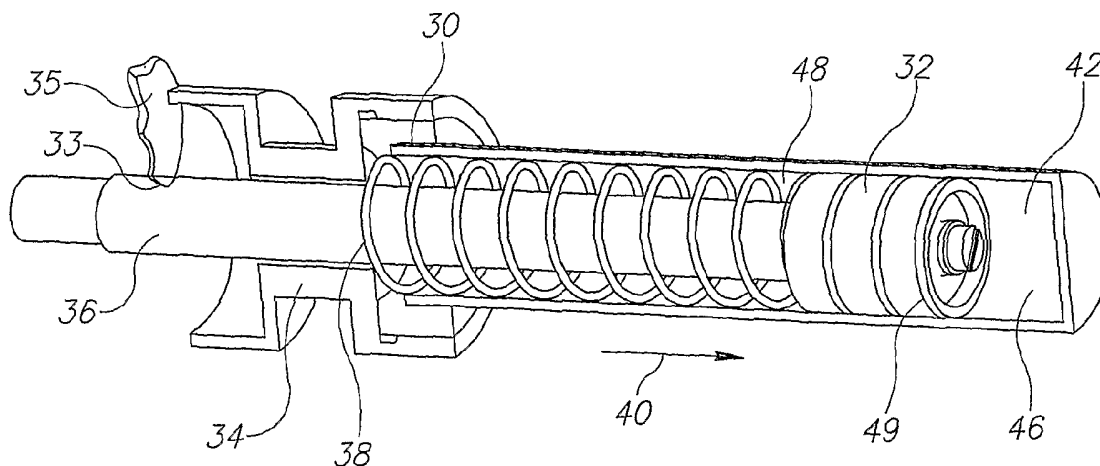

(57) Abstract: A syringe pump (10) including a syringe (16) including a plunger (20) that slides in a body (18) which has a discharge port (24), a driving mechanism (14) coupled to the syringe, including a cylinder (30) in which a piston (32) mounted on a shaft (36) slides, and a biasing (38) device operative to apply an urging force on the piston to drive the piston distally in the cylinder, and a safety catch (35) that initially prevents the biasing device from moving the piston, the safety catch being removable to permit the biasing device to move the piston.

SYRINGE PUMP

FIELD OF THE INVENTION

The present invention relates generally to syringe pumps, and particularly to a disposable syringe pump for sperm delivery, such as in slow-release insemination.

BACKGROUND OF THE INVENTION

Microfluidic pumping devices are used in numerous applications, such as administration of medicine and biological and pharmaceutical research. Such pumping devices include mechanical pumps, such as syringe-type pumps and micromechanical pumps, and non-mechanical pumps, such as electrohydrodynamic pumps, electro-osmotic flow pumps, electrowetting pumps, and thermocapillary pumps.

There are drawbacks to different pumping devices. For example, a steady flow rate is difficult to achieve. Moreover, many mechanical pumps require an electrical power source, as do pumps that operate based on electrical properties. Many of these pumps are costly and often have slow response times.

Conventional syringe pumps are typically employed with either a syringe or a vial and plunger system for administering a liquid to a patient. In such conventional systems, a syringe or vial of the liquid is oriented vertically in a fixed position on the syringe pump. The bottom of the syringe or vial defines a discharge port connected to a flexible, hollow tubing which extends to the patient. The plunger or piston of the apparatus is engaged with the moving pusher plate or drive member of the syringe pump and is driven downwardly into the syringe body or vial to force the liquid agent from the syringe body or vial through the tubing and into the patient.

An example of such a syringe pump is described in a system of PCT published patent application WO03008102. The system employs a microchannel and a gravity driven pump comprising horizontally oriented fluid supply reservoirs. The pump supplies fluid to the microchannel at a substantially constant rate. The device may be used, among other things, for motile sperm sorting.

SUMMARY OF THE INVENTION

The present invention seeks to provide a novel, disposable syringe pump for sperm delivery, such as in slow-release insemination, as described more in detail hereinbelow. The invention may have other applications and is not limited just to slow-release insemination. For example, the invention may be used in the laboratory or other research area for pumping sperm and other fluids.

There is thus provided in accordance with an embodiment of the present invention a syringe pump including a syringe including a plunger that slides in a body which has a discharge port, a driving mechanism coupled to the syringe, including a cylinder in which a piston mounted on a shaft slides, and a biasing device operative to apply an urging force on the piston to drive the piston distally in the cylinder, and a safety catch that initially prevents the biasing device from moving the piston, the safety catch being removable to permit the biasing device to move the piston.

The syringe pump may include one or more of the following features. For example, the cylinder may be at least partially filled with a hydraulic fluid. The piston may be formed with a vent hole that passes through the thickness of the piston and may be in fluid communication with a port in the shaft, wherein the vent hole and the port permit flow of the hydraulic fluid from a distal portion of the cylinder in front of the piston to a proximal portion of the cylinder behind the piston. The biasing force of the biasing device on the piston and hydraulic damping of the hydraulic fluid may provide a close-to-linear pumping force.

The driving mechanism may be coupled to a head of the plunger with a clasp. The biasing device may include a coil spring disposed on a portion of the shaft. The syringe and the driving mechanism may be housed in a casing. The casing may have a window through which travel of the driving mechanism may be observable.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the drawings in which:

Fig. 1 is a simplified pictorial illustration of a disposable syringe pump, constructed and operative in accordance with an embodiment of the present invention;

Fig. 2 is a simplified cutaway illustration of the syringe pump of Fig. 1, showing inner components thereof;

Fig. 3 is a simplified cutaway illustration of a driving mechanism used in the syringe pump of Fig. 1, constructed and operative in accordance with an embodiment of the present invention; and

Fig. 4 is a sectional illustration of a plunger used in the driving mechanism of Fig. 3, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

Reference is now made to Fig. 1, which illustrates a syringe pump 10, constructed and operative in accordance with an embodiment of the present invention.

The syringe pump 10 may include an outer casing 12, in which are housed a driving mechanism 14 coupled to a syringe 16. The casing 12 is illustrated as being constructed of two halves joined together (e.g., by screws, bonding, sonic welding or any other suitable method of connection), but may be constructed of one part or many parts as well. The syringe pump 10 may have any size and shape, which may depend, among other things, on the size and shape of the syringe 16 and the required flow rate. In one non-limiting embodiment of the invention, syringe pump 10 may be about 5-9 cm long, 5 cm wide and 3 cm thick.

The syringe 16 may include a body 18 in which a plunger 20 slides. The body 18 may hold any suitable volume of sperm 22, such as but not limited to, about 0.3-1.5 cc. The syringe 16 may have a discharge port 24, which may be connected to suitable tubing and a filter (not shown) for sperm delivery, such as in slow-release insemination. The syringe 16 and its parts may be made of any medically safe material, such as but not limited to, polycarbonate, and may be completely disposable.

The driving mechanism 14 may be coupled to a head 26 of plunger 20, such as by means of a clasp 28 or any other suitable link or connection. The driving mechanism 14 may include a cylinder 30 in which a piston 32 slides. The travel of piston 32 inside cylinder 30 may be bounded by end caps 34. Piston 32 may be mounted on a shaft 36, which is connected to clasp 28.

Reference is now made additionally to Figs. 3 and 4. The driving mechanism 14 may include a biasing device 38, such as but not limited to, a coil spring, disposed on a portion of shaft 36 proximal to the piston 32. The biasing device 38 is operative to apply an urging force on piston 32 to drive piston 32 distally (in the direction of an arrow 40) in cylinder 30. Initially, a safety catch 35 may arrest movement of shaft 36 and piston 32. For example, the safety catch 35 may initially abut against one of the end caps 34 and sit in a notch 33 formed in shaft 36, thereby preventing biasing device 38 from expanding and moving piston 32.

Cylinder 30 may be at least partially filled with a hydraulic fluid 42, such as but not limited to, glycerin. Piston 32 may be formed with a relatively tiny vent hole 44 (such as but not limited to, a diameter of 0.1 mm) that passes through the thickness of piston 32 and is in fluid communication with a port 45 in shaft 36 on the proximal side of piston 32 (see Fig. 4). The combination of vent hole 44 and port 45 permit flow of hydraulic fluid 42 from a distal portion 46 of cylinder 30 (that is, in front of piston 32) to a proximal portion 48 of cylinder 30 (that is, behind piston 32) (see Fig. 3). Accordingly, after

removal of safety catch 35, biasing device 38 pushes piston 32 distally in the direction of arrow 40, and hydraulic fluid 42 is transferred between the distal portion 46 to the proximal portion 48 of cylinder 30 (located at the posterior end of the moving plunger) via vent hole 44 and port 45. The combination of the biasing force of biasing device 38 and the hydraulic damping of the hydraulic fluid 42 may provide a close-to-linear pumping force.

As seen in Fig. 3, a regulator valve 49 may be disposed in the vent hole 44 that regulates the transfer of hydraulic fluid 42 between the distal portion 46 to the proximal portion 48 of cylinder 30. The regulator valve 49 may include a threaded screw shaft that may be turned (e.g., with a screwdriver) to regulate the size of the opening for passage therethrough of hydraulic fluid 42.

Referring again to Fig. 1, it is seen that the casing 12 may be provided with a window 50 through which the travel and forward progress of driving mechanism 14 may be observed. For example, the window 50 may expose a tab 52 formed on shaft 36, which easily allows observation of the movement of shaft 36.

The flow or pumping rate of syringe pump 10 may be adjusted by adjusting or selecting different operating parameters, such as but not limited to, the spring coefficient of biasing device 38, sizes and shapes of vent hole 44 and port 45, the position of regulator valve 49, the cross sectional area of cylinder 30 and of body 18, and/or the viscosity of hydraulic fluid 42 (e.g., in the range of 50-1000 centipoise at 20°C).

It is appreciated that various features of the invention which are, for clarity, described in the contexts of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination.

5
CLAIMS

What is claimed is:

1. A syringe pump comprising:
a syringe comprising a plunger that slides in a body which has a discharge port;
a driving mechanism coupled to said syringe, comprising a cylinder in which a piston mounted on a shaft slides, and a biasing device operative to apply an urging force on said piston to drive said piston distally in said cylinder; and
a safety catch that initially prevents said biasing device from moving said piston, said safety catch being removable to permit said biasing device to move said piston.
2. The syringe pump according to claim 1, wherein said cylinder is at least partially filled with a hydraulic fluid.
3. The syringe pump according to claim 2, wherein said piston is formed with a vent hole that passes through the thickness of said piston and is in fluid communication with a port in said shaft, wherein said vent hole and said port permit flow of said hydraulic fluid from a distal portion of said cylinder in front of said piston to a proximal portion of said cylinder behind said piston.
4. The syringe pump according to claim 2, wherein a biasing force of said biasing device on said piston and a hydraulic damping of said hydraulic fluid provide a close-to-linear pumping force.
5. The syringe pump according to claim 1, wherein said driving mechanism is coupled to a head of said plunger with a clasp.
6. The syringe pump according to claim 1, wherein said syringe contains sperm therein.
7. The syringe pump according to claim 1, wherein said syringe and said driving mechanism are housed in a casing.
8. The syringe pump according to claim 7, wherein said casing has a window through which travel of said driving mechanism is observable.
9. The syringe pump according to claim 2, wherein a vent hole passes through said piston and is in fluid communication with a port formed in said shaft on a proximal side of said piston, wherein the hydraulic fluid can flow from a distal portion of said cylinder in front of said piston through said vent hole and said port to a proximal portion of said cylinder behind said piston.

10. The syringe pump according to claim 10, further comprising a regulator valve disposed in said vent hole operative to regulate transfer of the hydraulic fluid between the distal portion to the proximal portion of said cylinder.

1/3

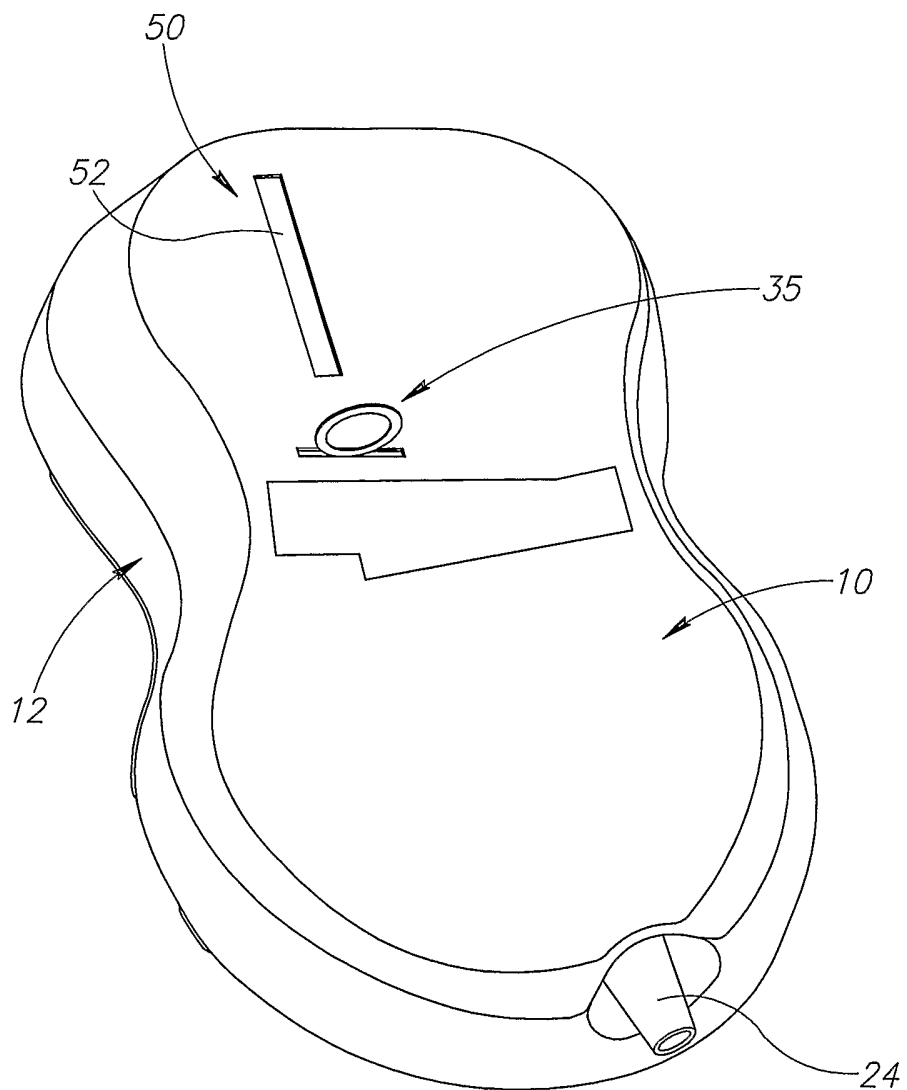


FIG.1

3/3

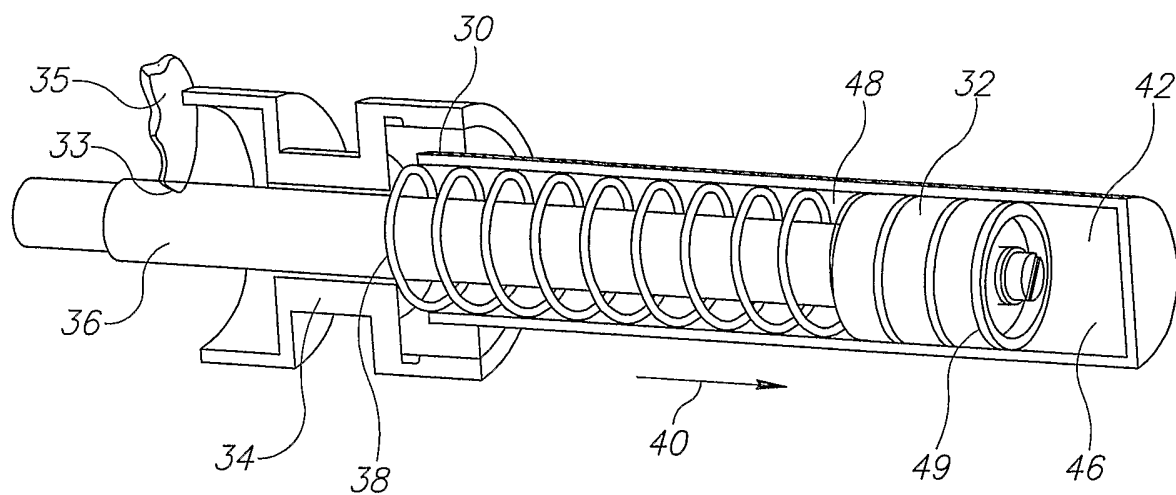


FIG. 3

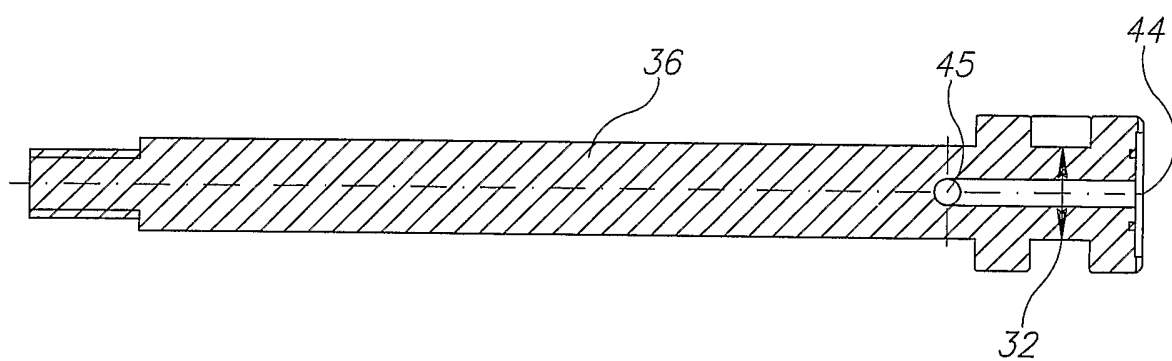


FIG. 4

INTERNATIONAL SEARCH REPORT

Intern Application No
PCT/IL2005/000349

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M5/145 A61B17/43 A61D19/02 A61K35/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M A61B A61D A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/019325 A1 (SHEKALIM AVRAHAM) 29 January 2004 (2004-01-29) paragraphs '0039! - '0054!; figures 1-7	1-10
X	US 5 788 673 A (YOUNG ET AL) 4 August 1998 (1998-08-04) column 5, line 11 - column 13, line 22; figures 1-10	1-10
X	US 2 605 765 A (KOLLSMAN PAUL) 5 August 1952 (1952-08-05) the whole document	1-10
X	GB 1 026 593 A (ALAN RICHARD NASH; VICTOR JAMES KEATING) 20 April 1966 (1966-04-20) the whole document	1-10
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

28 July 2005

Date of mailing of the international search report

05/08/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ceccarelli, D

INTERNATIONAL SEARCH REPORT

Int: Application No
PCT/IL2005/000349

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/111589 A1 (MICHEL PETER) 15 August 2002 (2002-08-15) the whole document -----	<u>1</u> -10
A	US 2004/059186 A1 (WEICHSELBAUM AMNON ET AL) 25 March 2004 (2004-03-25) the whole document -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL2005/000349

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2004019325	A1	29-01-2004	AU 2003247137 A1 WO 2004011056 A2	16-02-2004 05-02-2004
US 5788673	A	04-08-1998	NONE	
US 2605765	A	05-08-1952	NONE	
GB 1026593	A	20-04-1966	NONE	
US 2002111589	A1	15-08-2002	DE 19939023 A1 AU 5669800 A EP 1210136 A1 JP 2003507093 T US 2004143217 A1 WO 0112250 A1	22-02-2001 13-03-2001 05-06-2002 25-02-2003 22-07-2004 22-02-2001
US 2004059186	A1	25-03-2004	AU 2003263568 A1 WO 2004026154 A1	08-04-2004 01-04-2004