

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 June 2009 (11.06.2009)

PCT

(10) International Publication Number
WO 2009/072969 A1

(51) International Patent Classification:
C02F 1/32 (2006.01) *C02F 1/72* (2006.01)

(SE). STENMAN, David [SE/SE]; Fänkålsgränd 25,
S-182 45 Enebyberg (SE).

(21) International Application Number:
PCT/SE2008/051390

(74) Agent: MINDMAP IPR AB; Ingela Sjögren, Patron Carls
väg 2, S-683 40 Uddeholm (SE).

(22) International Filing Date:
2 December 2008 (02.12.2008)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0702742-8 5 December 2007 (05.12.2007) SE

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

(71) Applicant (*for all designated States except US*): WALLE-
NIUS WATER AKTIEBOLAG [SE/SE]; Warfvinges väg
32, S-112 51 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): NYBERG, Kristof-
fer [SE/SE]; Gotlandsgatan 76 B, S-116 38 Stockholm

[Continued on next page]

(54) Title: DEVICE FOR TREATMENT OF FLUIDS

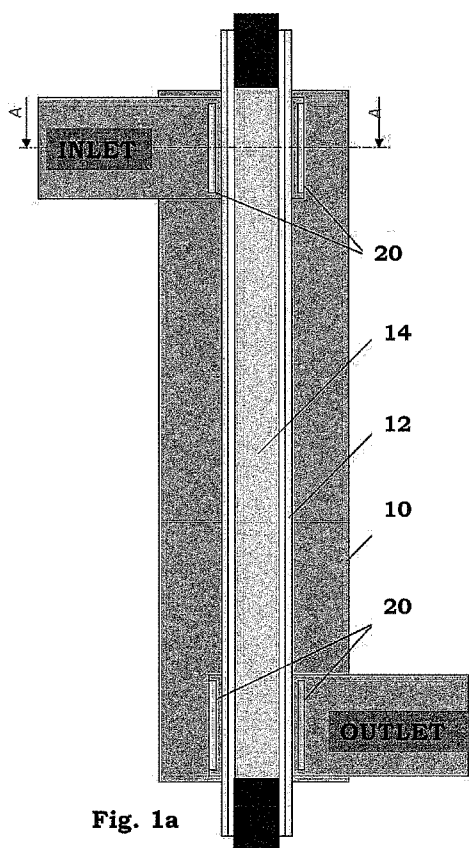


Fig. 1a

(57) Abstract: The present invention relates to a device for treatment of fluids, comprising a treatment chamber having an inlet and an outlet for the fluid to be treated, elongated UV light generating means arranged inside said treatment chamber, a photo-catalytic structure arranged in said treatment chamber, that said photo-catalytic structure is a filter arranged in the flow of fluid through the treatment chamber such that the fluid flows through said filter, wherein said filter is designed generally tubular and placed adjacent and surrounding said UV light generating means for radiating said filter with UV light, thereby creating treatment radicals, and wherein said filter is placed such that the whole flow of fluid is forced through the radiated filter.



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

DEVICE FOR TREATMENT OF FLUIDS

TECHNICAL AREA

The present invention relates to treatment of fluids such as water, air and
5 other types of gases and liquids, and according to one aspect of the
invention, of tap water in domestic water piping systems.

BACKGROUND OF THE INVENTION

During cleaning of fluids, in some cases equipment is used that create
10 photo-catalytic effects. It may comprise UV-generating light sources
capable of, within an enclosure filled with fluid, irradiate the fluid whereby
ozone is created. In order to obtain a photo-catalytic effect a surface with
photo-catalytic properties are arranged, such as titanium dioxide capable
of converting the light into free radicals through photo-catalysis, or breaks
15 down the ozone and creates free radicals, which are far more aggressive
against organisms than the ozone.

For some cleaning equipment that work with this type of technology a
limited photo-catalytic effect is obtained, which mainly depends on that
20 the photo-catalytic surface is in a border layer in the flow profile of the
cleaner. Further, the photo-catalytic effect is limited in that the titanium
dioxide surface for some types of cleaners are placed on a relatively large
distance from the light source.

25 At the same time as it is desirable to obtain a high production of radicals
by photo-catalysis it is also desirable to generate radicals by photolysis.
The photolysis is in these types of equipment a volume process in contrast
to the photo-catalysis which is a surface process. At the same time, during
applications where the killing of micro organisms is of interest, also
30 interested in direct UV inactivation, which also is a volume process. The
problem is that it is difficult to increase the photo-catalytic generation of
radicals without suppressing the volume processes by blocking the light or

obtaining too short processing time. Also the use of different kinds of nets gives substantial shadowing effects that suppress the use of the supplied photon energy.

- 5 What is desirable to obtain is to have a photo-catalytic surface that is placed close to the light source and that all fluid passes close thereto, without reducing the volume processes in a significant way.

BRIEF DESCRIPTION OF THE INVENTION

- 10 The aim of the present invention is to remedy the drawbacks of the state of the art technology. This aim is obtained according to the features of the independent patent claim 1.

- 15 Preferable embodiments of the invention form the subject of the dependent patent claims.

- According to a main aspect of the present invention it relates to a device for treatment of fluids, comprising a treatment chamber having an inlet and an outlet for the fluid to be treated, elongated UV light generating
20 means arranged inside said treatment chamber, a photo-catalytic structure arranged in said treatment chamber, that said photo-catalytic structure is a filter arranged in the flow of fluid through the treatment chamber such that the fluid flows through said filter, wherein said filter is designed generally tubular and placed adjacent and surrounding said UV
25 light generating means for radiating said filter with UV light, thereby creating treatment radicals, and wherein said filter is placed such that the whole flow of fluid is forced through the radiated filter.

- In this aspect, the word fluids is to be interpreted to encompass liquids as
30 well as gases of different content and temperature and for a number of applications ranging over treatment of air in domestic facilities to heavily polluted industrial liquids. Thus the present invention covers a large

number of environmental aspects and applications where the fluid in question needs to be treated in order to render it harmless to the environment.

- 5 According to a further aspect of the invention, said photo-catalytic filter comprises a net structure having a plurality of openings through which the fluid may flow.

According to yet an aspect of the invention, said photo-catalytic filter is
10 made of a material displaying photo-catalytic properties. Alternatively the surfaces of said photo-catalytic structure are covered with a material displaying photo-catalytic properties. Another alternative is to have a material displaying photo-catalytic properties is dispersed in the material of said photo-catalytic structure.

15 Preferably said photo-catalytic structure comprises a base material of quartz glass.

According to another aspect of the invention, the mesh size is chosen such
20 that the photo-catalytic structure acts as a filter.

According to a further aspect of the invention, said UV light generating means comprises low energy lamps such as LED's, Xenon flash lamps, deuterium lamps.

25 The advantages with the present invention is that the whole stream of fluid to be treated is forced through the photo-catalytic filter, which in turn is placed adjacent the UV generating means, whereby a very good exposure of the fluid is obtained improving the formation of radicals and
30 thereby improving the treatment.

Preferably the photo-catalytic filter is in the form of a net or the like structure with a plurality of perforations. Further this net structure contains photo-catalytic material, in all providing large photo-catalytic areas that are exposed to UV radiation.

5

In order to further enhance the exposure, the base material of the photo-catalytic filter may be made of a UV light transparent material, thereby enhancing the spreading of the UV light.

10 There is a further large advantage with the net-shape of the photo-catalytic filter and that it acts as a mechanical filter as well as photo-catalytic area. The filter function is of particular importance when treating fluids containing organisms that need to be killed off in order to, for example, prevent them from spreading diseases.

15

Because the generation of radicals is the strongest at the irradiated surfaces of the photo-catalytic filter, an extremely strong exposure is obtained when these organisms are caught in the filter, i.e. in direct contact with the photo-catalytic surfaces that are exposed to UV radiation.

20

In all a very powerful, versatile and flexible device for treating fluids is obtained with the present invention.

These and other aspects of and advantages with the present invention will
25 become apparent from the following detailed description and from the appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following detailed description of the invention reference will be
30 made to the attached drawings of which,

Fig. 1a,b show cross-sectional views of a first embodiment of the present invention,

Fig. 2a,b show cross-sectional views of a second embodiment of the
5 present invention,

Fig. 3 shows a cross-sectional view of a third embodiment of the present invention, and

10 Fig. 4 shows a cross-sectional view of a fourth embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1a, b show a first embodiment of the present invention. It
15 comprises an elongated tubular casing 10 made of a material capable of withstanding all sorts of fluids. The inner surface of the casing is covered with a photo-catalytic layer or the material of the casing could be made of a material exhibiting photo-catalytic properties. One such material is titanium where titanium dioxide acts as a catalyst. The catalytic material
20 could also be embedded in a suitable polymer, such as poly-tetra-fluor-ethylene (PTFE) which in addition to holding the photo-catalytic material and protecting the inner surface of the casing, also is capable of reflecting light of certain wavelengths.

25 The casing is arranged with an elongated tubular structure 12 positioned in the centre of the casing. The tubular structure is made of a UV light transparent material such as quartz glass. Inside the quartz tube a UV generating means 14 is arranged, in the embodiment shown an elongated lamp capable of emitting light in the spectra of 180 – 400 nm. The UV
30 lamp is connected in appropriate ways to a suitable power source (not shown). The quartz tube and the UV lamp extend through the end walls of the casing and are supported there.

- The casing is further arranged with an inlet pipe 16 and an outlet pipe 18, connectable to a piping system containing fluid to be treated. As seen in Fig. 1b, the inlet and outlet pipes surround the quartz tube and thus the UV lamp. On each side of the quartz tube, in the inlet and outlet pipes, nets 20 having certain mesh size are arranged. The nets are either covered with, or made by, material having photo-catalytic properties. The nets are thus placed very close to the UV lamp.
- 10 In use, when the fluid is flowing through the inlet and outlet and through the nets 20, all the fluid in the pipes passing through the nets will be irradiated with UV light, which in combination with the photo-catalytic material will create radicals, and thus an improved generation of radicals is obtained in the zones where all fluid is passing. The design would also
- 15 give a limited reduction of the volume processes. A further advantage is that the design will cause an increased turbulence in the casing, whereby it is possible to use the photo-catalysis of the casing in a more efficient way.
- 20 The nets also provide a filter function, where larger particles, organisms, and other objects are caught. The creation of radicals is the highest close to the photo-catalytic surfaces, and in particular so since they are very short-lived. This, on the other hand, provides an advantage when the photo-catalytic structure also has a filtering function since the organisms
- 25 that need to be killed off are caught by the filter, and immediately exposed to large amounts of radicals produced by the UV light radiating the photo-catalytic surfaces of the filter.

Figure 2a,b shows an alternative embodiment of the present invention comprising a tubular casing 30, the ends of which are connected to a piping system containing fluid to be treated. In this embodiment a UV generating means 32 is arranged transversal to the flow direction, which

30

UV generating means is placed in a UV light transparent tube 34 as with the previous embodiment. The quartz glass is in this embodiment surrounded by a tubular net structure 36 made of, or covered with, photo-catalytic material.

5

With this design it is possible to use light sources capable of generating light with longer wavelengths and whereby the energy of the light is less sensitive to pollutions in the water. Examples of such light sources are different types of UV generating LED's, Xenon flash lamps, deuterium
10 lamps, that further display the advantage of very short start-up times without extra wear. The short start-up times are very favourable in applications where the device is connected to tap water systems where the devices are used to clean the water. The filter aspect as mentioned in connection with the first embodiment is equally applicable for this
15 embodiment.

Figure 3 displays a further embodiment arranged in a filter that is used e.g. in ballast water treatment systems. The filter comprises a housing 40 having a main inlet 42 and a main outlet 44 for the water to be filtered.
20 Inside the housing a number of generally cylindrical tubular filter elements 46 are arranged such that the filtered water passes through the filter elements. According to the present invention UV generating lamps 48 are placed inside the tubular filter elements and the filter elements are made of, or covered with, photo-catalytic material as described above. In
25 this way the filter is not only capable of mechanically removing larger objects and organisms but is also capable of killing off both larger organisms stuck in the filter as well as smaller organisms that may be capable of passing the filter. A very much increased operation of the filter is obtained with the present invention. Also, as mentioned above, a very
30 powerful "treatment zone" is obtained on the surface of the filters, on which surface malicious organisms are stuck and killed.

The filters described above also have the further advantage that the treatment of fluid downstream of the filters is improved because there are no particles, organisms or objects that can disturb the distribution of UV light in the fluid to be treated.

5

Figure 4 shows a fourth embodiment, partly similar to the embodiment according to Fig. 1. It thus comprises a casing 50 with inlet 52 and outlet 54, a centrally placed UV lamp 56 surrounded by a protective quartz glass tube 58. Further, this embodiment is arranged with a catalytic structure 10 60 that is arranged as a spiral wound around the glass tube. The spiral is covered with catalytic material or having catalytic material embedded in the spiral material. The catalytic material may comprise any material metals, alloys and the like capable of creating photo-catalytic reactions in the fluid to be treated together with the UV radiation. Further the spiral is 15 made of a material that has a high transparency for UV wavelengths above 240 nm. The spiral could either be solid or as a net or the like with perforations, and a preferable material is quartz glass. It has a few advantages such as being inert to most matter, it is a clean material and therefore usable in tap water applications as well as in the food industry, 20 it may be covered with TiO₂ with good adhesion, it may be spun to threads enabling manufacture of nets, and it may relatively easily be moulded to a suitable form.

With the design according to Fig. 4, it is possible to increase the active 25 photo-catalytic area drastically, it is possible to obtain a photo-catalytic area in the whole volume and obtain photo-catalysis on the whole surface of the spiral, i.e. both on the front side and the back side. Further advantages are to maintain almost all photolysis induced by 185 nm closest to the lamp, maintain the majority of the direct acting 254 nm 30 radiation in the whole volume, and maintain most of the photo-catalysis in the casing.

It is to be understood that the embodiments described above and shown in the drawings are to be regarded only as non-limiting examples of the invention and that it may be modified in many ways within the scope of the patent claims.

PATENT CLAIMS

1. Device for treatment of fluids, comprising a treatment chamber having an inlet and an outlet for the fluid to be treated, elongated UV light generating means arranged inside said treatment chamber,
5 a photo-catalytic structure arranged in said treatment chamber, that said photo-catalytic structure is a filter arranged in the flow of fluid through the treatment chamber such that the fluid flows through said filter, wherein said filter is designed generally tubular and placed adjacent and surrounding said UV light generating
10 means for radiating said filter with UV light, thereby creating treatment radicals, and wherein said filter is placed such that the whole flow of fluid is forced through the radiated filter.
2. Device according to claim 1, wherein said photo-catalytic structure
15 comprises a net structure having a plurality of openings through which the fluid may flow.
3. Device according to claim 1 or 2, wherein said photo-catalytic
20 structure is made of a material displaying photo-catalytic properties.
4. Device according to claim 1 or 2, wherein the surfaces of said photo-catalytic structure are covered with a material displaying photo-catalytic properties.
- 25 5. Device according to claim 1 or 2, wherein a material displaying photo-catalytic properties is dispersed in the material of said photo-catalytic structure.
6. Device according to claim 1, wherein said photo-catalytic structure
30 comprises a base material of quartz glass.

7. Device according to any of the preceding claims 2-6, where the mesh size is chosen such that the photo-catalytic structure acts as a filter.
- 5 8. Device according to any of the preceding claims, wherein said UV light generating means comprises low energy lamps such as LED's, Xenon flash lamps, deuterium lamps.
9. Device according to any of the preceding claims, wherein said
10 catalytic material comprises titanium dioxide.
10. Device according to any of the preceding claims, wherein the inner surface of said treatment chamber is covered with material displaying photo-catalytic properties.

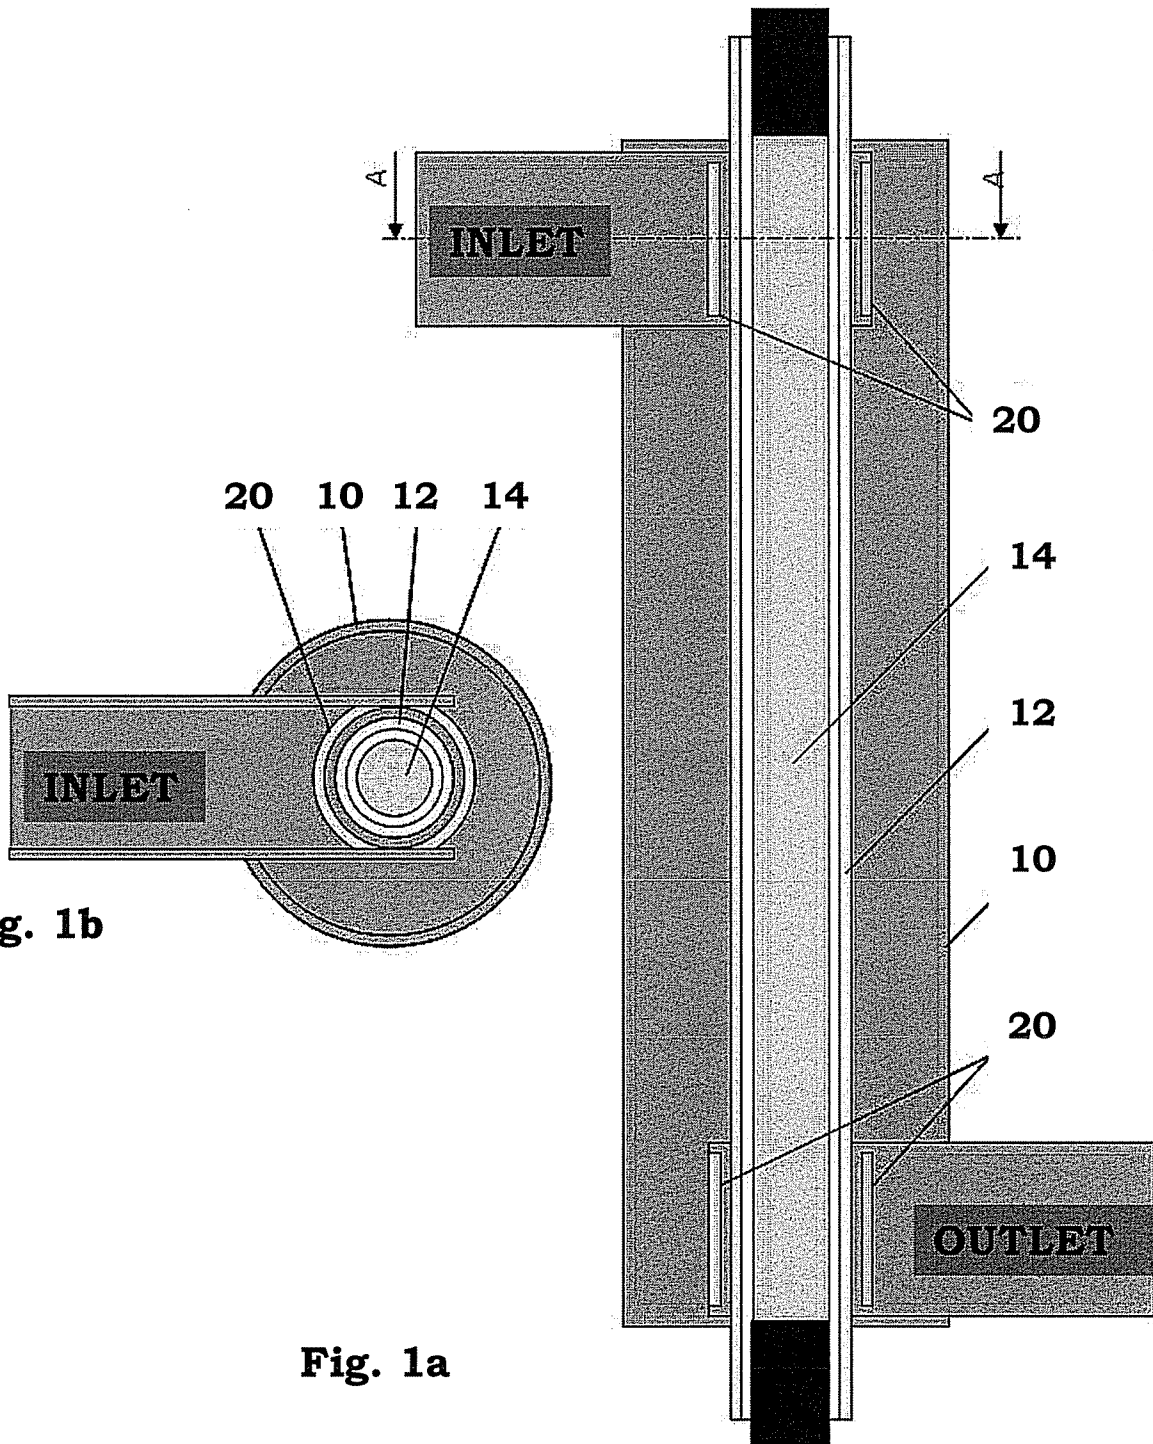


Fig. 1b

Fig. 1a

2/4

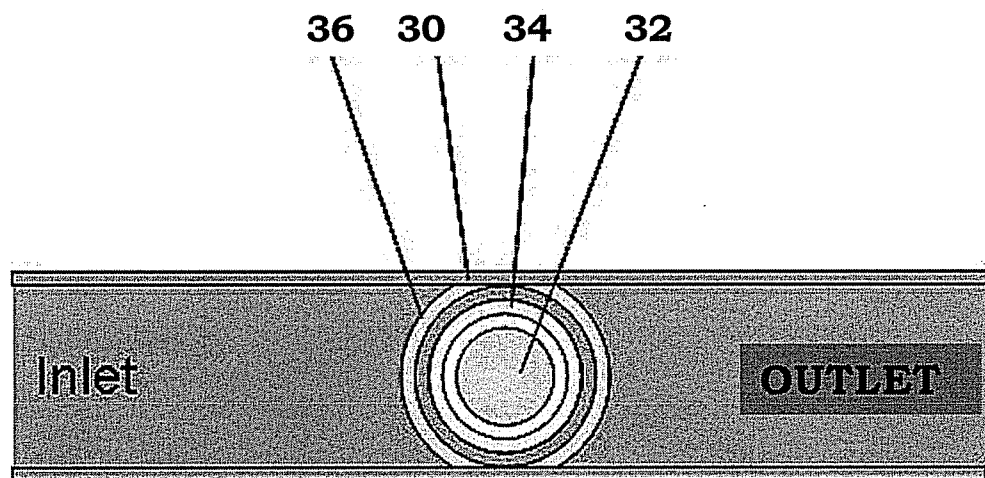
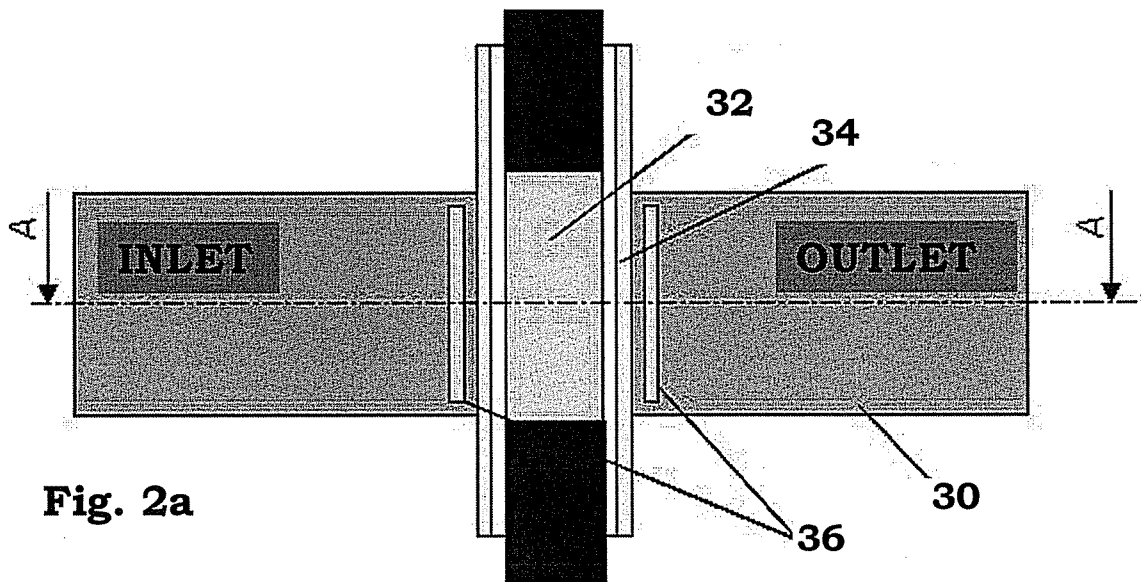


Fig. 2b

3/4

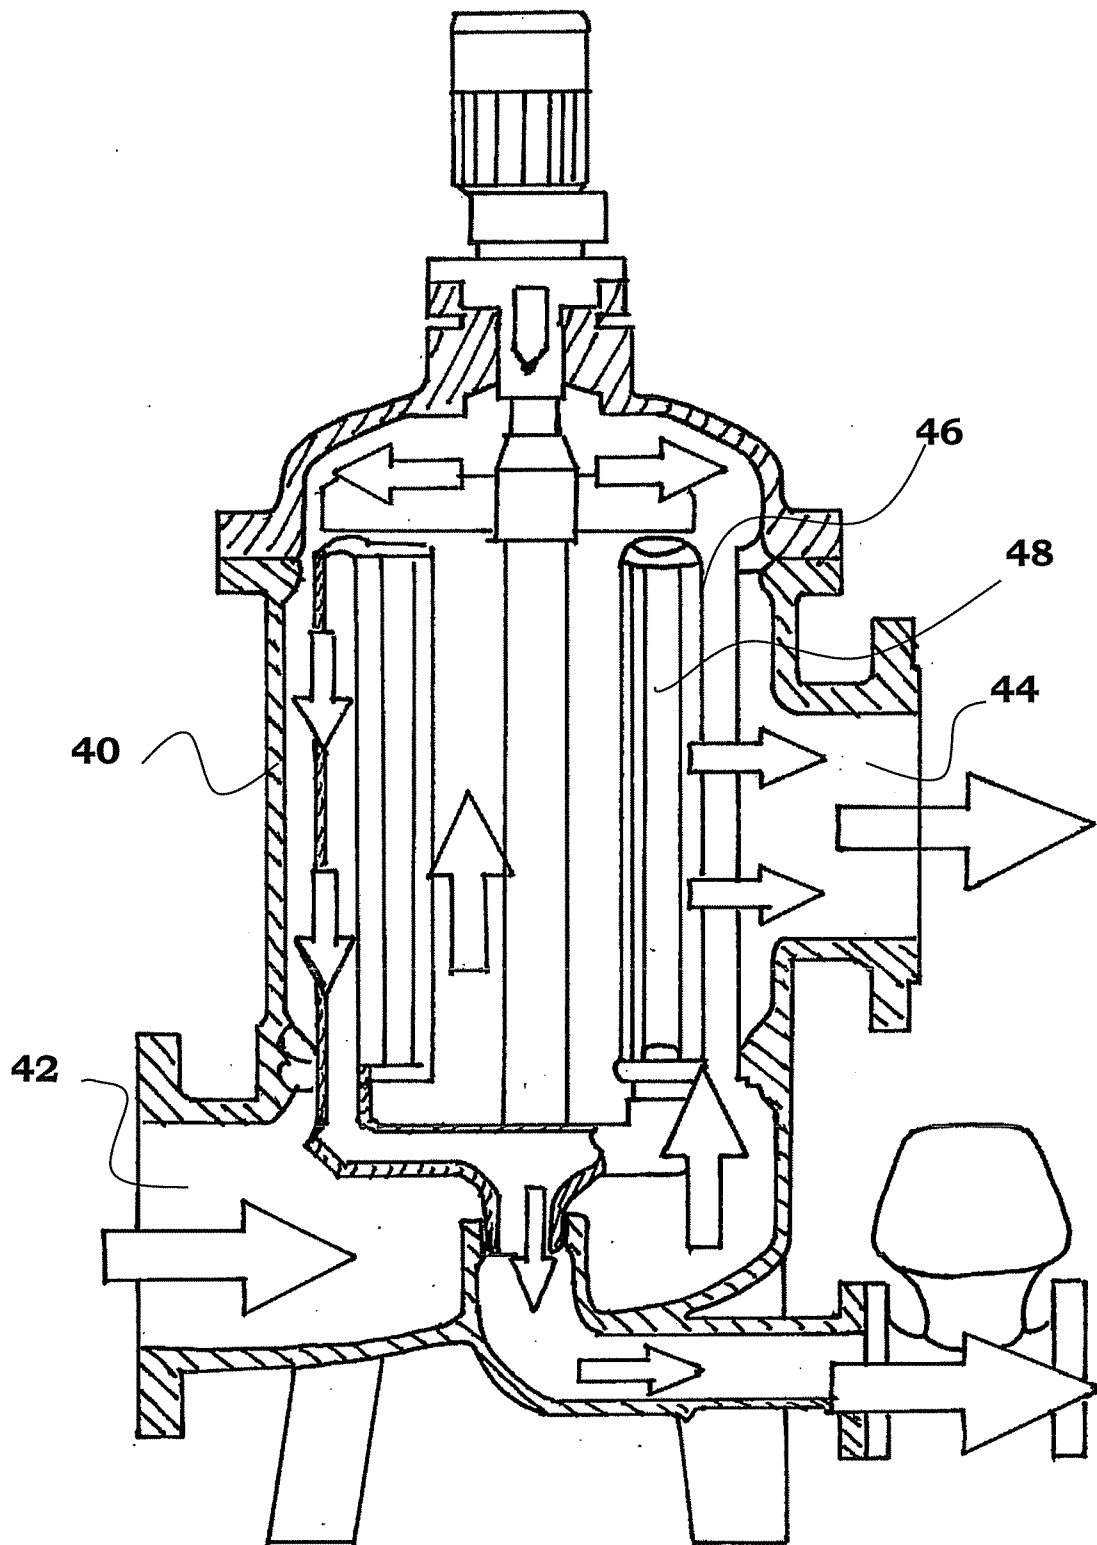


Fig. 3

4/4

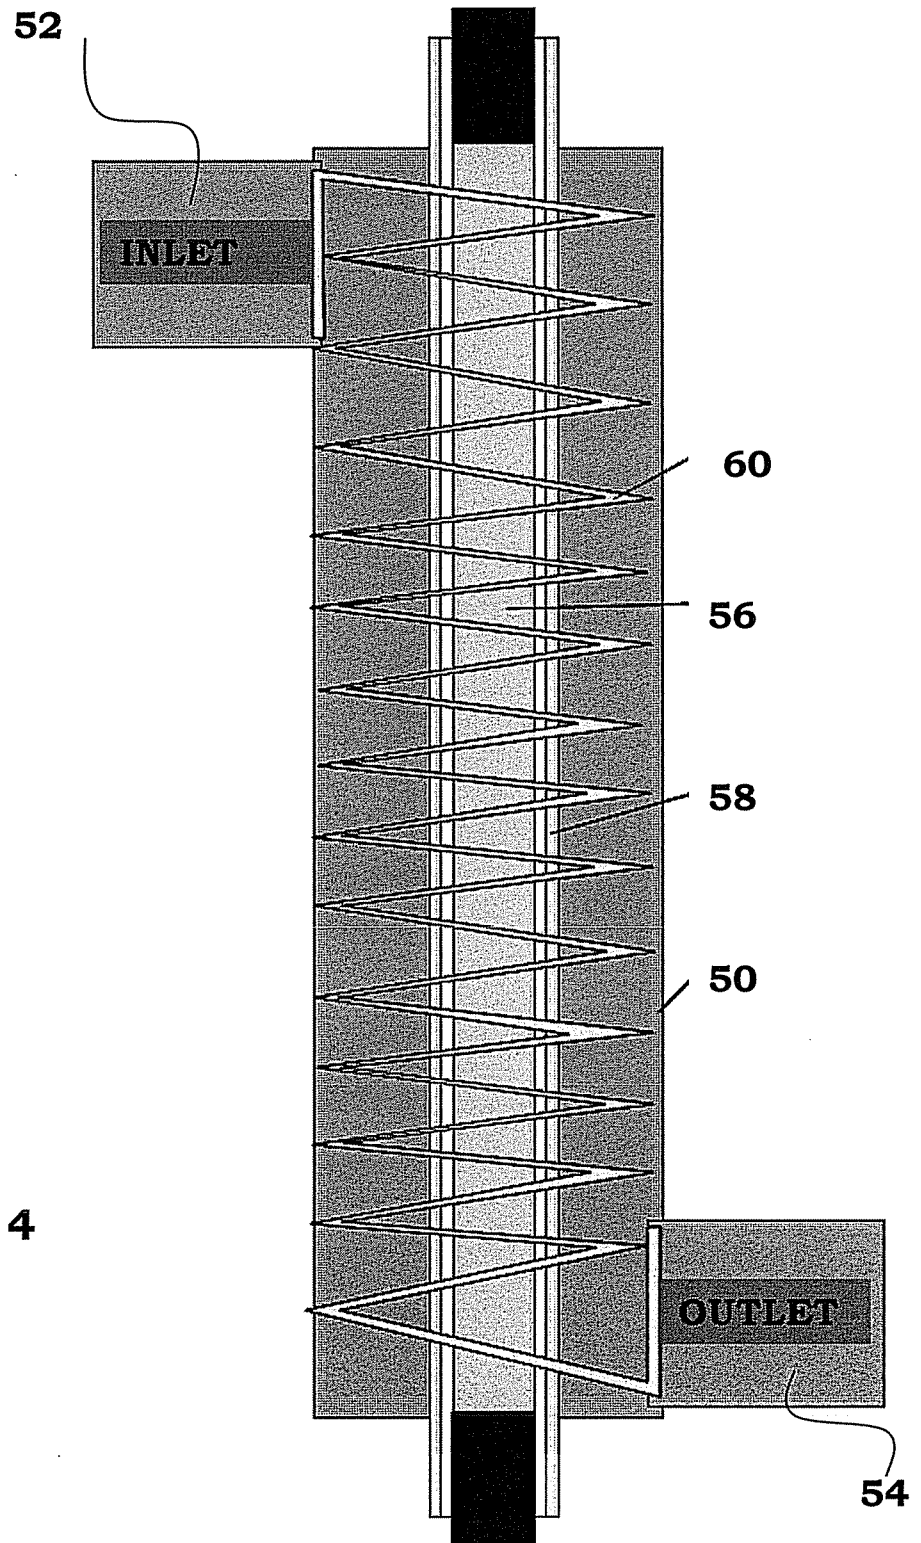


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2008/051390

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: C02F, M02F, B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 19963649 A1 (BIEDERMANN, ANDREAS), 12 July 2001 (12.07.2001), column 1, line 10 - line 15, figure 1, claims 2,3	1-5,7,9
Y	--	8,10
Y	WO 0170396 A2 (SPEER, SAMUEL, E.), 27 Sept 2001 (27.09.2001)	1,6
Y	EP 0993859 A1 (HITACHI METALS, LTD.), 19 April 2000 (19.04.2000)	1,6
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 February 2009

Date of mailing of the international search report

20-02-2009

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Linda Salomonsson/Eö

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2008/051390

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1843401 A1 (SUMITOMO ELECTRIC INDUSTRIES, LTD.), 10 October 2007 (10.10.2007), page 3, paragraphs [0013], [0021] --	8
Y	US 20060108293 A1 (BROLIN, ANDERS ET AL), 25 May 2006 (25.05.2006), page 2, paragraph [0017]; page 3, paragraph [0036] --	10
A	US 6074748 A (OGATA, SHIRO), 13 June 2000 (13.06.2000), column 7, line 41 - column 8, line 5; column 9, line 22 - column 10, line 17, figures 5, 10,11 --	1-10
A	GB 2292097 A (WATER RECOVERY PLC), 14 February 1996 (14.02.1996), whole document --	1-10
A	US 4694179 A (LEW, HYOK S. ET AL), 15 Sept 1987 (15.09.1987), column 3, line 9 - line 27, figure 1 -- -----	1-10

International patent classification (IPC)**C02F 1/32** (2006.01)**C02F 1/72** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument(service in Swedish).

Use the application number as username.

The password is **QLSXOHAPMC**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/11/2008

International application No.
PCT/SE2008/051390

DE	19963649	A1	12/07/2001	NONE		
WO	0170396	A2	27/09/2001	AU	8148601 A	03/10/2001
				CA	2404249 A,C	27/09/2001
				CN	1422176 A,T	04/06/2003
				EP	1278599 A	29/01/2003
				US	6315963 B	13/11/2001
EP	0993859	A1	19/04/2000	JP	2000086497 A	28/03/2000
				KR	2000023291 A	25/04/2000
				KR	20000023291 A	25/04/2000
				US	6238631 B	29/05/2001
				JP	2000300998 A	31/10/2000
EP	1843401	A1	10/10/2007	JP	2006237563 A	07/09/2006
				US	20080142435 A	19/06/2008
				WO	2006080216 A	03/08/2006
				CN	101178437 A	14/05/2008
				JP	2008116357 A	22/05/2008
				US	20080106462 A	08/05/2008
US	20060108293	A1	25/05/2006	AU	2003267916 A	00/00/0000
				CN	1720198 A	11/01/2006
				EP	1549589 A	06/07/2005
				JP	2006502861 T	26/01/2006
				SE	0202978 D	00/00/0000
				WO	2004033376 A	22/04/2004
				SE	0301564 D	00/00/0000
				AU	2003269775 A	04/05/2004
				BR	0315320 A	16/08/2005
				CA	2501418 A	29/04/2004
				EP	1554254 A	20/07/2005
				IS	7827 A	27/04/2005
				JP	2006505568 T	16/02/2006
				MX	PA05003901 A	22/06/2005
				NO	20052182 A	03/05/2005
				NZ	539079 A	30/11/2007
				SE	0301604 D	00/00/0000
				UA	81919 C	25/02/2008
				US	7407968 B	05/08/2008
				US	20070105893 A	10/05/2007
US	6074748	A	13/06/2000	CA	2220096 A	12/09/1997
				EP	0824040 A	18/02/1998
				JP	9234376 A	09/09/1997
				TW	398993 B	00/00/0000
				WO	9732664 A	12/09/1997

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/11/2008

International application No.
PCT/SE2008/051390

GB	2292097	A	14/02/1996	AU	687233	B	19/02/1998
				AU	3227195	A	07/03/1996
				CA	2197500	A	22/02/1996
				DE	69509393	D,T	16/12/1999
				EP	0775089	A,B	28/05/1997
				GB	9416287	D	00/00/0000
				JP	3968410	B	29/08/2007
				JP	10504236	T	28/04/1998
				US	5951876	A	14/09/1999
				WO	9605141	A	22/02/1996

US	4694179	A	15/09/1987	US	4766321	A	23/08/1988
