



(51) International Patent Classification:

H03H 7/01 (2006.01) *H01P* 5/12 (2006.01)
H01P 5/04 (2006.01)

(21) International Application Number:

PCT/US2015/015930

(22) International Filing Date:

13 February 2015 (13.02.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/940,064 14 February 2014 (14.02.2014) US

(71) Applicant: UNIVERSITY OF SOUTHERN CALIFOR-

NIA [US/US]; USC Stevens Center For Innovation, 1150
South Olive Street, Suite 2300, Los Angeles, CA 90015
(US).

(72) Inventors: ANALUI, Behnam; 10 Blackswan, Irvine, CA

92604 (US). GOEL, Ankush; 1001 North Ogden Drive,
Unit #4, West Hollywood, CA 90046 (US). HASHEMI,
Hossein; 269 Monte Grigio, Pacific Palisades, CA 90272
(US).

(74) Agent: BROWN, Marc, E.; McDermott Will & Emery

LLP, 2049 Century Park East, Suite 3800, Los Angeles,
CA 90067 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: REFLECTION AND HYBRID REFLECTION FILTERS

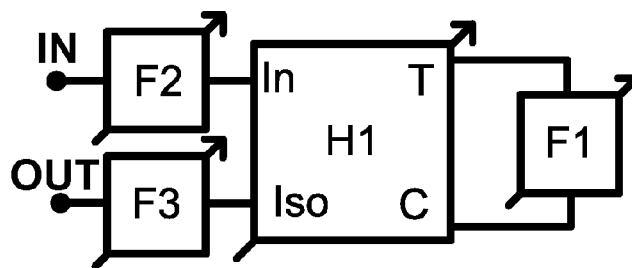


FIG. 4

(57) **Abstract:** A two-port tunable or reconfigurable network having a filter transfer function may include: a network input port; a network output port; a hybrid coupler having a hybrid input port, a hybrid isolated port, a hybrid through port, and a hybrid coupled port; a first internal two-port network connected between the network input port and the hybrid input port; a second internal two-port network connected between the network output port and the hybrid isolated port; and a third internal two-port network connected between the hybrid through port and the hybrid coupled port. At least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, and the hybrid coupler may be tunable or reconfigurable in response to an electrical signal or a user-operated control in a way that tunes or reconfigures the filter transfer function of the two-port tunable or reconfigurable network.



REFLECTION AND HYBRID REFLECTION FILTERS

BACKGROUND

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is based upon and claims priority to U.S. provisional patent application 61/940,064, entitled "Reflection-Type and Hybrid-Reflection Type Filters," filed February 14, 2014. The entire content of this application is incorporated herein by reference.

TECHNICAL FIELD

[0002] This disclosure relates to tunable and reconfigurable radio frequency (RF) filters suitable for multi-band, multi-standard, programmable, reconfigurable, adaptive, or cognitive communication systems.

DESCRIPTION OF RELATED ART

[0003] Filters are essential parts of many electrical systems, such as those used in communication applications. In communication systems, filters may be used to select a desired information signal that is separated in frequency domain from other signals. Historically, filters have been classified depending on their transfer function into low pass filters (LPF), high pass filters (HPF), band pass filters (BPF), and band stop filters (BSF).

[0004] Radio frequency (RF) BPFs and BSFs are commonly used in wireless communication systems, such as band select, channel select, band reject, or channel reject filters. Wireless communication systems exploit frequency division multiple access (FDMA) where different users of the shared propagation medium, that is air, are assigned different frequency bands. For instance, FM broadcast stations are assigned different channels, each 200 KHz wide, across the 87.5 MHz to 108.0 MHz contiguous frequency band. A wireless receiver may need to select the desired channel among all other channels. Difficulty in realization of tunable RF filters has led to utilization of frequency conversion schemes, such as heterodyne, homodyne, image-reject, etc., where the desired channel is shifted in the frequency domain to fall within the passband of fixed channel select filters. Band selection is typically achieved using fixed RF BPFs.

[0005] In some communication systems, multiple disjoint frequency bands may be assigned for the same application. For instance, in cellular wireless standards, the information signal may reside within several disjoint frequency bands. In such systems, a single-band RF BPF may not be used as the band select filter. A common solution is utilization of an array of switchable RF BPFs with frequency responses. This approach can lead to large footprint, high cost, and large insertion loss due to utilization of switches.

[0006] In some communication systems, it is desirable to support multiple standards within the same platform. For instance, multi-standard cellular phones or multi-standard televisions or setup boxes can be highly desirable. The difference in frequency bands, channel assignments, and other features of these communication standards may prohibit utilization of filters with fixed characteristics.

[0007] In some communication systems, it is desirable to concurrently operate across multiple disjoint frequency bands. For instance, some wireless communication standards may use multiple frequency channels or bands to increase the data rate (more aggregate bandwidth) or robustness (diversity). Examples include carrier aggregation scenarios. Conventional filters with single pass-band or stop-band may not be sufficient for these applications. For instance, band-pass filters with multiple pass-bands may be desirable.

[0008] In some platforms, multiple communication systems operate concurrently and in close physical proximity of each other. For instance, smart phones, notebooks, personal digital assistants, tablets, laptops, personal computers, etc. may include several wireless communication devices such as those concurrently supporting WiFi, Bluetooth, GPS, cellular, TV, and radio. In these platforms, each communication device can emit signals that are undesirable for at least one of the other communication devices. In such coexistence scenarios, the filtering requirement may be more stringent. For instance, a combination of BPF and BSF may be useful.

[0009] In some communication systems, the electromagnetic environment changes leading into varying levels of desired and undesired signals. For instance, in a wireless environment, the frequency location and power levels of jammers or blockers presented at the input of a receiver may change. In these scenarios, the requirement for the presence of filters and associated specifications may change.

For instance, in the presence of a large undesired signal, a BSP may be used while in its absence the BSP may be bypassed to reduce its insertion loss at the desired frequency band.

[0010] The designation of the frequency band or channel for a wireless receiver may be dynamic. For instance, a wireless communication system may use a portion of the frequency spectrum that is available at a given location and at a given time. These systems may include schemes that qualify them as cognitive radios. Examples include systems that are meant to operate in white spaces. In such communication systems, the specification of filters may need to dynamically accommodate the instantaneous needs.

[0011] The demand for increased capacity and number of users in a wireless communication system has led to closer channel spacing and reduction in so-called guard bands. This trend dictates more selective filters. RF filters with higher orders may be used in such systems. Given a technology, passive filters with higher order will incur higher insertion loss.

[0012] There may be a large interest and need in realization of RF filters with tunable or reconfigurable frequency responses. Such RF filters can enable low-cost, power-efficient, compact wireless communication devices, systems, and platforms including those that support multiple frequency bands, multiple standards, or multiple concurrent radios. Despite ongoing research and development towards realization of tunable or reconfigurable RF filters, embodiments that satisfy the stringent requirements of communication systems may not exist. This is evidenced by the continued use of switched filter approaches in commercial communication systems.

[0013] Reflection-type filters can use an elegant method to produce desired (maybe even unconventional) filter responses using traditional filters and hybrid couplers (US4694266, US4963945, US5525945, US5781084, US8013690, US8749321). For example, high quality BSFs can be implemented using high quality low loss BPF with high quality factor Surface Acoustic Wave (SAW) resonators and low loss quadrature hybrid.

[0014] Though these prior works have shown the efficacy of the reflection-type filters, they may have been limited to meet only a pre-determined (and static) frequency response or a set of pre-determined frequency responses. As discussed earlier, static or set of static filter responses may not be sufficient to meet the

requirement of many communication systems. A frequency tunable notch filter based on reflection-type filter concept exists (US 8013690) but it is limited to only narrowband notch frequency response.

[0015] It may be highly desirable to have a filter response which can not only be tunable but also reconfigurable. For example, the ability to dynamically change the number of noncontiguous passbands or stopbands along with the frequency at which these are present can be very advantageous. For example, a wireless communication receiver can add stopbands (or notches) to a filter response upon detection of undesired interference or jamming signals. For instance, a multi-standard wireless communication system may change a filter response from band-pass to band-stop for different standards. For instance, a wireless communication system may increase the number of passbands in a filter response to support concurrent multi-band operation or carrier aggregation while reducing the levels of undesired signals that are located outside of the frequency bands of interest. In many scenarios, the RF filter's response should be dynamically changeable (on the fly tunability or reconfigurability).

SUMMARY

[0016] A two-port tunable or reconfigurable network having a filter transfer function may include: a network input port; a network output port; a hybrid coupler having a hybrid input port, a hybrid isolated port, a hybrid through port, and a hybrid coupled port; and an internal two-port network connected between the hybrid through port and the hybrid coupled port. At least one of the internal two-port network and the hybrid coupler may be tunable or reconfigurable in response to an electrical signal or a user-operated control in a way that tunes or reconfigures the filter transfer function of the two-port tunable or reconfigurable network.

[0017] The filter transfer function may have multiple passbands or stopbands.

[0018] At least one of the internal two-port network and the hybrid coupler may be an integrated circuit, on the same substrate, and/or integrated with a receiver, a transmitter, or a transceiver.

[0019] An additional two-port network may be connected between the network input port and the hybrid input port.

[0020] An additional two-port network may be connected between the network output port and the hybrid isolated port.

[0021] A two-port tunable or reconfigurable network may include multiple instances of a two-port tunable or reconfigurable network connected in series.

[0022] A two-port tunable or reconfigurable network having a filter transfer function may include: a network input port; a network output port; a hybrid coupler having a hybrid input port, a hybrid isolated port, a hybrid through port, and a hybrid coupled port; a first load; a second load; a first internal two-port network connected between the first load and the hybrid through port; and a second internal two-port network connected between the second load and the hybrid coupled port. At least one of the first internal two-port network, the second internal two-port network, the hybrid coupler, the first load, and the second load may be tunable or reconfigurable in response to an electrical signal or a user-operated control in a way that tunes or reconfigures the filter transfer function of the two-port tunable or reconfigurable network.

[0023] At least one of the first internal two-port network, the internal second two-port network, the hybrid coupler, the first load, and the second load may be an integrated circuit, on the same substrate, and/or integrated with a receiver, a transmitter, or a transceiver.

[0024] An additional two-port network may be connected between the network input port and the hybrid input port.

[0025] An additional two-port network connected may be between the network output port and the hybrid isolated port.

[0026] Multiple instances of the two-port tunable or reconfigurable network may be connected in series.

[0027] These, as well as other components, steps, features, objects, benefits, and advantages, will now become clear from a review of the following detailed description of illustrative embodiments, the accompanying drawings, and the claims.

BRIEF DESCRIPTION OF DRAWINGS

[0028] The drawings are of illustrative embodiments. They do not illustrate all embodiments. Other embodiments may be used in addition or instead. Details that may be apparent or unnecessary may be omitted to save space or for more effective

illustration. Some embodiments may be practiced with additional components or steps and/or without all of the components or steps that are illustrated. When the same numeral appears in different drawings, it refers to the same or like components or steps.

[0029] Represented simulation results of various embodiments are only for illustrative reasons, and are not meant to cover all possible responses that various embodiments enable. For instance, the presented simulation results cover filters with a single passband and at least one stopband (or notch) in their transfer functions. Filters with multiple passbands or stopbands may also be realized using the embodiments or other teachings of this patent. Filters whose transfer functions fundamentally change as a function of at least one stimulus may also be realized using the embodiments or other teachings of the patent.

[0030] FIG. 1 illustrates an embodiment of a prior art two-port reflection-type filter realized by placing filter F1 between through (T) and coupled (C) ports of a hybrid coupler H1.

[0031] FIG. 2 illustrates an embodiment a prior art two-port reflection-type filter realized by placing filter F1 between through (T) and coupled (C) ports of a hybrid coupler H1, and two other filters F2 and F3 connected in series with the input (In) and isolated (Iso) ports of the hybrid coupler and the two-port reflection-type filter ports.

[0032] FIG. 3 illustrates an embodiment of a prior art two-port reflection-type filter realized by terminating the through (T) and coupled (C) ports of a hybrid coupler H1 with two filters F1 and F2 and their associated loads.

[0033] FIG. 4 illustrates an embodiment a tunable/reconfigurable two-port reflection-type filter realized by placing tunable/reconfigurable filter F1 between through (T) and coupled (C) ports of a tunable/reconfigurable hybrid coupler H1, and two other tunable/reconfigurable filters F2 and F3 connected in series with the input (In) and isolated (Iso) ports of the hybrid coupler and the two-port reflection-type filter ports. Tunable/reconfigurable response may be realized when at least one of the components F1, F2, F3, or H1 is tunable/reconfigurable.

[0034] FIG. 5 illustrates an embodiment of a tunable/reconfigurable reflection-type filter realized by terminating the through (T) and coupled (C) ports of a tunable/reconfigurable hybrid coupler H1 with two tunable/reconfigurable filters F1

and F2 and their associated tunable/reconfigurable loads. Tunable/reconfigurable response may be realized when at least one of the components H1, F1, F2, or their associated loads is tunable/reconfigurable.

[0035] FIG. 6 illustrates an embodiment of a tunable/reconfigurable reflection-type filter realized by terminating the through (T) and coupled (C) ports of a tunable/reconfigurable hybrid coupler H1 with two tunable/reconfigurable filters F1 and F2 and their associated tunable/reconfigurable loads, and placing two other tunable/reconfigurable filters in series with the input (In) and isolated (Iso) ports of the tunable/reconfigurable hybrid coupler and the tunable/reconfigurable two-port reflection-type filter ports. Tunable/reconfigurable response may be realized when at least one of the components H1, F3, F4, F1, F2, or their associated loads is tunable/reconfigurable.

[0036] FIG. 7 illustrates an embodiment of a two-port filter realized as a nested connection of multiple reflection-type filters that are realized using the approach shown in Fig. 4. Fixed as well as tunable/reconfigurable versions of this approach may be used.

[0037] FIG. 8 illustrates an embodiment of a two-port filter realized as a nested connection of multiple reflection-type filters that are realized using the approach shown in Fig. 6. Fixed as well as tunable/reconfigurable versions of this approach may be used.

[0038] Fig. 9 shows illustrative simulation results for a tunable/reconfigurable filter embodiment realized using the approach of Fig. 4. Different graphs correspond to the filter response at different represented settings.

[0039] Fig. 10 shows illustrative simulation results for a tunable/reconfigurable filter embodiment realized using the approach of Fig. 6. Different graphs correspond to the filter response at different represented settings.

[0040] Fig. 11 shows illustrative simulation results for a tunable/reconfigurable filter embodiment realized using the approach of Fig. 7. Different graphs correspond to the filter response at different represented settings.

[0041] Fig. 12 shows illustrative simulation results for a tunable/reconfigurable filter embodiment realized using the approach of Fig. 8. Different graphs correspond to the filter response at different represented settings.

[0042] Fig. 13 shows another illustrative simulation result for a tunable/reconfigurable filter embodiment realized using the approach of Fig. 4 for meeting concurrent multi-band scenarios.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0043] Illustrative embodiments are now described. Other embodiments may be used in addition or instead. Details that may be apparent to a person of ordinary skill in the art may have been omitted. Some embodiments may be practiced with additional components or steps and/or without all of the components or steps that are described.

[0044] Throughout this disclosure, the term signal is used to designate a quantity that has values over time. The specific structure of the signal is not material unless explicitly stated. A signal need not be generated from a single source. For instance, collection of signals received from multiple transmitting sources by a single antenna is still referred to as a signal.

[0045] Throughout this disclosure, the term filter corresponds to a two-port network with a corresponding transfer function in frequency domain. The transfer function of the two-port network need not resemble the classical transfer function of known filters such as band pass filters (BPF), low pass filters (LPF), high pass filters (HPF), and band stop filters (BSP) also known as band reject filters (BRF). For instance, the transfer function of the two-port network may have multiple passbands or multiple stopbands or a combination of pass bands and stop bands. Specifically, the usage of passband or stopband should not be interpreted as a single contiguous frequency band. Passband is referred to the range of all frequencies where the signal passes through the two-port network with little or no attenuation, and stopband is referred to the range of all frequencies where the signal does not pass through the two-port network or it passes through the two-port network with significant attenuation. Passband or stopband may include multiple disjoint frequency bands. The two-port network may use active or passive components in its realization.

[0046] Throughout this disclosure, the term transfer function indicates a mathematical representation between variables that appear across terminals of a component, network, or circuit. The transfer function may indicate the relationship between various ports of a multi-port network. The transfer function may use

voltages, currents, powers, charges, fluxes, etc. as its variable. The transfer function may or may not have units.

[0047] Throughout this disclosure, the terms tunable and reconfigurable refer to cases where circuitry is modified in response to at least one stimulus. The stimuli may be electrical such as voltage or current, mechanical, or of any other nature. Modification in a tunable or reconfigurable circuitry may lead to modification in a corresponding transfer function leading to a tunable or reconfigurable transfer function. Tunable transfer function generally refers to changing the specifications without substantially changing the structure (or shape) of the transfer function. For instance, the location and bandwidths of passbands or stopbands can be modified in a tunable filter. A reconfigurable transfer function generally refers to changing the structure (or shape) of the transfer function. For instance, a band-pass response may be modified to become a band-stop response in a reconfigurable filter. For the purpose of this disclosure, circuit modifications through mechanical addition or subtraction of components or rerouting of connections does not fall within reconfigurability or tunability. For instance, soldering or de-soldering components may lead to a new filter transfer function; but, this approach does not fall within a tunable or reconfigurable filter in this disclosure. Tunable or reconfigurable circuits may incorporate switches, diodes, or transistors to enable tunability or reconfigurability. The underlying mechanism for tuning can be electrical, optical, electromagnetic, mechanical, acoustic, chemical, or any of their combinations.

[0048] FIG. 1 illustrates an embodiment of a prior art two-port reflection type filter approach (WO 95/15018, US5525945, US8749321) where a two-port network F1 is connected between a through (T) port and a coupler (C) port of a hybrid coupler (H1). If the hybrid coupler is an ideal quadrature hybrid coupler, that is transfer functions from an input port (IN) to the T and C ports have 90° phase shift difference (or in other words T and C are in quadrature) and the hybrid is lossless, the transfer function from IN to an isolation port (ISO) of the hybrid coupler H1 may be written as:

$$S_{ISO,IN} = j*(1/2)*(S_{11,F1}+S_{22,F1}) + (1/2)*(S_{21,F1}-S_{12,F1}),$$

where S_{xy} denotes the scattering matrix parameter between ports x and y, and “j” is the complex symbol equal to $\sqrt{-1}$ having unity magnitude and 90° phase shift. For instance, $S_{21,F1}$ corresponds to the S_{21} of the two-port network F1 which may be a filter. If $S_{21,F1}$ and $S_{12,F1}$ of the two port network F1 are identical, for instance in a

passive reciprocal two-port network, the transfer function between from IN to ISO may become:

$$S_{ISO,IN} = j*(1/2)*(S_{11,F1} + S_{22,F1}).$$

In other words, in this case, the forward transfer function from the input to the isolation port of the hybrid may depend on the reflection coefficients of the two port network F1, namely $S_{11,F1}$ and $S_{22,F1}$.

[0049] For example, if the input and output reflection coefficients of the two-port network F1 follow a band-stop response at the same frequency range, the transfer function from IN to ISO may also follow a band-stop response at the same frequency range. For instance, a two-port network can be designed to have band-pass transfer functions between the two ports and band-stop reflection coefficients at both ports. If this two-port network is used as F1, the transfer function from IN to ISO may follow a band-stop response. In this case, the reflection-type approach may invert the transfer function of the two-port network F1.

[0050] Other two-port networks may be added in series with the IN or the ISO ports of the aforementioned approach. FIG. 2 shows such an approach where two-port networks F2 and F3 are added in series with an IN port and an ISO port of a hybrid coupler H1. A combination of the transfer function of the two port networks F2 and F3, and the transfer function offered by a combination of hybrid coupler H1 and two-port network F1 (as described above) may determine the overall transfer function in the new two-port network.

[0051] The two-port networks F1, F2, and F3 may be designed to achieve a desired transfer function. For instance, F2 and F3 may have band-pass transfer functions and the two-port network F1 may have band-stop reflection coefficient at a different frequency band. In this case, the overall transfer function may be band-pass with additional stop-band (or notch) for further attenuation of certain frequencies. One advantage of this approach may be that attenuation at the undesired frequencies does not require extremely high-order filters or components that have very high quality factor. It is possible that only one of the two-port networks F2 or F3 is used in this approach, in addition to the hybrid coupler H1 and two-port network F1.

[0052] FIG. 3 illustrates another embodiment of a prior art two-port reflection type filter (US4694266, US4963945, US8013690). The operation principle of this

approach may be similar to that of Fig. 1. However, this may use two two-port networks F1 and F2 and two associated loads that are connected to the coupled ports of a hybrid coupler H1. One advantage of Fig. 3 versus Fig. 1 may be added flexibility. Specifically, if the hybrid coupler H1 is an ideal quadrature hybrid coupler, that is the transfer functions from an input port (IN) to T and C ports have 90° phase shift difference (T and C are in perfect quadrature) and the hybrid coupler H1 is lossless, the transfer function from IN to ISO may be written as:

$$S_{ISO,IN} = j*(1/2)*(S_{11,F1}+S_{11,F2}).$$

The two-port networks F1 and F2 can be designed so that the addition of their input reflection coefficients, namely $S_{11,F1}$ and $S_{11,F2}$, results in a desired response.

[0053] Prior art illustrations and realizations of reflection-type filters cover approaches with predetermined transfer functions using fixed structures for the hybrid coupler, two-port networks, and their associated loads. Furthermore, prior art may focus on fixed transfer functions with a single pass-band or band-stop responses.

[0054] With the current and future dominance of multi-standard multi-band radios and wireless platforms with operability at multiple bands, a predetermined frequency response of the filter may be very restrictive. For example, state-of-the-art cellular phones may require operation over more than thirty frequency bands. One solution is to use a bank of multiple filters with predetermined frequency responses and a switching network to switch between the filters depending on the desired frequency band of operation. This approach may require a large footprint and may suffer from loss of the switching network.

[0055] FIG. 4 illustrates an embodiment of a tunable/reconfigurable two-port reflection-type filter of the type illustrated in Fig. 2 that allows for a tunable/reconfigurable frequency response. In this approach, a hybrid coupler H1 and/or one or more of two-port filters F1, F2, and F3 may be tunable/reconfigurable. This may lead to a tunable/reconfigurable overall two-port network. Variations of this approach may include cases where F2 and/or F3 may not be present.

[0056] Fig. 5 illustrates an embodiment of a tunable/reconfigurable two-port reflection-type filter of the type illustrated in Fig. 3 that allows for a tunable/reconfigurable frequency response. In this approach, a hybrid coupler H1 and/or one or more of two-port filters F1 and F2 and/or their associated loads may be

tunable/reconfigurable. This may lead to a tunable/reconfigurable overall two-port network.

[0057] FIG. 6 illustrates an embodiment of a tunable/reconfigurable reflection-type filter realized by terminating a through (T) port and a coupled (C) port of a tunable/reconfigurable hybrid coupler H1 with two tunable/reconfigurable filters F1 and F2 and their associated tunable/reconfigurable loads. Two other tunable/reconfigurable filters may be placed in series with an input (In) and isolated (Iso) ports of the tunable/reconfigurable hybrid coupler and the tunable/reconfigurable two-port reflection-type filter ports. A tunable/reconfigurable response may be realized when the hybrid coupler H1 and/or one or more of the filters F3, F4, F1, F2, or their associated loads is tunable/reconfigurable. For instance, the two-port networks F1, F2, F3, and F4 may be designed in such a way that the overall transfer function has one or more passbands at certain frequencies and one or more stopbands at other certain frequencies. Transfer functions or reflection coefficients of the filters F1, F2, F3, and F4 may be tunable/reconfigurable so that the overall transfer function of the new two-port network is also tunable/reconfigurable. Other embodiments of this approach may not include filters F3 or F4.

[0058] FIG. 7 illustrates an embodiment of a two-port filter realized as a nested connection of multiple reflection-type filters that are realized of the type shown in Fig. 4. The filter may include hybrid couplers H1 through HN and two-port networks F11, F12, and F13 through FN1, FN2, and FN3. The order of this nested reflection-type filter can be increased by adding more units in series. Fixed, as well as tunable/reconfigurable versions, of this approach may be used. Some or all of the components in series with the In or Iso ports of the hybrid couplers may instead not be present. The two-port networks in series, such as filters F13 and F22, may be combined into one to ease implementation.

[0059] FIG. 8 illustrates an embodiment of a two-port filter realized as a nested connection of multiple reflection-type filters that are realized using the approach shown in Fig. 6. The order of this nested reflection-type filter can be increased by adding more units in series. Fixed as well as tunable/reconfigurable versions of this approach may be used. Some or all of the components in series with the In or Iso

ports of the hybrid couplers may not be present. The two-port networks in series, such as F14 and F23, may be combined into one to ease implementation.

[0060] In all of these embodiments, transfer functions of the two-port networks, such as F1, F2, F3, F4, etc., may not resemble the classical transfer function of known filters, such as band pass filters (BPF), low pass filters (LPF), high pass filters (HPF), and band stop filters (BSP), also known as band reject filters (BRF). For instance, the transfer function of a two-port network may have multiple passbands or multiple stopbands or a combination of pass bands and stop bands. A passband or stopband filter also does not necessarily mean a single contiguous frequency band. Passband refers to a range of all frequencies where the signal passes through the two-port network with little or no attenuation. Stopband refers to a range of all frequencies where the signal does not pass through the two-port network or it passes through the two-port network with significant attenuation. Passband or stopband may include multiple disjoint frequency bands.

[0061] The transfer function of the two-port networks need not be predetermined or fixed. For instance, the transfer function of the two-port network may be tunable. As one representative example, the transfer function of the two-port network may resemble that of a band-pass filter where center frequency and bandwidth can be tuned. The tunability may be in response to external or internal stimuli. Tunable transfer functions may be realized by incorporating one or more tunable components within the two-port network. For instance, tunable capacitors, tunable inductors, tunable resonators, or their combinations may be used to realize a tunable two-port network.

[0062] The circuit configuration of the two-port network need not be predetermined or fixed. For instance, the circuit configuration of the two-port network may be reconfigurable. As one representative example, the two-port network circuitry may resemble that of a band-pass filter where the filter order can be reconfigured. As another representative example, the two-port network circuitry may be reconfigured to change from a band-pass to a band-stop, or vice versa. The reconfigurability may be in response to external or internal stimuli. Reconfigurable circuits may be realized by incorporating one or more switches or other selection circuitry. For instance, mechanical switches or relays, electrical switches using diodes or transistors, Micro Electro Mechanical (MEM) switches, or their combination may be used within the

reconfigurable two-port network. A reconfigurable two-port network may also have a tunable transfer function. A two-port network with a tunable transfer function may also incorporate reconfigurable circuitry. However, “reconfigurable” would not include replacing one or more component by unsoldering them.

[0063] The filter may be realized using passive components, active components, or a combination of active and passive components. The two-port network may use electrical, electro-mechanical, piezo-electric, or other types of components in its realization. For instance, the two-port network realization may include inductors, capacitors, resonators, transmission lines, or a combination. For instance, the two-port network realization may include Surface Acoustic Wave (SAW) or Bulk Acoustic Wave (BAW) components. Other variations may also be made.

[0064] Fig. 9 shows illustrative simulations for the embodiment described in Fig. 4. Here, F2 is a fixed BPF filter at 1 GHz, F3 is an all-pass filter (or no F3 at all), and F1 is a BPF with tunable center frequency. In these illustrative simulations, the center frequency of F1 is tuned from 1.05 GHz to 1.2 GHz in steps of 0.05 GHz and is indicated in the graphs as a “setting.” The combination of hybrid coupler H1 and tunable BPF F1 results in a tunable BSF. This example may be used in wireless communication schemes where the location of the undesired blockers, interferers, or jammers can vary.

[0065] Fig. 10 shows illustrative simulations for the embodiment described in Fig. 6. Here, F3 is fixed BPF filter at 1 GHz, F4 is an all-pass filter (or no F4 at all), and F1 and F2 are identical BPFs with tunable center frequency. In these illustrative simulations, the center frequencies of F1 and F2 are tuned from 1.05 GHz to 1.2 GHz in steps of 0.05 GHz and is indicated in the graphs as a “setting.” The combination of hybrid coupler H1 and tunable BPFs F1 and F2 results in a tunable BSF. This example may be used in wireless communication schemes where the location of the undesired blockers, interferers, or jammers can vary.

[0066] Fig. 11 shows illustrative simulations for the embodiment described in Fig. 7 for $N = 3$. Here, F12 is fixed BPF centered at 1 GHz, F13, F22, F23, F32, F33 are all-pass filters (or no filters at all), and F11, F21, and F31 are BPFs with independently controlled tunable center frequencies. In these illustrative simulations, for setting 1, the center frequencies of F11, F21, and F31 are tuned to 1.1 GHz, 1.15 GHz, and 1.3 GHz, respectively, resulting in three stopbands (or notches) at those

frequencies in the overall transfer function. For setting 2, the center frequencies of F11, F21, and F31 are tuned to 1.1 GHz, 1.25 GHz, and 1.3 GHz, respectively, resulting in three stopbands (or notches) at those frequencies in the overall transfer function. This example may be used in wireless communication schemes where the number and locations of the undesired blockers, interferers, or jammers can vary.

[0067] Fig. 12 shows illustrative simulations for the embodiment described in Fig. 8 for $N = 3$. Here, F13 is fixed BPF filter at 1 GHz, F14, F23, F24, F33, and F34 are all-pass filters (or no filters), and F11, F12, F21, F22, F32 and F32 are BPFs with independently controlled tunable center frequencies. In these illustrative simulations, for setting 1, the center frequencies of F11 and F12 are tuned at 1.1 GHz, center frequencies of F21 and F22 are tuned to 1.15 GHz, and center frequencies of F31 and F31 are tuned to 1.3 GHz. For setting 2, the center frequencies of F11 and F12 are tuned to 1.1 GHz, center frequencies of F21 and F22 are tuned to 1.25 GHz, and center frequencies of F31 and F32 are tuned to 1.3 GHz. This example may be used in wireless communication schemes where the number and locations of the undesired blockers, interferers, or jammers can vary.

[0068] Fig. 13 shows another illustrative simulation for the embodiment described in Fig. 4 for meeting requirements of multiple communication systems that operate concurrently and in close physical proximity of each other. In this example, two concurrent passbands located in close proximity to one another are generated by using a wideband bandpass filter for F2, while the center frequency of the bandpass filter F1 is chosen to lie in between the passband of F2. F1 and/or F2 can be reconfigurable and/or tunable.

[0069] Various components of this invention may be realized as integrated circuits. The entire scheme or some of its components may be realized monolithically on the same substrate. The entire scheme or some of its components may be integrated alongside other circuits. For instance, parts of or the entire scheme may be integrated with parts or the entire a communication receiver, transmitter, or transceiver in a monolithic integrated circuit, or on the same package, or in the same platform.

[0070] The components, steps, features, objects, benefits, and advantages that have been discussed are merely illustrative. None of them, nor the discussions relating to them, are intended to limit the scope of protection in any way. Numerous

other embodiments are also contemplated. These include embodiments that have fewer, additional, and/or different components, steps, features, objects, benefits, and/or advantages. These also include embodiments in which the components and/or steps are arranged and/or ordered differently.

[0071] Unless otherwise stated, all measurements, values, ratings, positions, magnitudes, sizes, and other specifications that are set forth in this specification, including in the claims that follow, are approximate, not exact. They are intended to have a reasonable range that is consistent with the functions to which they relate and with what is customary in the art to which they pertain.

[0072] All articles, patents, patent applications, and other publications that have been cited in this disclosure are incorporated herein by reference.

[0073] The phrase “means for” when used in a claim is intended to and should be interpreted to embrace the corresponding structures and materials that have been described and their equivalents. Similarly, the phrase “step for” when used in a claim is intended to and should be interpreted to embrace the corresponding acts that have been described and their equivalents. The absence of these phrases from a claim means that the claim is not intended to and should not be interpreted to be limited to these corresponding structures, materials, or acts, or to their equivalents.

[0074] The scope of protection is limited solely by the claims that now follow. That scope is intended and should be interpreted to be as broad as is consistent with the ordinary meaning of the language that is used in the claims when interpreted in light of this specification and the prosecution history that follows, except where specific meanings have been set forth, and to encompass all structural and functional equivalents.

[0075] Relational terms such as “first” and “second” and the like may be used solely to distinguish one entity or action from another, without necessarily requiring or implying any actual relationship or order between them. The terms “comprises,” “comprising,” and any other variation thereof when used in connection with a list of elements in the specification or claims are intended to indicate that the list is not exclusive and that other elements may be included. Similarly, an element preceded by an “a” or an “an” does not, without further constraints, preclude the existence of additional elements of the identical type.

[0076] None of the claims are intended to embrace subject matter that fails to satisfy the requirement of Sections 101, 102, or 103 of the Patent Act, nor should they be interpreted in such a way. Any unintended coverage of such subject matter is hereby disclaimed. Except as just stated in this paragraph, nothing that has been stated or illustrated is intended or should be interpreted to cause a dedication of any component, step, feature, object, benefit, advantage, or equivalent to the public, regardless of whether it is or is not recited in the claims.

[0077] The abstract is provided to help the reader quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, various features in the foregoing detailed description are grouped together in various embodiments to streamline the disclosure. This method of disclosure should not be interpreted as requiring claimed embodiments to require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus, the following claims are hereby incorporated into the detailed description, with each claim standing on its own as separately claimed subject matter.

CLAIMS

The invention claimed is:

1. A two-port tunable or reconfigurable network having a filter transfer function comprising:
 - a network input port;
 - a network output port;
 - a hybrid coupler having a hybrid input port, a hybrid isolated port, a hybrid through port, and a hybrid coupled port;
 - a first internal two-port network connected between the network input port and the hybrid input port;
 - a second internal two-port network connected between the network output port and the hybrid isolated port.A third internal two-port network connected between the hybrid through port and the hybrid coupled port;
wherein at least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, and the hybrid coupler are tunable or reconfigurable in response to an electrical signal or a user-operated control in a way that tunes or reconfigures the filter transfer function of the two-port tunable or reconfigurable network.
2. The two-port tunable or reconfigurable network of claim 1 wherein the filter transfer function has multiple passbands or stopbands.
3. The two-port tunable or reconfigurable network of claim 1 wherein at least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, and the hybrid coupler is an integrated circuit.
4. The two-port tunable or reconfigurable network claim 1 wherein at least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, and the hybrid coupler are on the same substrate.
5. The two-port tunable or reconfigurable network of claim 1 wherein at least one of the first internal two-port network, the second internal two-port network, the third

internal two-port network, and the hybrid coupler are integrated with a receiver, a transmitter, or a transceiver.

6. A two-port tunable or reconfigurable network comprising multiple instances of the two-port tunable or reconfigurable network of claim 1 connected in series.
7. A two-port tunable or reconfigurable network having a filter transfer function comprising:
 - a network input port;
 - a network output port;
 - a hybrid coupler having a hybrid input port, a hybrid isolated port, a hybrid through port, and a hybrid coupled port;
 - a first load;
 - a second load;
 - a first internal two-port network connected between the between the first load and the hybrid through port;
 - a second internal two-port network connected between the between the second load and the hybrid coupled port;
 - a third internal two-port network connected between the network input port and the hybrid input port;
 - a fourth internal two-port network connected between the network output port and the hybrid isolated port,wherein at least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, the fourth internal two-port network, the hybrid coupler, the first load, and the second load are tunable or reconfigurable in response to an electrical signal or a user-operated control in a way that tunes or reconfigures the filter transfer function of the two-port tunable or reconfigurable network.
8. The two-port tunable or reconfigurable network of claim 7 wherein the filter transfer function has multiple passbands or stopbands.

9. The two-port tunable or reconfigurable network of claim 7 wherein at least one of the first internal two-port network, the internal second two-port network, the third internal two-port network, the fourth internal two-port network, the hybrid coupler, the first load, and the second load is an integrated circuit.
10. The two-port tunable or reconfigurable network of claim 7 wherein at least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, the fourth internal two-port network, the hybrid coupler, the first load, and the second load are on the same substrate.
11. The two-port tunable or reconfigurable network of claim 7 wherein at least one of the first internal two-port network, the second internal two-port network, the third internal two-port network, the fourth internal two-port network, the hybrid coupler, the first load, and the second load are integrated with a receiver, a transmitter, or a transceiver.
12. A two-port tunable or reconfigurable network comprising multiple instances of the two-port tunable or reconfigurable network of claim 7 connected in series.

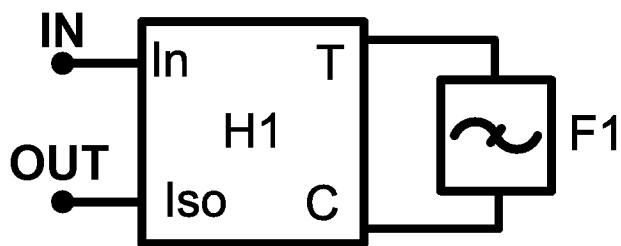


FIG. 1 (Prior Art)

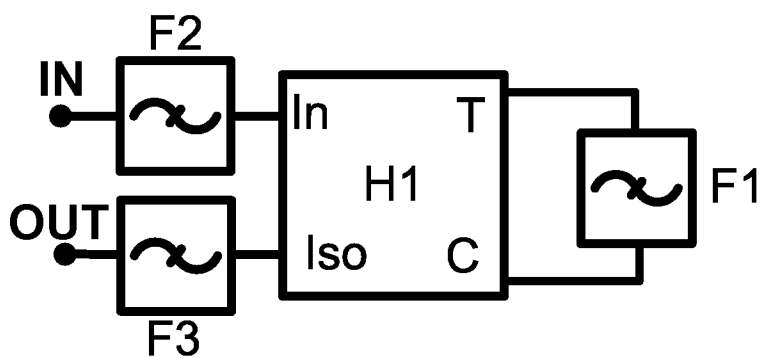


FIG. 2 (Prior Art)

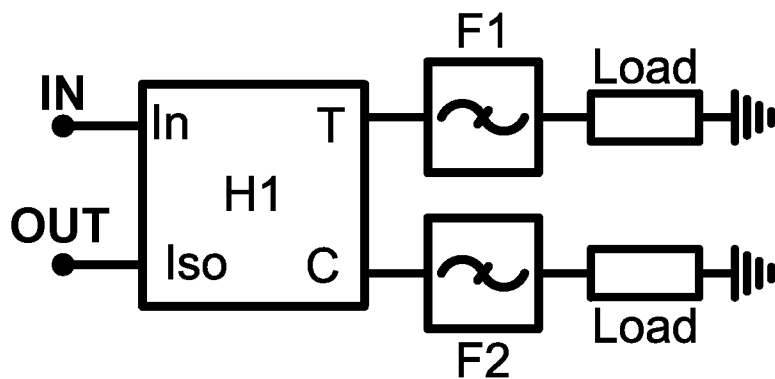


FIG. 3 (Prior Art)

2/7

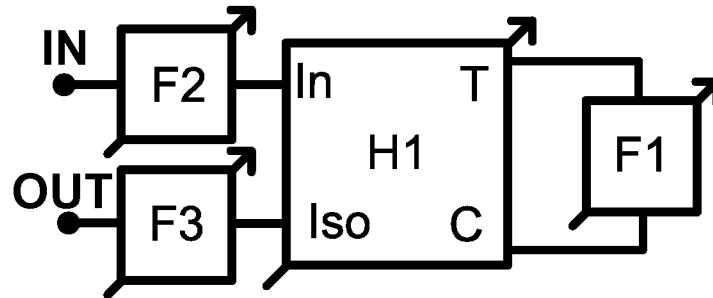


FIG. 4

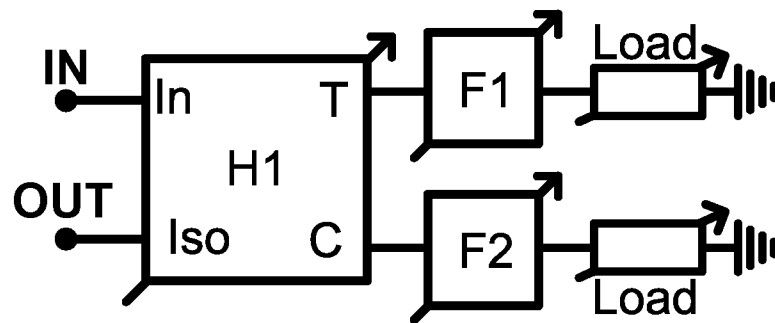


FIG. 5

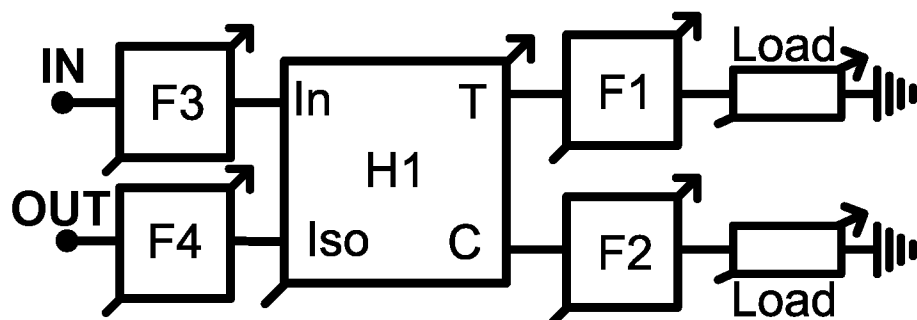


FIG. 6

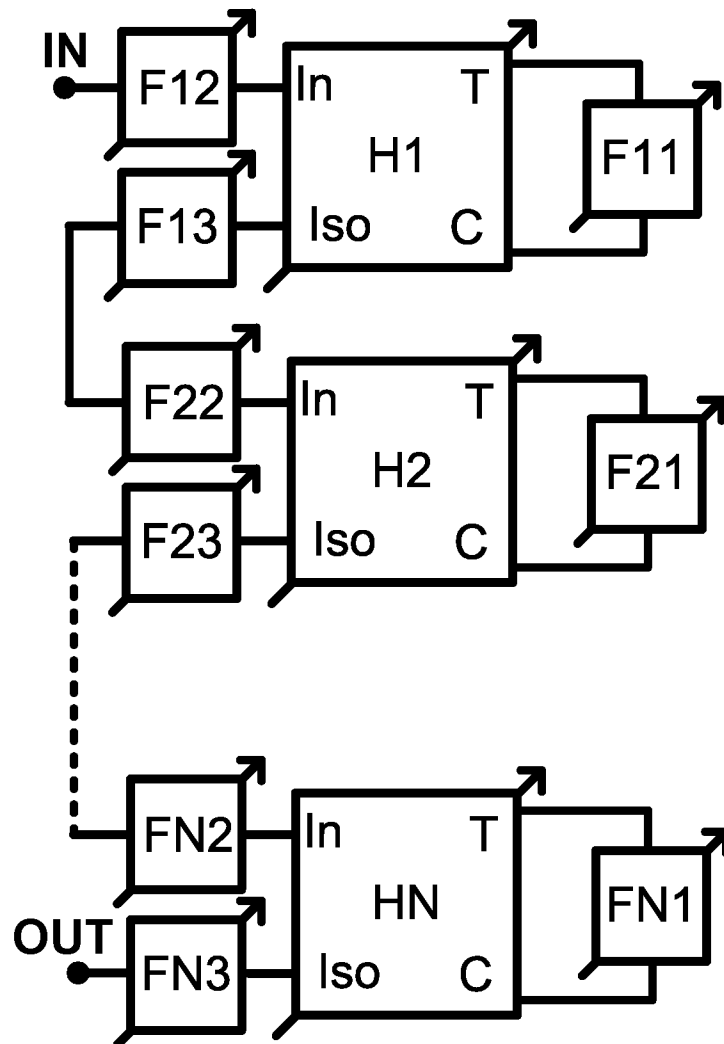


FIG. 7

4/7

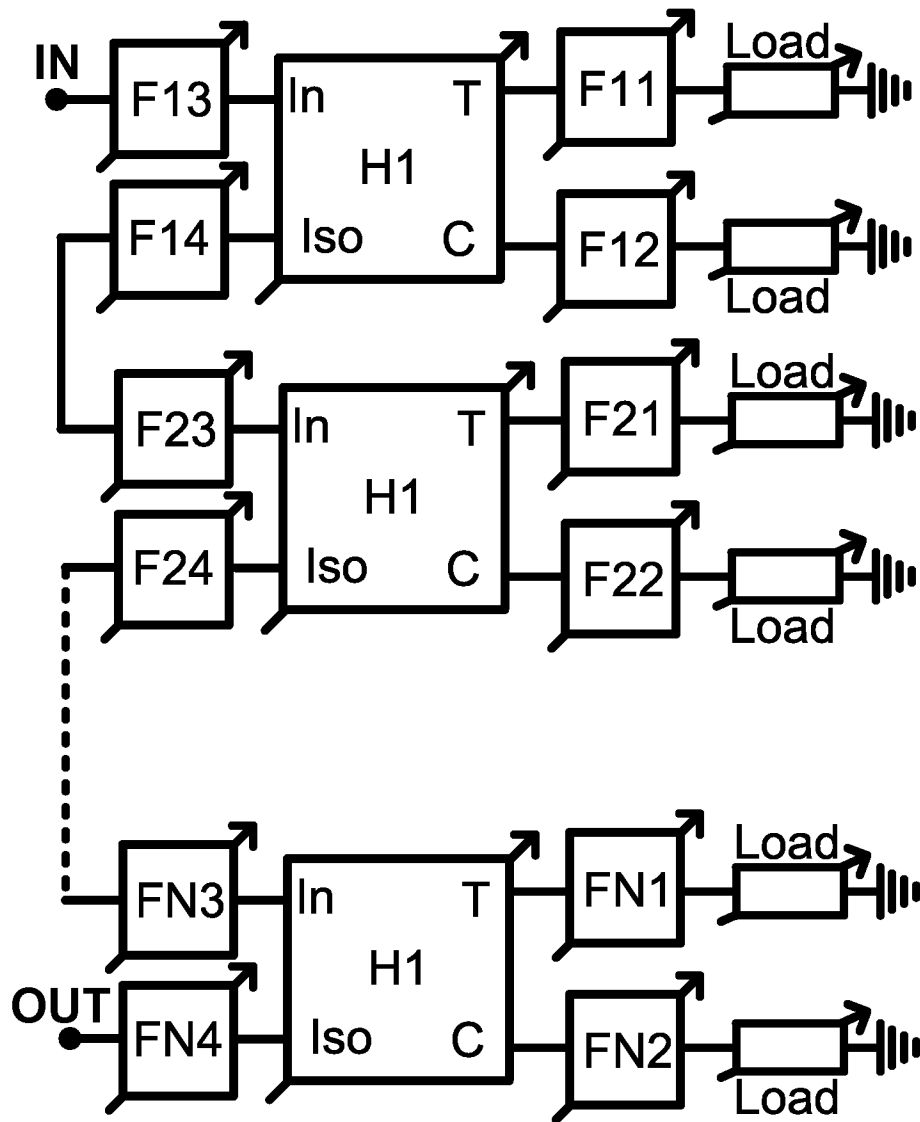


FIG. 8

5/7

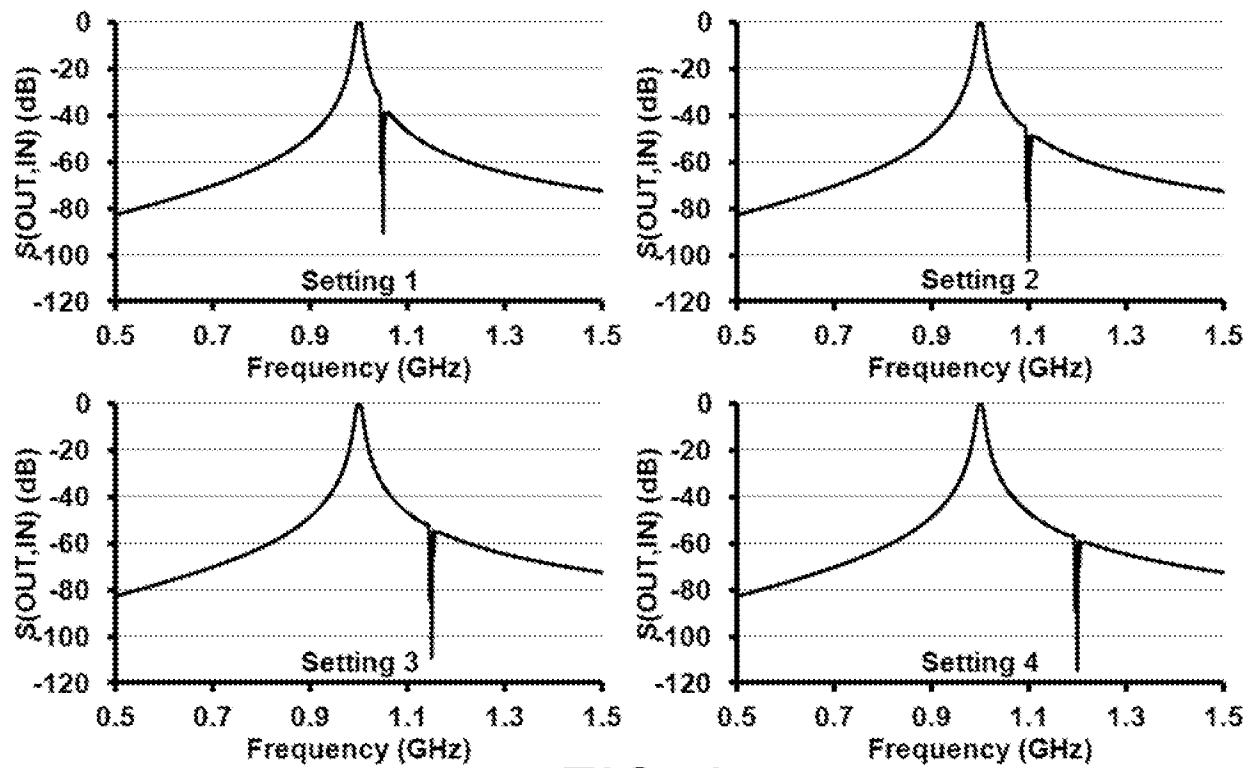


FIG. 9

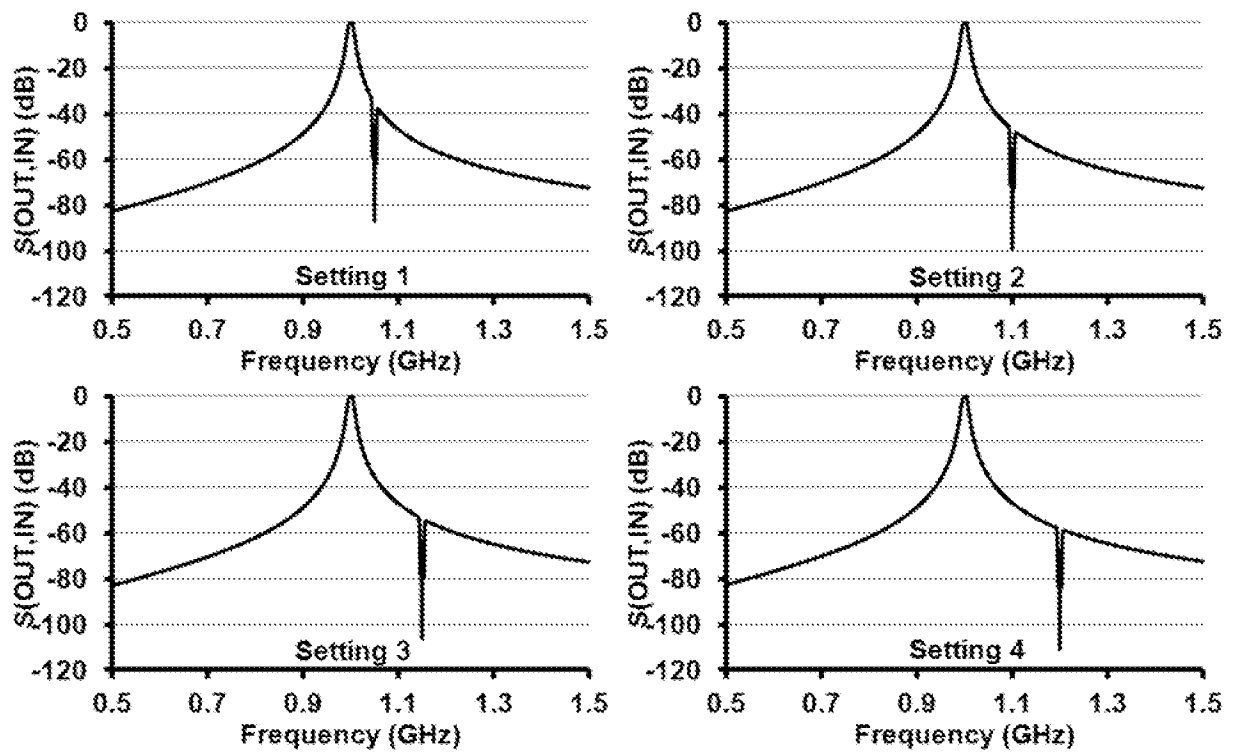


FIG. 10

6/7

FIG. 11



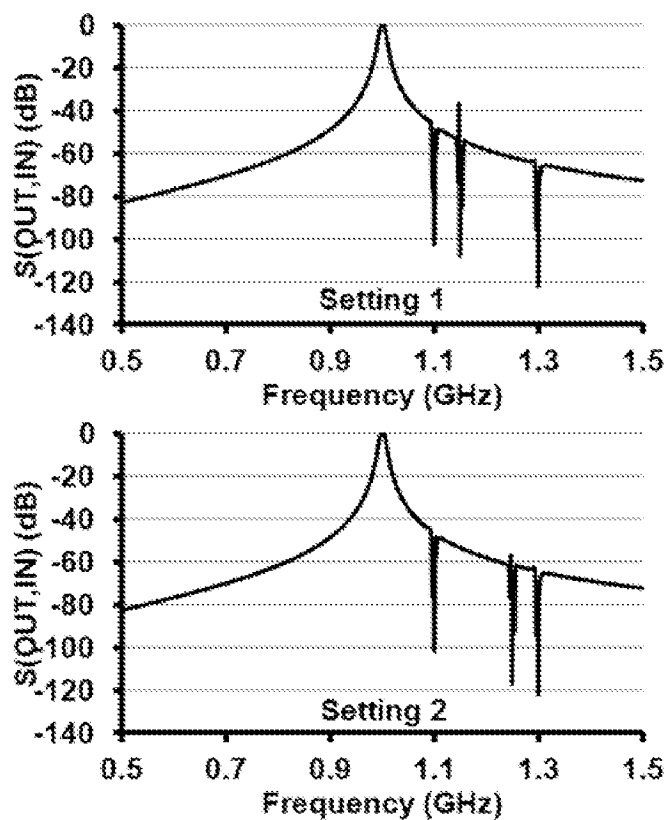


FIG. 12

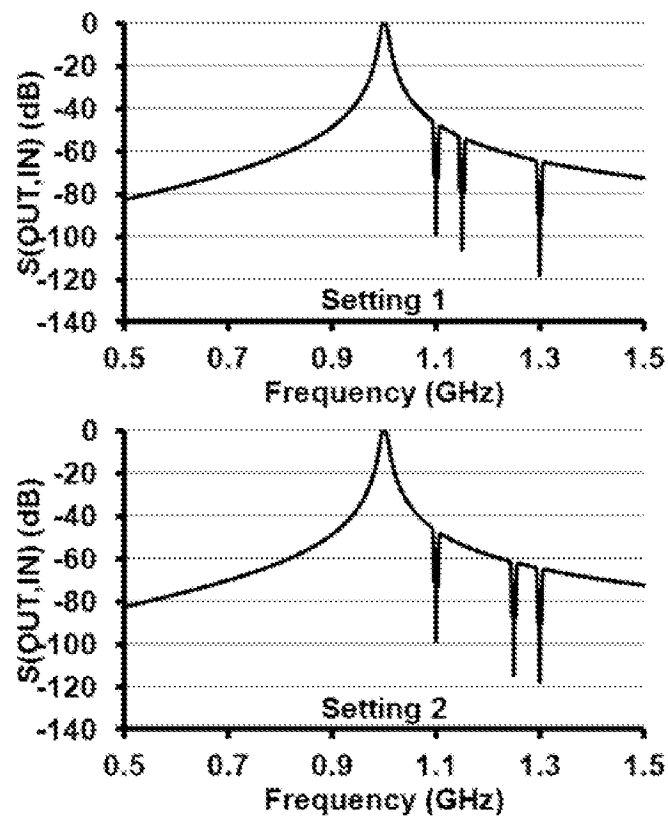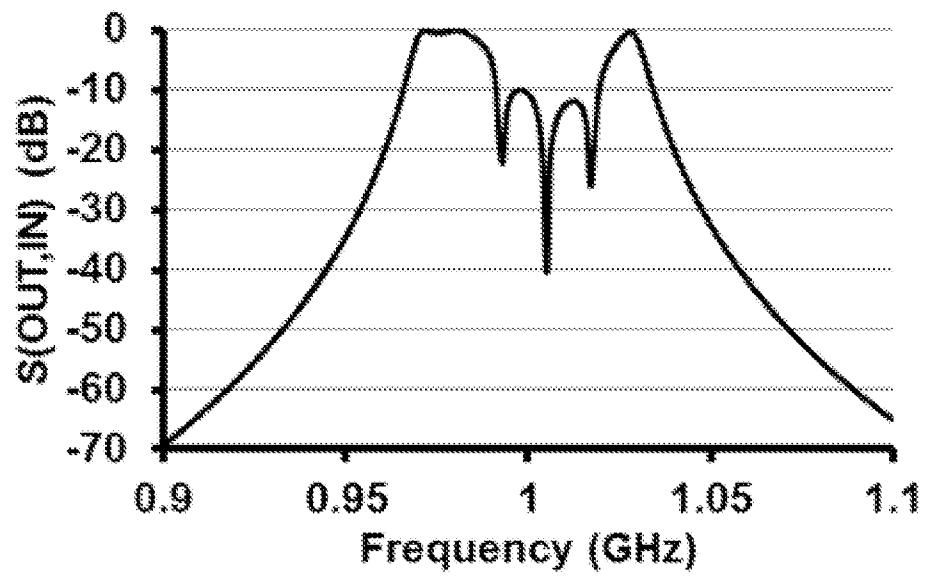

7/7

*FIG. 13*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US15/15930

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H03H 7/01; H01P 5/04, 5/12 (2015.01)

CPC - H03H 7/0138; H01P 1/20, 1/2039

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) Classification(s): H03H 7/01; H01P 5/04, 5/12 (2015.01)

CPC Classification(s): H03H 7/0138; H01P 1/20, 1/2039; H03D 7/16, 7/166

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, INPADOC Data); Google Scholar; IP.COM; IEEE

Keywords used: radio frequency filter; frequency translation filter; passbands; stopbands; tunable; reconfigurable; two-port tunable network; integrated circuit; hybrid port

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — Y	US 2013/0083703 A1 (GRANGER-JONES, M et al.) April 4, 2013; figures 3A-3B, 7; paragraphs [0030-0031]; [0082-0087]; [0092-0094]	7-9, 11-12 5, 10
X — Y	US 2011/0140803 A1 (KIM, D et al.) June 16, 2011; figures 1, 4; abstract; column 2, lines 29-36; column 6, lines 45-67	1-2, 6 3-5
Y	US 2013/0201882 A1 (RF MICRO DEVICES, INC.) August 8, 2013; figures 6A-6B, 8A; paragraphs [0004-0005]; [0122]	3-4, 10

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 April 2015 (17.04.2015)

Date of mailing of the international search report

27 MAY 2015

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774