



(86) Date de dépôt PCT/PCT Filing Date: 2006/12/08  
(87) Date publication PCT/PCT Publication Date: 2007/07/12  
(45) Date de délivrance/Issue Date: 2015/03/31  
(85) Entrée phase nationale/National Entry: 2008/06/09  
(86) N° demande PCT/PCT Application No.: US 2006/047005  
(87) N° publication PCT/PCT Publication No.: 2007/078620  
(30) Priorité/Priority: 2005/12/16 (US11/303,426)

(51) Cl.Int./Int.Cl. *C10G 65/02* (2006.01)


(72) Inventeurs/Inventors:  
FARSHID, DARUSH, US;  
REYNOLDS, BRUCE, US

(73) Propriétaire/Owner:  
CHEVRON U.S.A. INC., US

(74) Agent: SIM & MCBURNEY

(54) Titre : PROCEDE POUR VALORISER DES HUILES LOURDES AU MOYEN D'UNE COMPOSITION DE  
CATALYSEUR EN SUSPENSION FORTEMENT ACTIVE

(54) Title: PROCESS FOR UPGRADING HEAVY OIL USING A HIGHLY ACTIVE SLURRY CATALYST COMPOSITION

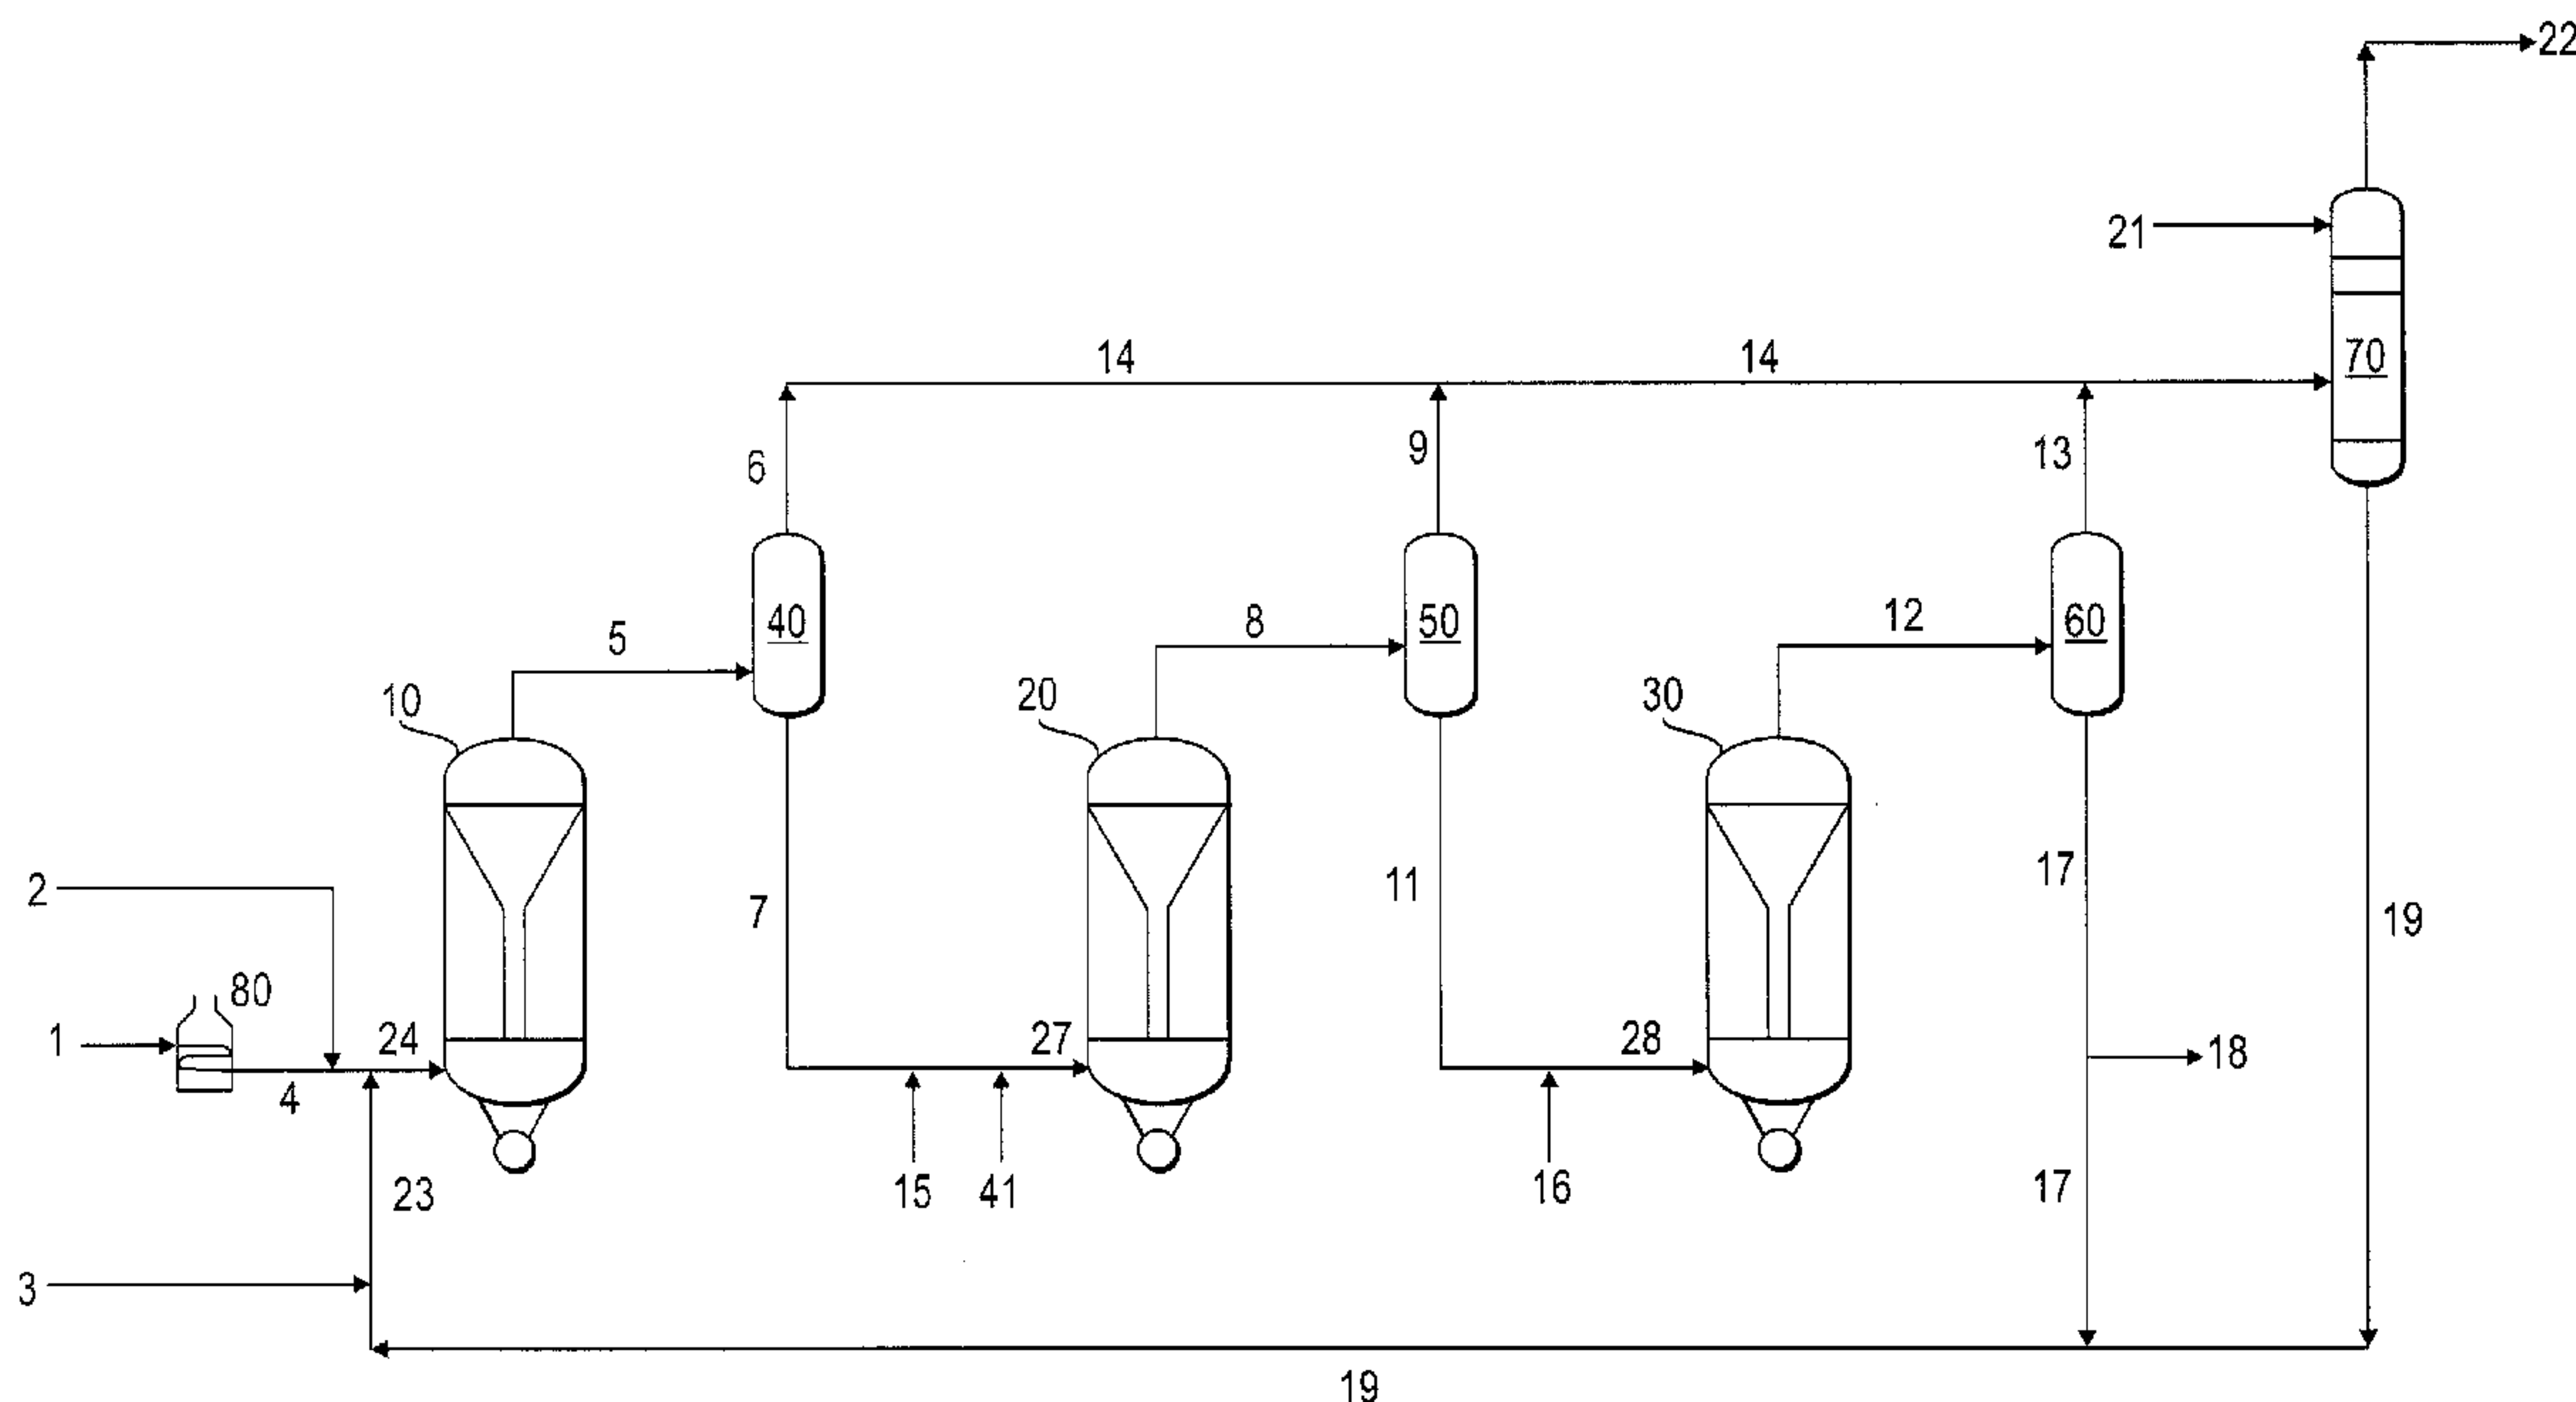

(57) Abrégé/Abstract:

Applicants have developed a new residuum full hydroconversion slurry reactor system that allows the catalyst, unconverted oil and converted oil to circulate in a continuous mixture throughout an entire reactor with no confinement of the mixture. The mixture is partially separated in between the reactors to remove only the products and hydrogen gas, while permitting the unconverted oil and the slurry catalyst to continue on into the next sequential reactor. A portion of the unconverted oil is then converted to lower boiling point hydrocarbons, once again creating a mixture of unconverted oil, products, hydrogen, and slurry catalyst. Further hydroprocessing may occur in additional reactors, fully converting the oil. Additional oil may be added at the interstage feed inlet, possibly in combination with slurry. The oil may alternately be partially converted, leaving a highly concentrated catalyst in unconverted oil which can be recycled directly to the first reactor.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 July 2007 (12.07.2007)

PCT

(10) International Publication Number  
**WO 2007/078620 A3**

(51) International Patent Classification:  
**C10G 65/02** (2006.01)

(21) International Application Number:  
PCT/US2006/047005

(22) International Filing Date:  
8 December 2006 (08.12.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/303,426 16 December 2005 (16.12.2005) US

(71) Applicant (for all designated States except US):  
**CHEVRON U.S.A. INC.** [US/US]; 6001 BOLLINGER  
CANYON ROAD, BUILDING T, 3RD FLOOR, San  
Ramon, CA 94583 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FARSHID, Darush**  
[US/US]; 19 HILLCREST AVENUE, Larkspur, CA 94939  
(US). **REYNOLDS, Bruce** [US/US]; 1739 JEAN CIR-  
CLE, Martinez, CA 94553 (US).

(74) Agents: **UZZELL, Allen, H.** et al.; CHEVRON COR-  
PORATION, LAW DEPARTMENT, POST OFFICE BOX  
6006, San Ramon, CA 94583-0806 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,  
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,  
LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY,  
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,  
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,  
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(88) Date of publication of the international search report:  
13 December 2007

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: PROCESS FOR UPGRADING HEAVY OIL USING A HIGHLY ACTIVE SLURRY CATALYST COMPOSITION

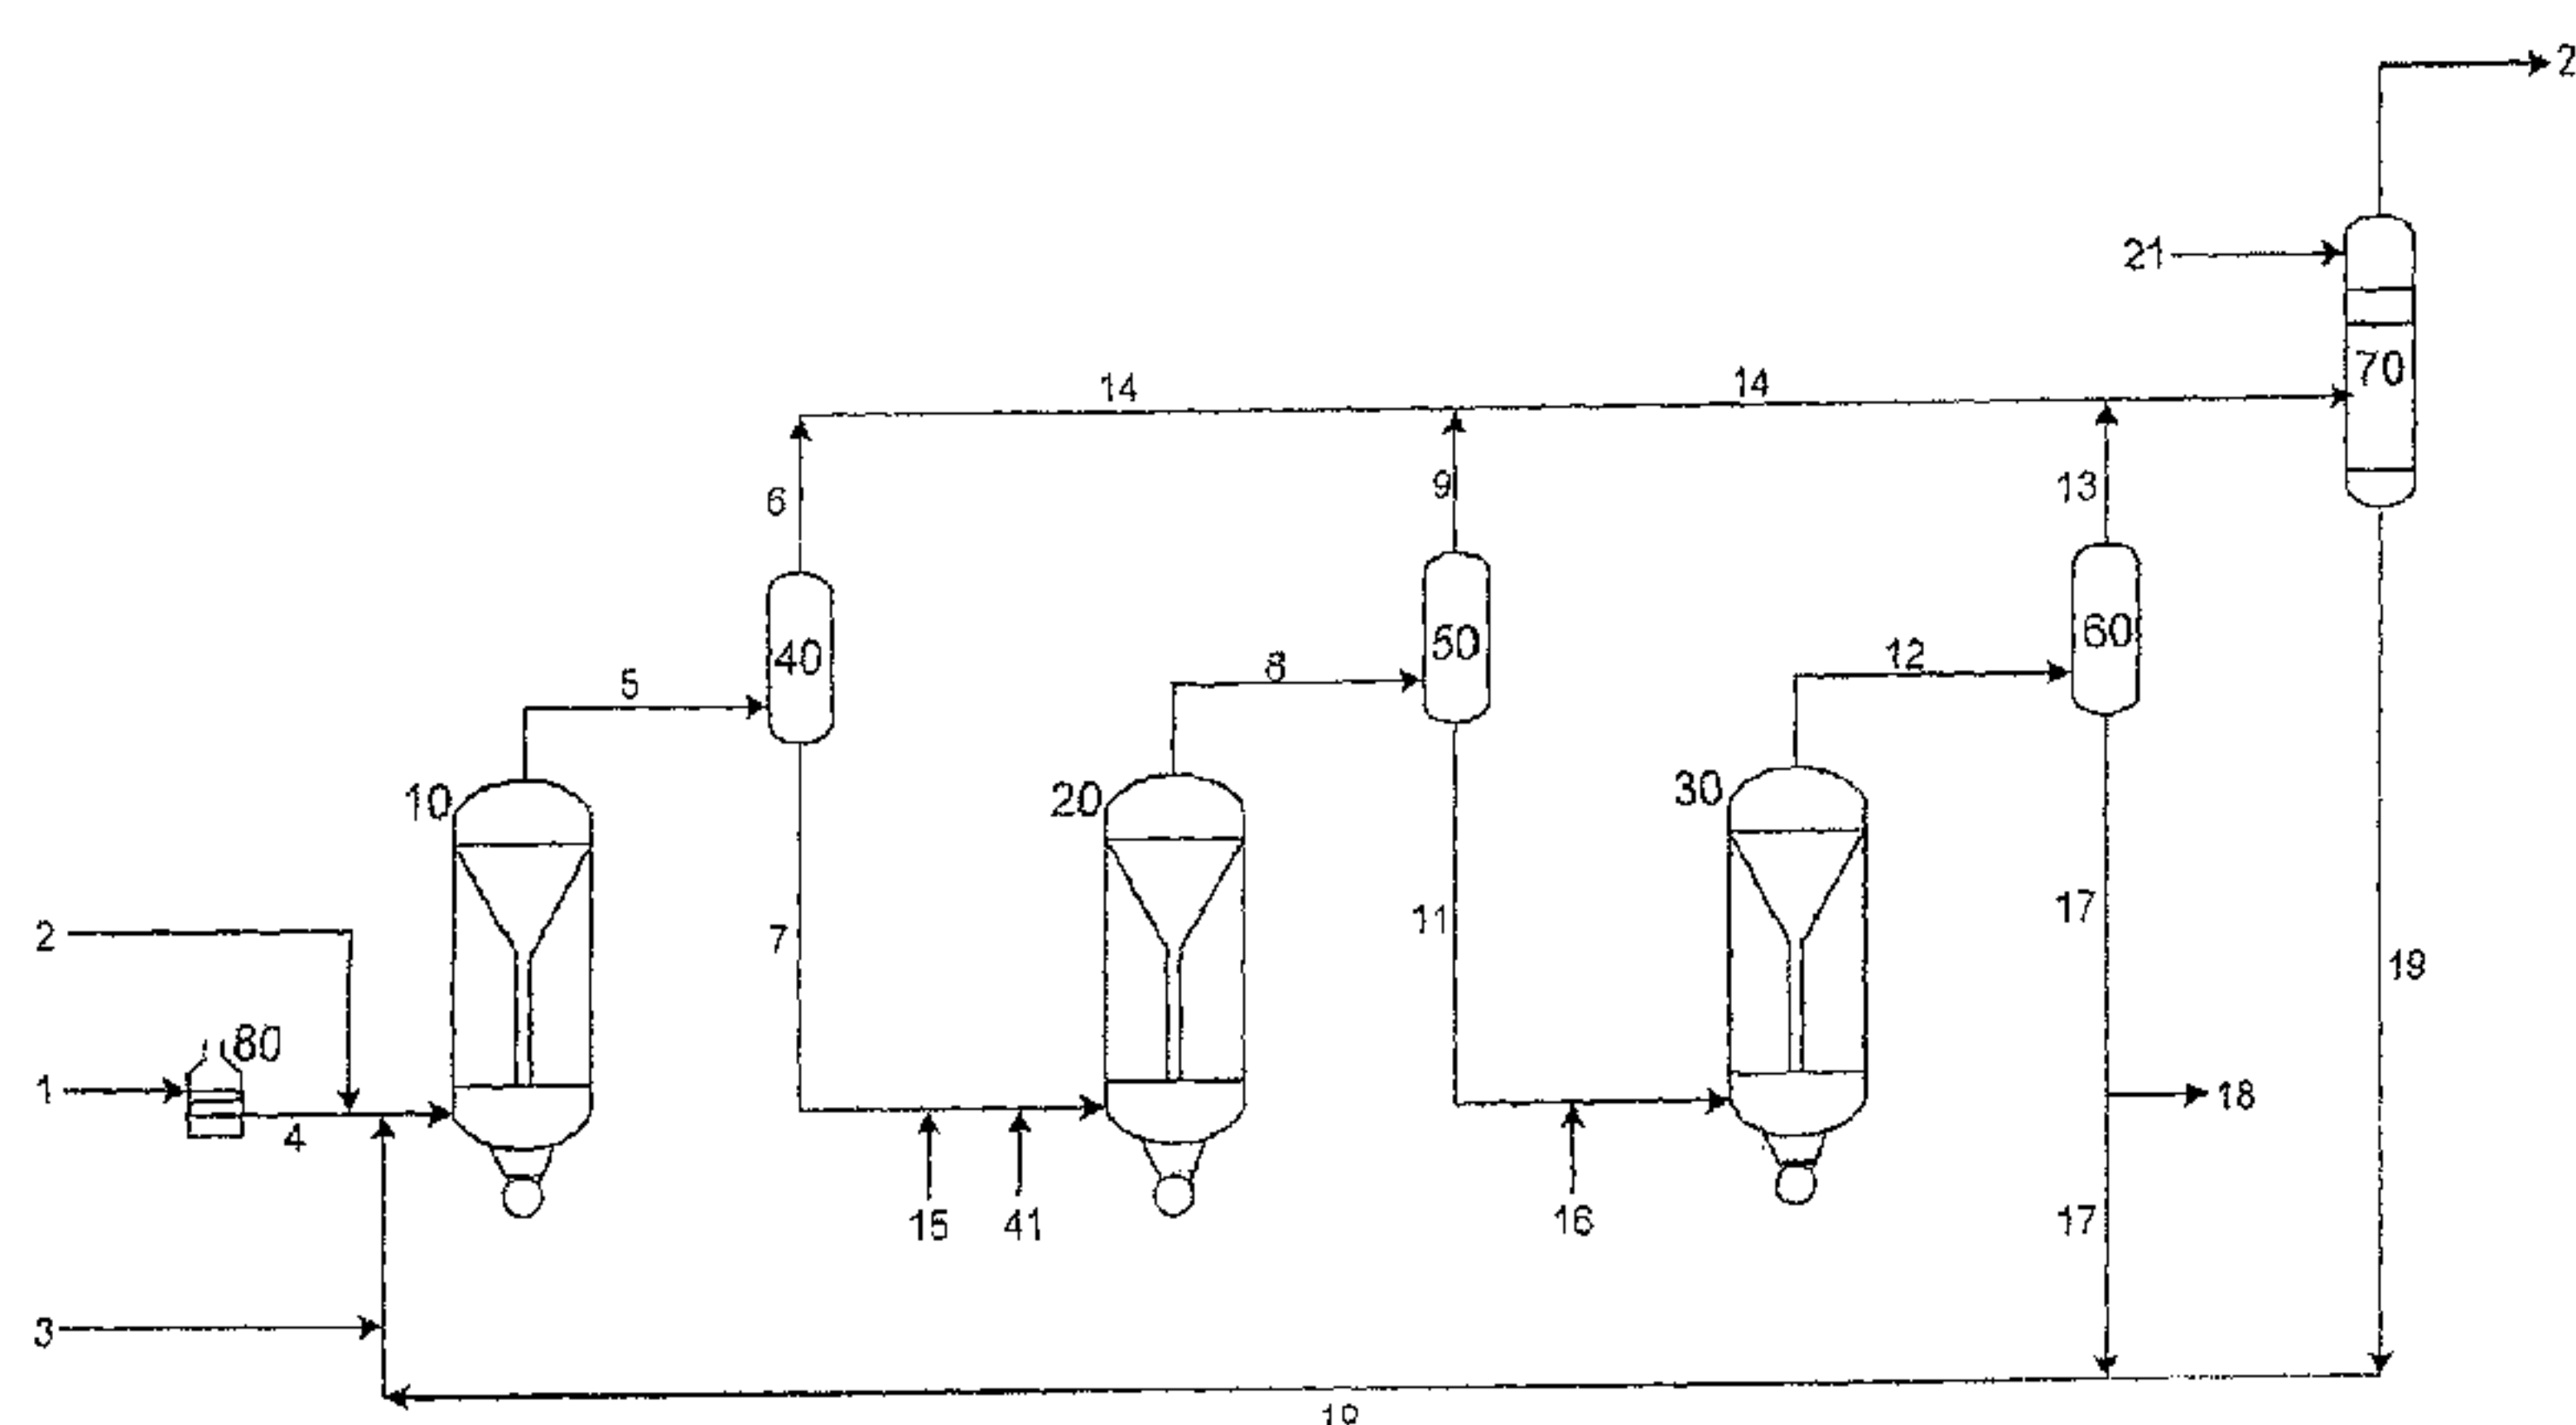

(57) Abstract: Applicants have developed a new residuum full hydroconversion slurry reactor system that allows the catalyst, unconverted oil and converted oil to circulate in a continuous mixture throughout an entire reactor with no confinement of the mixture. The mixture is partially separated in between the reactors to remove only the products and hydrogen gas, while permitting the unconverted oil and the slurry catalyst to continue on into the next sequential reactor. A portion of the unconverted oil is then converted to lower boiling point hydrocarbons, once again creating a mixture of unconverted oil, products, hydrogen, and slurry catalyst. Further hydroprocessing may occur in additional reactors, fully converting the oil. Additional oil may be added at the interstage feed inlet, possibly in combination with slurry. The oil may alternately be partially converted, leaving a highly concentrated catalyst in unconverted oil which can be recycled directly to the first reactor.

WO 2007/078620 A3

5           PROCESS FOR UPGRADING HEAVY OIL USING A HIGHLY ACTIVE  
              SLURRY CATALYST COMPOSITION

                  FIELD OF THE INVENTION

10    The instant invention relates to a process for upgrading heavy oils using a  
      slurry catalyst composition.

                  BACKGROUND OF THE INVENTION

15    There is an increased interest at this time in the processing of heavy oils, due  
      to larger worldwide demand for petroleum products. Canada and Venezuela  
      are sources of heavy oils. Processes which result in complete conversion of  
      heavy oil feeds to useful products are of particular interest.

20    The following patents are directed to the preparation of highly active slurry  
      catalyst compositions and their use in processes for upgrading heavy oil:

      U.S. Serial No. 10/938,202 is directed to the preparation of a catalyst  
      composition suitable for the hydroconversion of heavy oils. The catalyst  
25    composition is prepared by a series of steps, involving mixing a Group VIB  
      metal oxide and aqueous ammonia to form an aqueous mixture, and sulfiding  
      the mixture to form a slurry. The slurry is then promoted with a Group VIII  
      metal. Subsequent steps involve mixing the slurry with a hydrocarbon oil and  
      combining the resulting mixture with hydrogen gas and a second hydrocarbon  
30    oil having a lower viscosity than the first oil. An active catalyst composition is  
      thereby formed.

      U.S. Serial No. 10/938,003 is directed to the preparation of a slurry catalyst  
      composition. The slurry catalyst composition is prepared in a series of steps,  
35    involving mixing a Group VIB metal oxide and aqueous ammonia to form an  
      aqueous mixture and sulfiding the mixture to form a slurry. The slurry is then

- 5 promoted with a Group VIII metal. Subsequent steps involve mixing the slurry with a hydrocarbon oil, and combining the resulting mixture with hydrogen gas (under conditions which maintain the water in a liquid phase) to produce the active slurry catalyst.
- 10 U.S. Serial No. 10/938,438 is directed to a process employing slurry catalyst compositions in the upgrading of heavy oils. The slurry catalyst composition is not permitted to settle, which would result in possible deactivation. The slurry is recycled to an upgrading reactor for repeated use and products require no further separation procedures for catalyst removal.
- 15 U.S. Serial No. 10/938,200 is directed to a process for upgrading heavy oils using a slurry composition. The slurry composition is prepared in a series of steps, involving mixing a Group VIB metal oxide with aqueous ammonia to form an aqueous mixture and sulfiding the mixture to form a slurry. The slurry
- 20 is then promoted with a Group VIII metal compound. Subsequent steps involve mixing the slurry with a hydrocarbon oil, and combining the resulting mixture with hydrogen gas (under conditions which maintain the water in a liquid phase) to produce the active slurry catalyst.
- 25 U.S. Serial No. 10/938,269 is directed to a process for upgrading heavy oils using a slurry composition. The slurry composition is prepared by a series of steps, involving mixing a Group VIB metal oxide and aqueous ammonia to form an aqueous mixture, and sulfiding the mixture to form a slurry. The slurry is then promoted with a Group VIII metal. Subsequent steps involve mixing
- 30 the slurry with a hydrocarbon oil and combining the resulting mixture with hydrogen gas and a second hydrocarbon oil having a lower viscosity than the first oil. An active catalyst composition is thereby formed.

#### Summary of the Invention

- 35 A process for the hydroconversion of heavy oils, said process employing at least two upflow reactors in series with a separator in between each reactor, said process comprising the following steps :

- 5 (a) combining a heated heavy oil feed, an active slurry catalyst composition and a hydrogen-containing gas to form a mixture;
- 10 (b) passing the mixture of step (a) to the bottom of the first reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;
- 15 (c) removing a vapor stream comprising products and hydrogen, unconverted material and slurry catalyst from the top of the first reactor and passing it to a first separator;
- (d) in the first separator, removing the products and hydrogen overhead as vapor to further processing and unconverted material and slurry catalyst as a liquid bottoms stream;
- 20 (e) combining the bottoms of step (d) with additional feed oil resulting in an intermediate mixture;
- 25 (f) passing the intermediate mixture of step (e) to the bottom of the second reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;
- 30 (g) removing a vapor stream comprising products and hydrogen, unconverted material and slurry catalyst from the top of the second reactor and passing it to a second separator;
- (h) in the second separator, removing the products and hydrogen overhead as vapor to further processing and passing the liquid bottoms stream, comprising unconverted material and slurry catalyst, to further processing.
- 35

- 5 In another aspect, there is provided a process for the hydroconversion of heavy oils, said process employing at least two upflow reactors in series with a separator in between each reactor, said process comprising the following steps:
- 10 (a) combining a heated heavy oil feed, an active slurry catalyst composition and a hydrogen-containing gas to form a mixture;
- (b) passing the mixture of step (a) to the bottom of a first upflow reactor, which is maintained at hydroprocessing conditions;
- 15 (c) removing a first vapor stream comprising products, hydrogen, unconverted material and slurry catalyst from the top of the first upflow reactor and passing the first vapor stream to a first separator;
- 20 (d) removing overhead from the first separator, the products and hydrogen as vapor and removing from the bottom of the first separator an unconverted material and slurry catalyst as a first liquid bottoms stream;
- 25 (e) combining the liquid bottoms stream of step (d) with additional feed oil resulting in an intermediate mixture;
- 30 (f) passing the intermediate mixture of step (e) to the bottom of a second upflow reactor, which is maintained at hydroprocessing conditions;
- 35 (g) removing from the top of the second upflow reactor a second vapor stream comprising products, hydrogen, unconverted material and slurry catalyst and passing the second vapor stream to a second separator; and

5

- h) removing overhead from the second separator the products and hydrogen as vapor and removing from the bottom of the second separator a second liquid bottoms stream comprising unconverted material and slurry catalyst.

10

In another aspect, there is provided a process for the hydroconversion of heavy oils, said process employing at least two upflow reactors in series with a separator located internally in the first reactor, said process comprising the following steps:

15

- (a) combining a heated heavy oil feed, an active slurry catalyst composition and a hydrogen-containing gas to form a mixture;
- (b) passing the mixture of step (a) to the bottom of the first reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;
- (c) separating internally in the first reactor a stream comprising product, hydrogen gases, unconverted material and slurry catalyst into two streams, one vapor stream comprising products and hydrogen gases and one liquid stream comprising unconverted material and slurry catalyst;
- (d) passing the vapor stream comprising products and gases overhead to further processing, and passing the liquid stream comprising unconverted material and slurry catalyst from the first reactor as a bottoms stream;
- (e) combining the bottoms stream of step (d) with additional feed oil resulting in an intermediate mixture;

35

- 5 (f) passing the intermediate mixture of step (e) to the bottom of the  
second reactor, which is maintained at hydroprocessing  
conditions, including elevated temperature and pressure;
- 10 (g) removing a vapor stream comprising product, hydrogen  
unconverted material and slurry catalyst from the top of the  
second reactor and passing it to a separator; and
- 15 (h) in the separator, removing the products and hydrogen overhead  
to further processing and passing the liquid bottoms material,  
comprising unconverted material and slurry catalyst to further  
processing.

In another aspect, there is provided a process for the hydroconversion  
of heavy oils, said process employing at least two upflow reactors in  
20 series with a separator located internally in both reactors, said process  
comprising the following steps:

- 25 (a) combining a heated heavy oil feed, an active slurry catalyst  
composition and a hydrogen-containing gas to form a mixture;
- (b) passing the mixture of step (a) to the bottom of the first reactor,  
which is maintained at hydroprocessing conditions, including  
elevated temperature and pressure;
- 30 (c) separating internally in the first reactor a vapor stream  
comprising products, hydrogen, unconverted material and slurry  
catalyst into two streams, a vapor stream comprising products  
and hydrogen and a liquid stream comprising unconverted  
material and slurry catalyst;
- 35 (d) passing the vapor stream comprising products and hydrogen

- 5                   overhead to further processing, and passing the liquid stream  
                  comprising unconverted material and slurry catalyst from the  
                  first reactor as a bottoms stream;
- 10               (e)     combining the bottoms stream of step (d) with additional feed  
                  oil resulting in an intermediate mixture;
- (f)     passing the intermediate mixture of step (e) to the bottom of the  
                  second reactor, which is maintained at hydroprocessing conditions,  
                  including elevated temperature and pressure;
- 15               (g)     separating internally in the second reactor a vapor stream  
                  comprising products and gases, unconverted material and  
                  slurry catalyst into two streams, one vapor stream comprising  
                  products and hydrogen and one liquid stream comprising  
20               unconverted material and slurry catalyst; and
- (h)     passing the stream comprising products and hydrogen overhead to  
                  further processing, and passing the unconverted material and slurry  
                  catalyst from the first reactor as a liquid bottoms stream for further  
25               processing.

5

## BRIEF DESCRIPTION OF THE FIGURES

Figures 1-6 depict process schemes of this invention with interstage oil addition.

10

## DETAILED DESCRIPTION OF THE INVENTION

The instant invention is directed to a process for catalyst activated slurry hydrocracking. Interstage separation of products and uncovered material is effective in maintaining effective heat balance in the process. In Figure 1, stream 1 comprises a heavy feed, such as vacuum residuum. This feed enters furnace 80 where it is heated, exiting in stream 4. Stream 4 combines with a hydrogen containing gas (stream 2), and a stream comprising an active slurry composition (stream 23), resulting in a mixture (stream 24). Stream 24 enters the bottom of the reactor 10. Vapor stream 5 exits the top of the reactor 10 comprising product and hydrogen gas, as well as slurry and unconverted material. Stream 5 passes to separator 40, which is preferably a flash drum. Product and hydrogen is removed overhead from separator 40 as stream 6. Liquid stream 7 is removed through the bottom of the flash drum. Stream 7 contains slurry in combination with unconverted oil.

25

Stream 7 is combined with a gaseous stream comprising hydrogen (stream 15) and stream 41 (which comprises an additional feed such as a vacuum gas oil) to create stream 27. Stream 27 enters the bottom of second reactor 20. Vapor stream 8 exits second reactor 20 and passes to separator 50, which is preferably a flash drum. Product and hydrogen gas is removed overhead from separator 50 as stream 9. Liquid stream 11 is removed through the bottom of the flash drum. Stream 11 contains slurry in combination with unconverted oil.

30

Stream 11 is combined with a gaseous stream comprising hydrogen (stream 16) to create stream 28. Stream 28 enters the bottom of the third reactor 30. Vapor stream 12 exits reactor 30 and passes to separator 60, which is

35

- 5 preferably a flash drum. Product and hydrogen gas is removed overhead as stream 13. Liquid stream 17 is removed through the bottom of the flash drum. Stream 17 contains slurry in combination with unconverted oil. A portion of this stream may be drawn off through stream 18.
- 10 Overhead streams 6, 9 and 13 create stream 14, which passes to lean oil contactor 70. Stream 21, which contains a lean oil such as vacuum gas oil, enters the top portion of lean oil contactor 70 and flows downward. Products and gas exit lean oil contactor 70 overhead through stream 22, while liquid stream 19 exits at the bottom. Stream 19 comprises a mixture of slurry and
- 15 unconverted oil. Stream 19 is combined with stream 17, which also comprises a mixture of slurry and unconverted oil. Fresh slurry is added in stream 3, and stream 23 is created. Stream 23 is combined with the feed to first reactor 10.

Figure 2 depicts a flow scheme identical to that of Figure 1, except that

20 stream 11 is combined with an additional feed stream 42 such as vacuum gas oil, in addition to hydrogen stream 16, in order to create stream 28.

Figures 3, 4 and 5 are variations on a multi-reactor flow scheme in which some reactors have an internal phase separation means with in the reactor,

25 and some employ external separation with a flash drum.

In Figure 3, stream 1 comprises a heavy feed, such as vacuum residuum. This feed enters furnace 80 where it is heated, exiting in stream 4. Stream 4 combines with a hydrogen containing gas (stream 2), and a stream

30 comprising an active slurry composition (stream 23), resulting in a mixture (stream 24). Stream 24 enters the bottom of the reactor 10. Vapor stream 31 exits the top of the reactor comprising products and gases only, due to a separation apparatus inside the reactor. Stream 26, which contains slurry in combination with unconverted oil, exits the bottom of reactor 10.

35

5 Stream 26 is combined with a gaseous stream comprising hydrogen (stream 15) and stream 41 (which comprises an additional feed such as a vacuum gas oil) to create stream 27. Stream 27 enters the bottom of second reactor 20. The process continues as illustrated in Figure 1.

10 In Figure 4, Stream 11 is combined with an additional feed (stream 42) as well as with stream 16 to create stream 28. Otherwise Figure 4 is identical to Figure 3.

In Figure 5, stream 1 comprises a heavy feed, such as vacuum residuum.  
15 This feed enters furnace 80 where it is heated, exiting in stream 4. Stream 4 combines with a hydrogen containing gas (stream 2), and a stream comprising an active slurry composition (stream 23), resulting in a mixture (stream 24). Stream 24 enters the bottom of the reactor 10. Vapor stream 31 exits the top of the reactor 10, comprising products and gases only, due to a  
20 separation apparatus inside the reactor (not shown). Liquid stream 26, which contains slurry in combination with unconverted oil, exits the bottom of reactor 10.

Stream 26 is combined with a gaseous stream comprising hydrogen (stream  
25 15) and stream 41 (which is composed an additional feed such as a vacuum gas oil and may also contain a catalyst slurry) to create stream 27. Stream 27 enters the bottom of second reactor 20. Vapor stream 32 exits the top of the reactor 20 comprising products and gases only, due to a separation apparatus inside the reactor (not shown). Stream 28, which contains slurry in  
30 combination with unconverted oil, exits the bottom of reactor 20.

Stream 28 combines with gas containing hydrogen (stream 16) to create stream 29. Stream 29 enters the bottom of the reactor 30. Vapor stream 12 exits the top of the reactor, passing to separator 60, preferably a flash drum.  
35 Product and gases are removed overhead as stream 13. Liquid stream 17 is removed through the bottom of separator 60. Stream 17 contains slurry in

5 combination with unconverted oil. A portion of this stream may be drawn off through stream 18.

Overhead streams 31, 32 and 13 create stream 14, which passes to lean oil contactor 70. Stream 21, comprising a lean oil such as vacuum gas oil, enters  
10 the top portion of high pressure separator 70. Products and hydrogen exit high pressure separator 70 overhead, while stream 19 exits at the bottom. Stream 19 comprises a mixture of slurry and unconverted oil. Stream 19 is combined with stream 17, which also comprises a mixture of slurry and unconverted oil. Fresh slurry is added in stream 3, and stream 23 is created.  
15 Stream 23 is combined with the feed to first reactor 10.

In Figure 6, Stream 29 is combined with an additional feed (stream 42) as well as with stream 16 to create stream 28. Otherwise Figure 6 is identical to Figure 5.

20

The process for the preparation of the catalyst slurry composition used in this invention can be found in U.S. 2006/0058174 A1 and U.S. 2006/0058175 A1. The catalyst composition is useful for but not limited to hydrogenation upgrading processes such as thermal hydrocracking, hydrotreating,  
25 hydrodesulphurization, hydrodenitrification, and hydrodemetalization.

The feeds suitable for use in this invention are set forth in U.S. Patent No. 7,238,273 and include atmospheric residuum, vacuum residuum, tar from a solvent deasphalting unit, atmospheric gas oils, vacuum gas oils, deasphalted  
30 oils, olefins, oils derived from tar sands or bitumen, oils derived from coal, heavy crude oils, synthetic oils from Fischer-Tropsch processes, and oils derived from recycled oil wastes and polymers.

The preferred type of reactor in the instant invention is a liquid recirculating  
35 reactor, although other types of upflow reactors may be employed. Liquid recirculating reactors are discussed further in U.S. Patent No. 8,236,170,

5 which published May 28, 2009 (US2009/0134064 A1), and its parent  
application US2007/0140927 A1.

A liquid recirculation reactor is an upflow reactor which feeds heavy  
hydrocarbon oil and a hydrogen rich gas at elevated pressure and  
10 temperature for hydroconversion. Process conditions for the liquid  
recirculating reactor include a pressure in that range from 1500 through 3500  
psia and temperature in the range from 700 through 900 F. Preferred  
conditions include 2000 through 3000 psia and a temperature in the range  
from 700 through 900 F.

15

Hydroconversion includes processes such as hydrocracking and the removal  
of heteroatom contaminants (such sulfur and nitrogen). In slurry catalyst use,  
catalyst particles are extremely small (1-10 micron). Pumps are not generally  
needed for recirculation, although they may be used.

20

## WHAT IS CLAIMED IS:

1. A process for the hydroconversion of heavy oils, said process  
5 employing at least two upflow reactors in series with a separator  
in between each reactor, said process comprising the following  
steps:
- (a) combining a heated heavy oil feed, an active slurry catalyst  
10 composition and a hydrogen-containing gas to form a  
mixture;
- (b) passing the mixture of step (a) to the bottom of a first  
upflow reactor, which is maintained at hydroprocessing  
15 conditions;
- (c) removing a first vapor stream comprising products,  
hydrogen, unconverted material and slurry catalyst from  
the top of the first upflow reactor and passing the first  
20 vapor stream to a first separator;
- (d) removing overhead from the first separator, the products  
and hydrogen as vapor and removing from the bottom of  
the first separator an unconverted material and slurry  
25 catalyst as a first liquid bottoms stream;
- (e) combining the liquid bottoms stream of step (d) with  
additional feed oil resulting in an intermediate mixture;
- (f) passing the intermediate mixture of step (e) to the bottom  
30 of a second upflow reactor, which is maintained at  
hydroprocessing conditions;

- 5 (g) removing from the top of the second upflow reactor a second vapor stream comprising products, hydrogen, unconverted material and slurry catalyst and passing the second vapor stream to a second separator; and
- 10 h) removing overhead from the second separator the products and hydrogen as vapor and removing from the bottom of the second separator a second liquid bottoms stream comprising unconverted material and slurry catalyst.
- 15 2. The process of claim 1, further comprising at least one additional reactor connected in series to the first upflow reactor and the second upflow reactor in which the feed to the at least one additional reactor is selected from the group consisting of the heated heavy oil feed, the first liquid bottoms stream, the second liquid bottoms stream, the active slurry catalyst, the hydrogen, and any combination of the foregoing in which feed to one or
- 20 more additional reactors is combined with additional feed oil prior to entering the reactor.
- 25 3. The process of claim 2, in which the heated heavy oil feed is selected from the group consisting of atmospheric residuum, vacuum residuum, tar from a solvent deasphalting unit, atmospheric gas oils, vacuum gas oils, deasphalted oils, olefins, oils derived from tar sands or bitumen, oils derived from coal, heavy crude oils, synthetic oils from Fischer-Tropsch processes, and oils derived from recycled oil wastes and polymers.
- 30 4. The process of claim 3, wherein the heated heavy oil feed is a vacuum gas oil.

5. The process of claim 1, in which the heated heavy oil feed further comprises the slurry catalyst.
- 5 6. The process of claim 1, wherein the second liquid bottoms material of step (h) is recycled to step (a).
7. The process of claim 2, wherein the second liquid bottoms material of step (h) is passed to the bottom of a third reactor which is maintained at slurry hydroprocessing conditions.
- 10 8. The process of claim 1, in which a liquid recirculating reactor is employed in at least one of the reactors.
- 15 9. The process of claim 8, in which the recirculating reactor employs a pump.
10. The process of claim 1, in which hydroprocessing conditions employed in each reactor comprise a total pressure in the range from 1500 to 3500 psia, and a reaction temperature of from 700 to 900F.
- 20 11. The process of claim 10, wherein the total pressure range is from 2000 through 3000 psia and the reaction temperature is from 775 through 850F.
- 25 12. The process of claim 1, wherein the separator located between each reactor is a flash drum.
- 30 13. The hydroconversion process of claim 1, wherein the heavy oil is selected from the group consisting of atmospheric gas oils, vacuum gas oils, deasphalted oils, olefins, oils derived from tar

sands or bitumen, oils derived from coal, heavy crude oils, synthetic oils from Fischer-Tropsch processes, and oils derived from recycled oil wastes and polymers.

- 5            14.    The hydroconversion process of claim 1, wherein the process is selected from the group consisting of hydrocracking, hydrotreating, hydrodesulphurization, hydrodenitrification, and hydrodemetalization.
- 10           15.    The process of claim 1, wherein the active slurry catalyst composition of claim 1 is prepared by the following steps:
- (a)    mixing a Group VIB metal oxide and aqueous ammonia to form a Group VIB metal compound aqueous mixture;
- 15            (b)    sulfiding, in an initial reaction zone, the aqueous mixture of step (a) with a gas comprising hydrogen sulfide to a dosage greater than 8 SCF of hydrogen sulfide per pound of Group VIB metal to form a slurry;
- 20            (c)    promoting the slurry with a Group VIII metal compound;
- (d)    mixing the slurry of step (c) with a hydrocarbon oil having a viscosity of at least 2 cSt @ 212°F to form an intermediate mixture;
- 25            (e)    combining the intermediate mixture with hydrogen gas in a second reaction zone, under conditions which maintain the water in the intermediate mixture in a liquid phase, thereby forming an active catalyst composition admixed with a liquid hydrocarbon; and
- 30

(f) recovering the active catalyst composition.

16. The process of claim 1, wherein at least 90 wt% of the feed is converted to lower boiling products.

5

17. A process for the hydroconversion of heavy oils, said process employing at least two upflow reactors in series with a separator located internally in the first reactor, said process comprising the following steps:

10

(a) combining a heated heavy oil feed, an active slurry catalyst composition and a hydrogen-containing gas to form a mixture;

15

(b) passing the mixture of step (a) to the bottom of the first reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;

20

(c) separating internally in the first reactor a stream comprising product, hydrogen gases, unconverted material and slurry catalyst into two streams, one vapor stream comprising products and hydrogen gases and one liquid stream comprising unconverted material and slurry catalyst;

25

(d) passing the vapor stream comprising products and gases overhead to further processing, and passing the liquid stream comprising unconverted material and slurry catalyst from the first reactor as a bottoms stream;

30

(e) combining the bottoms stream of step (d) with additional feed oil resulting in an intermediate mixture;

- 5 (f) passing the intermediate mixture of step (e) to the bottom of the second reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;
- 10 (g) removing a vapor stream comprising product, hydrogen unconverted material and slurry catalyst from the top of the second reactor and passing it to a separator; and
- 15 (h) in the separator, removing the products and hydrogen overhead to further processing and passing the liquid bottoms material, comprising unconverted material and slurry catalyst to further processing.
18. The process of claim 16, in which feed to one or more additional reactors is combined with additional feed oil prior to entering the reactor.
- 20 19. A process for the hydroconversion of heavy oils, said process employing at least two upflow reactors in series with a separator located internally in both reactors, said process comprising the following steps:
- 25 (a) combining a heated heavy oil feed, an active slurry catalyst composition and a hydrogen-containing gas to form a mixture;
- 30 (b) passing the mixture of step (a) to the bottom of the first reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;

- 5 (c) separating internally in the first reactor a vapor stream comprising products, hydrogen, unconverted material and slurry catalyst into two streams, a vapor stream comprising products and hydrogen and a liquid stream comprising unconverted material and slurry catalyst;
- 10 (d) passing the vapor stream comprising products and hydrogen overhead to further processing, and passing the liquid stream comprising unconverted material and slurry catalyst from the first reactor as a bottoms stream;
- (e) combining the bottoms stream of step (d) with additional feed oil resulting in an intermediate mixture;
- 15 (f) passing the intermediate mixture of step (e) to the bottom of the second reactor, which is maintained at hydroprocessing conditions, including elevated temperature and pressure;
- 20 (g) separating internally in the second reactor a vapor stream comprising products and gases, unconverted material and slurry catalyst into two streams, one vapor stream comprising products and hydrogen and one liquid stream comprising unconverted material and slurry catalyst; and
- 25 (h) passing the stream comprising products and hydrogen overhead to further processing, and passing the unconverted material and slurry catalyst from the first reactor as a liquid bottoms stream for further processing.
- 30 20. The process of claim 18, in which feed to one or more additional reactors is combined with additional feed oil prior to entering the reactor.

1/6

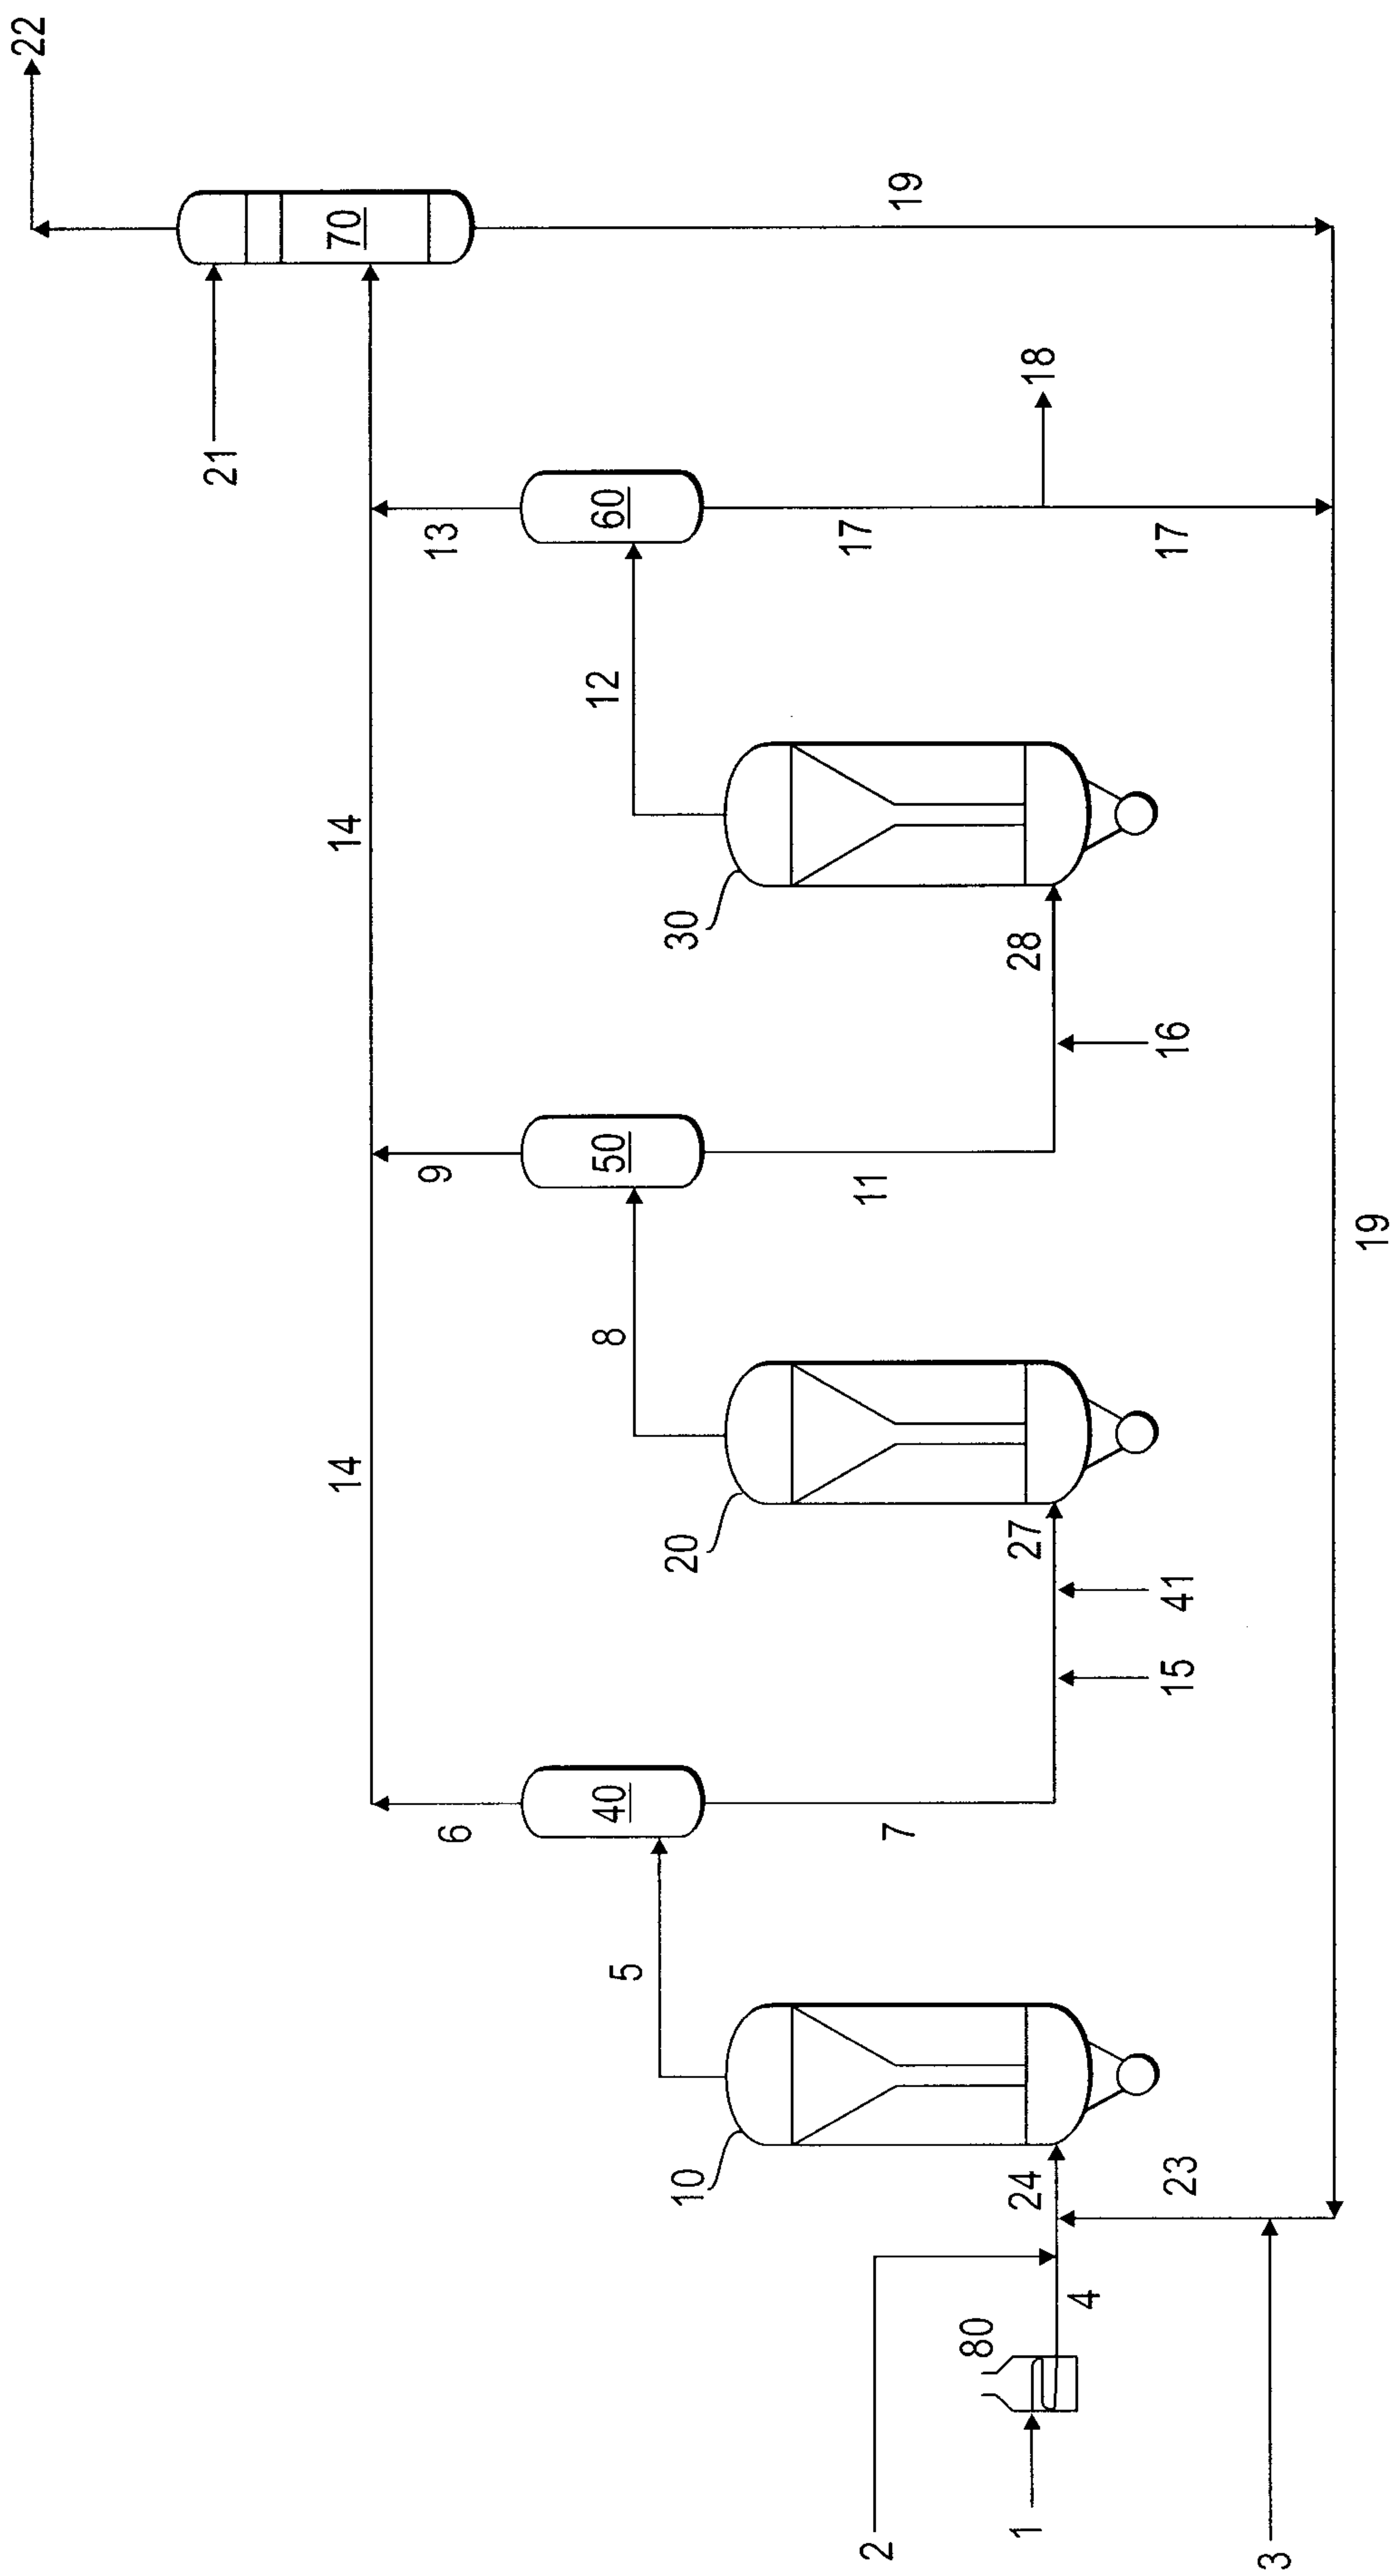


FIG. 1

2/6

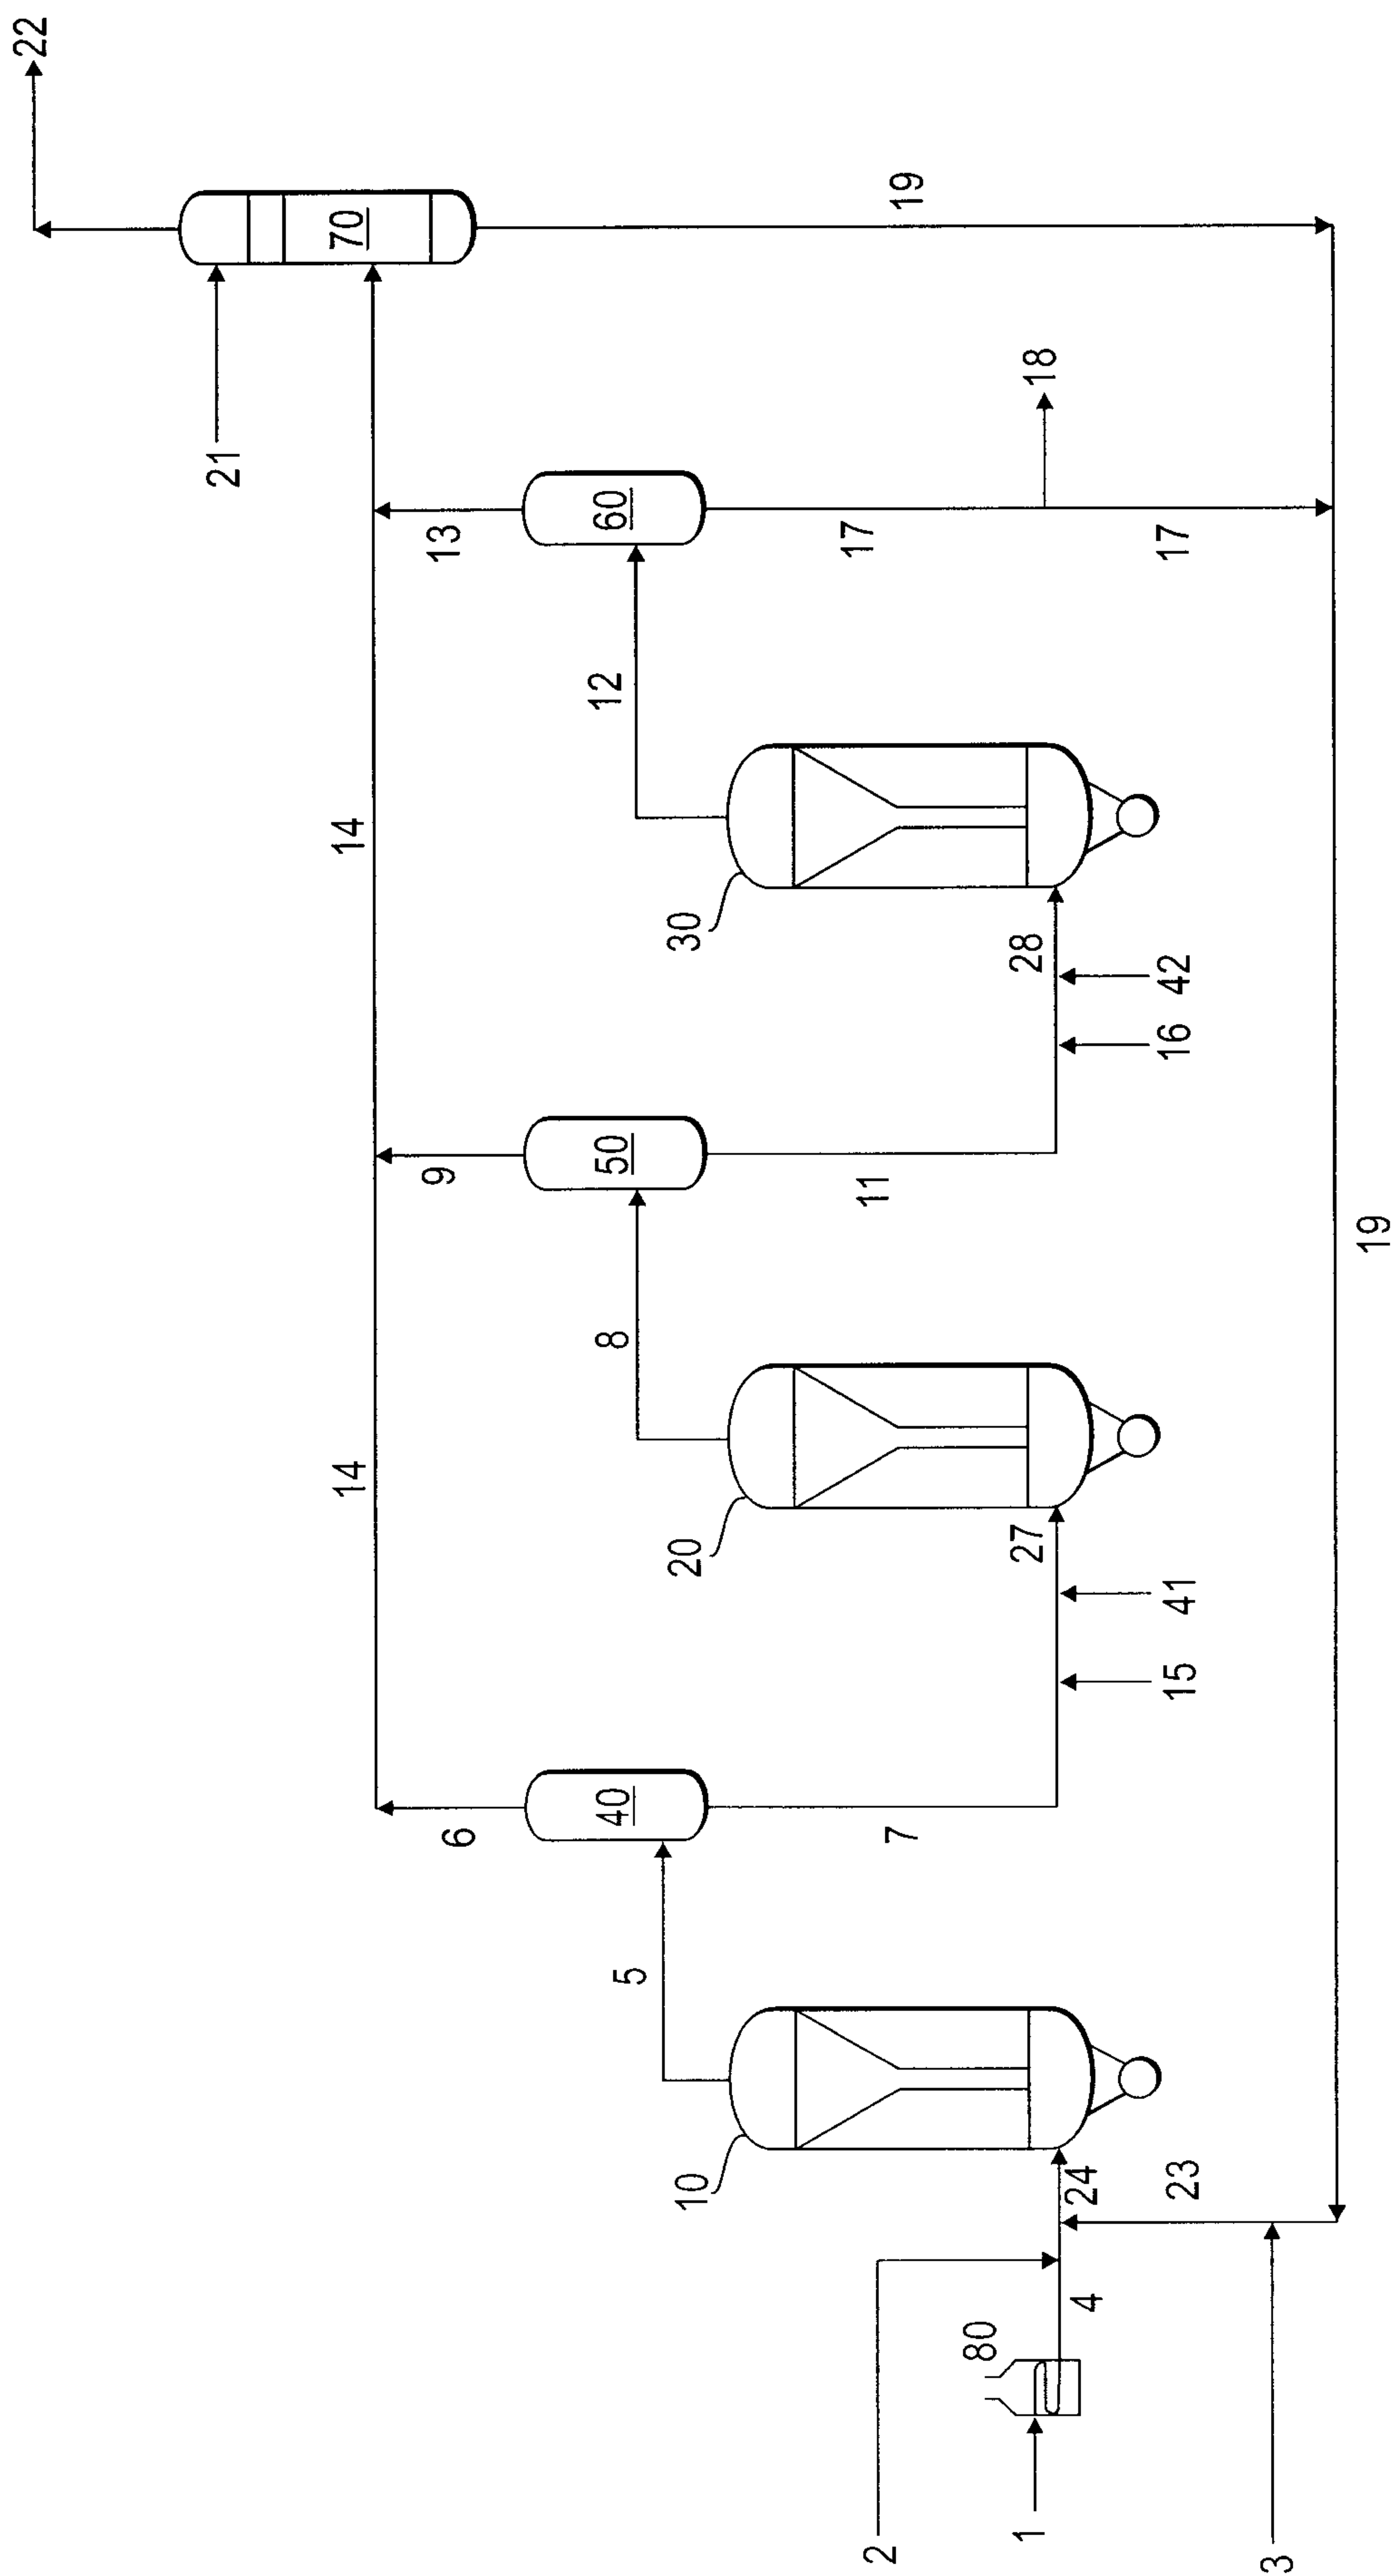


FIG. 2

3/6

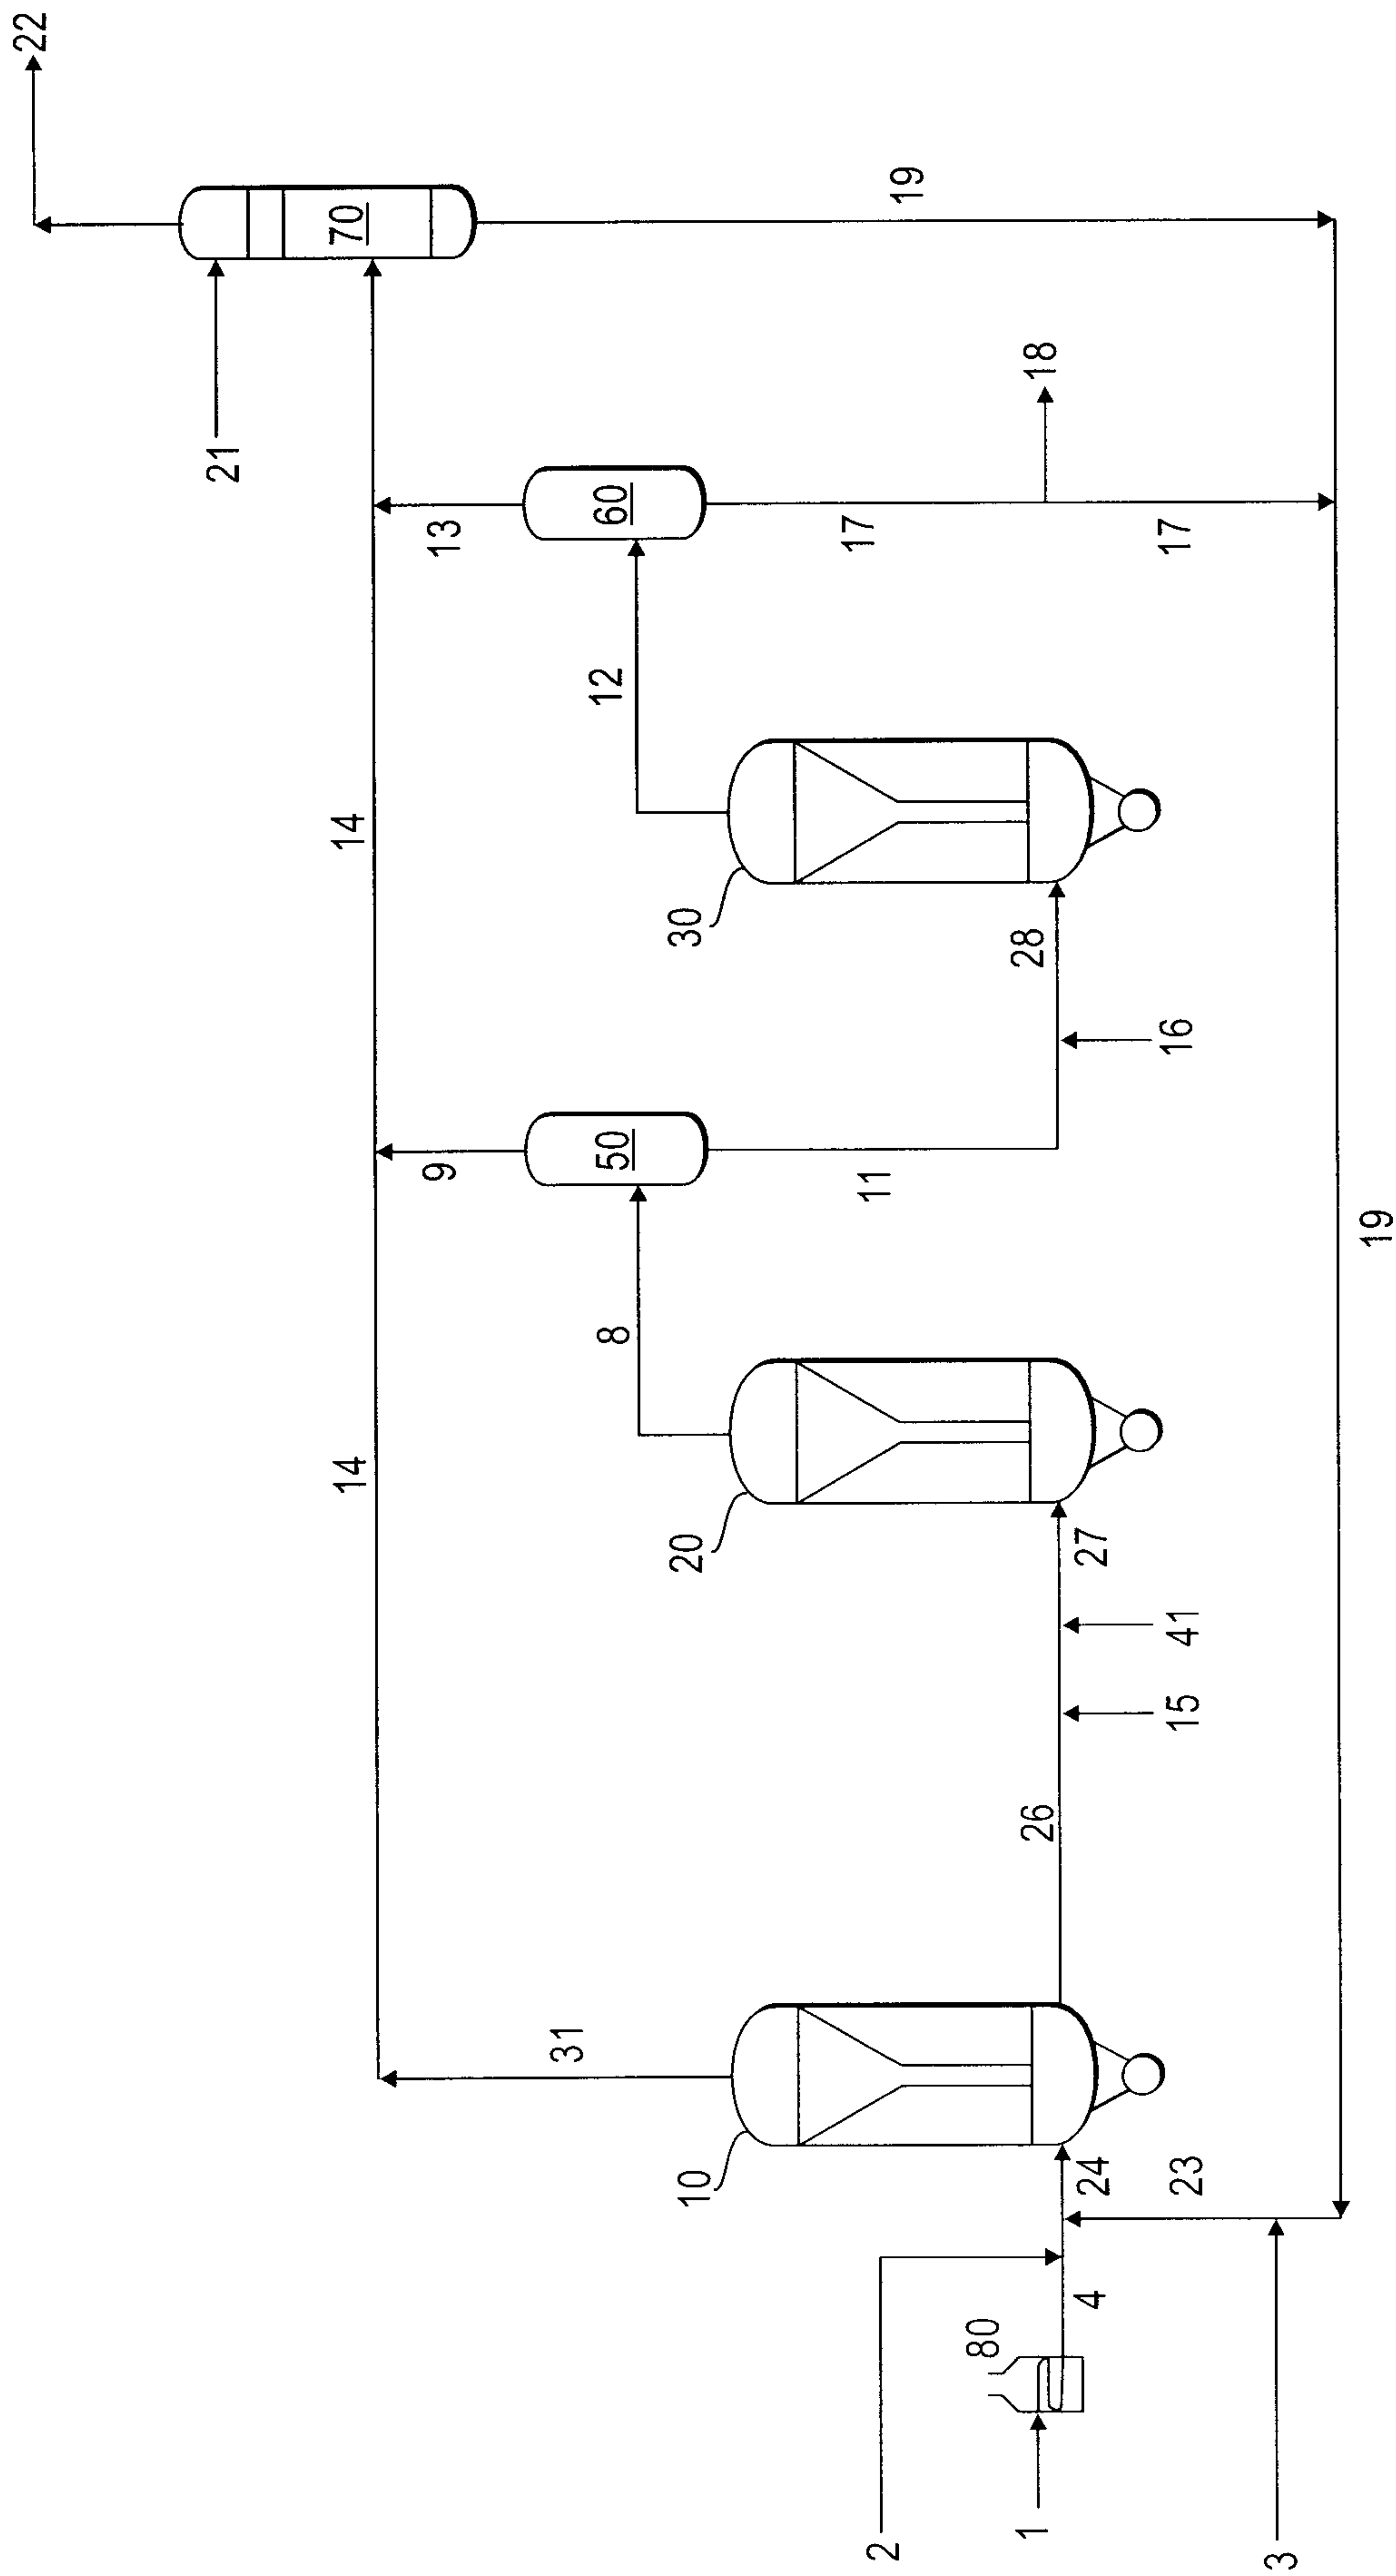


FIG. 3

4/6

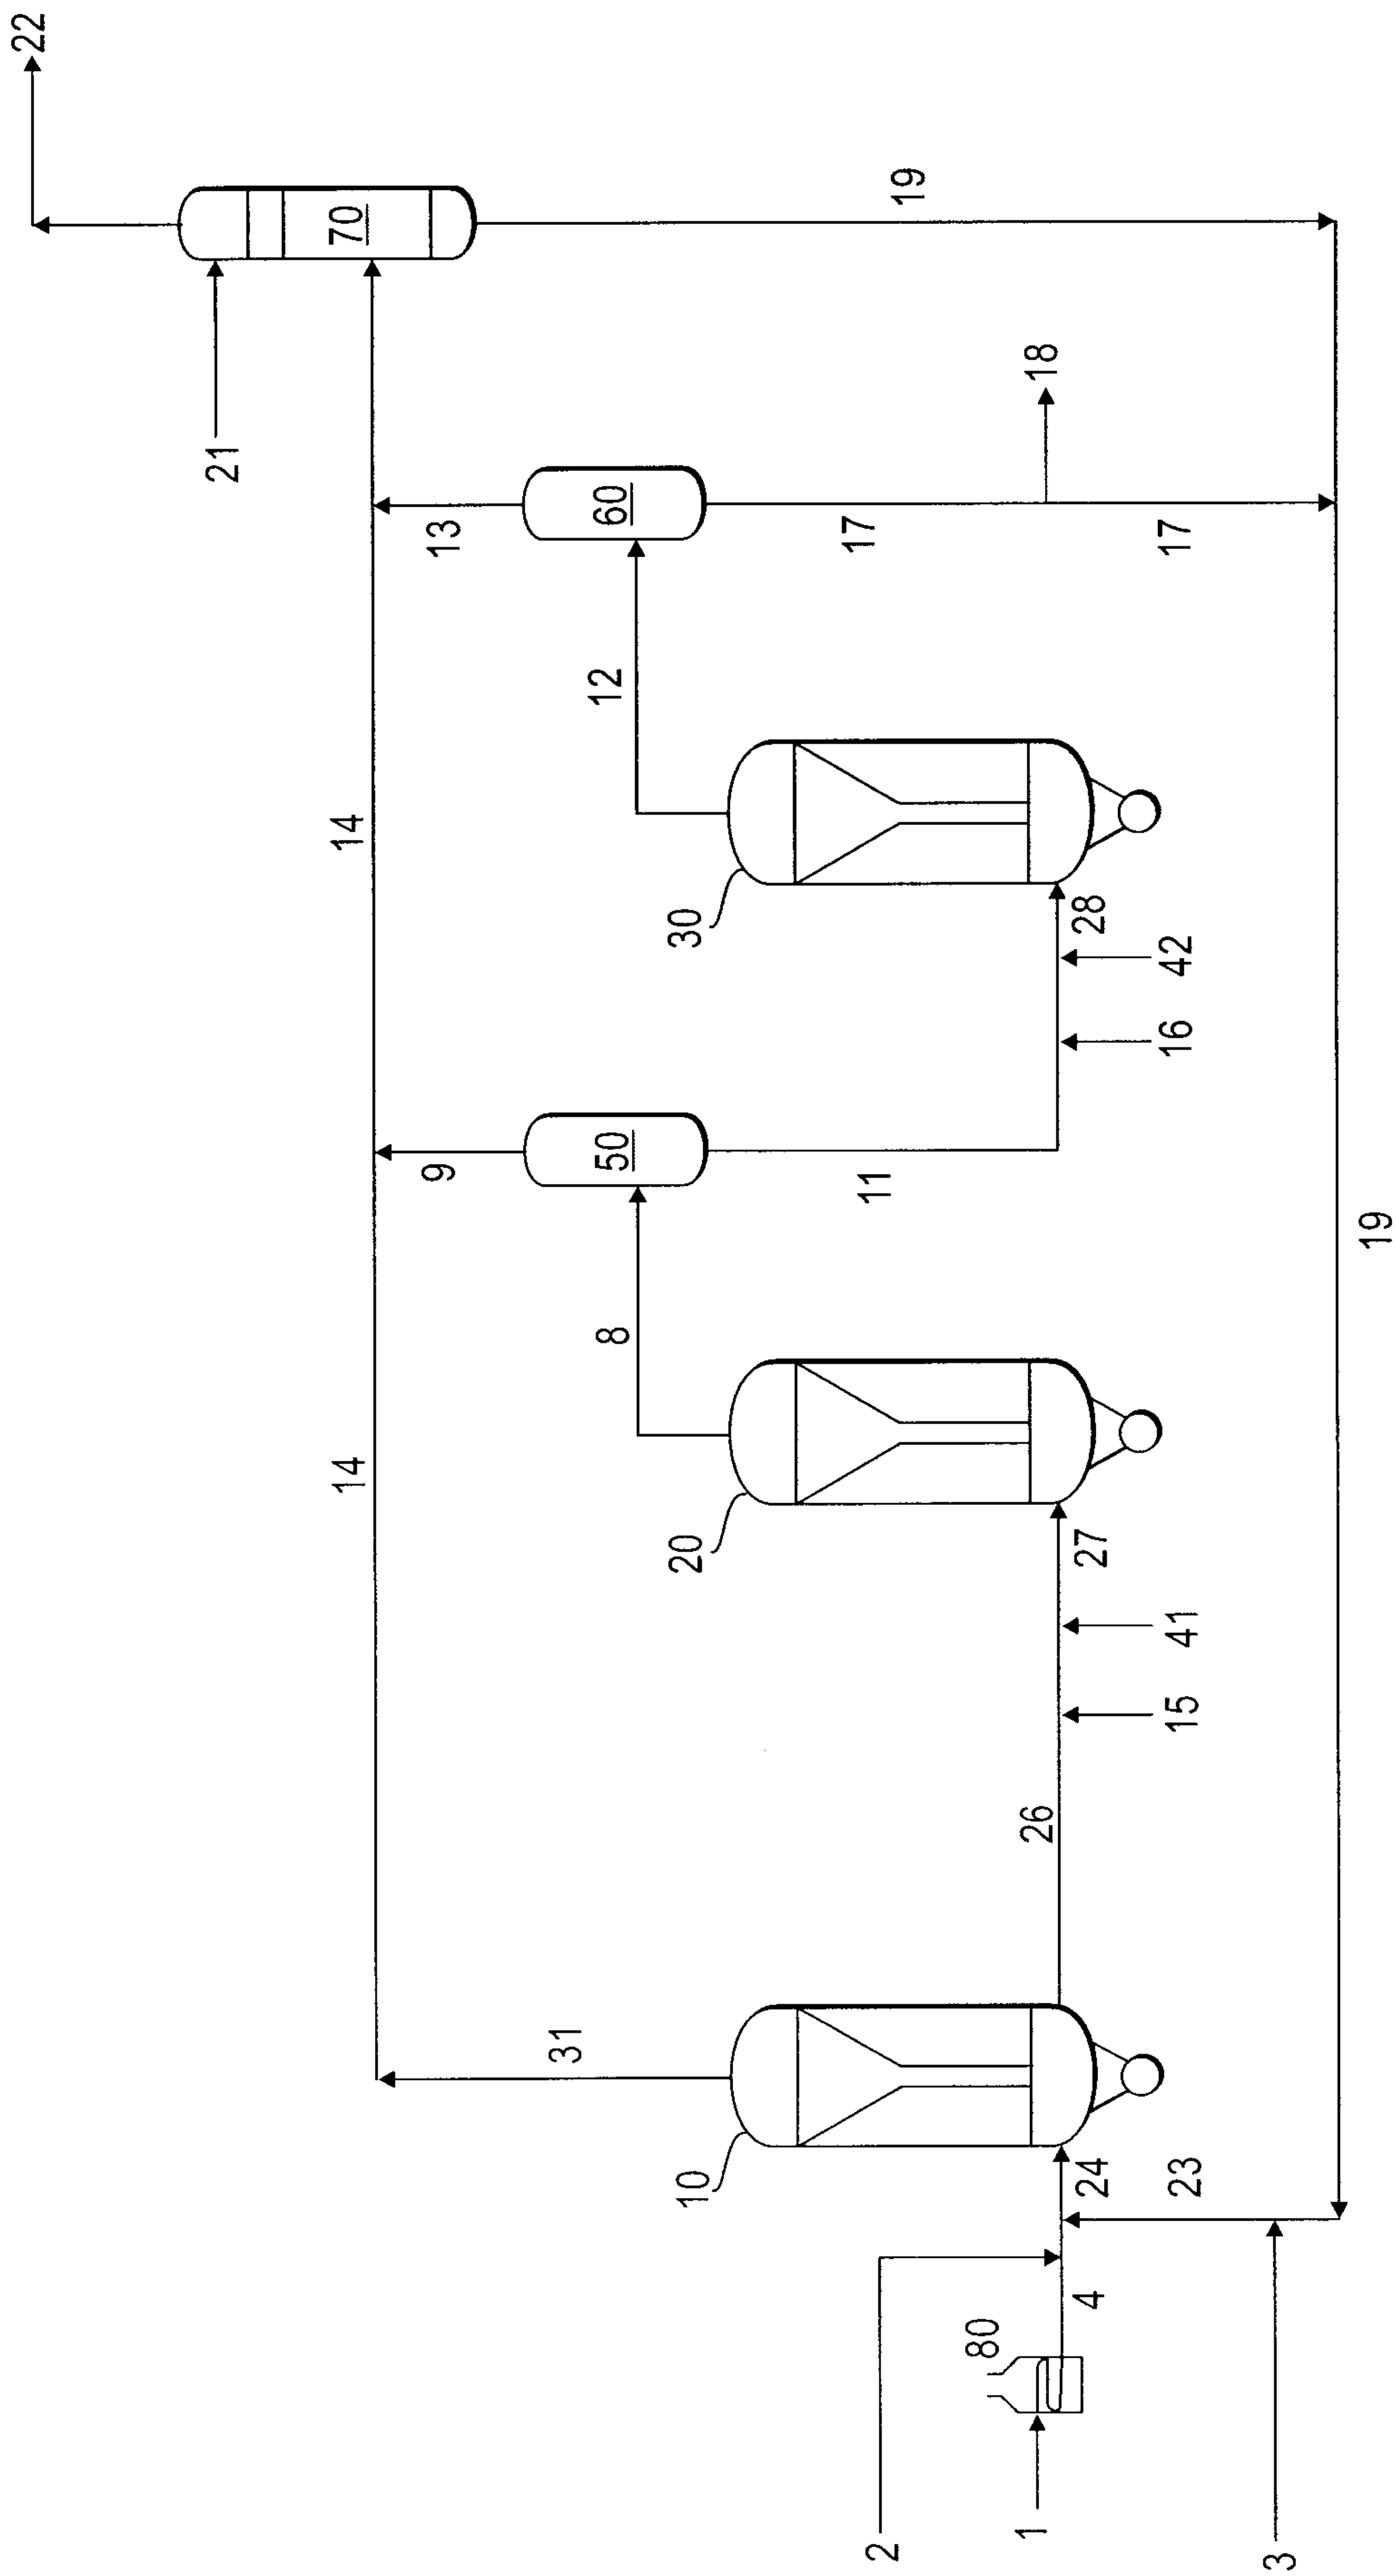


FIG. 4

5/6

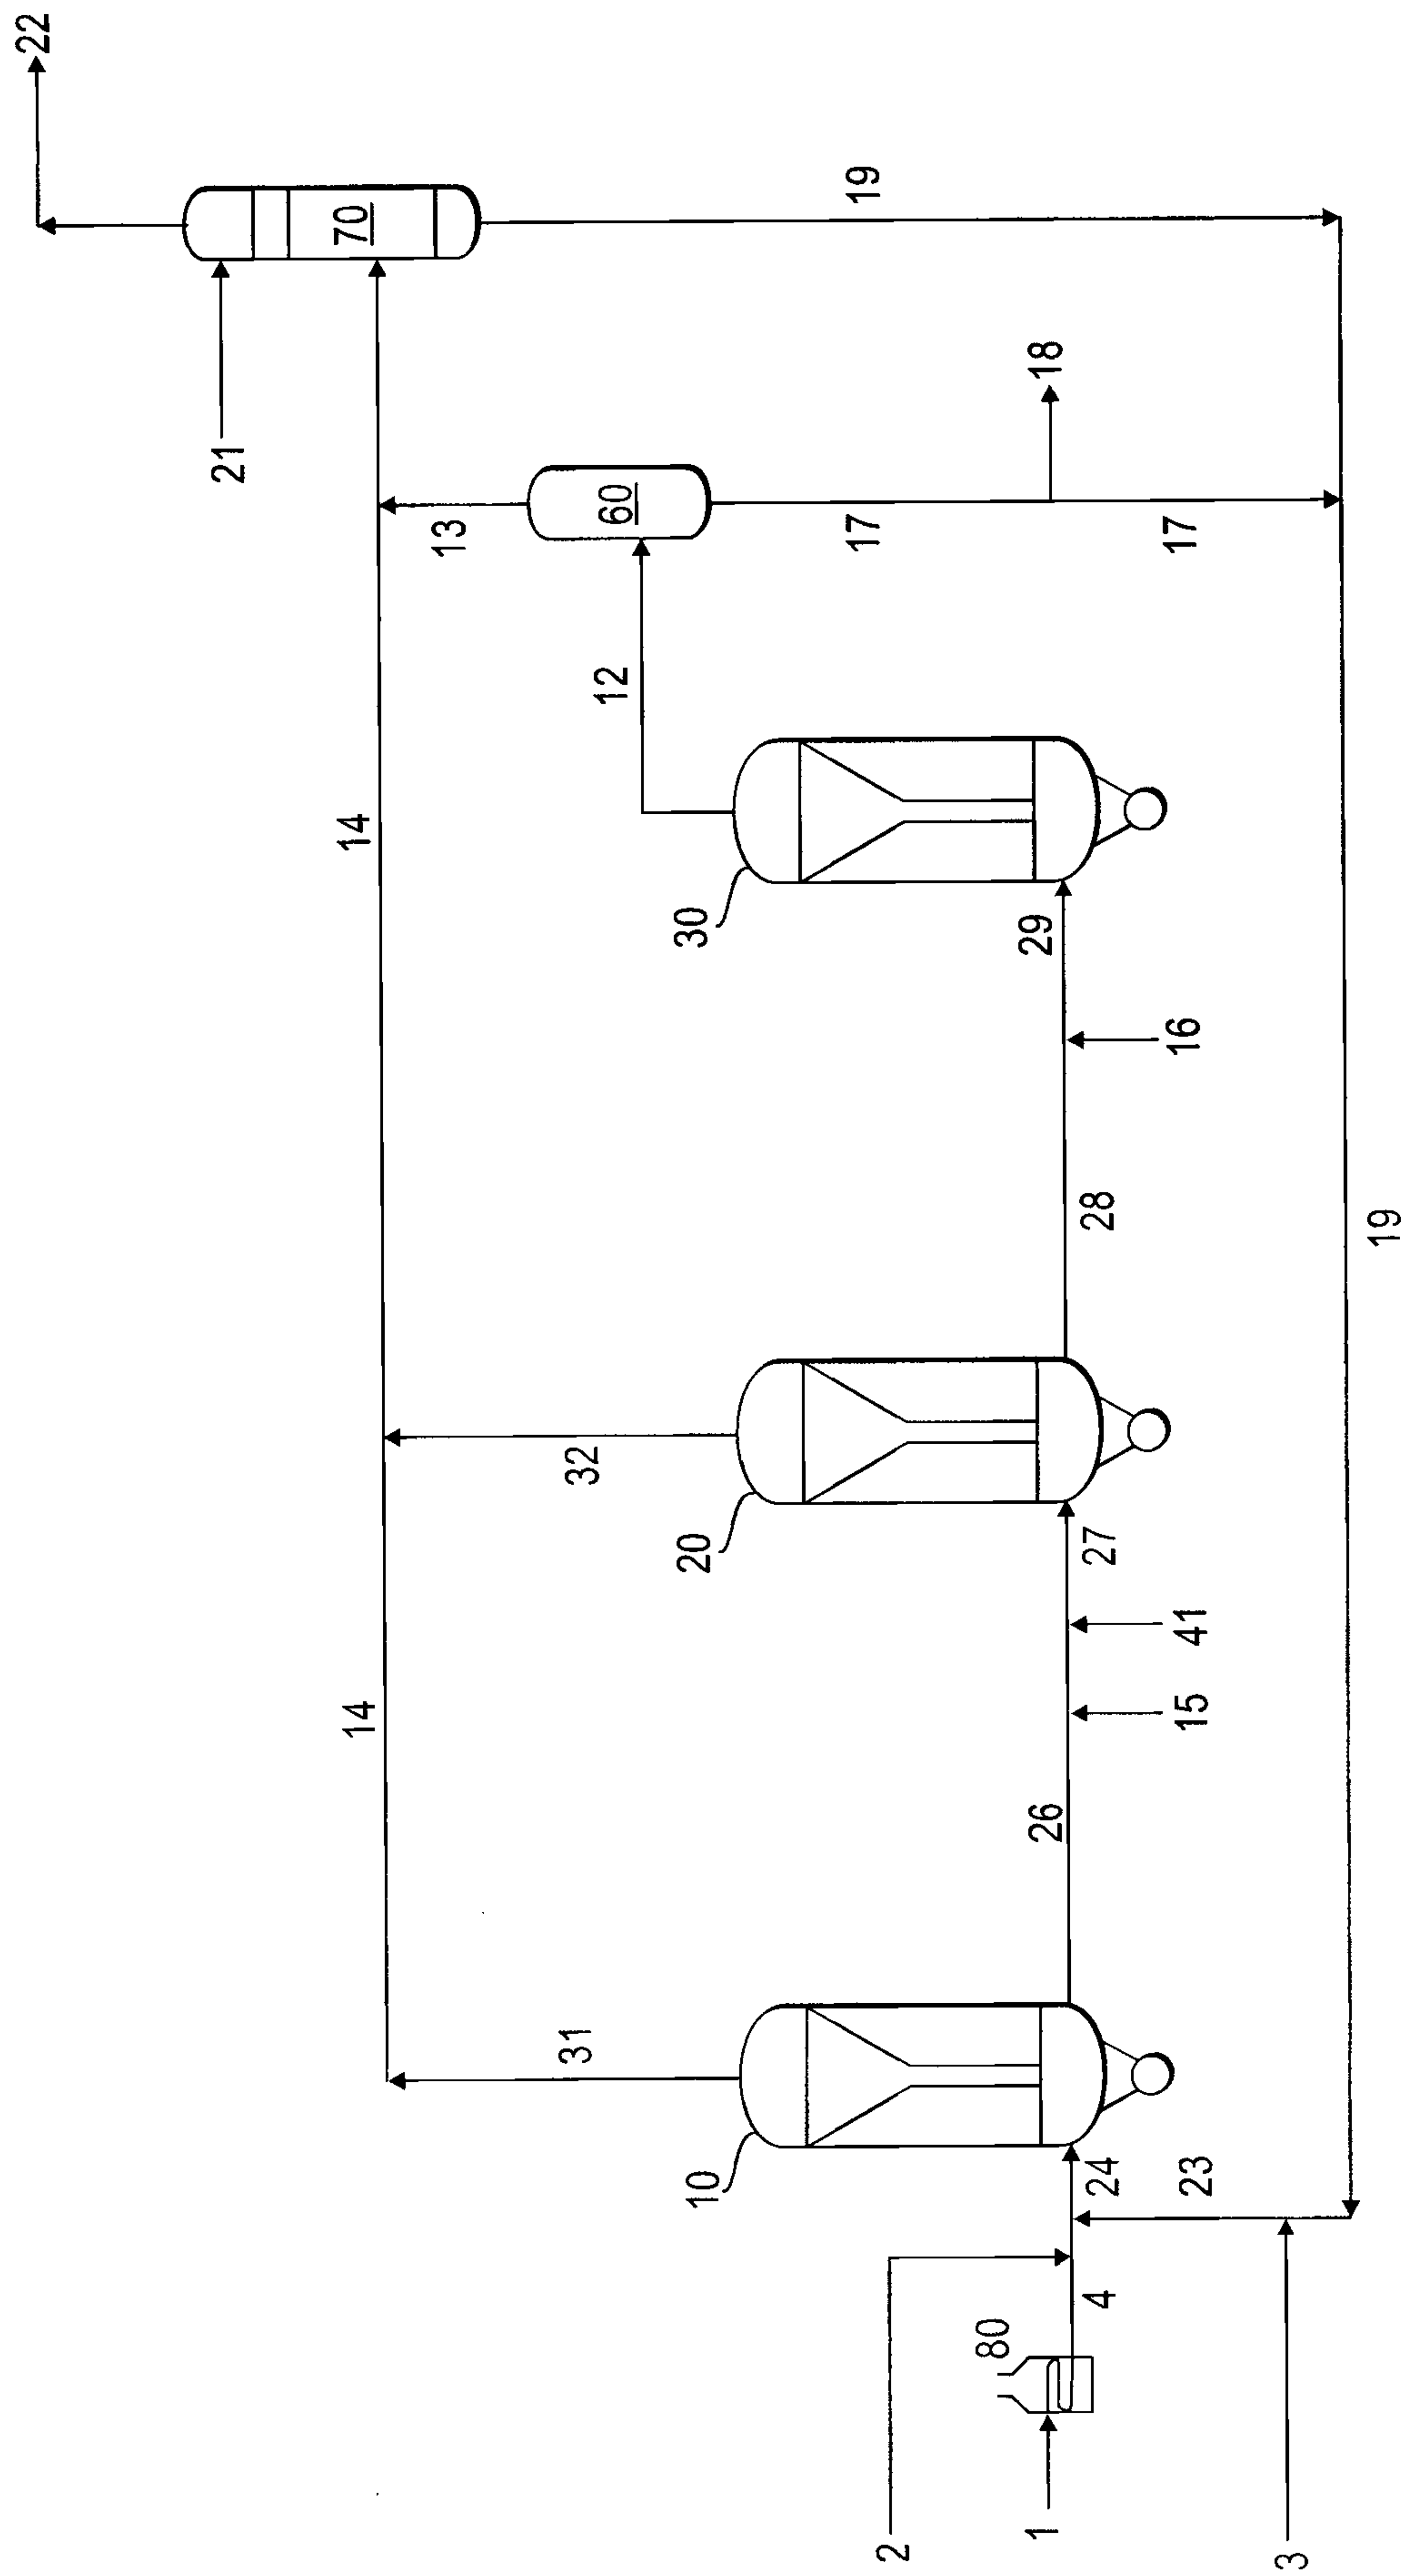


FIG. 5

6/6

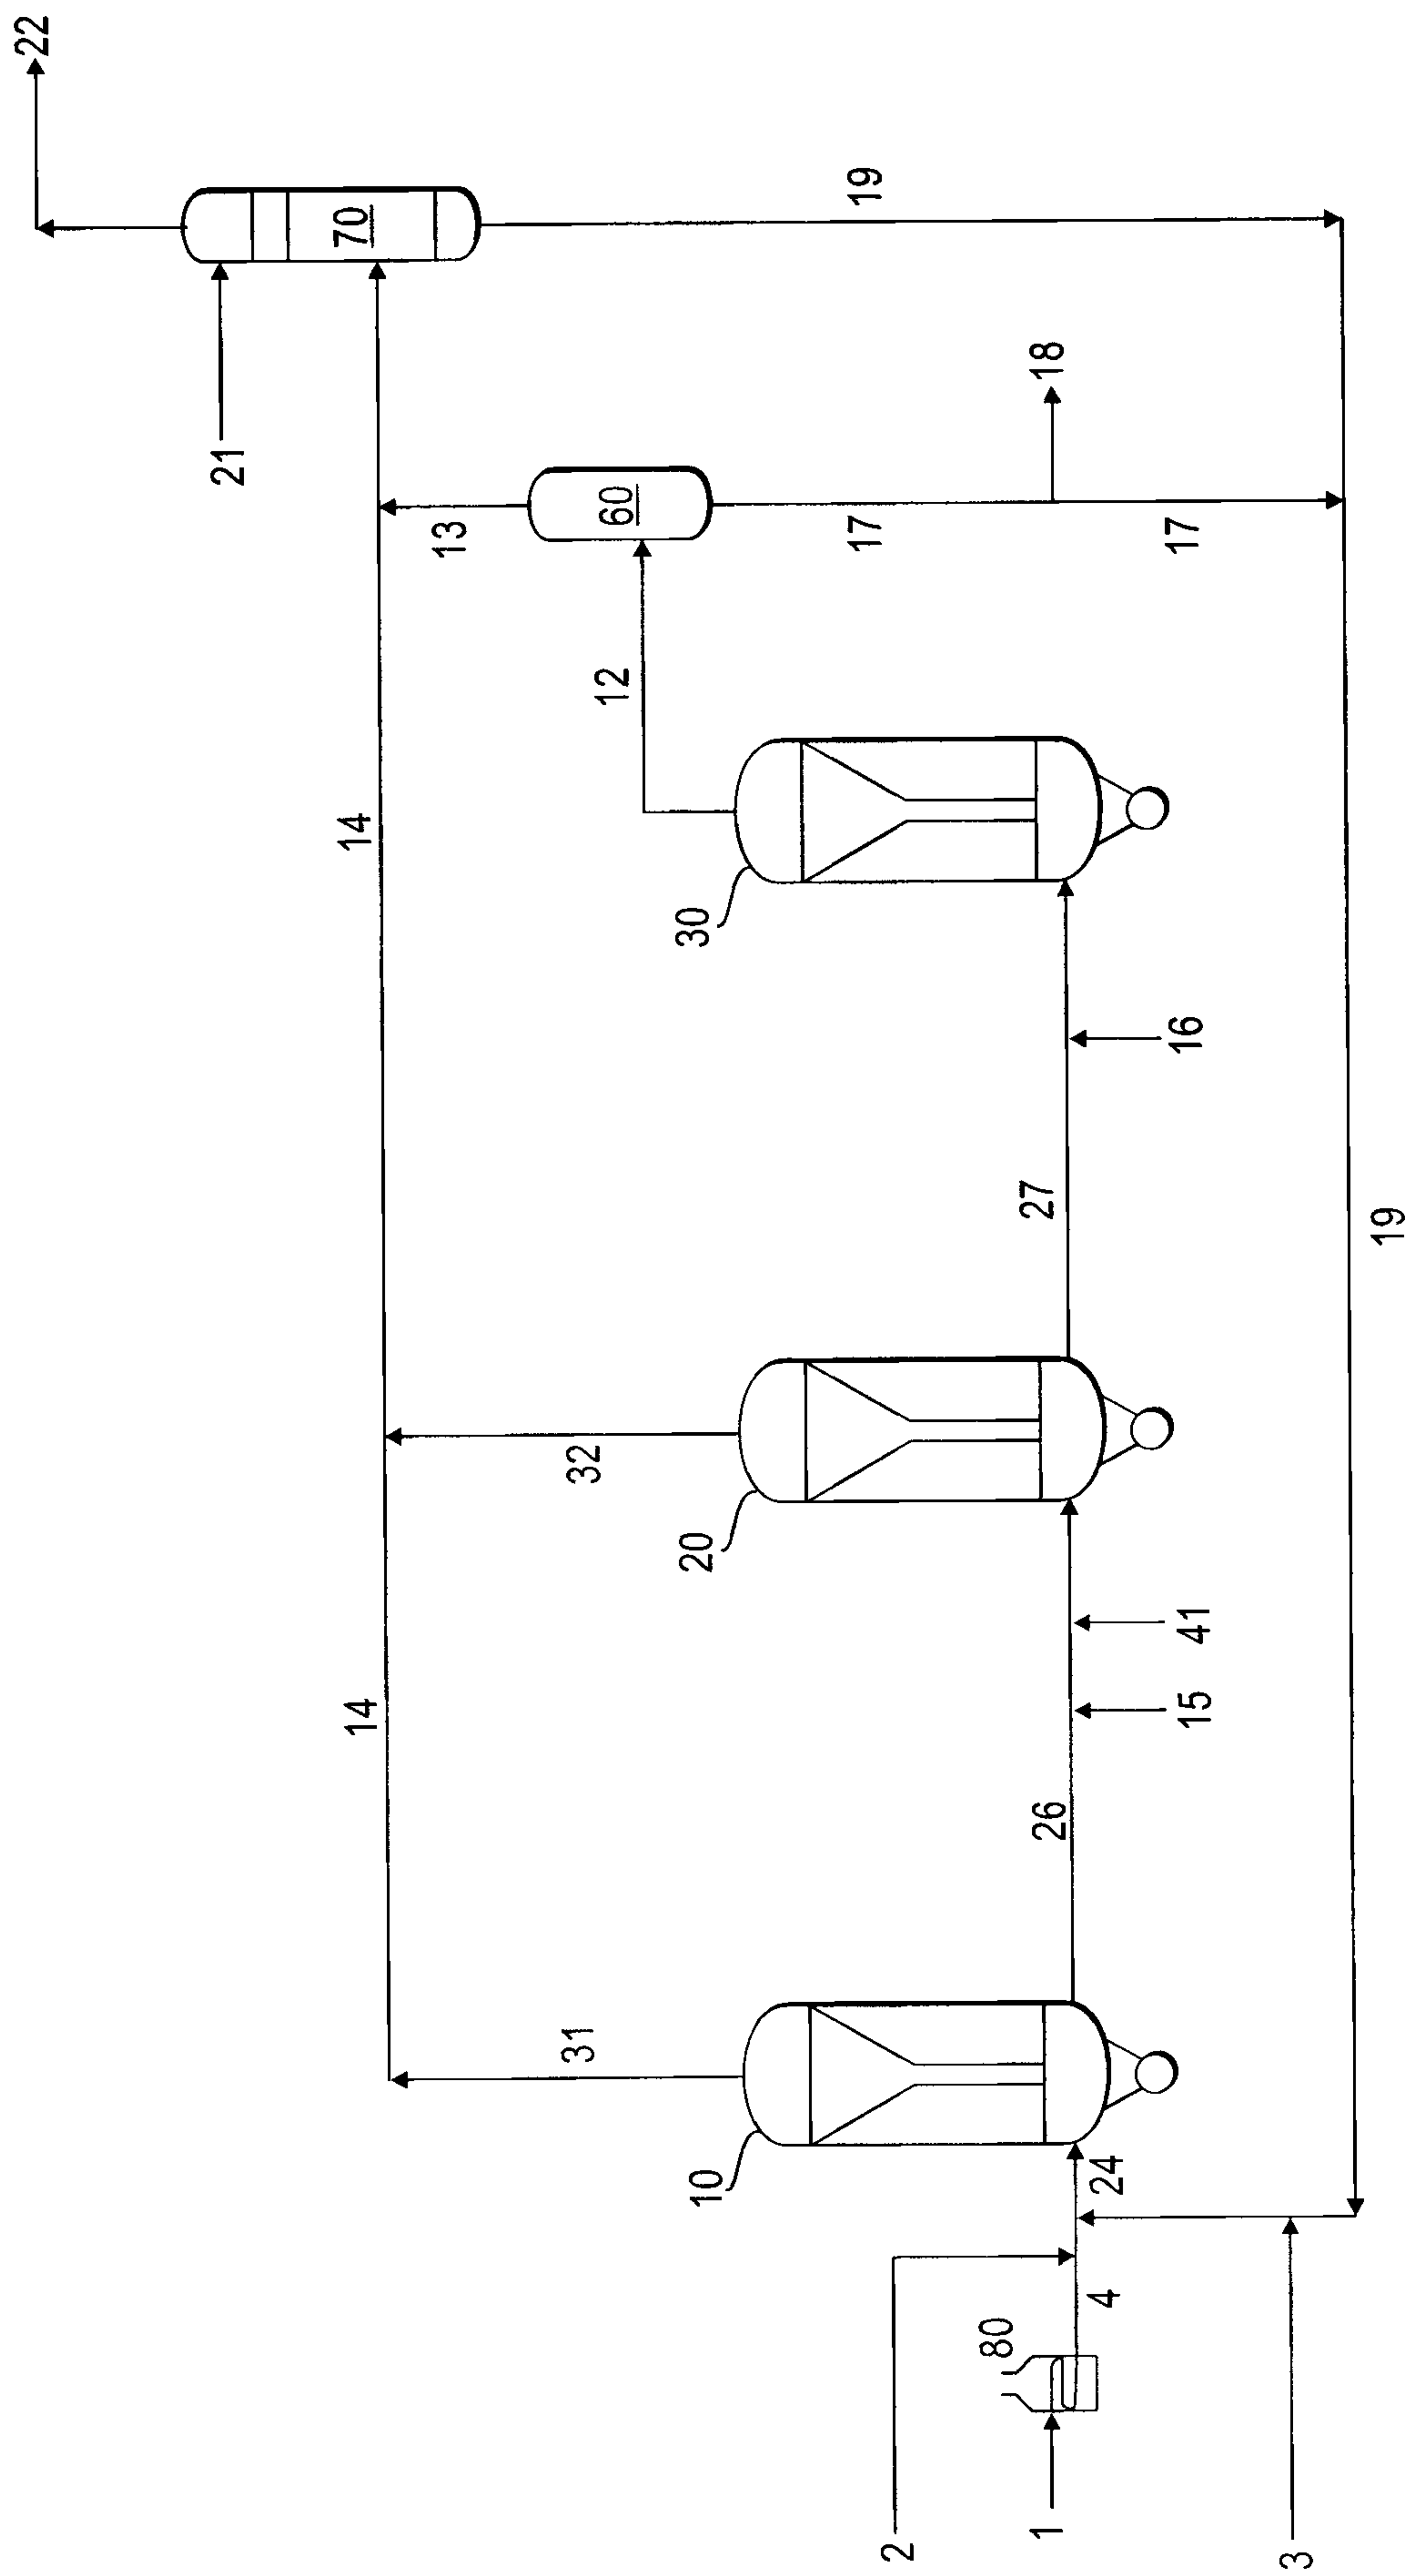


FIG. 6

