



(43) International Publication Date
5 March 2015 (05.03.2015)

- (51) **International Patent Classification:**
E21B 10/42 (2006.01) *E21B 10/43* (2006.01)
- (21) **International Application Number:**
PCT/US2014/051325
- (22) **International Filing Date:**
15 August 2014 (15.08.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/871,528 29 August 2013 (29.08.2013) US
- (71) **Applicant:** VERMEER MANUFACTURING COMPANY [US/US]; 1210 Vermeer Road East, Pella, IA 50219-0200 (US).
- (72) **Inventors:** FONTANA, Christopher, R.; 300 Washington Street, Pella, IA 50219 (US). HOELTING, Keith, Allen; 301 Nw 2nd Street, Dallas, IA 50062 (US). RUNQUIST, Randy, R.; 913 Hobert Street, Knoxville, IA 50138 (US).
- (74) **Agent:** BRUESS, Steven, C.; Merchant & Gould P.C., P.O. Box 2903, Minneapolis, MN 55402-0903 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DRILLING TOOL AND APPARATUS

FIG. 1

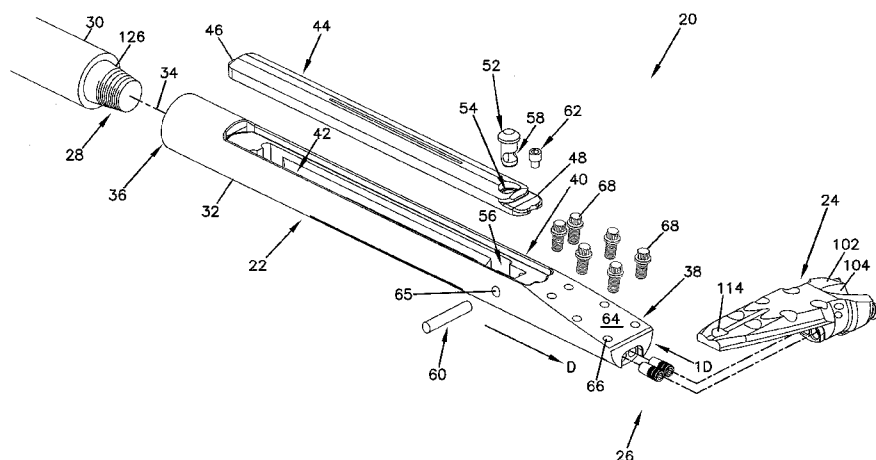

(57) Abstract: A drilling apparatus including a rotary cutting tool having a proximal end and a distal end and further defining a rotary axis generally extending between the proximal and distal ends. The rotary cutting tool includes a proximally directed face located between the proximal and distal ends that face mainly in a proximal direction. The rotary cutting tool also includes an angled mounting face that extends between the proximally directed face and the proximal end. The angled mounting face is angled relative to the proximally directed face and the rotary axis where one of a mounting aperture and a mounting protrusion are provided at the proximally directed face. The one of the mounting aperture and the mounting protrusion have a mounting depth that extends generally in the direction of the rotary axis. The distal end includes a feature that is configured for at least one of cutting and grinding.

DRILLING TOOL AND APPARATUS

This application is being filed on 15 August 2014, as a PCT International patent application, and claims priority to U.S. Provisional Patent Application No. 61/871,528, filed August 29, 2013, the disclosure of which is hereby incorporated by reference herein in its entirety.

TECHNICAL FIELD

The present invention relates generally to underground drilling equipment. More particularly, the present disclosure relates to drill heads and sonde housings adapted to be mounted at the end of a drill string.

BACKGROUND

Underground drilling systems often use a rotary drilling tool to form a bore in the ground. The rotary drilling tool is typically mounted at a distal end of a drill string including a plurality of drill rods (e.g., drill pipes) strung together end-to-end. The drill string transfers thrust and torque from a proximal drive mechanism (e.g., an above-ground drive mechanism) to the rotary drilling tool. In this way, the drill string is used to rotate the rotary drilling tool about a longitudinal axis of the drill string and is concurrently used apply thrust in a distal direction to the rotary drilling tool. Drill rods are progressively added to the drill string to increase the length of the bore. For certain applications, the rotary drilling tool includes structure (e.g., a slanted/angled face) that allows the rotary drilling tool to be steered to control the direction in which the bore is drilled. A sonde can be provided adjacent the rotary drilling tool for use in monitoring operational parameters of the rotary drilling tool such as pitch and rotational orientation (i.e., roll or clock position). The sonde can also work with other equipment to allow a geographic position of the drilling tool to be determined. The sonde typically interfaces with a control system that used to control the direction in which the rotary drilling tool travels. An example drilling system including a sonde is disclosed in U.S. Patent No. 7,172,035, which is hereby incorporated by reference in its entirety.

SUMMARY

Certain aspects of the present disclosure relate to techniques and arrangements for coupling rotary cutting tools to drive members such as sonde housings.

5 A variety of additional aspects will be set forth in the description that follows. These aspects can relate to individual features and to combinations of features. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the broad concepts upon which the embodiments disclosed herein are
10 based.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an exploded, perspective view of a sonde housing and rotary cutting tool in accordance with the principles of the present disclosure;

 Figure 2 is a proximal end perspective view of the sonde housing
15 and rotary cutting tool of Figure 1 with the rotary cutting tool coupled to the sonde housing;

 Figure 3 is a distal end perspective view of the sonde housing and the rotary cutting tool of Figure 2 with the rotary cutting tool coupled to the sonde housing;

20 Figure 4 is a partial perspective view of the sonde housing of Figure 1;

 Figure 4A is a partial perspective view of the sonde housing of Figure 1 with first and second pins connected to the sonde housing;

 Figure 5 is a perspective view of the rotary cutting tool of Figure 1;

25 Figure 6 is a side view of the rotary cutting tool of Figure 5;

 Figure 7 is a bottom perspective view of the rotary cutting tool of Figure 5;

 Figure 8 is another bottom perspective view of the rotary cutting tool of Figure 5;

30 Figure 9 is an opposite side view of the rotary cutting tool of Figure 6;

 Figure 10 is a top view of the rotary cutting tool of Figure 5;

Figure 11 is proximal side perspective view of the rotary cutting tool of Figure 5;

Figure 12 is a top view of the sonde housing and the rotary cutting tool of Figure 1 with the rotary cutting tool coupled to the sonde housing;

5 Figure 13 is a cross-sectional view taken along section line 13-13 of Figure 12;

Figure 14 is a side view of the sonde housing and rotary cutting tool of Figure 1 shown coupled to one another;

10 Figure 15 is a cross-sectional view taken along section line 15-15 of Figure 14;

Figure 16 is an enlarged view of the rotary cutting tool shown in Figure 15;

Figure 17 is a bottom view of the rotary cutting tool of Figure 10;

Figure 18 is a distal end view of the rotary cutting tool of Figure 5;

15 Figure 19 is a proximal end view of the rotary cutting tool of Figure 5;

Figure 20 illustrates another rotary cutting tool that can be interchanged with the rotary cutting tool of Figure 1;

Figure 21 is a side view of the rotary cutting tool of Figure 20;

20 Figure 22 is a top view of the rotary cutting tool of Figure 20;

Figure 23 is a bottom view of the rotary cutting tool of Figure 20;

Figure 24 is a distal end view of the rotary cutting tool of Figure 20;

and

25 Figure 25 is a proximal end view of the rotary cutting tool of Figure 20.

DETAILED DESCRIPTION

Figure 1 illustrates a drilling apparatus 20 in accordance with the principles of the present disclosure. The drilling apparatus 20 includes a sonde housing 22 (e.g., connection component) and a rotary cutting tool 24 (i.e., a rotary drilling tool) that mounts to the sonde housing 22. A coupling interface 26 can be provided between the sonde housing 22 and the rotary cutting tool 24. The drilling apparatus 20 can be adapted for connection to a distal end 28 of a drill string 30 such that the drill string 30 can be used to rotate the drilling apparatus 20 in a rotational cutting motion about a central axis of rotation of the drill string 30.

The coupling interface 26 can be adapted to mechanically secure the rotary cutting tool 24 to the sonde housing 22 such that torque can be transferred between the sonde housing 22 and the rotary cutting tool 24. Additionally, the coupling interface 26 can be configured to insure that the rotary cutting tool 24 remains attached to the sonde housing 22 during drilling operations, and also allow thrust and pull back loads to be transferred from the sonde housing 22 to the rotary cutting tool 24. The coupling interface 26 can also be configured to allow the rotary cutting tool 24 to be quickly coupled and uncoupled from the sonde housing 22.

Referring to Figures 1-3, the sonde housing 22 has an elongated body 32 having a length that extends along a central longitudinal axis 34. The elongated body 32 of the sonde housing 22 can extend along the central longitudinal axis 34 from a proximal end 36 of the sonde housing 22 to a distal end 38 of the sonde housing 22. The proximal end 36 of the sonde housing 22 can be adapted for connection to the drill string 30. In one example, the sonde housing 22 can define an elongate sonde compartment 40 (see Figure 1) having a length that extends along the central longitudinal axis 34 of the sonde housing 22. The sonde compartment 40 can have an open top side 42 that can be covered by a removable cover member 44. The removable cover member 44 can include a proximal tab 46 and a distal tab 48. When the removable cover member 44 is mounted over the sonde compartment 40, the proximal tab 46 fits within a notch 50 (see Figure 13) of the sonde housing 22 and the distal tab 48 is captured underneath a rear portion of the rotary cutting tool 24.

Referring again to Figure 1, the removable cover member 44 can be secured to the sonde compartment 40 by placing a plug 52 through a hole 54 defined by the removable cover member 44 such that the plug 52 can be received through a distal portion 56 of the sonde compartment 40 when the removable cover member 44 is mounted to the sonde compartment 40. The plug 52 can be positioned adjacent to the distal tab 48. The plug 52 can have a groove 58 therein for receiving a cross-member 60. In one example, the groove 58 can have an open sided configuration with an open side position adjacent to the distal end 38 of the sonde housing 22.

In one example, the cross-member 60 (e.g., a roll pin) can engage the groove 58 of the plug 52 so as to prevent the removable cover member 44 from sliding in a distal direction D when the cross-member 60 is in place. A cross-opening 65 can receive the cross-member 60 and by inserting the cross-member 60 within the cross-opening 65, the cross-member 60 and the groove 58 prevent the proximal tab 46 from disengaging from the notch 50. After the cross-member 60 is inserted within the cross-opening 65, a redundant fastener 62 (e.g., a cap screw) can be secured (e.g., threaded into) at a location immediately distal to the distal tab 48 to also prevent the removable cover member 44 from sliding in the distal direction D. An opening 114 in the rotary cutting tool 24 allows the fastener 62 to be accessed when the rotary cutting tool 24 has been secured to the sonde housing 22.

To remove the removable cover member 44 from the sonde housing 22, the cross-member 60 is removed by punching the cross-member 60 transversely from the sonde housing 22 out of the cross-opening 65 and the redundant fastener 62 can be removed by unthreading the redundant fastener 62 from the sonde housing 22. With the cross-member 60 and the redundant fastener 62 removed, the removable cover member 44 can be slid in the distal direction D to disengage the proximal tab 46 from the notch 50. Thereafter, the proximal end of the removable cover member 44 and the distal tab 48 can be slid out from beneath the rear portion of the rotary cutting tool 24.

Referring to Figure 4, the sonde housing 22 can include a first angled face 64 that is angled relative to the central longitudinal axis 34 and that converges toward the central longitudinal axis 34 as the first angled face 64 extends toward the distal end 38 of the sonde housing 22. The first angled face 64 of the sonde housing 22 can define a plurality of internally threaded apertures 66 for receiving fasteners 68 (see Figure 1) therein. The distal end 38 of the sonde housing 22 can include a

distal face 70 (e.g., perpendicular face) that may be generally perpendicular to the central longitudinal axis 34 of the sonde housing 22. The distal face 70 can define a recess portion 72 (e.g., mounting aperture) that defines a first opening 74 and a second opening 76 extending into the sonde housing 22. In this example, the first and second openings 74, 76 (i.e. first and second pin mount openings) can extend from the distal face 70 proximally into the sonde housing 22. The first and second openings 74, 76 can have central axes that extend along the central longitudinal axis 34 of the sonde housing 22.

The recess portion 72 of the sonde housing 22 can have a distal end 71, a proximal end 73, and a depth d1 (e.g., mounting depth) that extends between the distal and proximal ends 71, 73. The distal end 71 of the recess portion 72 may have an opening and the proximal end 73 may be defined at least in part by a recess end surface 75 that faces in the distal direction D. In the example shown, the recess portion 72 of the sonde housing 22 has an open side 77 that extends between the distal and proximal ends 71, 73 of the recess portion 72. In certain examples, the recess portion 72 can be fully enclosed around its perimeter so that no open sides are provided.

Referring to Figures 5-6, the rotary cutting tool 24 defining the mounting block 90 is illustrated in more detail. The rotary cutting tool 24 can be mounted to the distal end 38 of the sonde housing 22. The rotary cutting tool 24 can include a main body 78 that has a distal side 80 and a proximal side 82. The main body 78 can extend along an axis of rotation 101 of the rotary cutting tool 24 between the proximal side 82 of the main body 78 and the distal side 80 of the main body 78. The axis of rotation 101 of the rotary cutting tool 24 is the axis that the rotary cutting tool 24 rotates about during drilling. The distal side 80 can include a distal face 84 in which a plurality of cutting teeth pockets 86 are defined. The proximal side 82 can include a proximal face 88 (e.g., proximally directed face) at the proximal side 82 of the main body 78 that faces in a proximal direction. The proximal face 88 can be arranged and configured to oppose the distal face 70 of the sonde housing 22.

Referring to Figure 7, the proximal face 88 can be integrated with or coupled to a block element 90 (e.g., mounting protrusion). The block element 90 projects proximally from the proximal face 88 of the main body 78. The block element 90 can be defined as being formed from one unitary piece with the main body 78 of the rotary cutting tool 24. In other examples, the block element 90 can be coupled to the main body 78 of the rotary cutting tool 24 by other means such as fasteners or a weld mount. The rotary cutting tool 24 may define a first pin opening 96 and a second pin opening 100 that extend through the block element 90 in a proximal-to-distal direction. The first and second pin openings 96, 100 (i.e., first and second pin sockets) also extend distally past the proximal face 88 distally into the main body 78 of the rotary cutting tool 24. The first and second pin openings 96, 100 can be arranged and configured to respectively co-axially align with the first and second openings 74, 76 of the sonde housing 22.

Referring to Figures 8-11, the main body 78 of the rotary cutting tool 24 can define a second angled face or angled steering face 102 (i.e., a ramp surface) that faces at least partially in the distal direction and angles toward the central longitudinal axis 34 as the second angled face 102 extends in the distal direction D. In other examples, second angled face 102 can be angled toward the axis of rotation 101 as the second angled face 102 extends in the distal direction D along the axis of rotation 101. The second angled face 102 can be used to facilitate steering of the drilling apparatus 20. A recess area 104 can be defined within the second angled face 102 where the recess area 104 defines discharge ports 106 for fluids to pass therethrough. The distal face 84 may be generally perpendicular to the central longitudinal axis 34.

In certain examples, the rotary cutting tool 24 can include the proximal face 88 located between the distal and proximal sides 80, 82 and oriented approximately perpendicular to the axis of rotation 101. The second angled mounting face 102 can extend between the proximal face 88 and the proximal side 82.

In one example, the rotary cutting tool 24 can include a proximal tail or extension 108 that extends proximally from the proximal face 88 of the main body 78 of the rotary cutting tool 24. The proximal extension 108 can have a bottom surface 110 that opposes the first angled face 64 of the sonde housing 22 such that the plurality of apertures 66 located in the first angled face 64 align with apertures 112 located in the proximal extension 108 when the rotary cutting tool 24 is coupled to the sonde housing 22. Then as described above, the redundant fastener 62 (e.g., a cap screw) can be inserted through the opening 114 in the rotary cutting tool 24 and threaded into the sonde housing 22 to help prevent the removable cover member 44 from sliding in the distal direction D. Fasteners 68 can be inserted through the apertures 112 and threaded into the plurality of apertures 66 to secure the rotary cutting tool 24 to the sonde housing 22.

In certain examples, the block element 90 can be separated from the proximal extension 108 by a spacing S (see Figure 9) such that the axis of rotation 101 extends through the spacing S and the block element 90 can be offset from the axis of rotation 101. In other examples, the recess portion 72 can be offset from the axis of rotation 101. In some examples, the proximal extension 108 can have a length measured in the proximal-to-distal direction.

Referring again to Figures 4-5, the coupling interface 26 can include the block element 90 having a pin-and-socket arrangement with a first pin 116 and a second pin 118 that can be slid into the first and second pin openings 96, 100 of the rotary cutting tool 24 when the rotary cutting tool 24 is mated with the sonde housing 22. The first and second pins 116, 118 can be secured to (e.g., threaded into) corresponding first and second openings 74, 76 of the sonde housing 22. In other examples, the first and second pins 116, 118 can be secured to (e.g., threaded into) the first and second pin openings 96, 100 of the rotary cutting tool 24 and slid into the first and second openings 74, 76 of the sonde housing 22. In some examples, one of the first or second pins 116, 118 can be secured to (e.g., threaded into) the sonde housing 22 and the other of the first or second pins 116, 118 can be secured to (e.g., threaded into) the rotary cutting tool 24.

In one example, the first and second pins 116, 118 can be integral (e.g., one-piece unit) with the sonde housing 22. In certain examples, the first and second pins 116, 118 can be integral (e.g., one-piece unit) with the rotary cutting tool 24. In other words, the first and second pins 116, 118 can be carried with either
5 the sonde housing 22 or the rotary cutting tool 24. Figure 4A shows the first and second pins 116, 118 connected to the sonde housing 22.

In certain examples, a single pin may be used to secure the rotary cutting tool 24 and the sonde housing 22 together. The block element 90 can define at least one pin socket that extends through the depth d2 of the block element 90.
10 The sonde housing 22 can define at least one opening that extends in an orientation that extends along the depth d1. It is understood that the single pin can be either threaded or slid into the block element 90 or the sonde housing 22.

In certain examples, the block element 90 and the recess portion 72 can be reversed. In some examples, the block element 90 can be positioned on the sonde housing 22 and the recess portion 72 can be defined by the rotary cutting tool 24. In other words, the block element 90 or the recess portion 72 can be provided at
15 the proximal face 88 of the rotary cutting tool 24. In other examples, either the block element 90 or the recess portion 72 can be provided at the distal face 70 of the sonde housing 22. The distal side 80 of the rotary cutting tool 24 can include a
20 feature that is configured for at least one of cutting and grinding.

In other examples, the first angled face 64 of the sonde housing 22 and the bottom surface 110 of the proximal extension 108 can slide axial together when the sonde housing 22 and the rotary cutting tool 24 are coupled together. Fasteners 68 (e.g., a cap screw) can be threaded within the plurality of apertures 66
25 located in the sonde housing 22 and through the apertures 112 located in the proximal extension 108 to couple the sonde housing 22 and the rotary cutting tool 24 together. In certain examples, the proximal extension 108 and the block element 90 can be unitarily formed with the main body 78 of the rotary cutting tool 24.

In one example, the recess portion 72 of the distal face 70 of the sonde housing 22 can be arranged and configured to receive the block element 90
30 integrated with or coupled to the proximal face 88 of the rotary cutting tool 24 such that the first and second pins 116, 118 extending from the sonde housing 22 can be inserted into the first and second pin openings 96, 100 of the rotary cutting tool 24. The block element 90 of the coupling interface 26 can have a configuration that

corresponds to the recess portion 72 of the distal face 70 of the sonde housing 22 to allow the block element 90 to be inserted within the recess portion 72 when the first and second pins 116, 118 are received within the first and second pin openings 96, 100. The block element 90 can be inserted in the recess portion 72 in an insertion
5 direction ID that extends along the central longitudinal axis 34 of the sonde housing 22 when the sonde housing 22 and the rotary cutting tool 24 are coupled together. The block element 90 can have a perimeter shape that matches or complements a perimeter shape of the recess portion 72. In some examples, the block element 90 can have rounded corners. It is to be understood that the block element 90 can have
10 other shaped corners (e.g., non-round). In certain examples, when the block element 90 is mated with the recess portion 72, torque and shear can be transferred between the rotary cutting tool 24 and the sonde housing 22 through the mated interface between the block element 90 and the recess portion 72. Thus, the mated interface provided by the block element 90 and the recess portion 72 cooperates with the pin-
15 and-socket coupling provided by the first and second pins 116, 118 and the first and second openings 74, 76 to enhance the shear and torque capacity provided at the interface between the rotary cutting tool 24 and the sonde housing 22.

The mating relationship between the recess portion 72 and the block element 90 can allow torque and shear to be transferred between the parts. In one
20 example, the mating interface can be offset from the axis of rotation 101 such that torque will be transferred regardless of the shape of the mating parts. In another example, the mating interface can be centered on the axis of rotation 101. In such configuration, it would be advantageous to use a non-circular mating interface shape to promote the transfer of torque. In certain examples, the elongated configuration
25 of the block element 90 can allow it to accommodate two pins and also provide a significant amount of material for transferring torque and/or resisting shear.

In other examples, the block element 90 or the recess portion 72 can include a first cross-dimension CD1 that extends along a major axis 91 of the block element, a second cross-dimension CD2 that extends along a minor axis 93 of the
30 block element, and a depth d2 (e.g., mounting depth) that extends along the axis of rotation 101.

In certain examples, the major and minor axes 91, 93 can be perpendicular to the depths d1, d2. The major and minor axes 91, 93 can be perpendicular to relative to each other and the first cross-dimension CD1 can be

longer than the second cross-dimension CD2. In some examples, the minor axis 93 can extend in a radial direction relative to the axis of rotation 101. In certain examples, the depth d2 can be at least 10 percent as long as the second cross-dimension CD2. In other examples, the depth d2 can be at least 20 percent as long as the second cross-dimension CD2.

In some examples, the first cross-dimension CD1 can be at least 1.5 times as long as the second cross-dimension CD2. In still other examples, the second cross-dimension CD2 can be longer than the depth d2. In some examples, the second cross-dimension CD2 can be at least twice as long as the depth d2. In other examples, the second cross-dimension CD2 can be at least three times as long as the depth d2. In certain examples, the first cross-dimension CD1 can be at least 25 percent as long as a cutting diameter of the rotary cutting tool 24. In some examples, the proximal extension 108 can have a length L (see figure 6) measured at least 5 times as long as the depth d2 of the block element 90. In other examples, the proximal extension 108 can be a length L of at least 10 times as long as the depth d2 of the block element 90.

Referring to Figures 12-15, for most drilling applications it is desirable to provide drilling fluid to the rotary cutting tool 24 during drilling. Typically, drilling fluid can be pumped down the drill string 30 into the rotary cutting tool 24 and discharged through discharge ports 97. The sonde housing 22 can be adapted to receive drilling fluid through the socket 120 at the proximal end 36 of the sonde housing 22. From the socket 120, the drilling fluid can travel through two separate, parallel passages 122 that extend from the socket 120 to the first and second openings 74, 76. The first and second pins 116, 118 can be hollow to provide for fluid communication between fluid passages of the sonde housing 22 and fluid passages of the rotary cutting tool 24.

Referring to Figure 16, from the first and second openings 74, 76 the fluid flows through the first and second pins 116, 118 to distal passages 124 extending through the main body 78 of the rotary cutting tool 24. The distal passages 124 can extend from their respective pins 116, 118 to discharge ports 97 defined by the recess area 104 of the second angled face 102. Advantageously, the arrangement utilizes two separate passages and/or flow lines that extend separately from the socket 120 at the proximal end 36 of the sonde housing 22 to the discharge ports 97. By having two separate fluid lines extending substantially the entire length

of the drilling apparatus 20, one is always available in the event the other becomes plugged. Moreover, the generally straight paths of the fluid lines reduce the likelihood of plugging.

It will be appreciated that the sonde housing 22 can be configured for
5 holding a sonde used to monitor operational parameters of the rotary drilling tool such as pitch and rotational orientation (i.e., roll position or clock position). The sonde can be secured in a compartment of the sonde housing at a fixed position relative to the first angled face 64 and the recess portion 72. The sonde housing 22 can be configured to allow side loading of the sonde, end loading of the sonde or
10 other loading configurations. Further details about an example sonde are disclosed at U.S. Patent No. 7,172,035, which was previously incorporated by reference herein.

The proximal end 36 of the sonde housing 22 is adapted for connection to the distal end 28 of the drill string 30. For example, as shown at
15 Figures 1-2, the proximal end 36 of the sonde housing 22 comprises a female end having a socket 120 with internal threads 121 and the distal end 28 of the drill string 30 comprises a male end having a shank 126 with external threads. In this way, the distal end 28 of the drill string 30 can be readily threaded into the proximal end 36 of the sonde housing 22.

20 The first and second pins 116, 118 of the coupling interface 26 are preferably secured within the first and second openings 74, 76 of the sonde housing 22. In certain examples, the first and second pins 116, 118 can be secured within the first and second pin openings 96, 100 of the rotary cutting tool 24. For example, the first and second pins 116, 118 can include threaded ends having external threads that
25 are threaded into corresponding internal threads provided within the first and second openings 74, 76. The threaded ends of the pins 116, 118 can be fixed within the first and second openings 74, 76 and the opposite ends of the pins 116, 118 comprise free ends 117 that project distally outwardly from the proximal face of the block element 90. The free ends 117 of the first and second pins 116, 118 can be inserted into the
30 first and second pin openings 96, 100 of the rotary cutting tool 24 to couple the rotary cutting tool 24 to the sonde housing 22. In other examples, the free ends 117 of the first and second pins 116, 118 can be inserted into the first and second openings 74, 76, of the sonde housing 22. In other examples, a single pin may be used to secure the sonde housing 22 to the rotary cutting tool 24. In some examples,

one pin can be secured within the sonde housing 22 and one pin can be secured within the rotary cutting tool 24. In certain examples, the first and second pin openings 96, 100 can be aligned along the major axis 91. In other examples, the first and second pins 116, 118, can have o-ring seals about them providing
5 circumferential seals around the first and second pins 116, 118 within first and second pin openings 96, 100.

Referring to Figures 17-19, the rotary cutting tool 24 of the drilling apparatus 20 comprises the main body 78 having the distal side 80 and the proximal side 82. The distal side 80 includes the distal face 84 in which a plurality of cutting
10 teeth pockets 86 are defined. Cutting teeth 128 are mounted within the cutting teeth pockets 86. Friction rings (not shown) can be used to secure the cutting teeth 128 within the cutting teeth pockets 86. The friction rings can allow the cutting teeth 128 to rotate about their central axes during drilling operations. Rear access openings (not shown) can be provided for facilitating tapping the cutting teeth 128
15 from the cutting teeth pockets 86.

In one example, the rotational orientation of the rotary cutting tool 24 determines the direction in which the second angled face 102 of the rotary cutting tool 24 faces. By knowing the direction in which the second angled face 102 of the rotary cutting tool 24 faces, the operator can manipulate the rotary cutting tool 24 to
20 steer the rotary cutting tool 24 in a desired direction (e.g., a direction opposite from the direction in which the second angled face 102 faces). Because the rotary cutting tool 24 is not threaded on the sonde housing 22 and can only be mounted in one rotational orientation due to the configuration of the coupling interface 26, the system is not required to be recalibrated each time a new cutting tool is mounted to
25 the sonde housing 22.

It will be appreciated that other types of tools can also be mounted to the distal end 38 of the sonde housing 22 using the same coupling arrangement used to secure the rotary cutting tool 24 to the distal end 38 of the sonde housing 22. For example, Figures 20-25 show an alternative rotary cutting tool 24a that can be
30 coupled to the sonde housing 22 using the same type of coupling interface 26 described with respect to the rotary cutting tool 24. The rotary cutting tool 24a can include cutting teeth 128a along the perimeter of the second angled face 102a. The rotary cutting tool 24a can be similar to the rotary cutting tool 24 but have different

sized cutting teeth 128a, a different tooth pattern and a main body with a larger front concavity.

As described above, the drilling apparatus 20 can be used to drill a bore to a desired underground location. At the desired location, a pit can be
5 excavated to access the rotary cutting tool 24 or 24a at the underground location. The rotary cutting tool 24 can then be removed from the sonde housing 2 and replaced with another tool (e.g., a back reamer).

For ease of explanation, various components have been described in directional terms such as “top”, “bottom”, “upwardly”, and “downwardly” so as to
10 provide relative frames of reference for describing the parts. These terms do not suggest that the disclosed apparatus is required to be used in a particular orientation. Quite to the contrary, during drilling operations, the drilling apparatus is rotated about a drill axis such that the directions in which the various parts of the drilling apparatus face are constantly changing. As used herein, “orifices”, “sockets” and
15 “slots” can be referred to as openings. In the depicted embodiment, the rotary cutting tool 24 is shown connected to the sonde housing 22. In alternative embodiments, the rotary cutting tool 24 can be connected to other types of drive members such as rods, stems, subs or other structures that do not contain sondes.

From the forgoing detailed description, it will be evident that
20 modifications and variations can be made without departing from the spirit and scope of the disclosure.

CLAIMS:

1. A drilling apparatus comprising:
a rotary cutting tool having a proximal end and a distal end and further
5 defining a rotary axis generally extending between the proximal and distal ends, the
rotary cutting tool including a proximally directed face located between the proximal
and distal ends that faces mainly in a proximal direction, the rotary cutting tool also
including an angled mounting face that extends between the proximally directed face
and the proximal end, the angled mounting face being angled relative to the
10 proximally directed face and the rotary axis, wherein one of a mounting aperture and
a mounting protrusion are provided at the proximally directed face, the one of the
mounting aperture and the mounting protrusion having a mounting depth that
extends generally in the direction of the rotary axis, the distal end including a feature
that is configured for at least one of cutting and grinding.
15
2. The drilling apparatus of claim 1, wherein the angled mounting face defines
a plurality of fastener openings.
3. The drilling apparatus of claim 1, wherein the proximally directed face of the
20 rotary cutting tool is defined by a body of the rotary cutting tool and is substantially
perpendicular relative to the rotary axis, wherein the rotary cutting tool includes a
proximal tail that is integral with the body and that projects proximally from the
proximally directed face of the rotary cutting tool, and wherein the angled mounting
face is defined by the proximal tail of the rotary cutting tool.
25
4. The drilling apparatus of claim 1, wherein a fluid flow passage is defined
through the one of the mounting aperture and the mounting projection.
5. The drilling apparatus of claim 3, wherein the one of the mounting protrusion
30 and the mounting aperture are offset from the rotary axis.
6. The drilling apparatus of claim 5, wherein the one of the mounting protrusion
and the mounting aperture defines major and minor axes that are perpendicular
relative to one another and are also perpendicular to the depth, and wherein the one

of the mounting protrusion and the mounting aperture defines a first cross-dimension along the major axis and a second cross-dimension along the minor axis, the first cross-dimension being longer than the second cross-dimension.

- 5 7. The drilling apparatus of claim 6, wherein the first cross-dimension is at least 1.5 times as long as the second cross-dimension, wherein the second cross-dimension is longer than the depth, and wherein the mounting depth is at least 10 percent as long as the second cross-dimension.
- 10 8. The drilling apparatus of claim 6, wherein the first cross-dimension is at least 25 percent as long as a cutting diameter of the drilling tool.
9. The drilling apparatus of claim 8, wherein the proximal tail has a proximal tail length measured in the proximal-to-distal direction, and wherein the proximal
- 15 tail length is at least 5 times as long as the mounting depth.
10. The drilling apparatus of claim 1, wherein the mounting protrusion is provided at the proximally directed face.
- 20 11. The drilling apparatus of claim 10, wherein the mounting protrusion defines at least one pin socket that extends through the mounting depth of the mounting protrusion.
12. The drilling apparatus of claim 10, wherein the mounting protrusion defines
- 25 first and second pin sockets that extend through the mounting depth of the mounting protrusion.
13. The drilling apparatus of claim 1, further comprising a sonde housing which mates with the rotary cutting tool.
- 30 14. The drilling apparatus of claim 13, wherein the sonde housing includes a distally directed face that opposes the proximally directed face of the rotary cutting tool when the sonde housing and the rotary cutting tool are mated together, wherein the other of the mounting aperture and the mounting protrusion are provided at the

distally directed face of the sonde housing, and wherein the sonde housing defines an angled mounting face that opposes the angled mounting face of the rotary cutting tool when the sonde housing and the rotary cutting tool are mated together.

- 5 15. The drilling apparatus of claim 14, wherein the mounting aperture is defined by the sonde housing and the mounting protrusion is defined by the rotary cutting tool, wherein the mounting aperture and the mounting protrusion mate when the sonde housing is mated with the rotary cutting tool, wherein the angled mounting surfaces of the sonde housing and the rotary cutting tool are secured together by
10 fasteners when the rotary cutting tool and the sonde housing are coupled together, wherein a pin extends through the mounting protrusion and the mounting aperture in an orientation that extends along the mount depth, and wherein a fluid flow path is defined through the pin.

- 15 16. A drilling apparatus comprising:
a drilling tool including :
a drilling tool body that extends along an axis of
rotation of the drilling tool between a proximal end of the body and a distal end of
the body, the body defining an angled steering face that faces at least partially in a
20 distal direction and that angles toward the axis of rotation as the steering face
extends in the distal direction along the axis of rotation, the body also including a
proximal face at the proximal end of the body that faces in a proximal direction;
a proximal tail that projects proximally from the
proximal face of the body;
25 a block element that projects proximally from the
proximal face of the body; and
the drilling tool defining at least a first socket that
extends in a proximal-to-distal direction, the first socket extending through the block
element and into the body.

- 30 17. A drilling apparatus comprising:
a drilling tool; and
a connection component that mates with the drilling tool at a
socket arrangement, the socket arrangement including a recess defined by one of the

drilling tool and the connection component and a block defined by the other of the drilling tool and the connection component, the block fitting within the recess when the connection component and the drilling tool are mated together, the socket arrangement also including a pin that extends through a closed end of the recess and
5 into the block when the connection component and the drilling tool are mated together.

18. The drilling apparatus of claim 17, wherein a fluid passage is defined through the pin.

10

19. A drilling apparatus comprising:
a drilling tool including :
a drilling tool body that extends along an axis of rotation of the drilling tool between a proximal end of the body and a distal end of the body, the
15 body defining an angled steering face that faces at least partially in a distal direction and that angles toward the axis of rotation as the steering face extends in the distal direction along the axis of rotation, the body also including a proximal face at the proximal end of the body that faces in a proximal direction;
a proximal tail that projects proximally from the proximal
20 face of the body;
a block element that projects proximally from the proximal face of the body; and
the drilling tool defining first and second pin sockets that extend in a proximal-to-distal direction, the first and second pin sockets extending
25 through the block element and into the body.

20. The drilling apparatus of claim 19, wherein the block element includes a first cross-dimension that extends along a major axis of the block element, a second cross-dimension that extends along a minor axis of the block element, and a depth
30 that extends along the axis of rotation, wherein the major and minor axes are perpendicular to each other and wherein the first cross-dimension is longer than the second cross-dimension.

21. The drilling apparatus of claim 20, wherein the second cross-dimension is longer than the depth.
22. The drilling apparatus of claim 20, wherein the second cross-dimension is at
5 least twice as long as the depth.
23. The drilling apparatus of claim 20, wherein the second cross-dimension is at least three times as long as the depth.
- 10 24. The drilling apparatus of claim 22, wherein the first cross-dimension is at least 1.5 times as long as the second cross-dimension.
25. The drilling apparatus of claim 24, wherein the block element has rounded corners.
15
26. The drilling apparatus of claim 24, wherein the depth is at least 10 percent as long as the second cross-dimension.
27. The drilling apparatus of claim 24, wherein the depth is at least 20 percent as
20 long as the second cross-dimension.
28. The drilling apparatus of claim 26, wherein the first cross-dimension is at least 25 percent as long as a cutting diameter of the drilling tool.
- 25 29. The drilling apparatus of claim 26, wherein the block element is separated from the proximal tail by a spacing, and wherein the axis of rotation extends through the spacing such that the block element is offset from the axis of rotation.
30. The drilling apparatus of claim 26, wherein the proximal tail has a proximal
30 tail length measured in the proximal-to-distal direction, and wherein the proximal tail length is at least 5 times as long as the depth of the block element.

31. The drilling apparatus of claim 26, wherein the proximal tail has a proximal tail length measured in the proximal-to-distal direction, and wherein the proximal tail length is at least 10 times as long as the depth of the block element.
- 5 32. The drilling apparatus of claim 30, wherein the proximal tail defines a plurality of fastener openings.
33. The drilling apparatus of claim 30, wherein cutting teeth are provided at the distal end of the drilling tool.
- 10 34. The drilling apparatus of claim 20, wherein the minor axis extends in a radial direction relative to the axis of rotation.
- 15 35. The drilling apparatus of claim 20, wherein the first and second pin sockets are aligned along the major axis.
36. The drilling apparatus of claim 19, wherein the proximal tail and the block element are unitarily formed with the body.
- 20 37. The drilling apparatus of claim 19, further comprising a connection component adapted to mate with the drilling tool, the connection component including a component body having a distal end including a distal face in which a recess is defined, the recess being sized to receive the block element when the connection component and the drilling tool are mated together, the recess having a distal end, a proximal end and a depth that extends between the distal and proximal ends, the distal end of the recess being open and the proximal end being defined at least in part by a recess end surface that faces in a distal direction, the connection component body defining *first and second pin mounting openings that extend* through the recess end surface proximally into the component body, the connection component also including first and second pins secured within the first and second pin mounting openings, wherein when the connection component and the drilling tool are mated together, the first and second pins of the connection component fit within the first and second pin sockets of the drilling tool and the block element of the drilling tool fits within the recess of the connection component.
- 25
- 30

38. The drilling apparatus of claim 37, wherein o-ring seals are provided about the first and second pins for providing circumferential seals about the first and second pins within the first and second pin sockets.

5

39. The drilling apparatus of claim 38, wherein the first and second pins are hollow and provide fluid communication between fluid passages of the connection component and fluid passages of the drilling tool.

10 40. The drilling apparatus of claim 37, wherein the first and second pins are threaded within the first and second pin mounting openings.

41. The drilling apparatus of claim 37, wherein the recess and the block element have complementary mating transverse cross-sectional shapes.

15

42. The drilling apparatus of claim 37, wherein the recess has an open side that extends between the distal and proximal ends of the recess.

20 43. The drilling apparatus of claim 37, wherein the connection component is a sonde housing.

44. The drilling apparatus of claim 37, wherein the component body defines an angled tool mounting face that faces at least partially in a distal direction and is angled relative to the axis of rotation, wherein the proximal tail of the drilling tool is fastened to the angled tool mounting face with a plurality of fasteners used to secure the drilling tool to the component body, and wherein the proximal tail includes a major face that opposes and engages the angled tool mounting face when the drilling tool is secured to the connection component.

30 45. A drilling tool connection component adapted to mate with a drilling tool, the connection component comprising:
a component body having a distal end including a distal face in which a recess is defined, the recess having a distal end, a proximal end and a depth that extends between the distal and proximal ends, the distal end of the recess being open

and the proximal end being defined at least in part by a recess end surface that faces in a distal direction, the connection component body defining first and second pin mounting openings that extend through the recess end surface proximally into the component body, the connection component also including first and second pins
5 secured within the first and second pin mounting openings.

46. The drilling tool connection component of claim 45, wherein the first and second pins are threaded within the first and second pin mounting openings.

10 47. The connection component of claim 45, wherein the recess has an open side that extends between the distal and proximal ends of the recess.

48. The drilling tool connection component of claim 45, wherein the connection component is a sonde housing.

15

49. The drilling tool connection component of claim 45, wherein the component body defines an angled tool mounting face that faces at least partially in a distal direction and is angled relative to the axis of rotation, and wherein the angled tool mounting face intersects the distal end face of the component body and defines a
20 plurality of fastener openings.

25

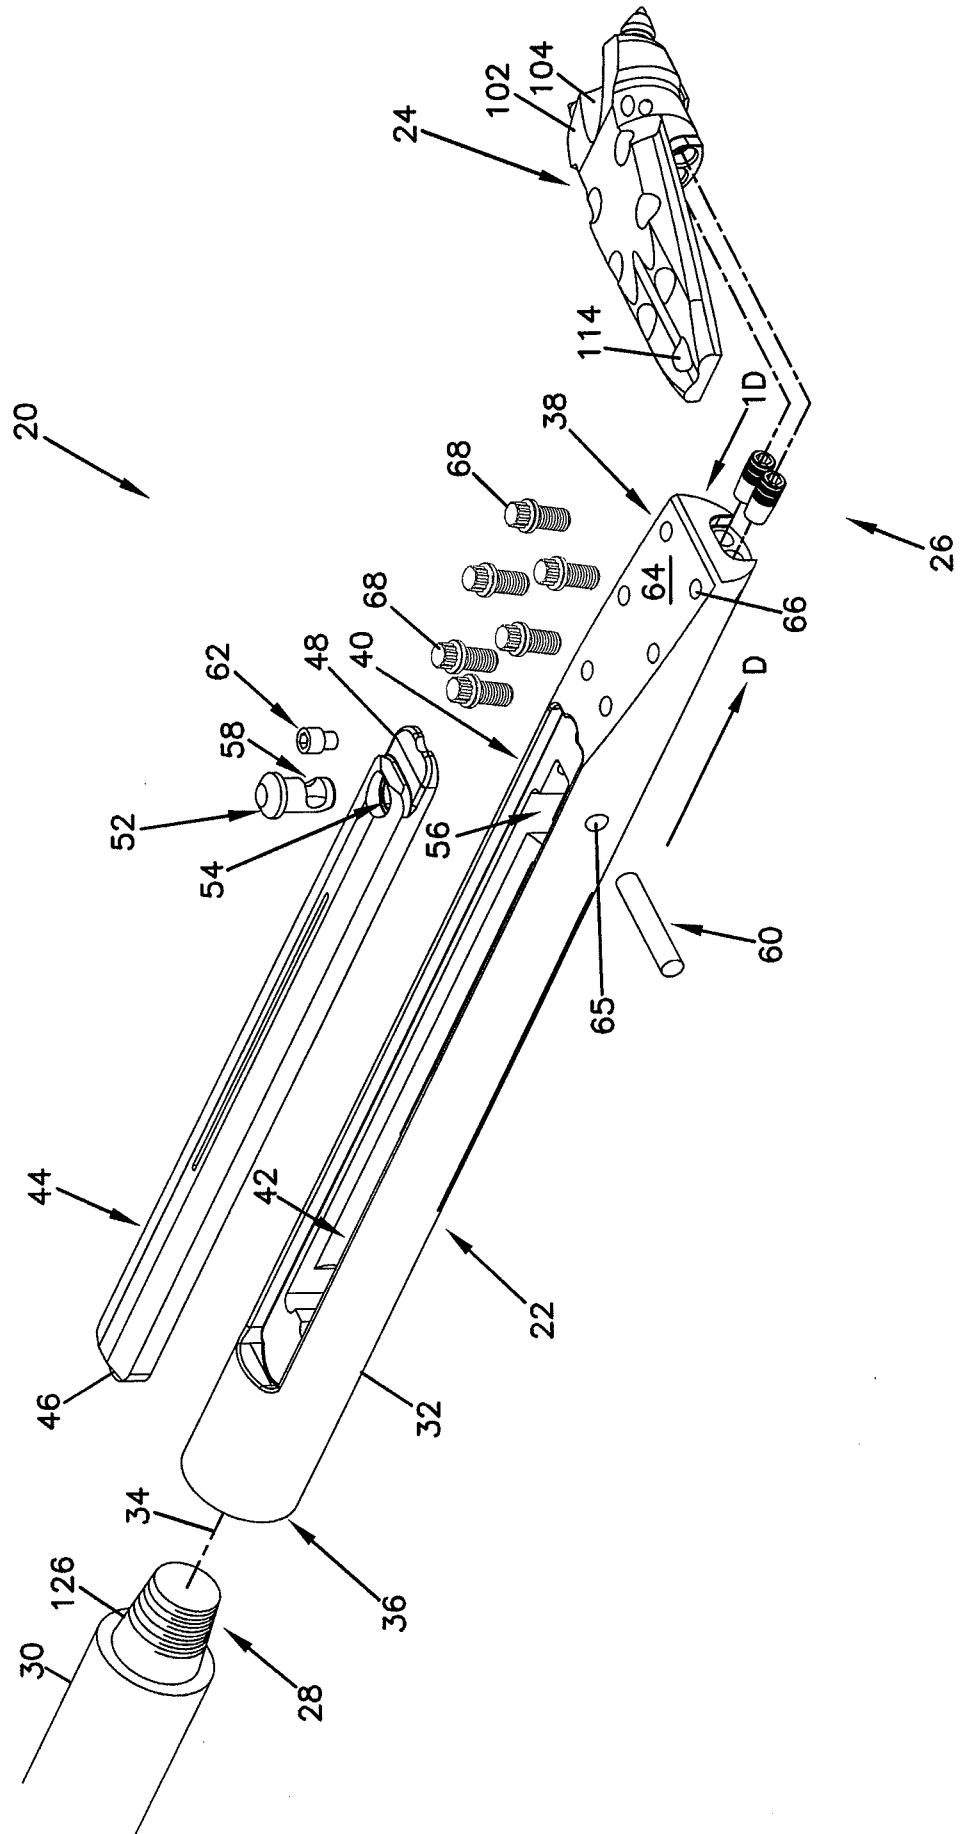


FIG. 1

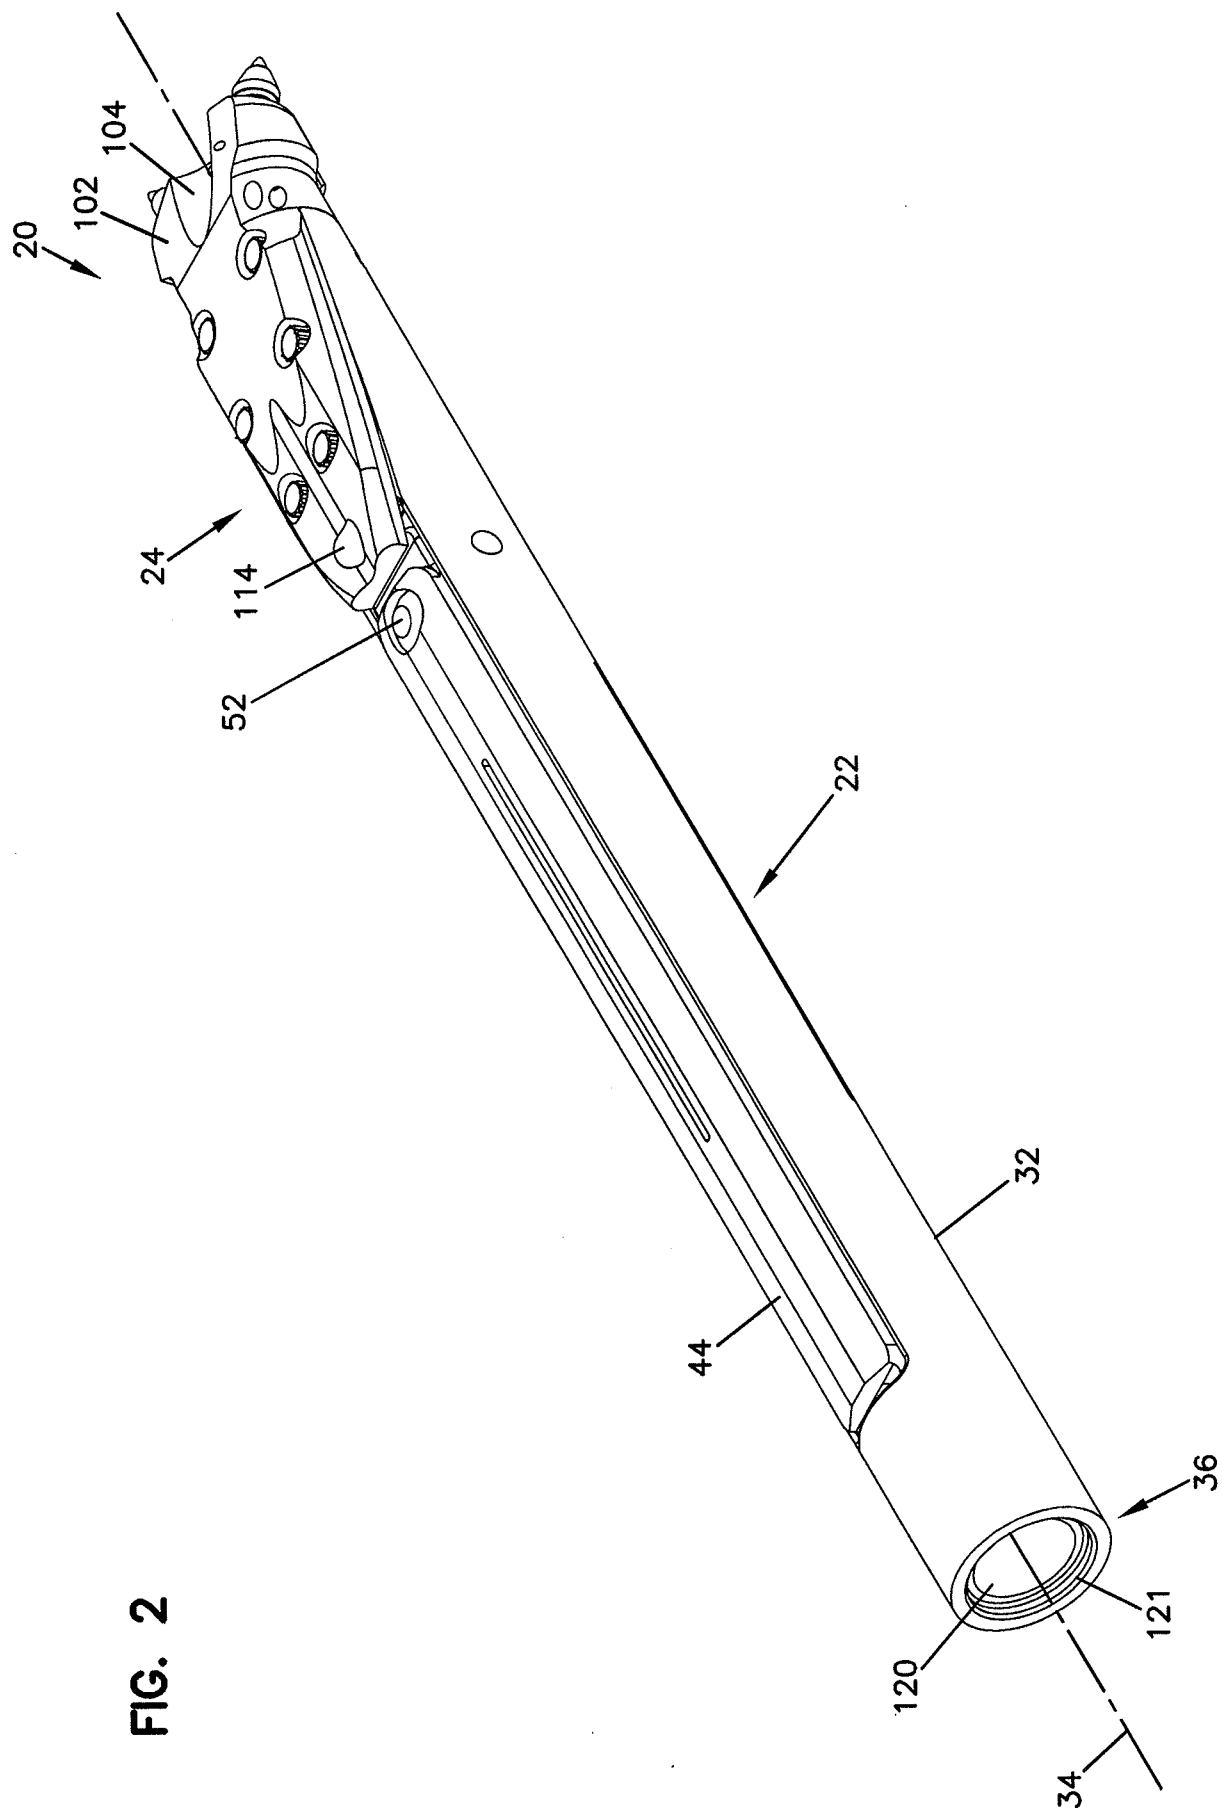


FIG. 2

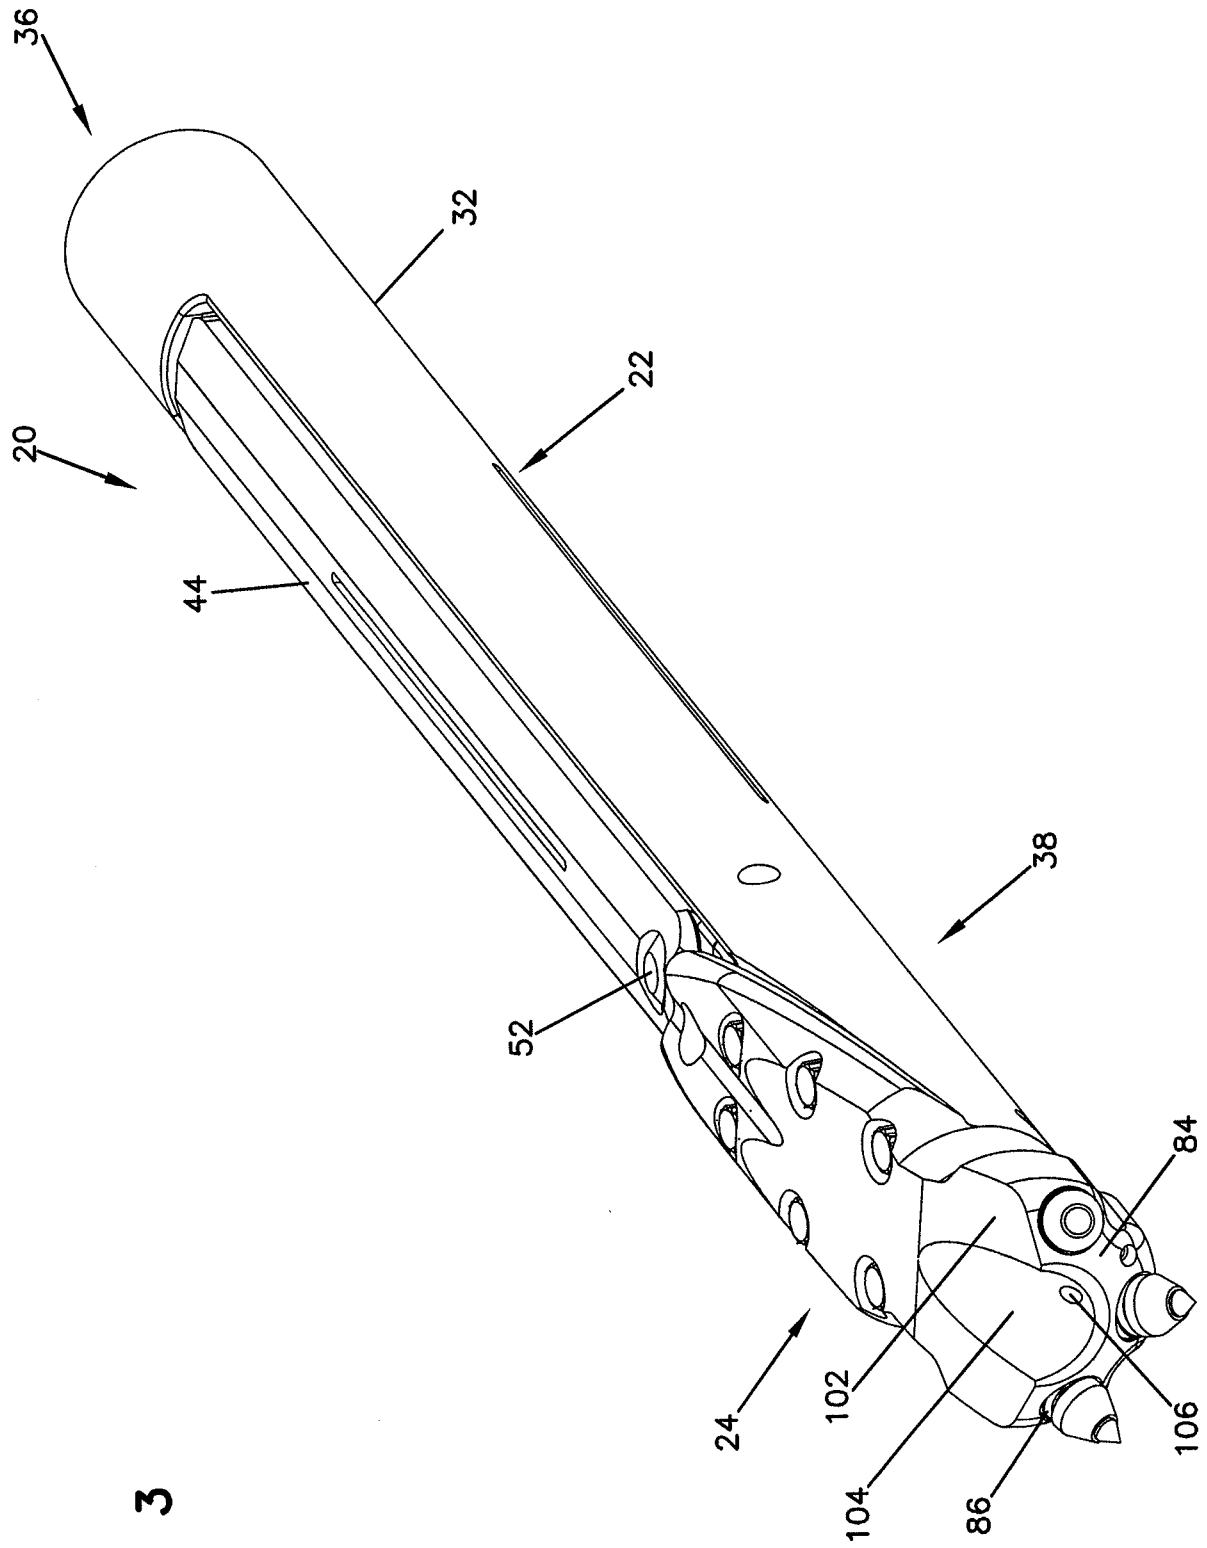


FIG. 3

FIG. 4

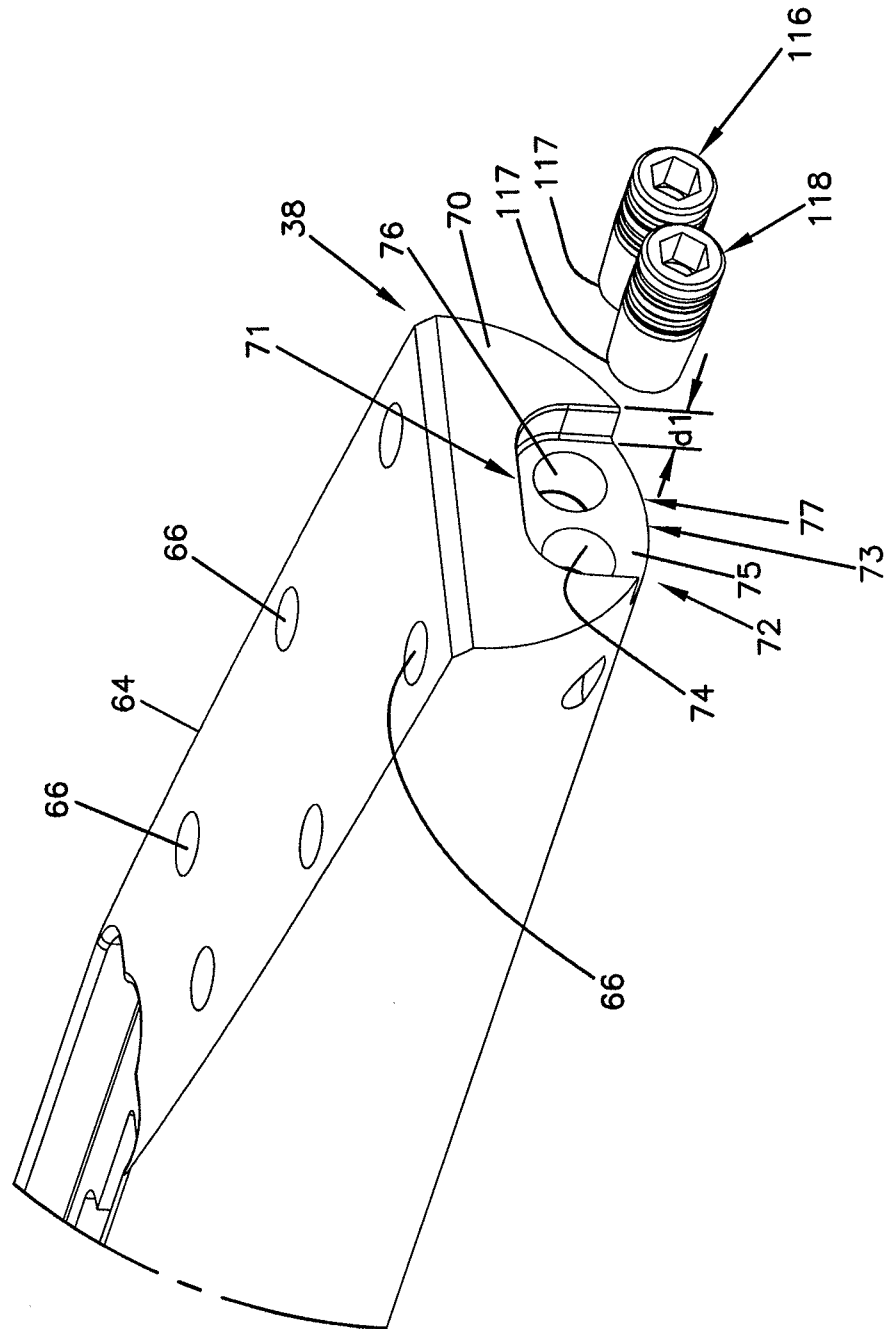
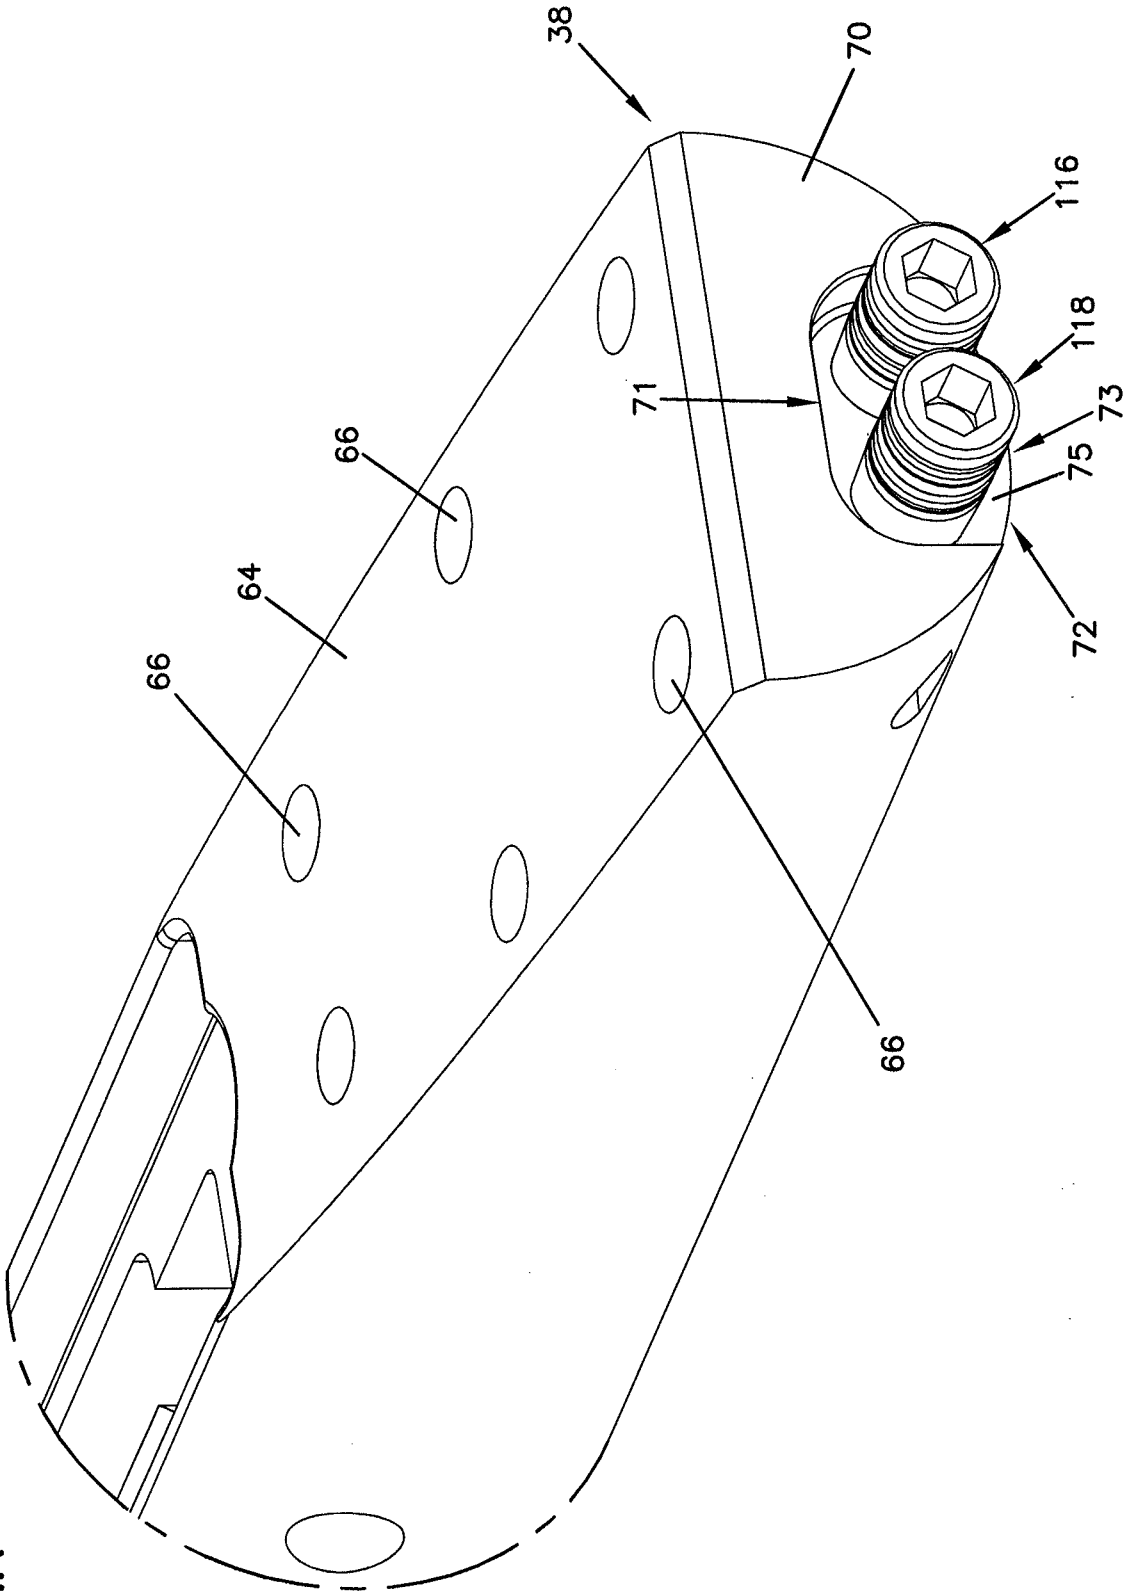


FIG. 4A



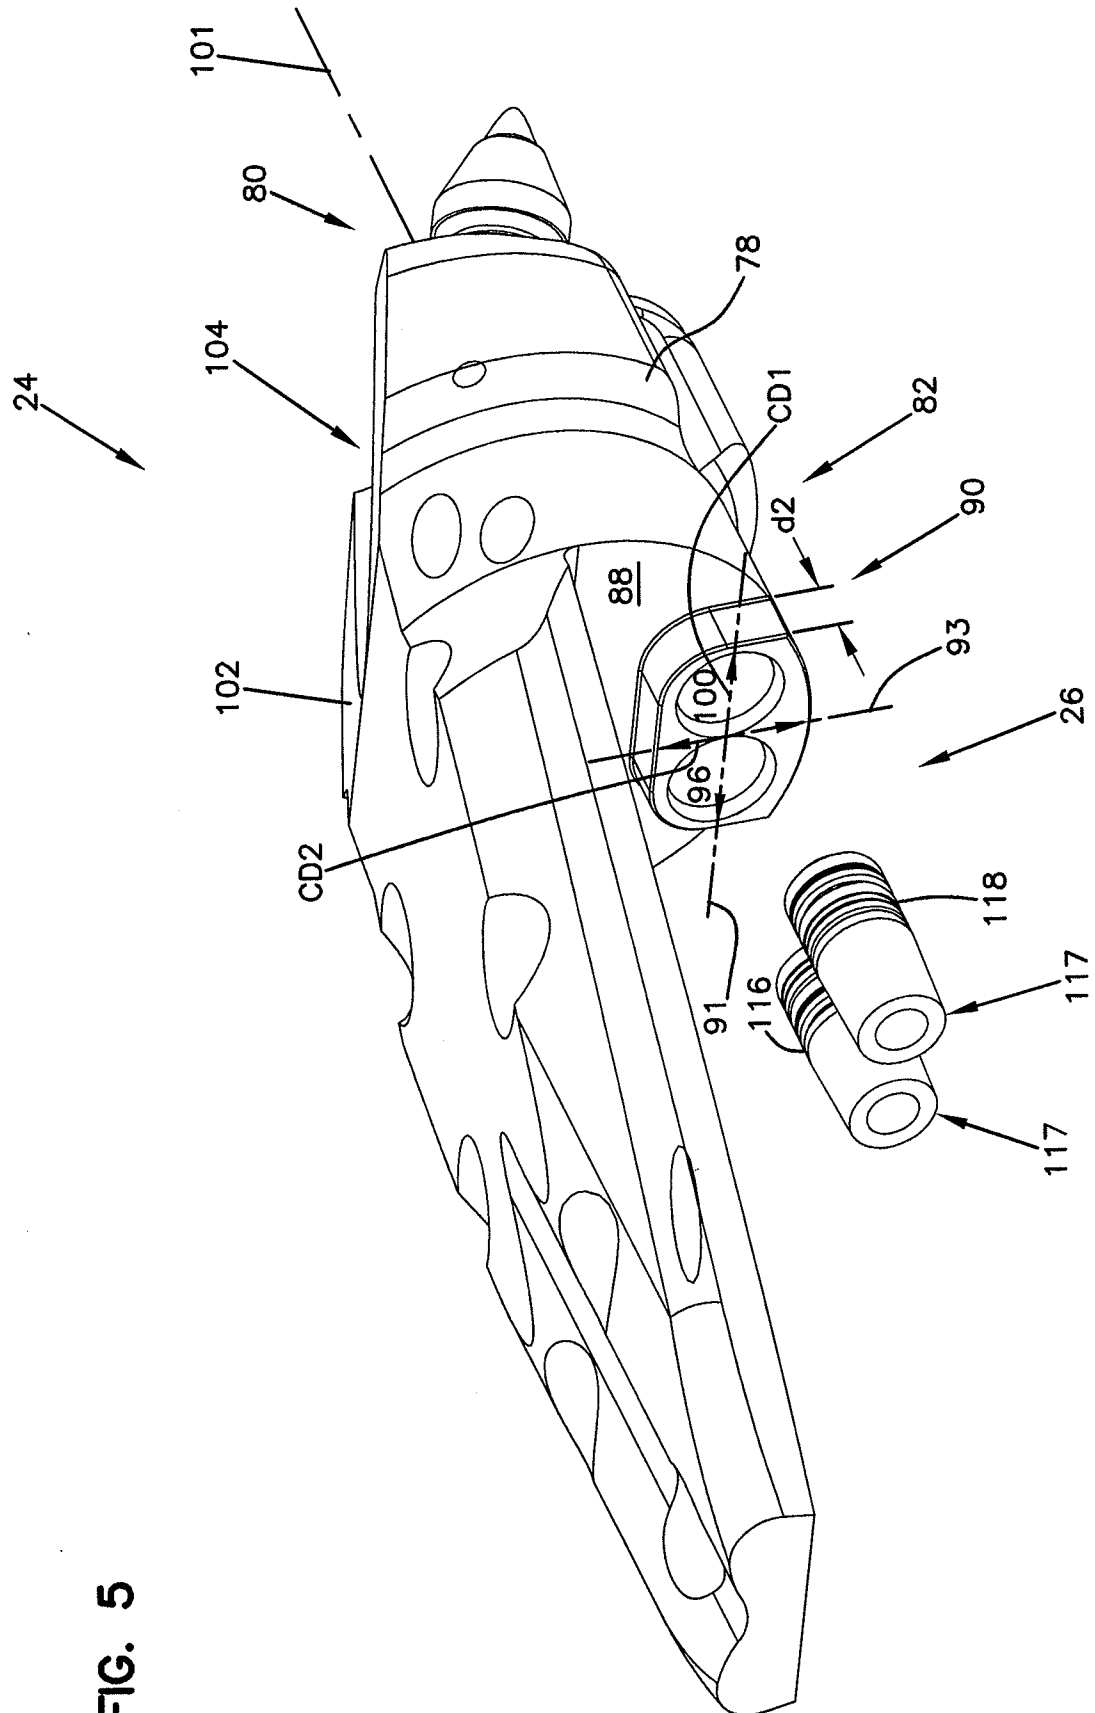
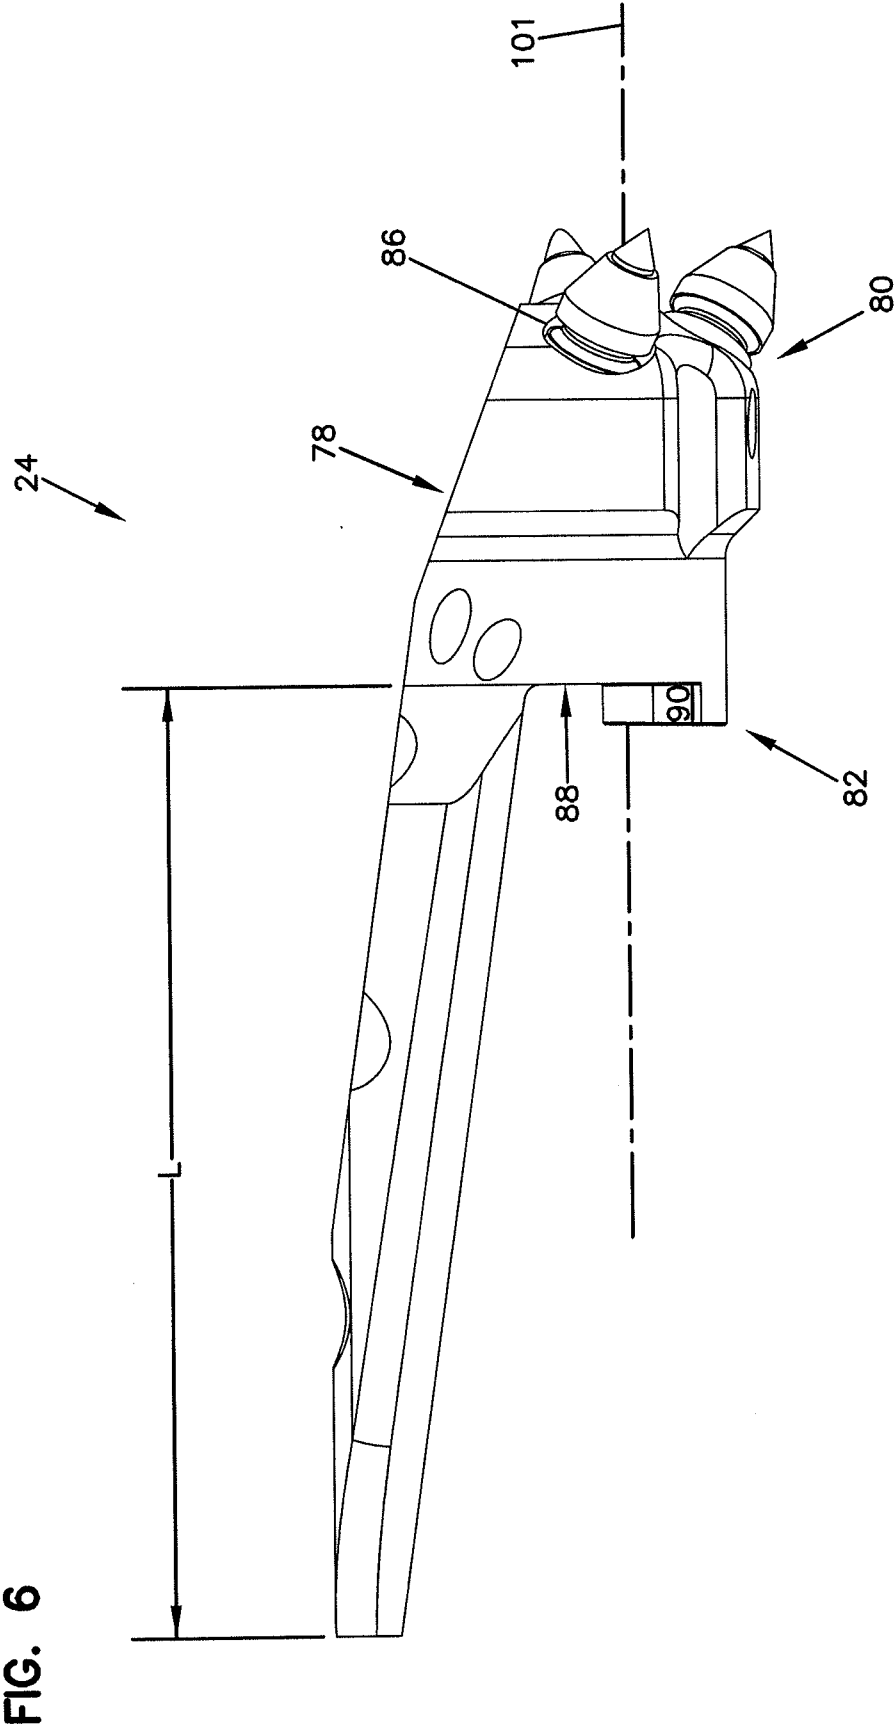


FIG. 5



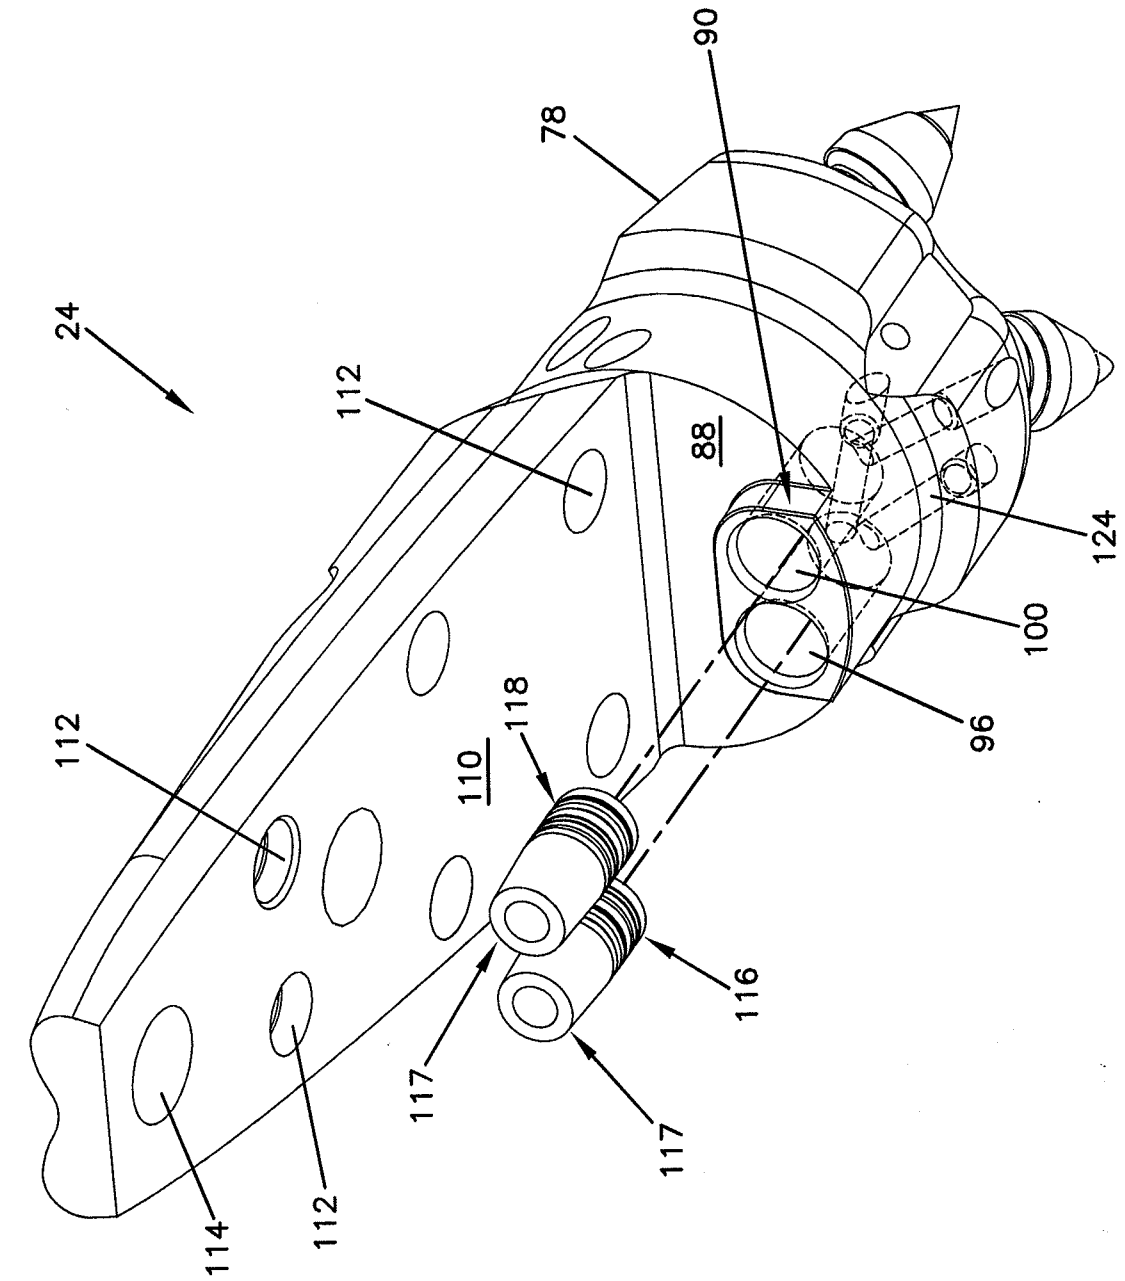


FIG. 7

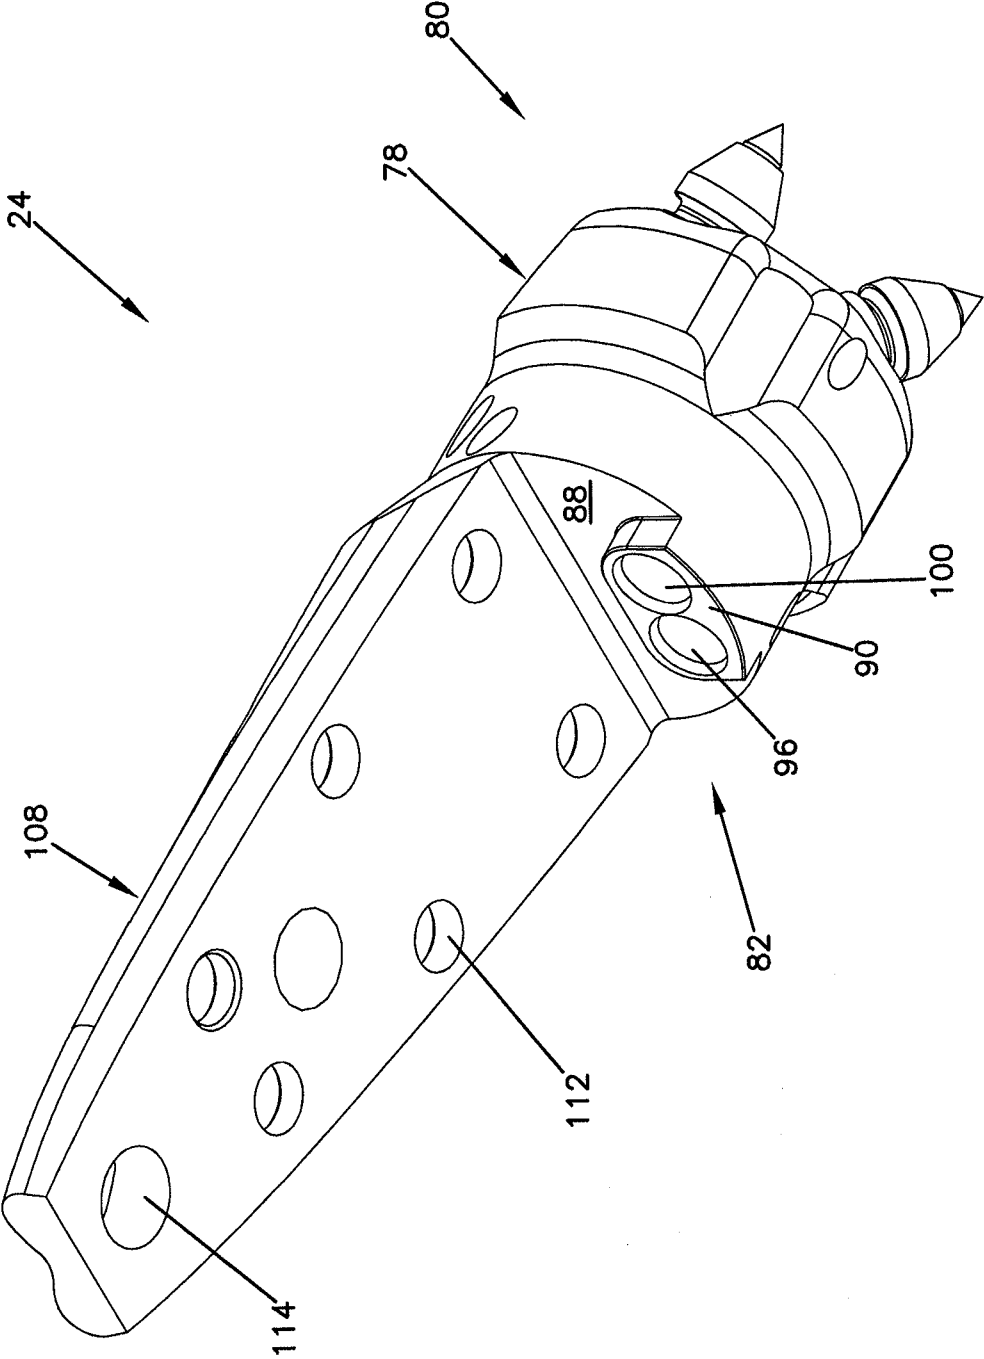
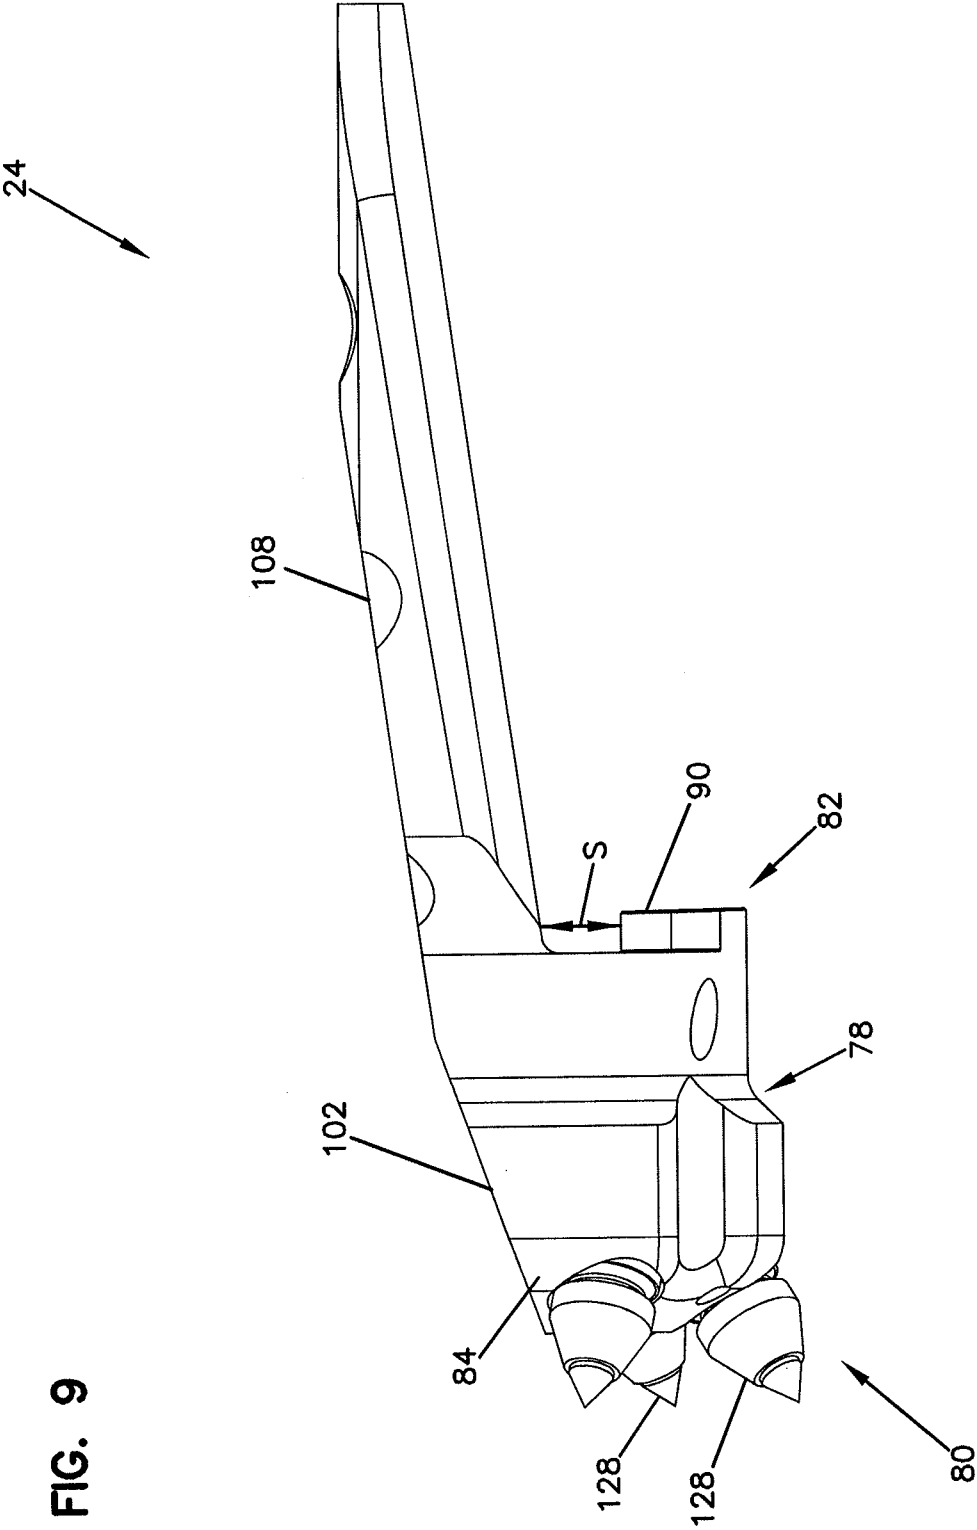


FIG. 8



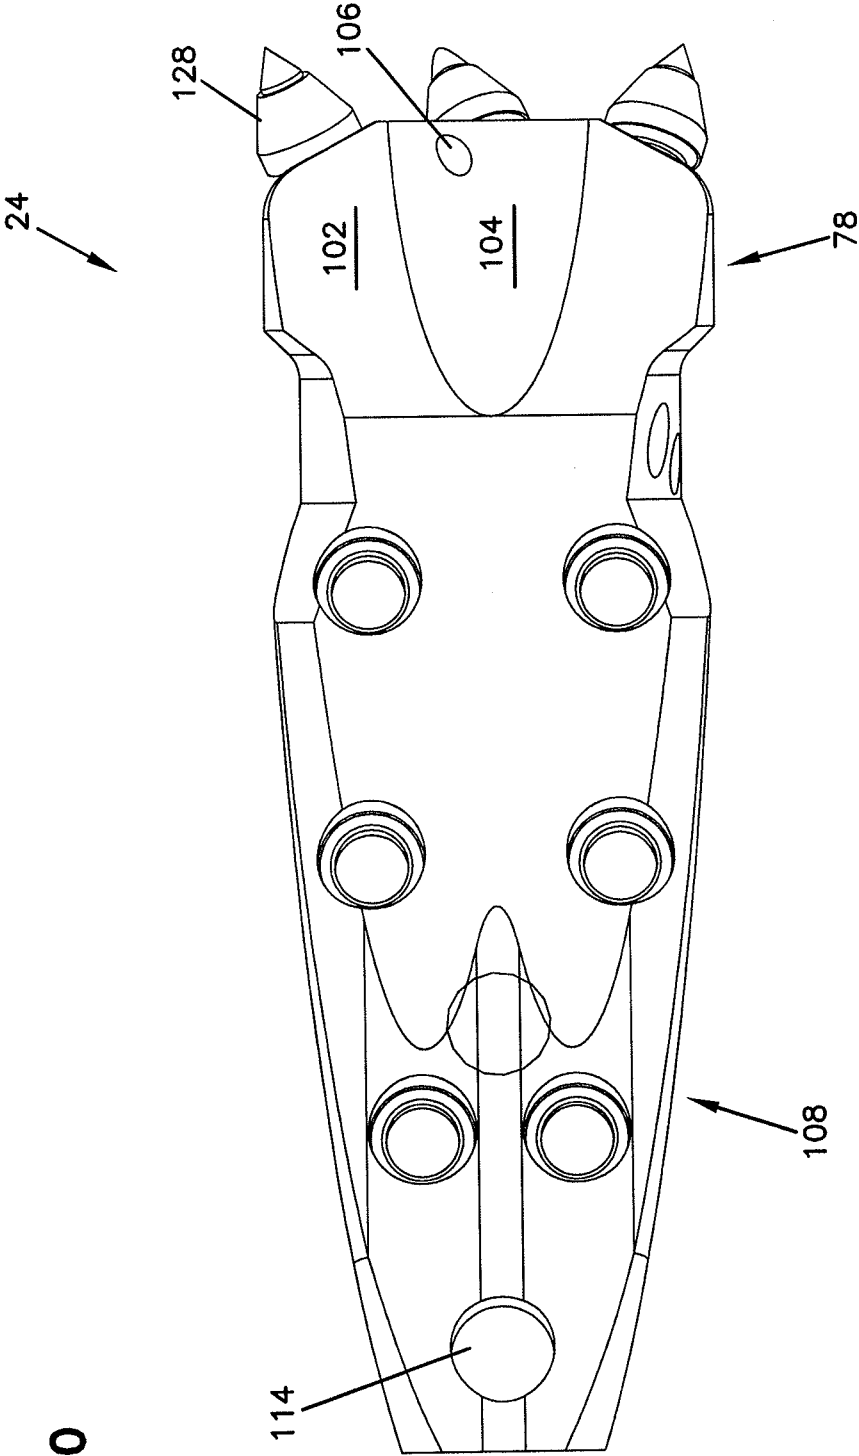


FIG. 10

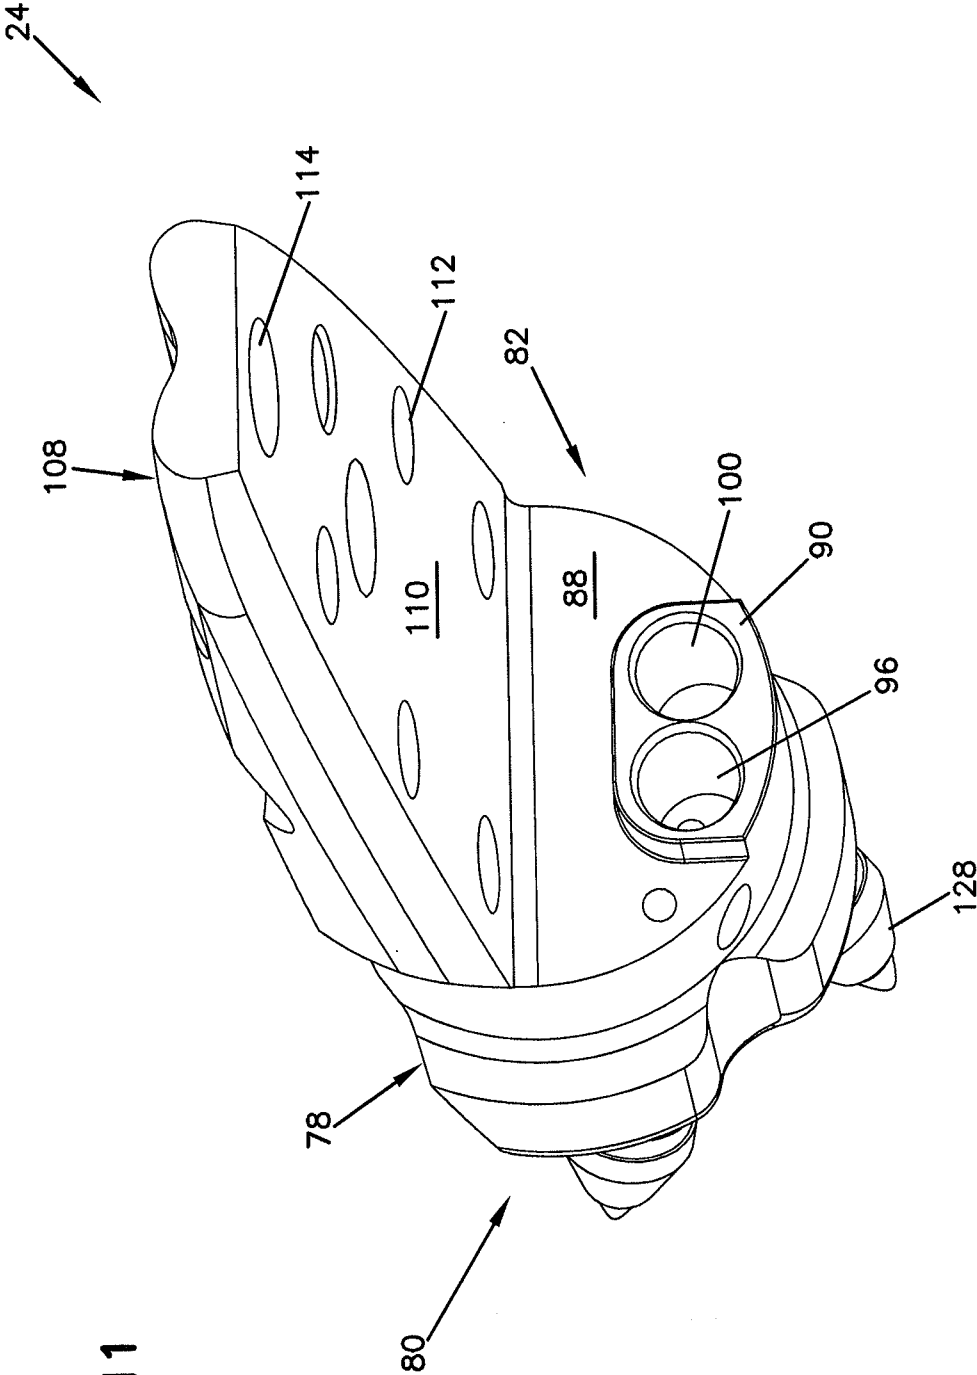
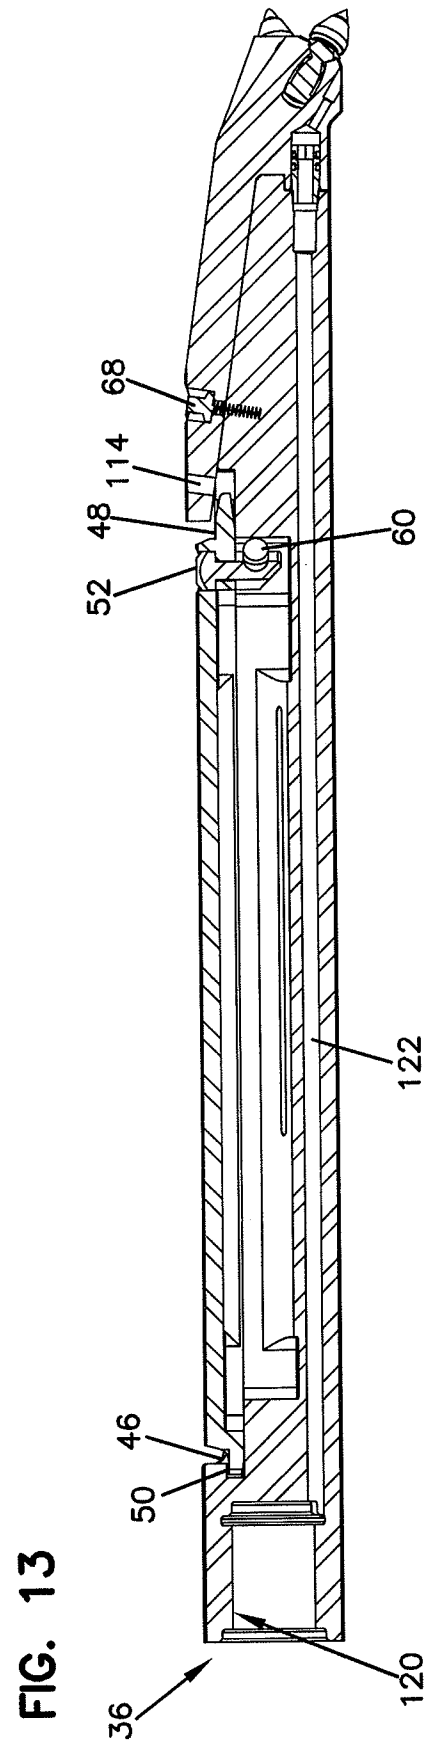
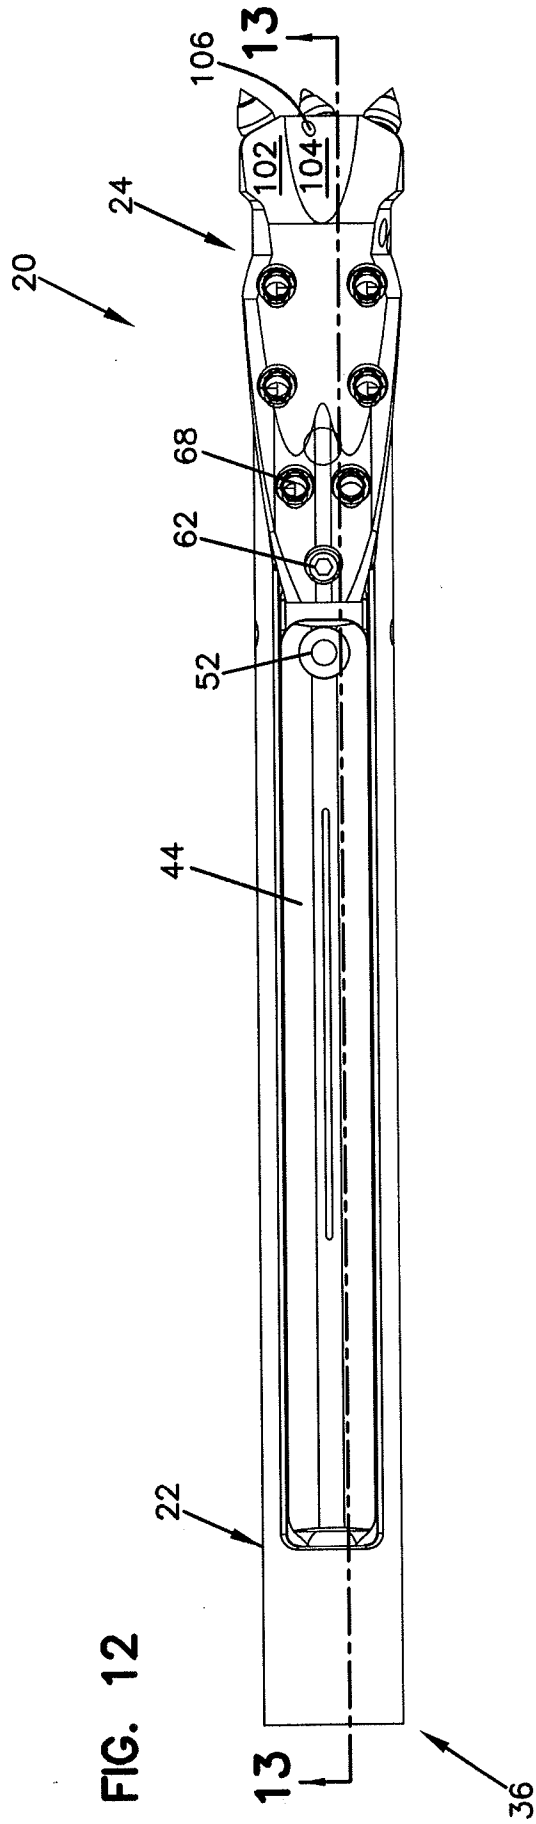


FIG. 11



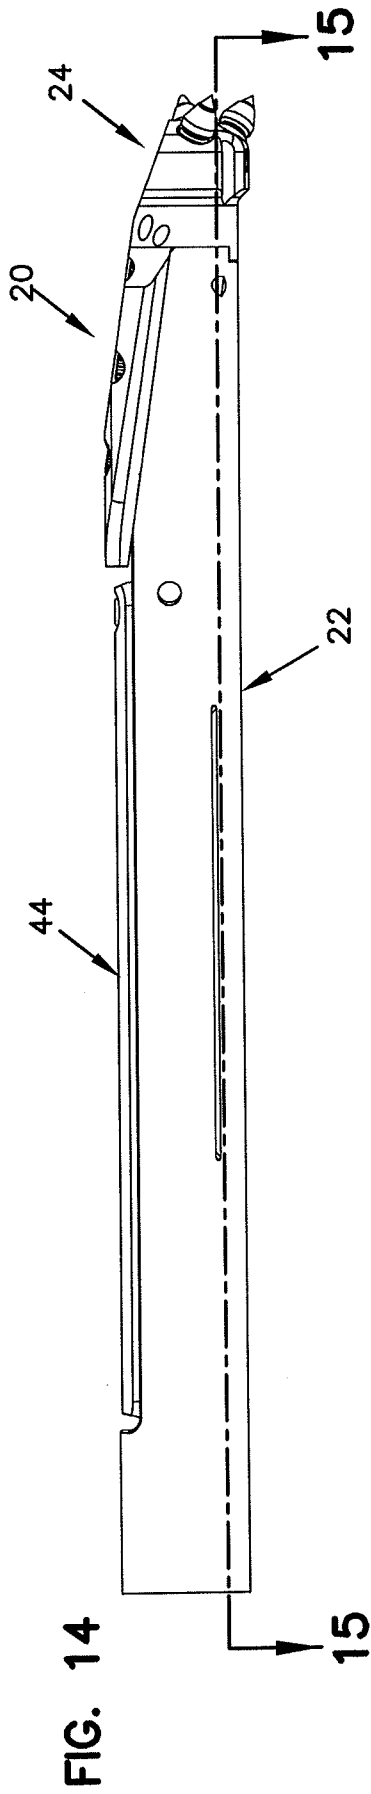
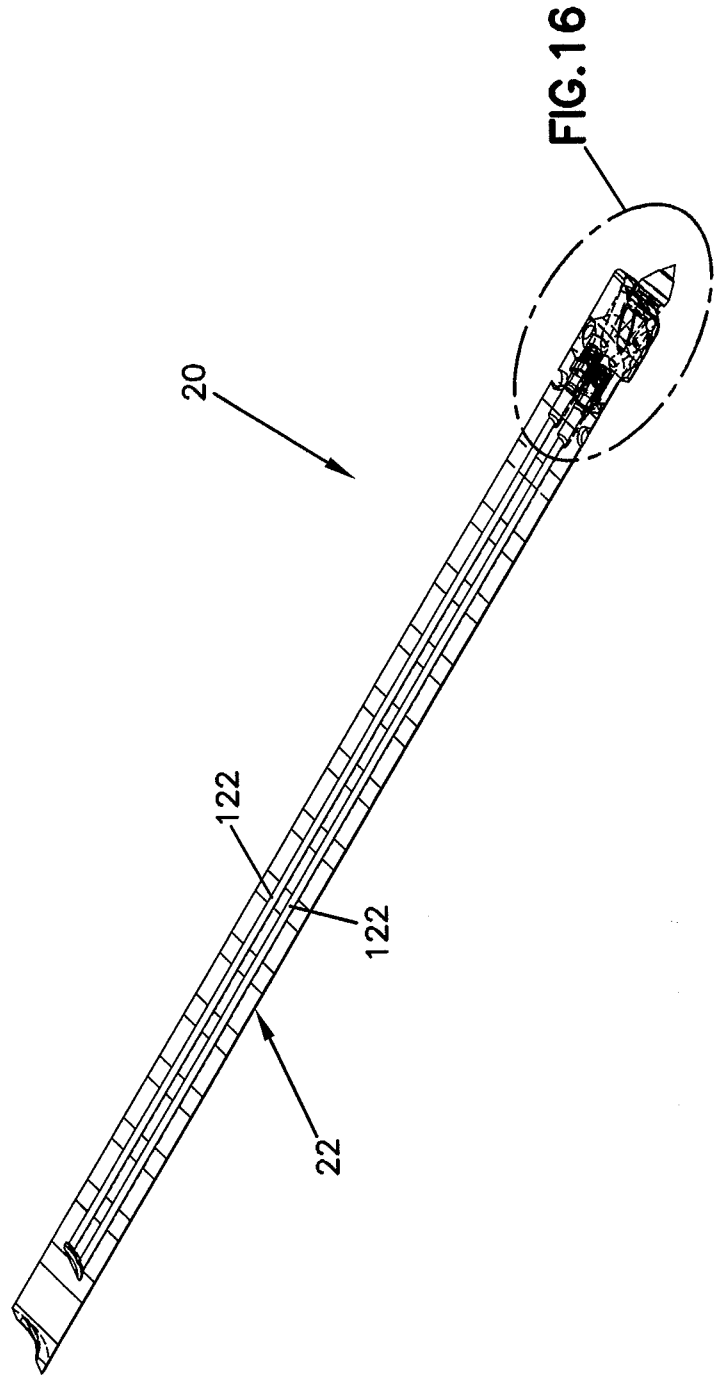


FIG. 15



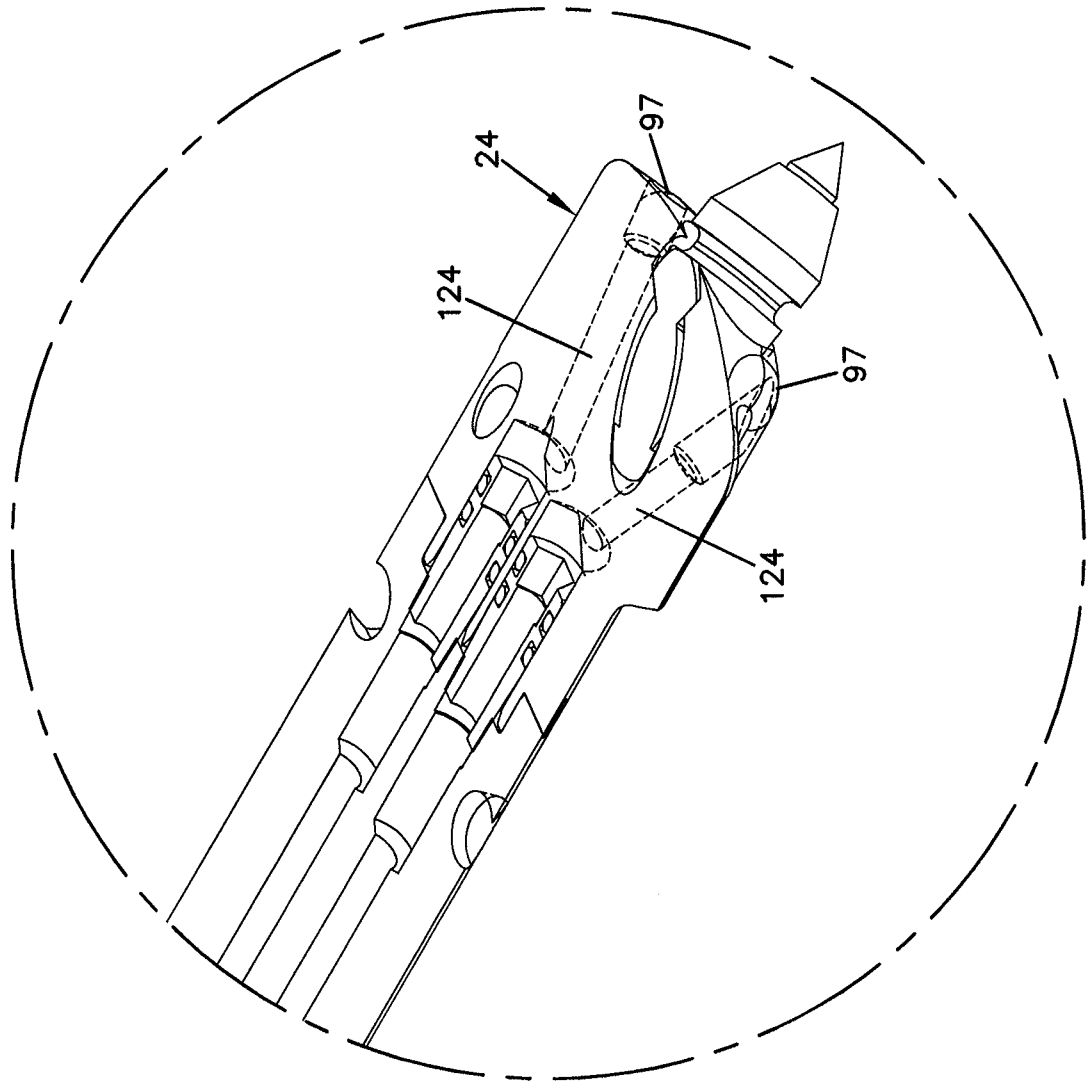


FIG. 16

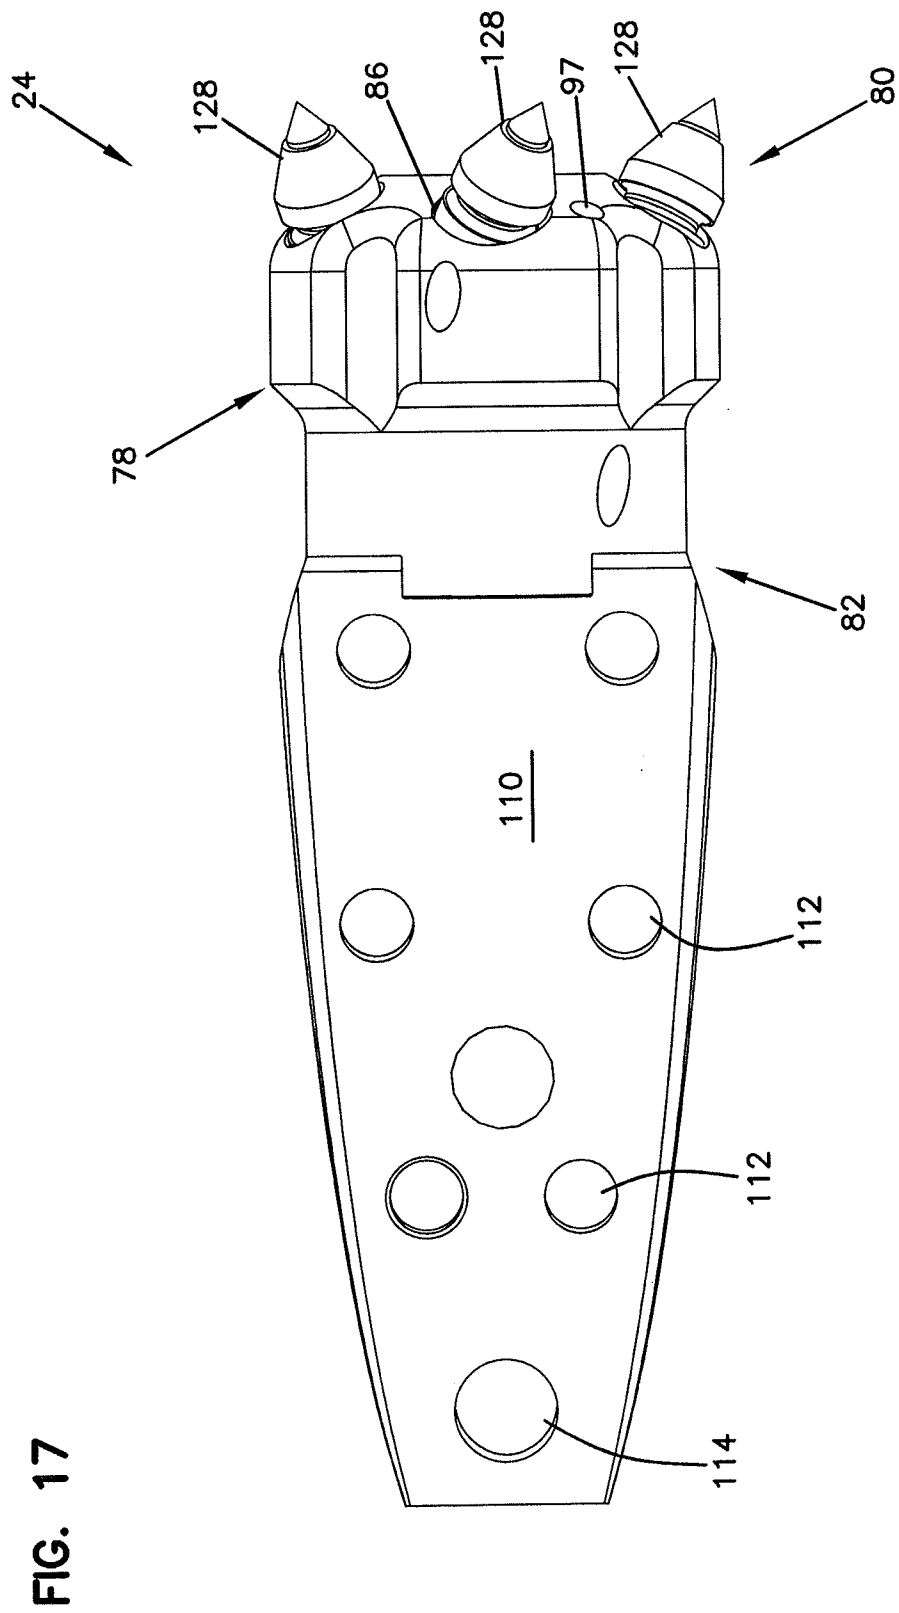


FIG. 18

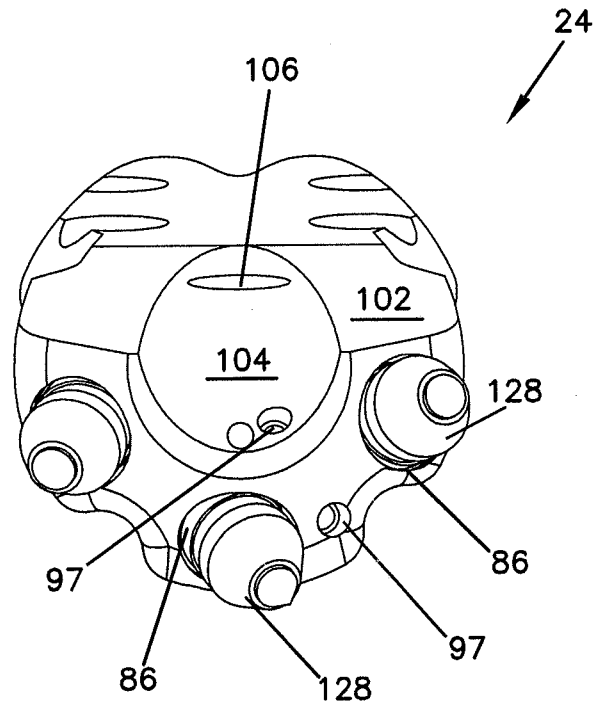
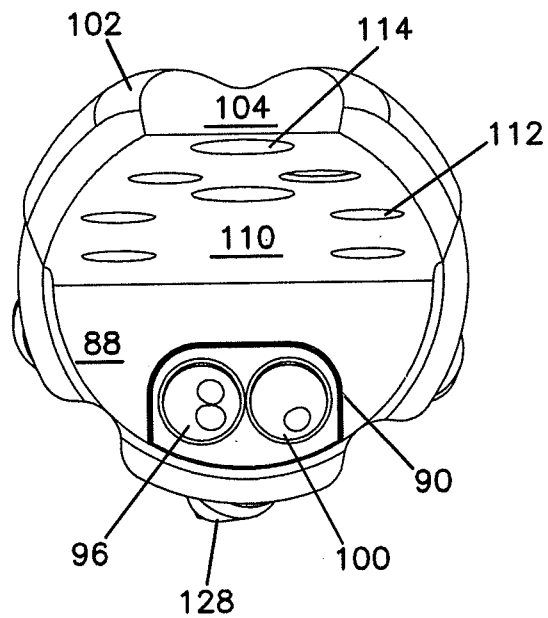


FIG. 19



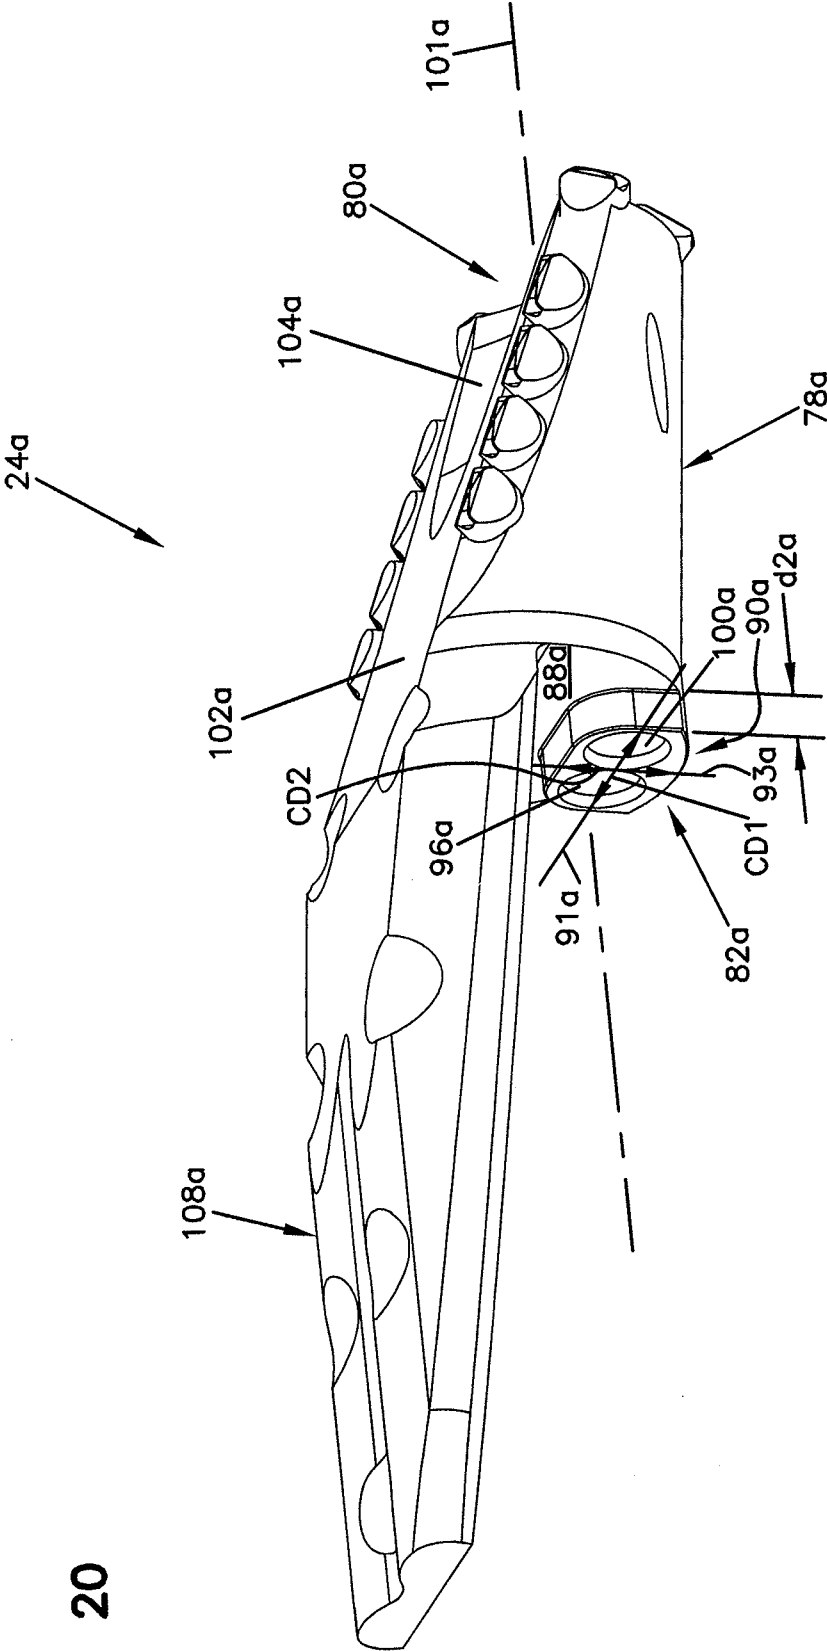


FIG. 20

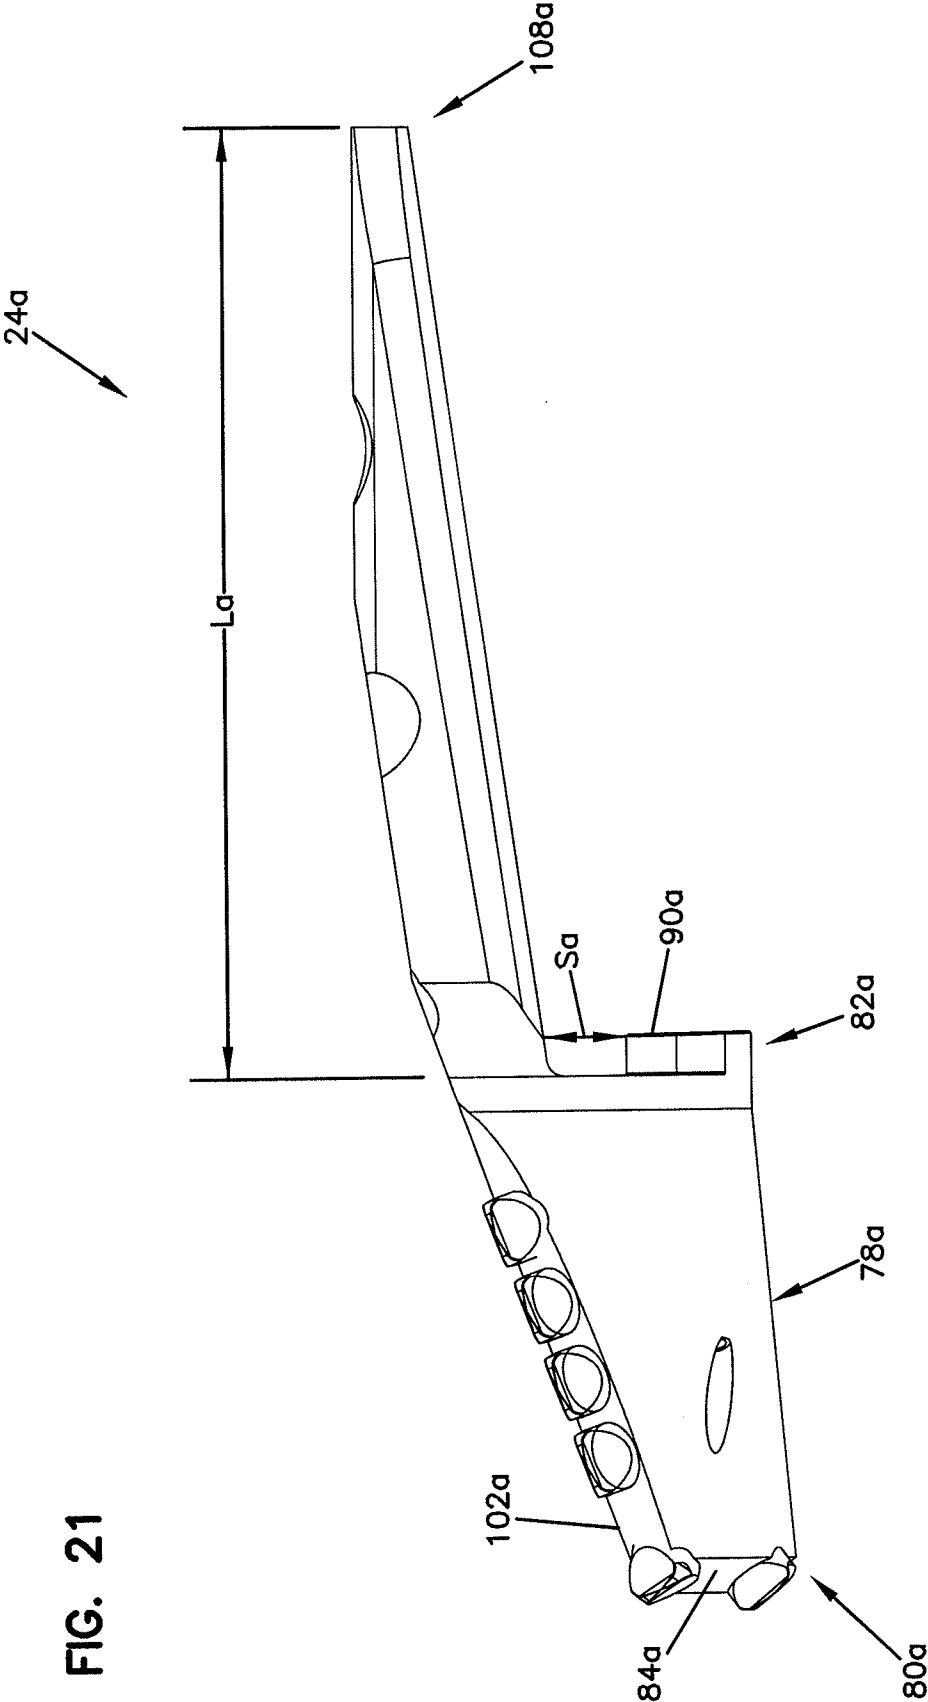
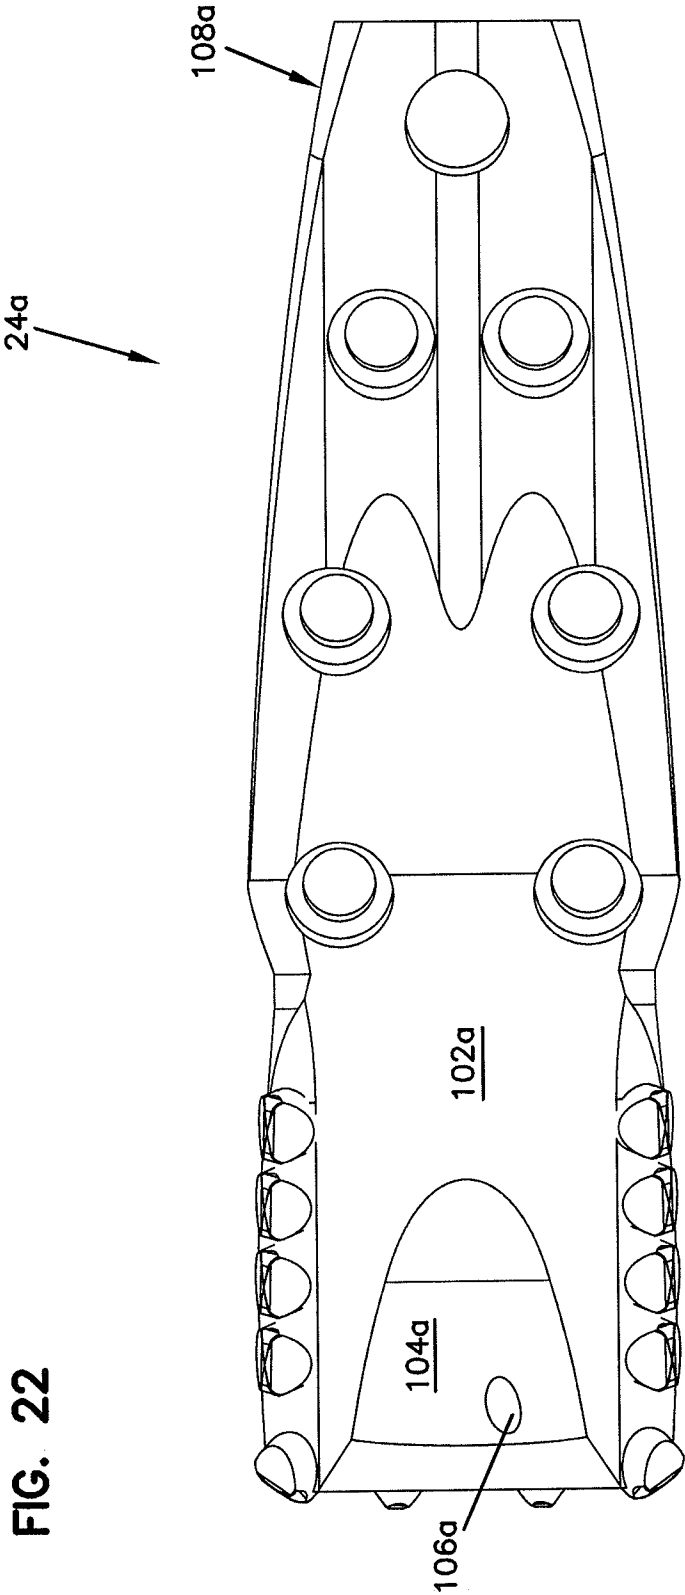


FIG. 22



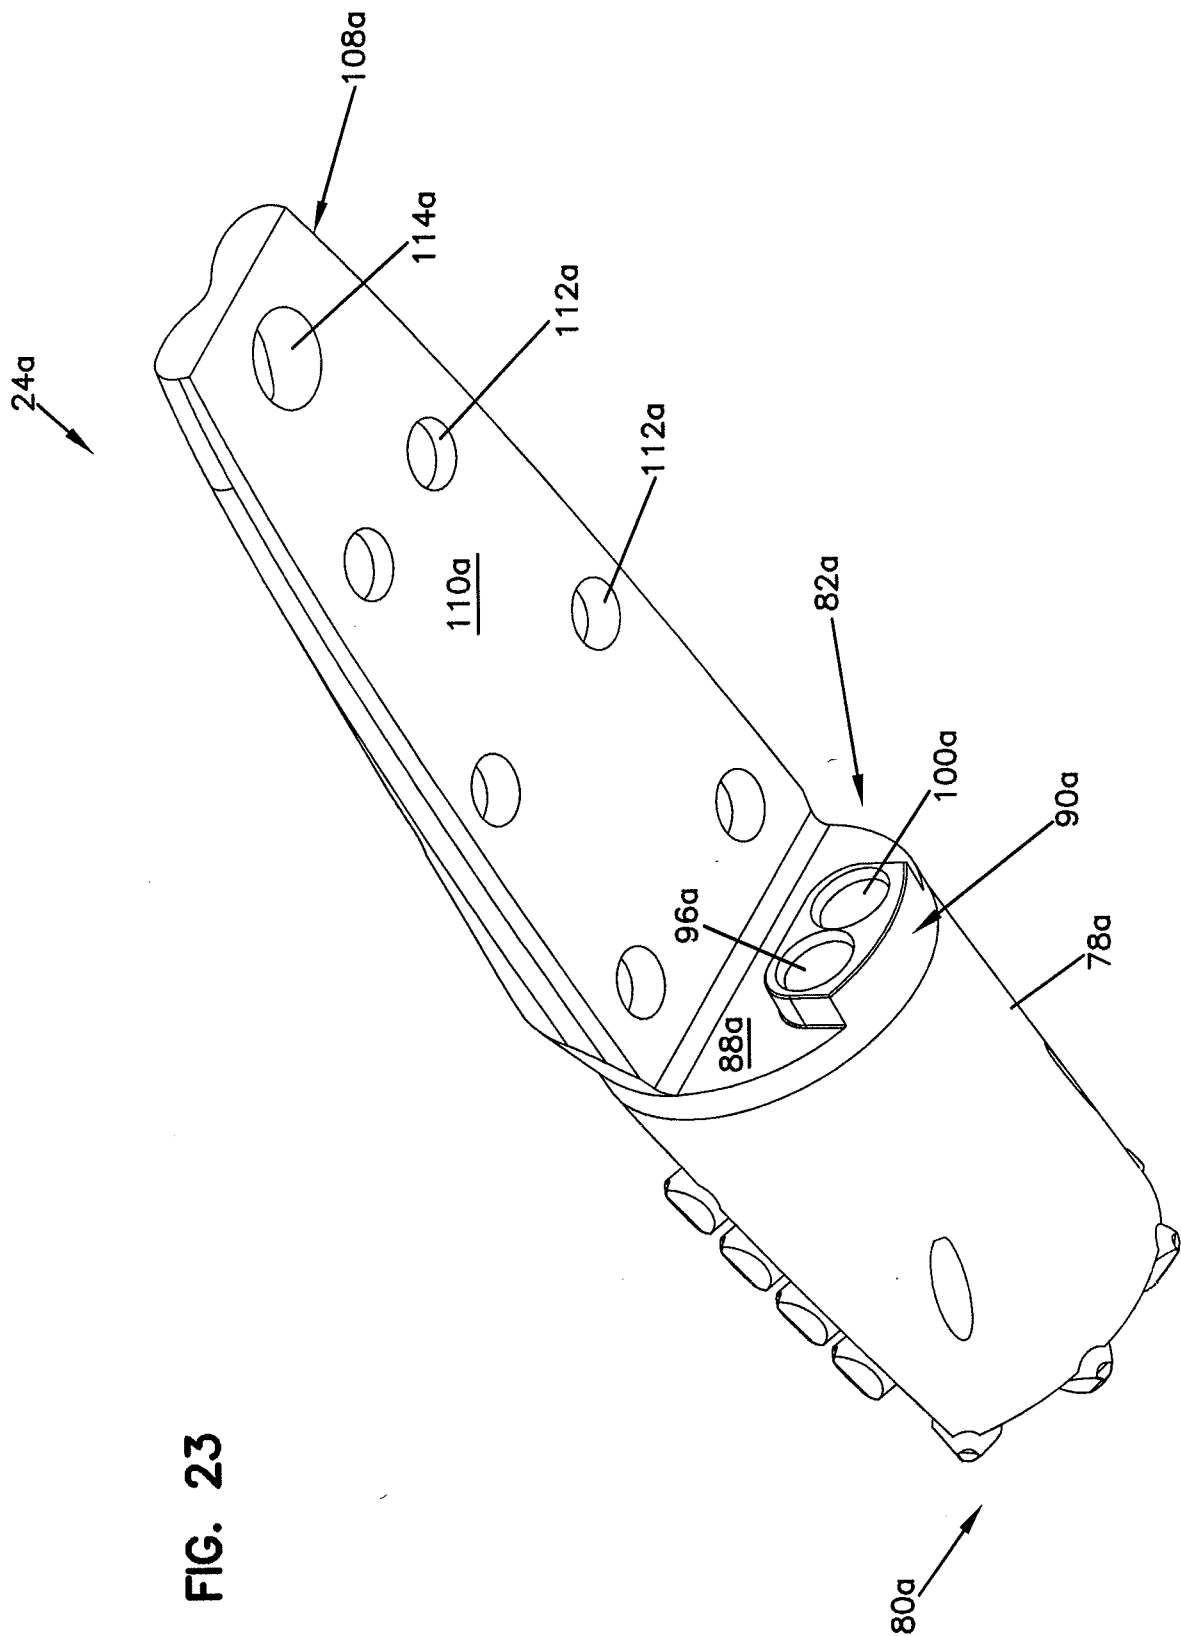


FIG. 23

FIG. 24


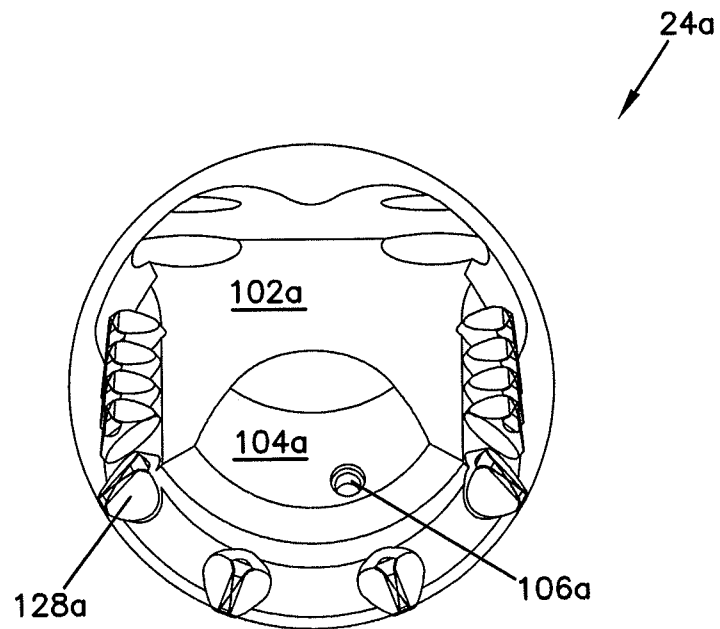


FIG. 25

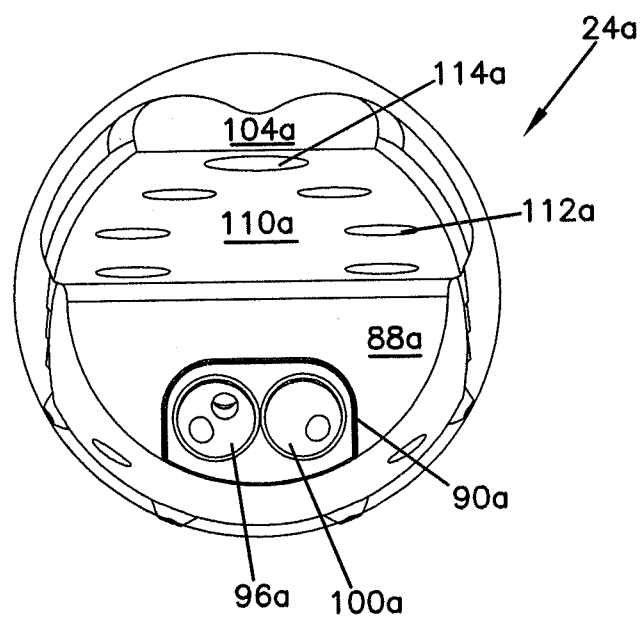

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/051325**A. CLASSIFICATION OF SUBJECT MATTER****E21B 10/42(2006.01)i, E21B 10/43(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 10/42; E21B 25/16; E21B 47/01; E21B 47/02; E21B 29/06; E21B 7/04; E21B 10/43

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: drill, rotary, cutting, proximal, distal, end, angle, mount, aperture and protrusion

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006-0151213 A1 (TOD MICHAEL et al.) 13 July 2006 See abstract, paragraphs [0044]-[0049] and figures 1-4.	1-49
A	US 2007-0029113 A1 (SHILIN CHEN) 08 February 2007 See abstract, paragraphs [0083]-[0166] and figures 1A-5D.	1-49
A	US 2004-0173381 A1 (N. BRUCE MOORE et al.) 09 September 2004 See abstract, paragraphs [0035]-[0057] and figures 1-10.	1-49
A	US 2011-0266066 A1 (MARCEL VIEL et al.) 03 November 2011 See abstract, paragraphs [0038]-[0046] and figures 1-6.	1-49
A	US 2002-0170713 A1 (DAVID M. HAUGEN et al.) 21 November 2002 See abstract, paragraphs [0066]-[0077] and figures 1-14.	1-49



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 November 2014 (26.11.2014)

Date of mailing of the international search report

27 November 2014 (27.11.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

CHOI, Sang Won

Telephone No. +82-42-481-8291



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/051325

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006-0151213 A1	13/07/2006	CN 1633542 A	29/06/2005
		CN 1633542 B	13/10/2010
		DE 60308993 D1	23/11/2006
		DE 60308993 T2	24/05/2007
		EP 1468166 A2	20/10/2004
		EP 1468166 B1	11/10/2006
		EP 1726776 A2	29/11/2006
		EP 1726776 A3	05/01/2011
		EP 2280146 A1	02/02/2011
		US 2003-0131992 A1	17/07/2003
		US 2005-0205299 A1	22/09/2005
		US 7036609 B2	02/05/2006
		US 7121363 B2	17/10/2006
		US 7172035 B2	06/02/2007
		WO 03-060283 A2	24/07/2003
		WO 03-060283 A3	27/11/2003
US 2007-0029113 A1	08/02/2007	AU 2008-338627 A1	25/06/2009
		CA 2624106 A1	15/02/2007
		CA 2624106 C	09/07/2013
		CA 2625009 A1	15/02/2007
		CA 2625012 A1	15/02/2007
		CA 2684276 A1	30/10/2008
		CA 2704718 A1	20/11/2010
		CA 2706343 A1	25/06/2009
		DE 112006002134 T5	26/06/2008
		DE 112006002135 T5	31/07/2008
		DE 112006002137 T5	26/06/2008
		EP 1929117 A1	11/06/2008
		EP 1931854 A1	18/06/2008
		EP 1931858 A1	18/06/2008
		EP 2149104 A1	03/02/2010
		EP 2240881 A1	20/10/2010
		EP 2258918 A2	08/12/2010
		EP 2264275 A2	22/12/2010
		EP 2281996 A2	09/02/2011
		GB 0802299 D0	12/03/2008
		GB 0802300 D0	12/03/2008
		GB 0802302 D0	12/03/2008
		GB 201120833 D0	11/01/2012
		GB 201121670 D0	25/01/2012
		GB 201121671 D0	25/01/2012
		GB 2443125 A	23/04/2008
		GB 2443125 B	08/02/2012
		GB 2443126 A	23/04/2008
		GB 2443126 B	28/03/2012
		GB 2443127 A	23/04/2008
		GB 2443127 B	14/12/2011
		GB 2482850 A	15/02/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/051325

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		GB 2482850 B	28/03/2012
		GB 2482851 A	15/02/2012
		GB 2482851 B	04/04/2012
		GB 2483022 A	22/02/2012
		GB 2483022 B	04/04/2012
		NO 20081184 A	05/05/2008
		NO 20081184 B	05/05/2008
		NO 20081185 A	05/05/2008
		NO 20081185 B	05/05/2008
		NO 20081187 A	05/05/2008
		NO 20081187 B	05/05/2008
		US 2007-0029111 A1	08/02/2007
		US 2007-0032958 A1	08/02/2007
		US 2007-0192074 A1	16/08/2007
		US 2009-0090556 A1	09/04/2009
		US 2009-0229888 A1	17/09/2009
		US 2010-0300758 A1	02/12/2010
		US 2011-0015911 A1	20/01/2011
		US 2011-0077928 A1	31/03/2011
		US 2013-0043077 A1	21/02/2013
		US 7729895 B2	01/06/2010
		US 7778777 B2	17/08/2010
		US 7827014 B2	02/11/2010
		US 7860693 B2	28/12/2010
		US 7860696 B2	28/12/2010
		US 8145465 B2	27/03/2012
		US 8296115 B2	23/10/2012
		US 8352221 B2	08/01/2013
		US 8606552 B2	10/12/2013
		WO 2007-019471 A1	15/02/2007
		WO 2007-019472 A1	15/02/2007
		WO 2007-019472 A8	06/01/2011
		WO 2007-019483 A1	15/02/2007
		WO 2008-130997 A1	30/10/2008
		WO 2009-079371 A1	25/06/2009
US 2004-0173381 A1	09/09/2004	AU 1999-65319 A1	22/06/2000
		AU 1999-65319 B2	18/04/2002
		AU 2000-44599 A1	14/11/2000
		AU 2000-65058 A1	19/02/2001
		AU 4459900 A	14/11/2000
		CA 2292676 A1	18/06/2000
		CA 2292676 C	23/05/2006
		CA 2366002 A1	19/10/2000
		CA 2366002 C	22/08/2006
		CA 2380034 A1	08/02/2001
		CA 2380034 C	18/04/2006
		CA 2542024 A1	18/06/2000
		CA 2542024 C	16/02/2010
		CA 2686627 A1	18/06/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/051325

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2686627 C	11/02/2014
		GB 0123904 D0	28/11/2001
		GB 2346908 A	23/08/2000
		GB 2366582 A	13/03/2002
		GB 2366582 B	24/12/2003
		GB 2370056 A	19/06/2002
		GB 2378468 A	12/02/2003
		GB 2378469 A	12/02/2003
		NO 20014993 A	14/12/2001
		NO 20014993 D0	12/10/2001
		NO 323033 B1	27/12/2006
		US 2002-0029908 A1	14/03/2002
		US 2003-0051919 A1	20/03/2003
		US 2003-0121703 A1	03/07/2003
		US 2004-0084219 A1	06/05/2004
		US 2004-0245018 A1	09/12/2004
		US 2005-0252686 A1	17/11/2005
		US 2006-0196694 A1	07/09/2006
		US 2006-0196696 A1	07/09/2006
		US 6347674 B1	19/02/2002
		US 6367366 B1	09/04/2002
		US 6467557 B1	22/10/2002
		US 6470974 B1	29/10/2002
		US 6478097 B2	12/11/2002
		US 6708783 B2	23/03/2004
		US 6745854 B2	08/06/2004
		US 6938708 B2	06/09/2005
		US 6942044 B2	13/09/2005
		US 7080701 B2	25/07/2006
		US 7174974 B2	13/02/2007
		US 7185716 B2	06/03/2007
		WO 00-61916 A1	19/10/2000
		WO 01-09478 A1	08/02/2001
US 2011-0266066 A1	03/11/2011	None	
US 2002-0170713 A1	21/11/2002	AU 2001-86062 A1	26/03/2002
		AU 2003-219133 A1	09/09/2003
		AU 2003-219133 A8	09/09/2003
		CA 2421712 C	04/04/2006
		CA 2475602 A1	28/08/2003
		CA 2475602 C	20/09/2011
		EP 1319115 A2	18/06/2003
		EP 1319115 B1	08/11/2006
		GB 0419474 D0	06/10/2004
		GB 2403242 A	29/12/2004
		GB 2403242 B	13/09/2006
		US 2003-0141063 A1	31/07/2003
		US 6536525 B1	25/03/2003
		US 6695056 B2	24/02/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/051325Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

US 6708762 B2	23/03/2004
WO 02-023008 A3	19/09/2002
WO 02-23008 A2	21/03/2002
WO 03-071084 A2	28/08/2003
WO 03-071084 A3	13/11/2003