



(51) International Patent Classification:

B07B 1/28 (2006.01) *B07B 1/32* (2006.01)
B07B 1/42 (2006.01) *B07B 1/34* (2006.01)
B07B 1/46 (2006.01) *B07B 1/38* (2006.01)
B07B 1/30 (2006.01) *B07B 1/40* (2006.01)

(21) International Application Number:

PCT/SE2010/051320

(22) International Filing Date:

30 November 2010 (30.11.2010)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0901506-6 30 November 2009 (30.11.2009) SE

(72) Inventor; and

(71) Applicant : **FROST, Magnus** [SE/SE]; Skrivartorp 1,
S-635 08 Eskilstuna (SE).

(74) Agent: **AXELSSON, Nils, Åke**; Groth & Co. KB, Box
6107, S-102 32 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MOBILE SCREEN DEVICE

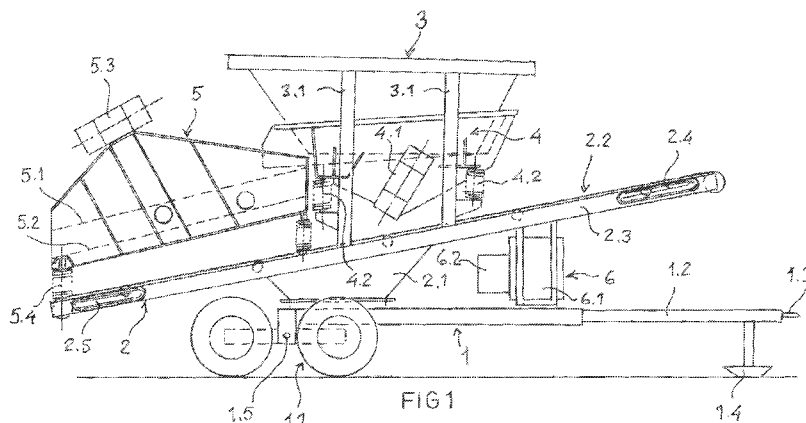

(57) Abstract: The present invention relates to a mobile screening device for the screening of soil and other materials having a chassis (1), which is carried by at least one wheel (1.1) or a similar member, and a screen frame (2), which is carried by said chassis (1) and which comprises at least one screen (5) that is supplied with material to be screened. Said screen frame (2) is pivotable around a primarily vertical turning axis (7) in relation to said chassis (1).

MOBILE SCREENING DEVICE

The present invention relates to a mobile screening device for the screening of soil and other materials having a chassis, which is carried by
5 at least one wheel or a similar member, and a screen frame, which is carried by said chassis and which comprises at least one screen that is supplied with material to be screened.

Prior Art

10 Screening devices for the separation of, e.g., stones and roots from a soil material are usually stationary, which generally means that unscreened material is transported to the screening assembly, is screened and divided into at least one useful fraction and one useless fraction, which should be deposited on, e.g., a dump. The useful fraction is in many cases
15 used as refilling where the material once was excavated and accordingly has to be transported back to the place of origin. Therefore, there is a need of being able to screen, e.g., soil material on-site to avoid transports and unnecessary material handling.

A principally movable screening device is known from US, A, 5 285 905, but the device is not suited for, e.g., being moved along a pipe
20 trench to refill material as excavation and piping advances. A screening device that is more suitable for a successive screening of material and repetitive movement is known from WO, A1, 9804783. This screening device has a chassis that is carried by caterpillar tracks and that carries an infeed
25 bucket, a crushing device, a storage bin for soil improvement material as well as conveyors, an output conveyor of which for finished soil seems to be fixedly connected with the chassis. Similar screening devices are also known from JP, A, 2003041618 and JP, A, 2003170118 and have output conveyors that are fixedly connected with the chassis.

30 The caterpillar propulsion of the known screening devices is a disadvantage if the devices are to be transported longer distances, since they have to be transported on trailers. Another disadvantage of the known screening devices is that the infeed bucket and the output conveyor cannot

be placed in a labour-saving way, e.g. when screening is to be made during successive movement of the screening device and, e.g., the excavator that excavates material and feeds the screening device. The chassis carried by caterpillar tracks has in such cases to be driven a distance, and then the
5 entire chassis has to be rotated to come into position for a simultaneous excavation and replacement of screened material.

Summary of the Invention

The object of the present invention is to provide a screening
10 device that better meets the needs, e.g. in excavation and replacement of material. Thus, the invention embraces a mobile screening device for the screening of soil and other materials having a chassis, which is carried by at least one wheel or a similar member, and a screen frame, which is carried by
15 said chassis and which comprises at least one screen that is supplied with material to be screened. Said screen frame is pivotable around a primarily vertical turning axis in relation to said chassis.

At least one feeding device may be arranged connected to said at least one screen and said screen frame may carry at least one output conveyor for finished screened material.

20 At least one locking device may be arranged between the chassis and the screen frame for the fixation of the position of the screen frame in relation to the chassis. The screen frame may be carried by a base, which is mounted to a turntable, which in turn is arranged on the chassis and has two mutually rotatable parts, wherein one part may be connected to the
25 base and the other part may be connected to the chassis.

Said at least one locking device may comprise at least one tooth rim, which is connected with the base, and which further is connected to at least one lock member. At least one of said at least one lock member may be arranged to spring in between teeth on at least one of said at least one tooth
30 rim by means of force from at least one spring, and to spring out when the screen frame is subjected to a horizontal force of a determined size that rotates the screen frame around the turning axis. The force from at least one

of said at least one spring may be adjustable by means of at least one adjusting member.

By chassis, here all kinds of underframes with or without wheels or caterpillar tracks, which may be movable by their own engines or by
5 towing by means of a traction vehicle or the like, are intended.

One or more feeding devices are arranged connected to occurring screens, preferably a feed hopper that in a freestanding way projects down into a spring-suspended feed bucket, which is provided with vibrators for the disintegration and feed of the material to the screen, which
10 also is spring-suspended. The feed bucket has an outlet end, which suitably projects inwardly over the screen tray, inside which one or more mutually parallel grating-like screens are arranged. The screen tray also carries vibrators, by means of which the soil material is screened at the same time as separated coarser material is fed rearwardly and out through an opening
15 in the rear end of the screen tray.

It is within the scope of the invention to implement the locking device in several different ways, e.g. in the form of friction blocks that abut against a brake disc that substitutes the chain wheel. It is also within the scope of the invention to rotate the screen frame mechanically, e.g. by
20 means of an electric motor, which also may be remotely controlled from, e.g., the excavator operating at the screening device. This solution may advantageously be combined with different kinds of locking devices for the screen frame, which also may be remote-controlled.

An integrated drive generator is arranged hanging under the
25 front part of the conveyor frame and comprises an internal combustion engine, which drives an electric generator. The belt conveyor and the vibrators are supplied with electric current from the integrated drive generator. To the integrated drive generator, a hydraulic pump may also be connected in the case hydraulic operation is an advantage.

30 By means of the screening device according to the invention, it is possible to carry out screening during successive movement of the screening device and, e.g., the excavator that excavates material and feeds the screening device. By means of the excavator, it is possible to tow the

screening device to a desired location and there rotate the screen frame into a desired angle to the longitudinal direction of the chassis so that the excavator can feed in material into the feed hopper directly from the location where the material is excavated.

5

List of Figures

Figure 1 shows, in a side view, a complete screening device according to the invention.

10 Figure 2 shows, in a perspective view, a section of the screening device according to Figure 1.

Figure 3 shows, in a side view, a section of the chassis included in the screening device according to Figure 1.

Figure 4 shows, in a top view, the section of the chassis according to Figure 3.

15

Description of Embodiments

The screening device shown in Figure 1 comprises a chassis 1, which on each side is carried by a wheel bogie 1.1 and which at its front part has a telescopic towbar 1.2, which in front is provided with a tow loop 1.3 and a support foot 1.4. The respective wheel bogie 1.1 is rotatable around a horizontal turning axis 1.5.

20 A screen frame 2 is carried by the chassis 1 and comprises a base 2.1 that is pivotable around a vertical pivot in relation to the chassis 1, and a belt conveyor 2.2 that is arranged in a conveyor frame 2.3 on the base 2.1. The conveyor frame 2.3 may slope 10–20°, preferably 11° to the horizontal plane. In Figure 1, an inclination of approx. 15° is shown.

25 A feed hopper 3 for the soil material is arranged on legs 3.1 that are attached to the conveyor frame 2.3 and project down freely into a feed bucket 4 provided with two electrically driven feed vibrators 4.1. The feed bucket is carried by four helical springs 4.2 connected to the conveyor frame 2.3. The feed vibrators 4.1 cause material filled through the feed hopper 3 to be thrown upwardly and rearwardly against a screen tray 5. The feed bucket 4 has an outlet end, which projects inwardly over the screen tray 5 inside

30

which two mutually parallel screen gratings 5.1, 5.2 are arranged. The screen tray 5 furthermore carries two electrically driven screen vibrators 5.3, by means of which the material is screened at the same time as separated coarser material is fed rearwardly and out through an opening in the rear end of the screen tray 5. The screen tray 5 is carried by four helical springs 5.4 connected to the conveyor frame 2.3.

An integrated drive generator 6 is arranged hanging under the front part of the conveyor frame 2.3 and comprises an internal combustion engine 6.1, which drives an electric generator 6.2. The belt conveyor 2.2 and the vibrators 4.1, 5.3 are supplied with electric current from the integrated drive generator 6.

The base 2.1 of the screen frame 2 is, as shown in Figure 2, connected with the chassis 1, which at its rear end has a triangular portion 1.6, via a conventional turntable 7. The turntable 7 principally consists of two rings having intermediate ball bearings, a lower ring of which is attached to the triangular portion 1.6 and an upper ring is attached to the base 2.1 of the screen frame 2. The turntable 7 is arranged at a distance in front of the turning axis 1.5 on the respective wheel bogie 1.1 so that the centre of gravity of the screen frame 2 always is lying between the wheel bogies 1.1 and the support foot 1.4, irrespective of which angular setting the screen frame 2 has in relation to the chassis 1.

A locking device 8 shown in detail in Figures 3 and 4 is arranged to lock the screen frame 2 in a desired position in relation to the chassis 1 depending on the operating conditions when the screening device is in operation. The locking device 8 comprises a tooth rim 8.1 that is mounted between the turntable 7 and the base 2.1 in the screen frame 2. Thus, the tooth rim 8.1 follows the rotary motion of the base 2.1. Via a roller, e.g. a ball bearing, an upper lock arm 8.2 is in contact with the tooth rim 8.1 and is carried by a rotatable vertical pin 8.3 arranged on the triangular portion 1.6 of the chassis 1. A lower lock arm 8.4, which is arranged underneath the triangular portion 1.6, is also carried by the pin 8.3, and is connected to a towbar 8.5 that is threaded at its outer end and projects through a side wall of the triangular portion 1.6. The towbar 8.5 is held spring-loaded in a direction

out from the triangular portion 1.6 by means of a helical spring 8.6. The force of the spring 8.6 can be set by means of a knob 8.7 so that the upper lock arm 8.2 can clamp the tooth rim 8.1 and thereby also the screen frame 2 in a desired position.

5 Upon a change of the position of the screen frame 2 in relation to the chassis 1, pressure is applied, e.g. by an excavator bucket or the like, against the side of the front part of the screen frame 2, whereby the upper lock arm 8.2 springs out from the tooth rim 8.1 into a new position. For this purpose, the screen frame 2 may be provided with rubber linings 2.4, 2.5 at
10 each side at the front as well as the rear end. For a permanent setting of the position of the screen frame 2, e.g. during road transportation of the screening device, the tooth rim 8.1 can be locked, e.g. by a cotter (not shown) that is brought down into a hole in any one of the teeth of the tooth rim 8.1, down into a corresponding hole in the triangular portion 1.6.

15 A simple movement of the screening device is provided by pulling or pushing, e.g. by means of an excavator bucket, a member (not shown) projecting from the chassis 1 and arranged on the telescopic towbar 1.2. In longer distance transportation, the towbar 1.2 is coupled to, e.g., a wheel-loader via the tow loop 1.3.


20 The invention is not limited to the embodiments shown herein, but may be varied within the scope of the subsequent claims.


CLAIMS



1. Mobile screening device for the screening of soil and other materials having a chassis (1), which is carried by at least one wheel (1.1) or a similar member, and a screen frame (2), which is carried by said chassis (1) and which comprises at least one screen (5) that is supplied with material to be screened, **characterized in** that said screen frame (2) is pivotable around a primarily vertical turning axis (7) in relation to said chassis (1).
2. Screening device according to claim 1, **characterized in** that at least one feeding device (3, 4) is arranged connected to said at least one screen (5), and that said screen frame (2) carries at least one output conveyor (2.2) for finished screened material.
3. Screening device according to any one of the preceding claims, **characterized in** that at least one locking device (8) is arranged between the chassis (1) and the screen frame (2) for the fixation of the position of the screen frame (2) in relation to the chassis (1).
4. Screening device according to any one of the preceding claims, **characterized in** that the screen frame (2) is carried by a base (2.1), which is mounted to a turntable (7), which in turn is arranged on the chassis (1) and has two mutually rotatable parts, one part being connected to the base (2.1) and the other part being connected to the chassis (1, 1.6).
5. Screening device according to claim 4 when claim 4 depends on claim 3, **characterized in** that said at least one locking device (8) comprises at least one tooth rim (8.1), which is connected with the base (2.1), and which further is connected to at least one lock member (8.2).
6. Screening device according to claim 5, **characterized in** that at least one of said at least one lock member (8.2) is arranged to spring in between teeth on at least one of said at least one tooth rim (8.1) by means of

force from at least one spring (8.6), and to spring out when the screen frame (2) is subjected to a horizontal force of a determined size that rotates the screen frame (2) around the turning axis (7).

- 5 7. Screening device according to claim 6, **characterized in** that the force from at least one of said at least one spring (8.6) is adjustable by means of at least one adjusting member (8.7).

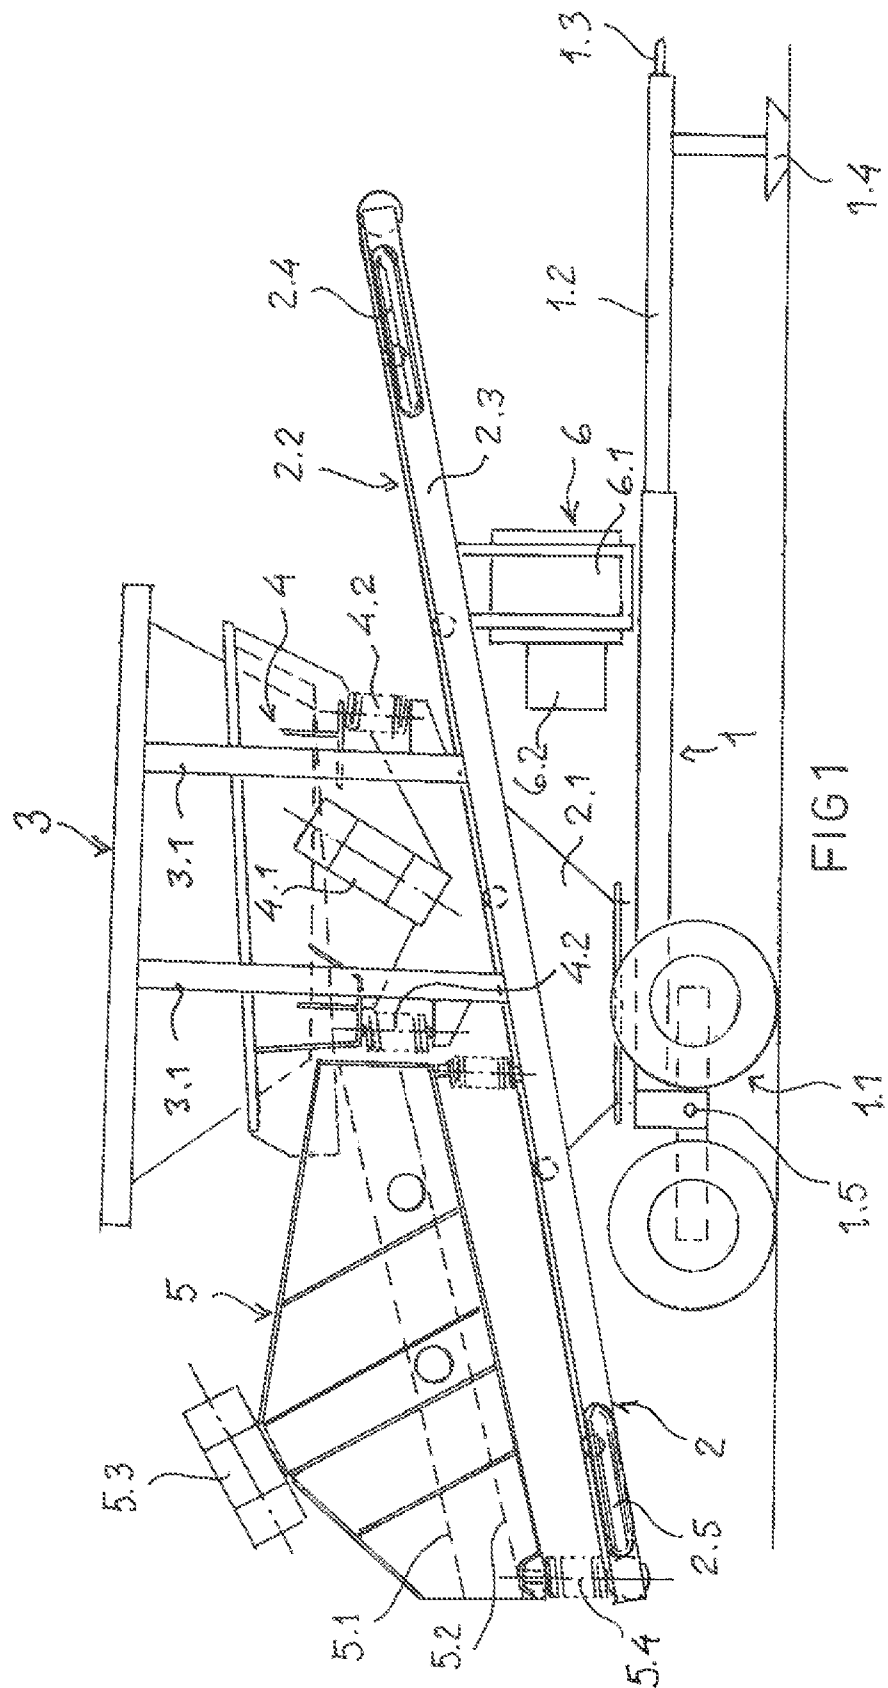

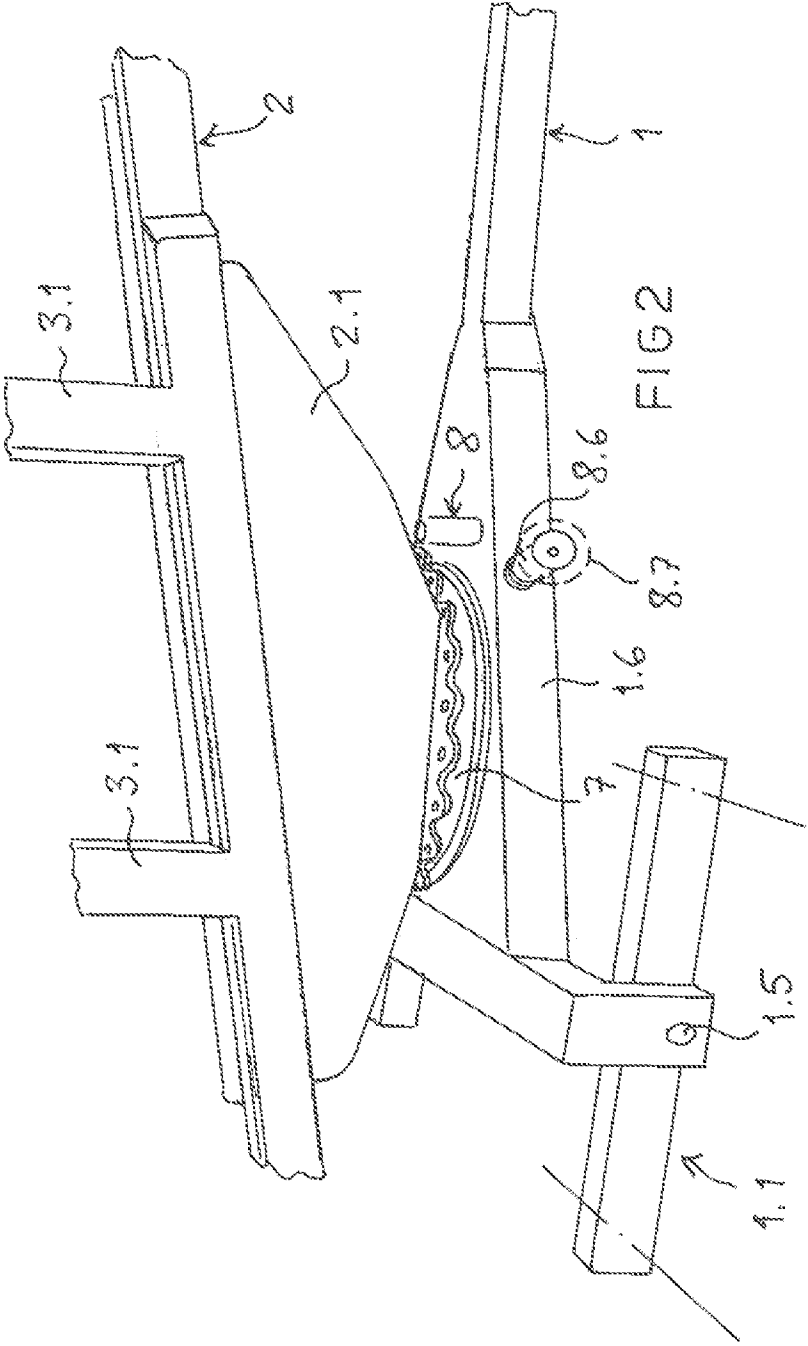

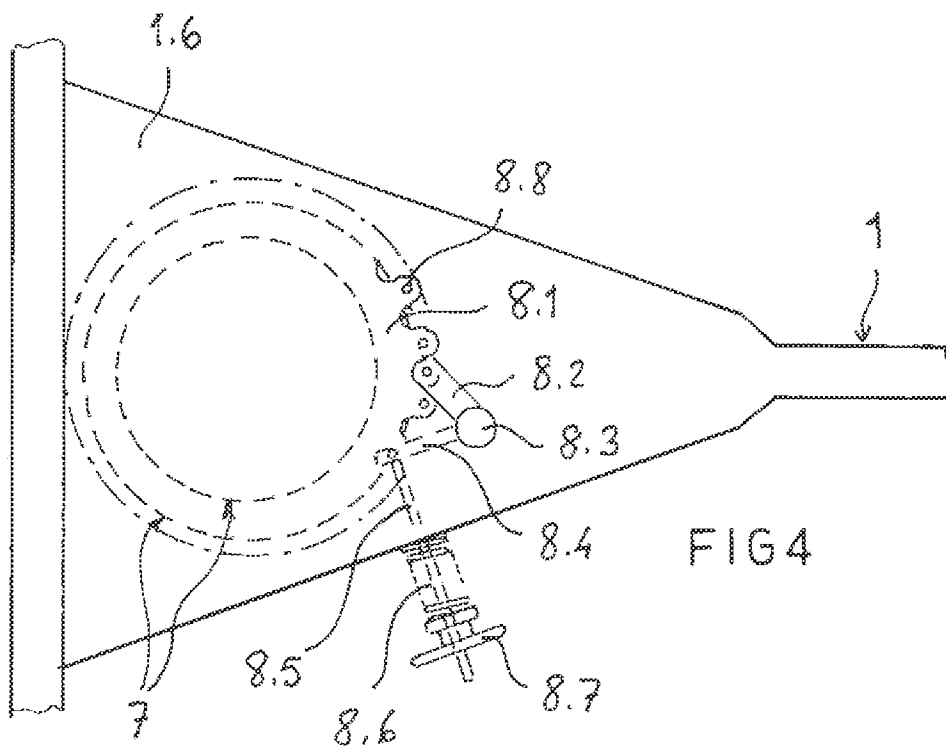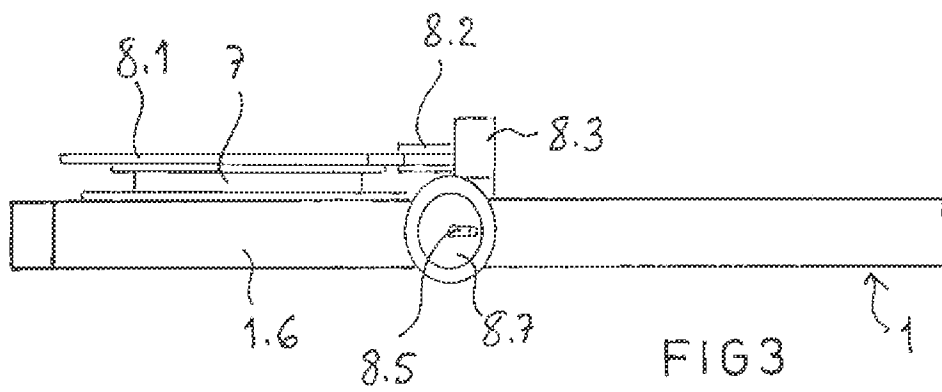

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2010/051320

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B07B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2459287 A (WILLIAM DOYLE), 21 October 2009 (21.10.2009), figures 1-4, abstract --	1-7
A	US 5979666 A (DOUGLAS, PATRICK J.), 9 November 1999 (09.11.1999), figures 1-8, abstract --	1-7
A	US 20060237346 A1 (FRIDMAN, BORIS ET AL), 26 October 2006 (26.10.2006), figures 1-8, abstract --	1-7
A	US 6543622 B1 (FRIDMAN, BORIS), 8 April 2003 (08.04.2003), figures 1-12B, abstract --	1-7

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 February 2011

Date of mailing of the international search report

01-03-2011

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Strand / EÖ
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2010/051320

International patent classification (IPC)

B07B 1/28 (2006.01)

B07B 1/42 (2006.01)

B07B 1/46 (2006.01)

B07B 1/30 (2006.01)

B07B 1/32 (2006.01)

B07B 1/34 (2006.01)

B07B 1/38 (2006.01)

B07B 1/40 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is **RUUMTGXAYL**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2010/051320

GB	2459287	A	21/10/2009	NONE

US	5979666	A	09/11/1999	NONE

US	20060237346	A1	26/10/2006	NONE

US	6543622	B1	08/04/2003	NONE
