



US009270882B2

(12) **United States Patent**
Razavi et al.

(10) **Patent No.:** **US 9,270,882 B2**
(45) **Date of Patent:** **Feb. 23, 2016**

(54) **SYSTEM AND METHOD FOR CONTEXTUAL DIGITAL PHOTOGRAPHY MODE SELECTION**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)
(72) Inventors: **Frank Razavi**, Fairport, NY (US);
Bruce H. Pillman, Rochester, NY (US);
Kenneth A. Parulski, Rochester, NY (US)

3,971,065 A 7/1976 Bayer
4,642,678 A 2/1987 Cok
4,774,574 A 9/1988 Daly
4,939,601 A 7/1990 Endo
5,189,511 A 2/1993 Parulski
5,493,335 A 2/1996 Parulski
5,652,621 A 7/1997 Adams, Jr.
5,668,597 A 9/1997 Parulski

(Continued)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

CN 1936685 A 3/2007
EP 1220530 7/2002

(Continued)

(21) Appl. No.: **14/582,302**

OTHER PUBLICATIONS

(22) Filed: **Dec. 24, 2014**

Lowe, 'Distinctive Image Features from Scale-Invariant Keypoints', International Journal of Computer Vision 60 (2), 91-110,2004.

(65) **Prior Publication Data**

Primary Examiner — Gary C Vieaux

US 2015/0189181 A1 Jul. 2, 2015

(74) *Attorney, Agent, or Firm* — Blank Rome LLP

Related U.S. Application Data

(57) **ABSTRACT**

(63) Continuation of application No. 12/843,275, filed on Jul. 26, 2010, now Pat. No. 8,970,720.


A digital camera having a plurality of photography modes, comprising: an image sensor; an optical system for imaging a scene onto the image sensor; an image capture control for initiating an image capture operation; a photography mode user interface for selecting between a plurality of photography modes, the photography modes having associated image capture and image processing settings; a power control for turning the digital camera on or off, wherein when the camera is in an off state and the power control is activated with a first activation pattern the digital camera is turned on and set to operate in a default photography mode and when the power control is activated with a second activation pattern the digital camera is turned on and set to operate in a previously selected photography mode.

(51) **Int. Cl.**
H04N 5/232 (2006.01)

(52) **U.S. Cl.**
CPC **H04N 5/23245** (2013.01); **H04N 5/23216** (2013.01); **H04N 5/23222** (2013.01); **H04N 5/23241** (2013.01)

(58) **Field of Classification Search**
CPC H04N 5/23222
See application file for complete search history.

20 Claims, 5 Drawing Sheets

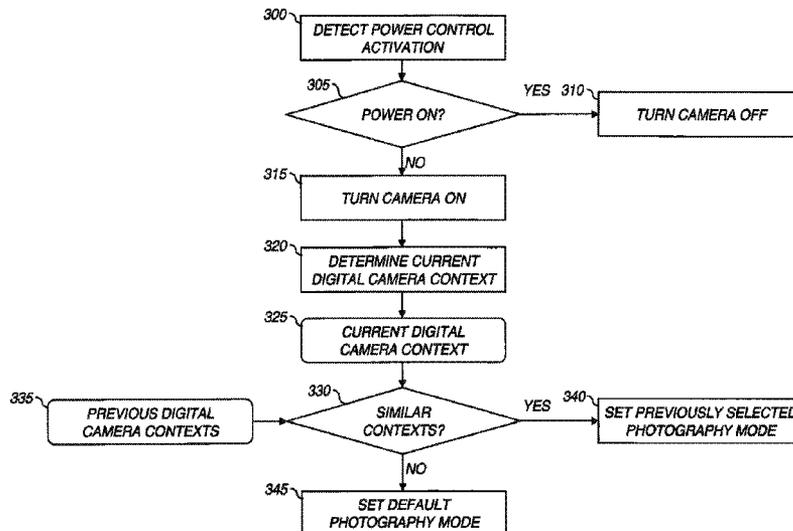

(56)

References Cited

U.S. PATENT DOCUMENTS

5,721,989	A	2/1998	Kitazawa
6,192,162	B1	2/2001	Hamilton, Jr.
6,292,218	B1	9/2001	Parulski
6,301,440	B1	10/2001	Bolle
6,571,066	B1	5/2003	Tsai
6,727,830	B2	4/2004	Lui
6,778,770	B1	8/2004	Cazier
6,934,056	B2	8/2005	Gindele
6,976,215	B1	12/2005	Roderick
7,139,445	B2	11/2006	Pilu
7,212,235	B2	5/2007	Nakayama
7,542,077	B2	6/2009	Miki
7,646,297	B2	1/2010	Aaron
7,721,227	B2	5/2010	Ronkainen
2002/0130959	A1	9/2002	McGarvey
2004/0072589	A1	4/2004	Hamamura
2004/0119877	A1	6/2004	Shinozaki
2005/0168611	A1	8/2005	Yamaya
2005/0191729	A1	9/2005	Kaczmarek
2006/0044400	A1	3/2006	Lee
2007/0008321	A1	1/2007	Gallagher
2007/0024931	A1	2/2007	Compton
2007/0248330	A1	10/2007	Pillman

2008/0129836	A1	6/2008	Kim
2008/0133791	A1	6/2008	Hodges
2008/0143518	A1	6/2008	Aaron
2009/0180659	A1	7/2009	Sander
2009/0290807	A1	11/2009	Marchesotti
2009/0297032	A1	12/2009	Loui
2010/0149370	A1	6/2010	Kim
2011/0102630	A1	5/2011	Rukes
2012/0019704	A1	1/2012	Levey
2012/0140088	A1	6/2012	Clark

FOREIGN PATENT DOCUMENTS

GB	2403365	12/2004
JP	7306436	11/1995
JP	2000299814 A	10/2000
JP	2001211369	8/2001
JP	2002094854	3/2002
JP	2003032611	1/2003
JP	2003248262 A	9/2003
JP	2006253887 A	9/2006
JP	2008078738	4/2008
JP	2008078738 A	4/2008
JP	2010016761 A	1/2010
JP	2010158041 A	7/2010
TW	200818883 A	4/2008

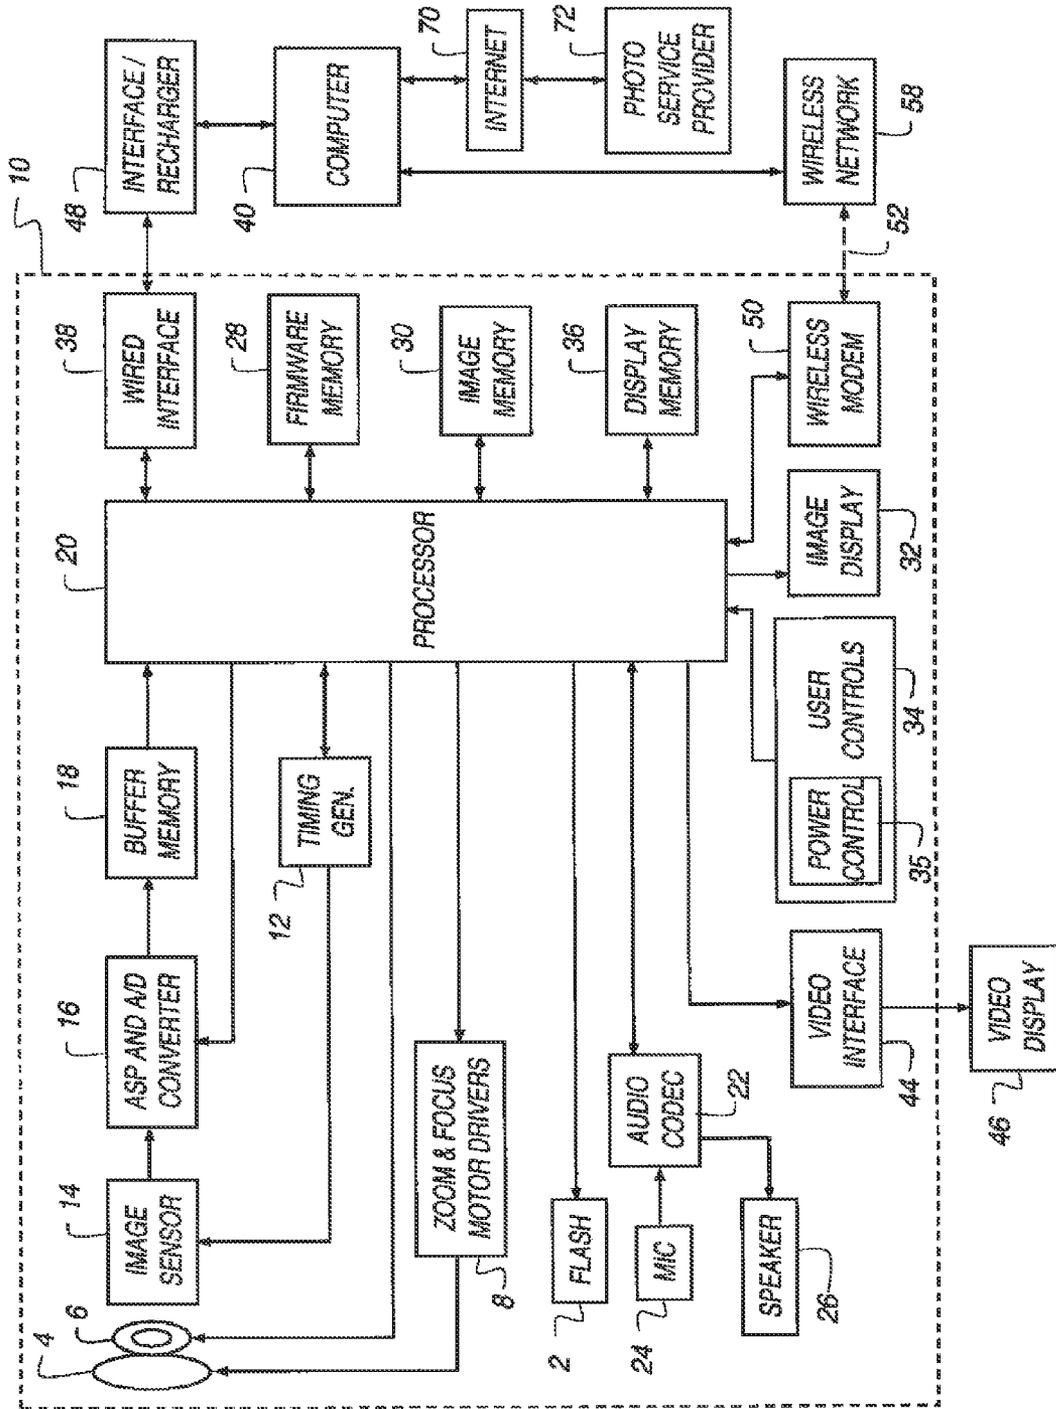


FIG. 1

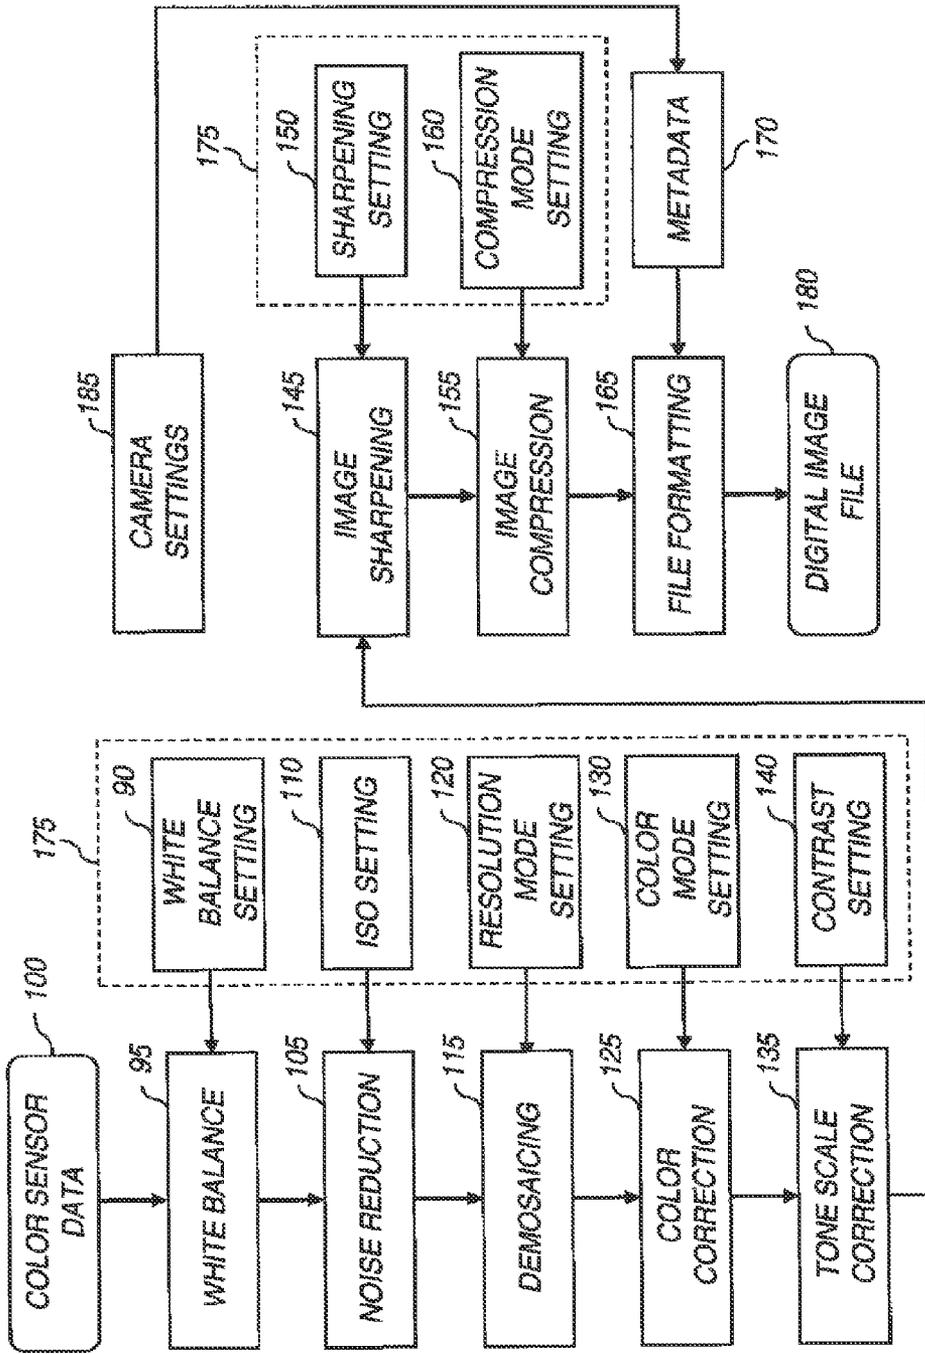


FIG. 2

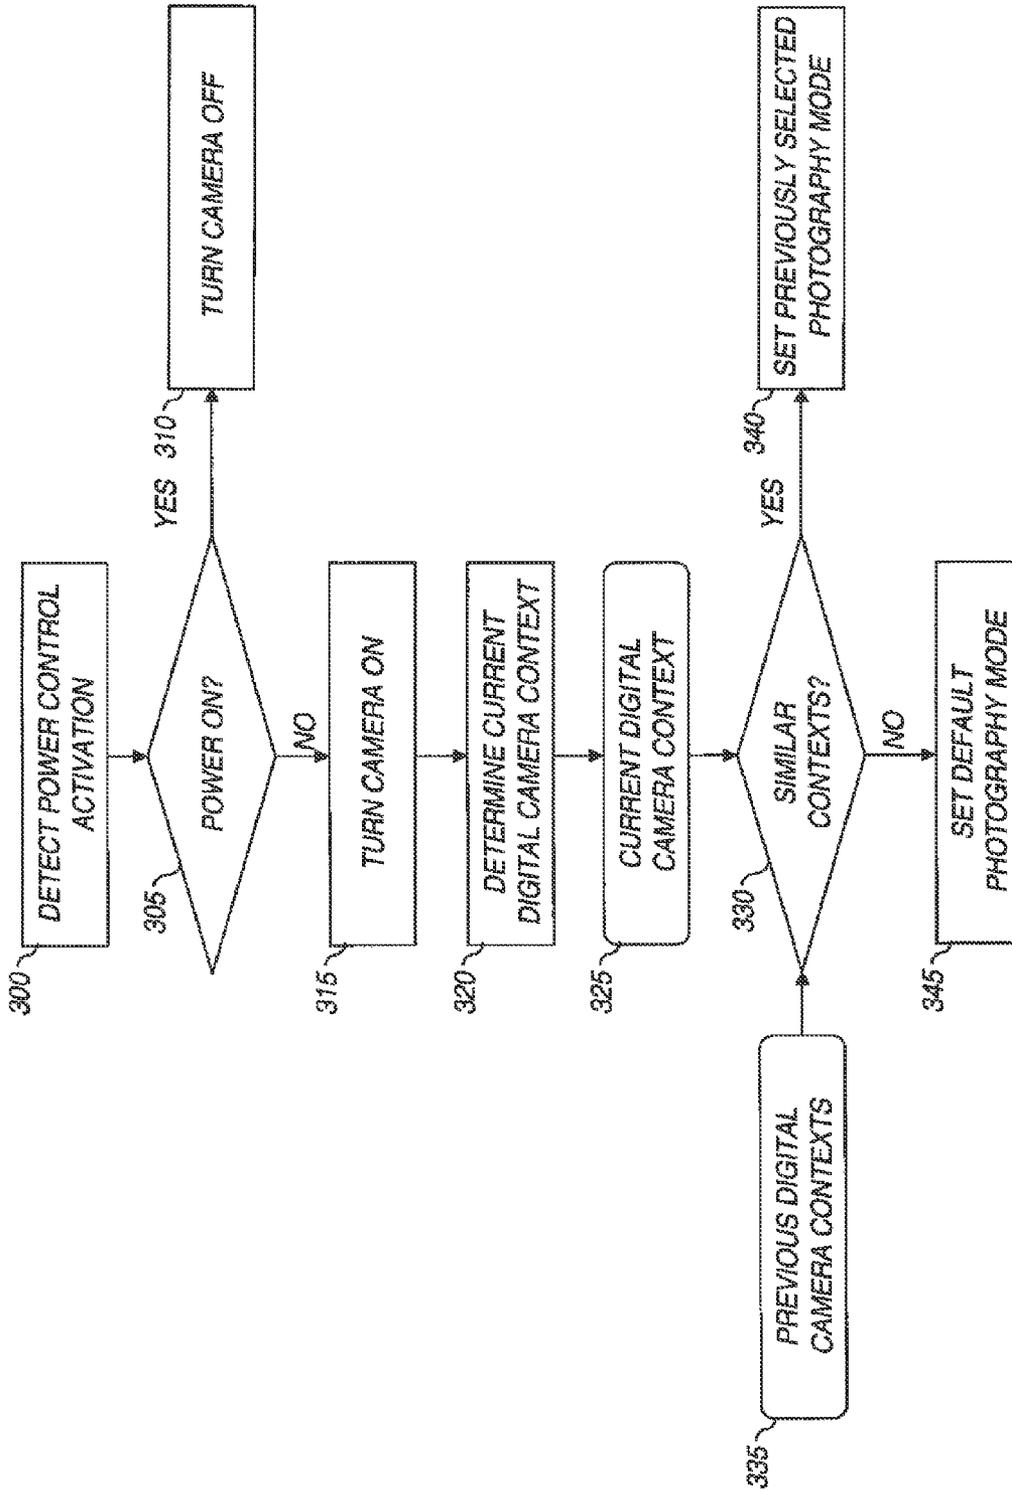


FIG. 3

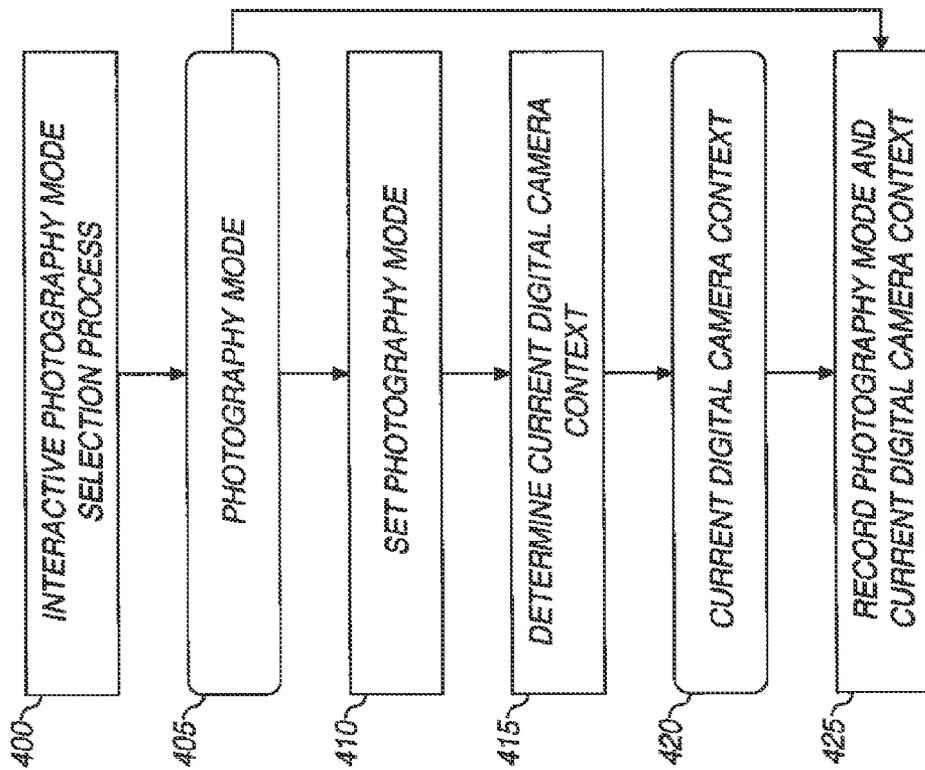


FIG. 4

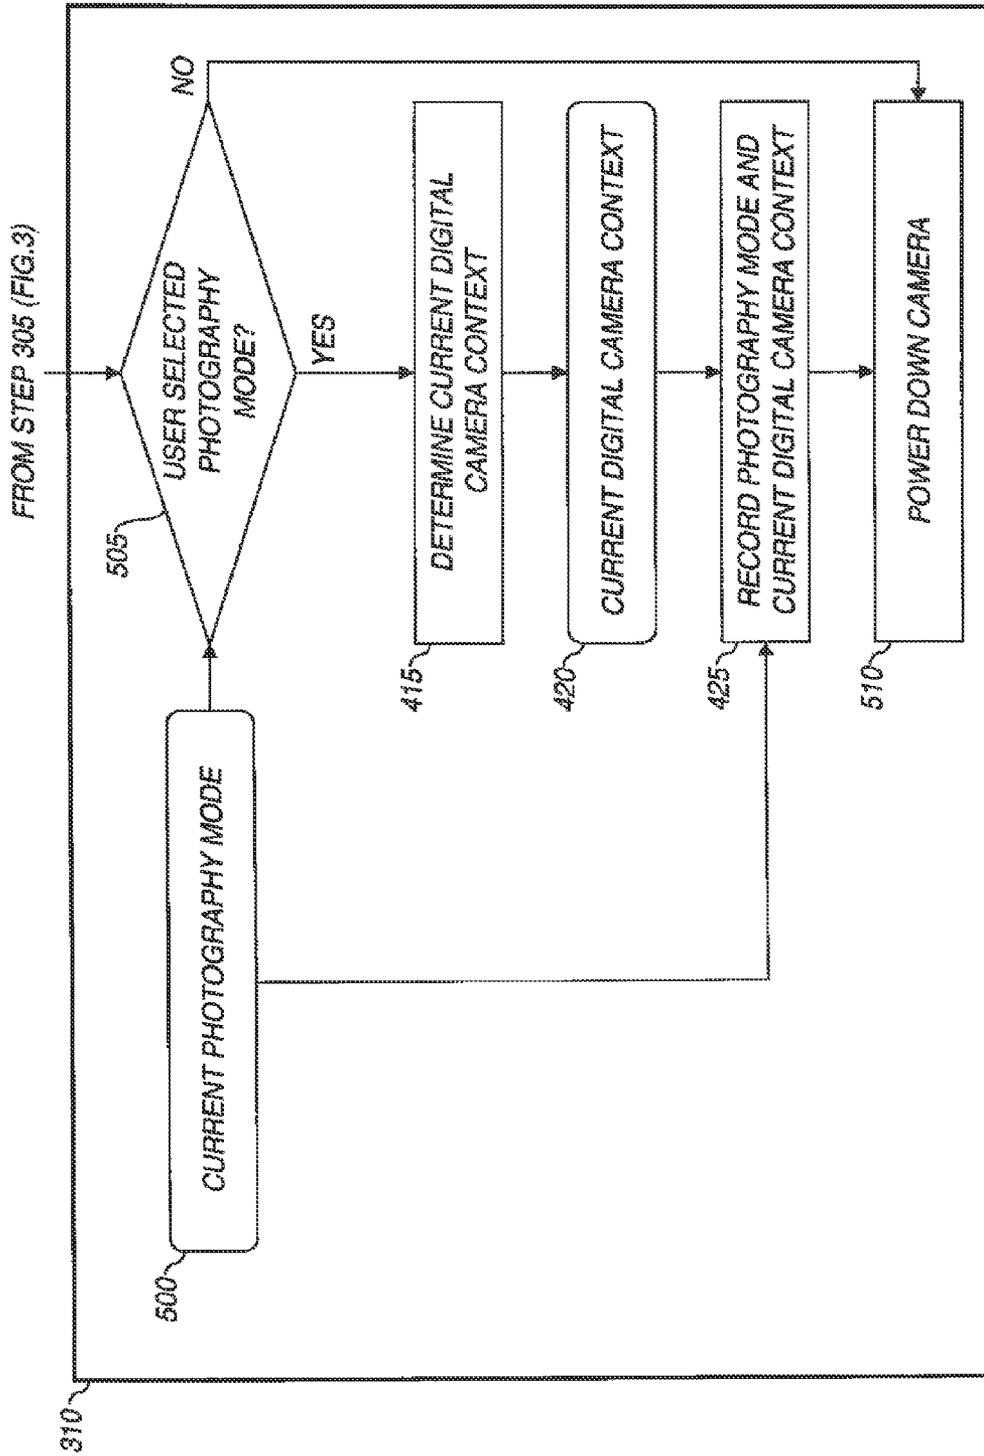


FIG. 5

SYSTEM AND METHOD FOR CONTEXTUAL DIGITAL PHOTOGRAPHY MODE SELECTION

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation application of U.S. patent application Ser. No. 12/843,275, filed Jul. 26, 2010 which is incorporated herein by reference in its entirety.

Reference is made to commonly assigned, co-pending U.S. patent application Publication No. 2012/0019704, entitled: "Automatic Digital Camera Photography Mode Selection," by Charles I. Levey, which is incorporated herein by reference.

FIELD OF THE INVENTION

This invention pertains to the field of digital cameras and more particularly to the automatic selection of a photography mode.

BACKGROUND OF THE INVENTION

Digital cameras with a multitude of operational features including but not limited to exposure control, white balance, auto focus, etc. have been a consumer staple for decades. As camera complexity has increased, required actions by the user to operate digital cameras have increased.

Most digital cameras have a variety of photography modes that can be selected by the user to control various elements of the image capture process, and the image processing chain. Examples of typical photography modes include smart capture, portrait, sport, landscape, close-up, sunset, backlight, children, bright, self-portrait, night portrait, night landscape, high-ISO and panorama. Various methods have been described to select an appropriate photography mode and control other digital camera functions. Some digital cameras include mechanical dials that can be used to select the photography mode. However, this adds expense to the digital camera and limits the number of choices that can be offered.

In other digital camera models, the photography mode can be selected by navigating a series of menus on a soft-copy display on the back of the digital camera. Often it can be a lengthy process for the user to navigate through several levels of menus to choose the desired photography mode. Then, if the user turns the camera off and back on again, it is generally necessary to repeat those time-consuming steps again in order to return to the same photography mode. This can be a frustrating experience for the user.

In some digital camera models, a photography mode can automatically be selected based on context, such as scene brightness, scene motion. For example, the KODAK EASY-SHARE Z915 Digital Camera includes a "Smart Capture" feature which automatically adjusts the camera settings. The camera detects and analyzes scene conditions, and then automatically sets camera settings including exposure, focus and ISO speed based on these conditions. This selection can be convenient, since it does not require user intervention. However, it is limited because the user has no simple way to influence the selection of the photography mode, aside from simply overriding the automatic photography mode selection. Because automatic selection of photographic mode is imperfect, there remains a need for user control, but there is also a need to easily get the camera to operate in a user-selected mode at power-up.

U.S. Pat. No. 7,646,297 to Aaron, entitled "Context-detected auto-mode switching" describes a method for self configuration of a communication device to adjust to the user's environmental circumstances. At predetermined intervals, a suite of environmental sensors integral to the device, which can include a camera, periodically samples the user's environment. A derived set of environmental circumstances may then be compared to mode templates to determine a matching template. The operational settings of the device, such as the audio level and display screen contrast, are changed based on the matching template.

U.S. Pat. No. 6,571,066 to Tsai, entitled "Camera with multimode power button," describes a method for using the power button to either turn on the camera or to select the camera operation mode. This scheme requires multiple pushes of the power button to first turn on the camera then select the operating mode.

U.S. Pat. No. 7,721,227 to Ronkainen, entitled "Method for describing alternative actions caused by pushing a single button," describes a user interface for making a choice between two different actions dependent on how long a button is depressed. If the button is released immediately, a first action is taken. If the button is held for a longer period of time, a message is displayed indicating that if the button is continued to be held a second action will be taken. If the button is not released within a specified time interval, the second action is then taken.

U.S. Pat. No. 6,727,830 to Lui, entitled "Time based hardware button for application launch," teaches the use of a time dependent press of an "application" button to select between various functions. Multiple button presses can also be used to select different functions.

U.S. Pat. No. 6,976,215 to Roderick et al., entitled "Push-button user interface with functionality preview," teaches a user-interface that uses a pressure-sensitive multi-state button. If the button is pushed with a first pressure a preview is provided of the effect that will be produced if the button is pressed using a higher pressure.

These approaches all rely on a user interface to control the selection of a photography mode when the camera is powered on. In some instances, photography of a particular event may occur over an extended period of time, such as during a concert or ceremony, during a day of skiing, or during a soccer game. During such extended events, the camera is likely to be powered down occasionally between shots. This generally requires that the user manually navigate the user interface at each power up to return the digital camera to the appropriate photography mode.

There remains a need for a method to automatically return a digital camera to a previously-selected photography mode while photographing a particular event, without adding the cost of additional buttons or the inconvenience of needing to navigate complex user-interface menus.

SUMMARY OF THE INVENTION

The present invention represents a digital camera having a plurality of photography modes, comprising: an image sensor; an optical system for imaging a scene onto the image sensor; an image capture control for initiating an image capture operation; a photography mode user interface for enabling a user to select between a plurality of photography modes, the photography modes having associated image capture and image processing settings; a memory for storing captured digital images, and for storing one or more previous digital camera contexts and corresponding user-selected photography modes; and a power control for powering up or

powering down the digital camera; wherein when the power control is activated to power up the digital camera, a digital camera context is determined and compared to the stored previous digital camera contexts, and if the digital camera context is determined to be sufficiently similar to one of the stored previous digital camera contexts, the digital camera is set to operate in the corresponding user-selected photography mode, otherwise the digital camera is set to operate in a default photography mode.

The present invention has the advantage that it simplifies camera operation by automatically returning to a previously selected photography mode when the digital camera is powered on and the current picture-taking context is sufficiently similar to a previous picture-taking context.

It has the additional advantage that consistency of camera behavior is enhanced during photography in a particular context. Because the previously selected mode is automatically selected if the context is the same, there is no need to rely on the user to maintain consistency of the photography mode. At the same time, user control is preserved, since the normal user-interface for controlling photography mode is preserved.

It has the further advantage that no additional user interface controls are required to provide the added functionality.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a high-level diagram showing the components of a system for capturing digital images according to an embodiment of the present invention;

FIG. 2 is a flow diagram depicting typical image processing operations used to process digital images in a digital camera;

FIG. 3 is a flowchart illustrating a method for selecting a photography mode in a digital camera at power on according to an embodiment of the present invention;

FIG. 4 is a flowchart depicting photography mode selection in a digital camera according to an embodiment of the present invention; and

FIG. 5 is a flowchart depicting a power down sequence in a digital camera according to an embodiment of the present invention.

DETAILED DESCRIPTION

In the following description, a preferred embodiment of the present invention will be described in terms that would ordinarily be implemented as a software program. Those skilled in the art will readily recognize that the equivalent of such software can also be constructed in hardware. Because image manipulation algorithms and systems are well known, the present description will be directed in particular to algorithms and systems forming part of, or cooperating more directly with, the system and method in accordance with the present invention. Other aspects of such algorithms and systems, and hardware or software for producing and otherwise processing the image signals involved therewith, not specifically shown or described herein, can be selected from such systems, algorithms, components and elements known in the art. Given the system as described according to the invention in the following materials, software not specifically shown, suggested or described herein that is useful for implementation of the invention is conventional and within the ordinary skill in such arts.

Still further, as used herein, a computer program for performing the method of the present invention can be stored in a computer readable storage medium, which can include, for example; magnetic storage media such as a magnetic disk

(such as a hard drive or a floppy disk) or magnetic tape; optical storage media such as an optical disc, optical tape, or machine readable bar code; solid state electronic storage devices such as random access memory (RAM), or read only memory (ROM); or any other physical device or medium employed to store a computer program having instructions for controlling one or more computers to practice the method according to the present invention.

The invention is inclusive of combinations of the embodiments described herein. References to “a particular embodiment” and the like refer to features that are present in at least one embodiment of the invention. Separate references to “an embodiment” or “particular embodiments” or the like do not necessarily refer to the same embodiment or embodiments; however, such embodiments are not mutually exclusive, unless so indicated or as are readily apparent to one of skill in the art. The use of singular or plural in referring to the “method” or “methods” and the like is not limiting. It should be noted that, unless otherwise explicitly noted or required by context, the word “or” is used in this disclosure in a non-exclusive sense.

Because digital cameras employing imaging devices and related circuitry for signal capture and processing, and display are well known, the present description will be directed in particular to elements forming part of, or cooperating more directly with, the method and apparatus in accordance with the present invention. Elements not specifically shown or described herein are selected from those known in the art. Certain aspects of the embodiments to be described are provided in software. Given the system as shown and described according to the invention in the following materials, software not specifically shown, described or suggested herein that is useful for implementation of the invention is conventional and within the ordinary skill in such arts.

The following description of a digital camera will be familiar to one skilled in the art. It will be obvious that there are many variations of this embodiment that are possible and are selected to reduce the cost, add features or improve the performance of the camera.

FIG. 1 depicts a block diagram of a digital photography system, including a digital camera 10 in accordance with the present invention. Preferably, the digital camera 10 is a portable battery operated device, small enough to be easily handheld by a user when capturing and reviewing images. The digital camera 10 produces digital images that are stored as digital image files using image memory 30. The phrase “digital image” or “digital image file”, as used herein, refers to any digital image file, such as a digital still image or a digital video file.

In some embodiments, the digital camera 10 captures both motion video images and still images. The digital camera 10 can also include other functions, including, but not limited to, the functions of a digital music player (e.g. an MP3 player), a mobile telephone, a GPS receiver, or a programmable digital assistant (PDA).

The digital camera 10 includes a lens 4 having an adjustable aperture and adjustable shutter 6. In a preferred embodiment, the lens 4 is a zoom lens and is controlled by zoom and focus motor drivers 8. The lens 4 focuses light from a scene (not shown) onto an image sensor 14, for example, a single-chip color CCD or CMOS image sensor. The lens 4 is one type optical system for forming an image of the scene on the image sensor 14. In other embodiments, the optical system may use a fixed focal length lens with either variable or fixed focus.

The output of the image sensor 14 is converted to digital form by Analog Signal Processor (ASP) and Analog-to-Digital (A/D) converter 16, and temporarily stored in buffer

5

memory **18**. The image data stored in buffer memory **18** is subsequently manipulated by a processor **20**, using embedded software programs (e.g. firmware) stored in firmware memory **28**. In some embodiments, the software program is permanently stored in firmware memory **28** using a read only memory (ROM). In other embodiments, the firmware memory **28** can be modified by using, for example, Flash EPROM memory. In such embodiments, an external device can update the software programs stored in firmware memory **28** using the wired interface **38** or the wireless modem **50**. In such embodiments, the firmware memory **28** can also be used to store image sensor calibration data, user setting selections and other data which must be preserved when the camera is turned off. In some embodiments, the processor **20** includes a program memory (not shown), and the software programs stored in the firmware memory **28** are copied into the program memory before being executed by the processor **20**.

It will be understood that the functions of processor **20** can be provided using a single programmable processor or by using multiple programmable processors, including one or more digital signal processor (DSP) devices. Alternatively, the processor **20** can be provided by custom circuitry (e.g., by one or more custom integrated circuits (ICs) designed specifically for use in digital cameras), or by a combination of programmable processor(s) and custom circuits. It will be understood that connectors between the processor **20** from some or all of the various components shown in FIG. **1** can be made using a common data bus. For example, in some embodiments the connection between the processor **20**, the buffer memory **18**, the image memory **30**, and the firmware memory **28** can be made using a common data bus.

The processed images are then stored using the image memory **30**. It is understood that the image memory **30** can be any form of memory known to those skilled in the art including, but not limited to, a removable Flash memory card, internal Flash memory chips, magnetic memory, or optical memory. In some embodiments, the image memory **30** can include both internal Flash memory chips and a standard interface to a removable Flash memory card, such as a Secure Digital (SD) card. Alternatively, a different memory card format can be used, such as a micro SD card, Compact Flash (CF) card, MultiMedia Card (MMC), xD card or Memory Stick.

The image sensor **14** is controlled by a timing generator **12**, which produces various clocking signals to select rows and pixels and synchronizes the operation of the ASP and A/D converter **16**. The image sensor **14** can have, for example, 12.4 megapixels (4088×3040 pixels) in order to provide a still image file of approximately 4000×3000 pixels. To provide a color image, the image sensor is generally overlaid with a color filter array, which provides an image sensor having an array of pixels that include different colored pixels. The different color pixels can be arranged in many different patterns. As one example, the different color pixels can be arranged using the well-known Bayer color filter array, as described in commonly assigned U.S. Pat. No. 3,971,065, "Color imaging array" to Bayer, the disclosure of which is incorporated herein by reference. As a second example, the different color pixels can be arranged as described in commonly assigned U.S. Patent Application Publication 2007/0024931 to Compton and Hamilton, entitled "Image sensor with improved light sensitivity", the disclosure of which is incorporated herein by reference. These examples are not limiting, and many other color patterns may be used.

It will be understood that the image sensor **14**, timing generator **12**, and ASP and A/D converter **16** can be separately fabricated integrated circuits, or they can be fabricated as a

6

single integrated circuit as is commonly done with CMOS image sensors. In some embodiments, this single integrated circuit can perform some of the other functions shown in FIG. **1**, including some of the functions provided by processor **20**.

The image sensor **14** is effective when actuated in a first mode by timing generator **12** for providing a motion sequence of lower resolution sensor image data, which is used when capturing video images and also when previewing a still image to be captured, in order to compose the image. This preview mode sensor image data can be provided as HD resolution image data, for example, with 1280×720 pixels, or as VGA resolution image data, for example, with 640×480 pixels, or using other resolutions which have significantly fewer columns and rows of data, compared to the resolution of the image sensor.

The preview mode sensor image data can be provided by combining values of adjacent pixels having the same color, or by eliminating some of the pixel values, or by combining some color pixel values while eliminating other color pixel values. The preview mode image data can be processed as described in commonly assigned U.S. Pat. No. 6,292,218 to Parulski, et al., entitled "Electronic camera for initiating capture of still images while previewing motion images," which is incorporated herein by reference.

The image sensor **14** is also effective when actuated in a second mode by timing generator **12** for providing high resolution still image data. This final mode sensor image data is provided as high resolution output image data, which for scenes having a high illumination level includes all of the pixels of the image sensor, and can be, for example, a 12 megapixel final image data having 4000×3000 pixels. At lower illumination levels, the final sensor image data can be provided by "binning" some number of like-colored pixels on the image sensor, in order to increase the signal level and thus the "ISO speed" of the sensor.

The zoom and focus motor drivers **8** are controlled by control signals supplied by the processor **20**, to provide the appropriate focal length setting and to focus the scene onto the image sensor **14**. The exposure level of the image sensor **14** is controlled by controlling the *f*/number and exposure time of the adjustable aperture and adjustable shutter **6**, the exposure period of the image sensor **14** via the timing generator **12**, and the gain (i.e., ISO speed) setting of the ASP and A/D converter **16**. The processor **20** also controls a flash **2** which can illuminate the scene.

The lens **4** of the digital camera **10** can be focused in the first mode by using "through-the-lens" autofocus, as described in commonly-assigned U.S. Pat. No. 5,668,597, entitled "Electronic Camera with Rapid Automatic Focus of an Image upon a Progressive Scan Image Sensor" to Parulski et al., which is incorporated herein by reference. This is accomplished by using the zoom and focus motor drivers **8** to adjust the focus position of the lens **4** to a number of positions ranging between a near focus position to an infinity focus position, while the processor **20** determines the closest focus position which provides a peak sharpness value for a central portion of the image captured by the image sensor **14**. The focus distance which corresponds to the closest focus position can then be utilized for several purposes, such as automatically setting an appropriate scene mode, and can be stored as metadata in the image file, along with other lens and camera settings.

The processor **20** produces menus and low resolution color images that are temporarily stored in display memory **36** and are displayed on the image display **32**. The image display **32** is typically an active matrix color liquid crystal display (LCD), although other types of displays, such as organic light

emitting diode (OLED) displays, can be used. A video interface **44** provides a video output signal from the digital camera **10** to a video display **46**, such as a flat panel HDTV display. In preview mode, or video mode, the digital image data from buffer memory **18** is manipulated by processor **20** to form a series of motion preview images that are displayed, typically as color images, on the image display **32**. In review mode, the images displayed on the image display **32** are produced using the image data from the digital image files stored in image memory **30**.

The graphical user interface displayed on the image display **32** is controlled in response to user input provided by user controls **34**. The user controls **34** are used to select various camera modes, such as video capture mode, still capture mode, and review mode, and to initiate capture of still images and recording of motion images. User controls **34** typically include some combination of buttons, rocker switches, joysticks, or rotary dials. In some embodiments, some of the user controls **34** are provided by using a touch screen overlay on the image display **32**. In other embodiments, additional status displays or images displays can be used. In a preferred embodiment, the user controls **34** include a power control **35** (e.g., a power button) which is used to turn on or off the camera, as well as other controls such as a lens control to control the lens **4**, and an image capture control (e.g., a shutter button) to initiate an image capture operation. In some embodiments, the still preview mode is initiated when the user partially depresses the shutter button, and the still image capture mode is initiated when the user fully depresses the shutter button.

The camera modes that can be selected using the user controls **34** include a "timer" mode. When the "timer" mode is selected, a short delay (e.g., 10 seconds) occurs after the user fully presses the shutter button, before the processor **20** initiates the capture of a still image.

An audio codec **22** connected to the processor **20** receives an audio signal from a microphone **24** and provides an audio signal to a speaker **26**. These components can be used to record and playback an audio track, along with a video sequence or still image. If the digital camera **10** is a multi-function device such as a combination camera and mobile phone, the microphone **24** and the speaker **26** can be used for telephone conversation.

In some embodiments, the speaker **26** can be used as part of the user interface, for example to provide various audible signals which indicate that a user control has been depressed, or that a particular mode has been selected. In some embodiments, the microphone **24**, the audio codec **22**, and the processor **20** can be used to provide voice recognition, so that the user can provide a user input to the processor **20** by using voice commands, rather than user controls **34**. The speaker **26** can also be used to inform the user of an incoming phone call. This can be done using a standard ring tone stored in firmware memory **28**, or by using a custom ring-tone downloaded from a wireless network **58** and stored in the image memory **30**. In addition, a vibration device (not shown) can be used to provide a silent (e.g., non audible) notification of an incoming phone call.

The processor **20** also provides additional processing of the image data from the image sensor **14**, in order to produce rendered sRGB image data which is compressed and stored within a "finished" image file, such as a well-known Exif-JPEG image file, in the image memory **30**.

The digital camera **10** can be connected via the wired interface **38** to an interface/recharger **48**, which is connected to a computer **40**, which can be a desktop computer or portable computer located in a home or office. The wired interface **38** can conform to, for example, the well-known USB 2.0

interface specification. The interface/recharger **48** can provide power via the wired interface **38** to a set of rechargeable batteries (not shown) in the digital camera **10**.

The digital camera **10** can include a wireless modem **50**, which interfaces over a radio frequency band **52** with the wireless network **58**. The wireless modem **50** can use various wireless interface protocols, such as the well-known Bluetooth wireless interface or the well-known 802.11 wireless interface. The computer **40** can upload images via the Internet **70** to a photo service provider **72**, such as the Kodak EasyShare Gallery. Other devices (not shown) can access the images stored by the photo service provider **72**.

In alternative embodiments, the wireless modem **50** communicates over a radio frequency (e.g. wireless) link with a mobile phone network (not shown), such as a 3GSM network, which connects with the Internet **70** in order to upload digital image files from the digital camera **10**. These digital image files can be provided to the computer **40** or the photo service provider **72**.

FIG. 2 is a flow diagram depicting image processing operations that can be performed by the processor **20** in the digital camera **10** (FIG. 1) in order to process color sensor data **100** from the image sensor **14** output by the ASP and A/D converter **16**. In some embodiments, the processing parameters used by the processor **20** to manipulate the color sensor data **100** for a particular digital image are determined by various user settings **175**, which can be selected via the user controls **34** in response to menus displayed on the image display **32**.

The color sensor data **100** which has been digitally converted by the ASP and A/D converter **16** is manipulated by a white balance step **95**. In some embodiments, this processing can be performed using the methods described in commonly-assigned U.S. Pat. No. 7,542,077 to Mild, entitled "White balance adjustment device and color identification device", the disclosure of which is herein incorporated by reference. The white balance can be adjusted in response to a white balance setting **90**, which can be manually set by a user, or which can be automatically set by the camera.

The color image data is then manipulated by a noise reduction step **105** in order to reduce noise from the image sensor **14**. In some embodiments, this processing can be performed using the methods described in commonly-assigned U.S. Pat. No. 6,934,056 to Gindele et al., entitled "Noise cleaning and interpolating sparsely populated color digital image using a variable noise cleaning kernel," the disclosure of which is herein incorporated by reference. The level of noise reduction can be adjusted in response to an ISO setting **110**, so that more filtering is performed at higher ISO exposure index setting.

The color image data is then manipulated by a demosaicing step **115**, in order to provide red, green and blue (RGB) image data values at each pixel location. Algorithms for performing the demosaicing step **115** are commonly known as color filter array (CFA) interpolation algorithms or "deBayering" algorithms. In one embodiment of the present invention, the demosaicing step **115** can use the luminance CFA interpolation method described in commonly-assigned U.S. Pat. No. 5,652,621, entitled "Adaptive color plane interpolation in single sensor color electronic camera," to Adams et al., the disclosure of which is incorporated herein by reference. The demosaicing step **115** can also use the chrominance CFA interpolation method described in commonly-assigned U.S. Pat. No. 4,642,678, entitled "Signal processing method and apparatus for producing interpolated chrominance values in a sampled color image signal", to Cok, the disclosure of which is herein incorporated by reference.

In some embodiments, the user can select between different pixel resolution modes, so that the digital camera can

produce a smaller size image file. Multiple pixel resolutions can be provided as described in commonly-assigned U.S. Pat. No. 5,493,335, entitled "Single sensor color camera with user selectable image record size," to Parulski et al., the disclosure of which is herein incorporated by reference. In some embodiments, a resolution mode setting **120** can be selected by the user to be full size (e.g. 3,000×2,000 pixels), medium size (e.g. 1,500×1000 pixels) or small size (750×500 pixels).

The color image data is color corrected in color correction step **125**. In some embodiments, the color correction is provided using a 3×3 linear space color correction matrix, as described in commonly-assigned U.S. Pat. No. 5,189,511, entitled "Method and apparatus for improving the color rendition of hardcopy images from electronic cameras" to Parulski, et al., the disclosure of which is incorporated herein by reference. In some embodiments, different user-selectable color modes can be provided by storing different color matrix coefficients in firmware memory **28** of the digital camera **10**. For example, four different color modes can be provided, so that the color mode setting **130** is used to select one of the following color correction matrices:

Setting 1 (Normal Color Reproduction)

$$\begin{bmatrix} R_{out} \\ G_{out} \\ B_{out} \end{bmatrix} = \begin{bmatrix} 1.50 & -0.30 & -0.20 \\ -0.40 & 1.80 & -0.40 \\ -0.20 & -0.20 & 1.40 \end{bmatrix} \begin{bmatrix} R_{in} \\ G_{in} \\ B_{in} \end{bmatrix} \quad (1)$$

Setting 2 (Saturated Color Reproduction)

$$\begin{bmatrix} R_{out} \\ G_{out} \\ B_{out} \end{bmatrix} = \begin{bmatrix} 2.00 & -0.60 & -0.40 \\ -0.80 & 2.60 & -0.80 \\ -0.40 & -0.40 & 1.80 \end{bmatrix} \begin{bmatrix} R_{in} \\ G_{in} \\ B_{in} \end{bmatrix} \quad (2)$$

Setting 3 (De-Saturated Color Reproduction)

$$\begin{bmatrix} R_{out} \\ G_{out} \\ B_{out} \end{bmatrix} = \begin{bmatrix} 1.25 & -0.15 & -0.10 \\ -0.20 & 1.40 & -0.20 \\ -0.10 & -0.10 & 1.20 \end{bmatrix} \begin{bmatrix} R_{in} \\ G_{in} \\ B_{in} \end{bmatrix} \quad (3)$$

Setting 4 (Monochrome)

$$\begin{bmatrix} R_{out} \\ G_{out} \\ B_{out} \end{bmatrix} = \begin{bmatrix} 0.30 & 0.60 & 0.10 \\ 0.30 & 0.60 & 0.10 \\ 0.30 & 0.60 & 0.10 \end{bmatrix} \begin{bmatrix} R_{in} \\ G_{in} \\ B_{in} \end{bmatrix} \quad (4)$$

In other embodiments, a three-dimensional lookup table can be used to perform the color correction step **125**.

The color image data is also manipulated by a tone scale correction step **135**. In some embodiments, the tone scale correction step **135** can be performed using a one-dimensional look-up table as described in U.S. Pat. No. 5,189,511, cited earlier. In some embodiments, a plurality of tone scale correction look-up tables is stored in the firmware memory **28** in the digital camera **10**. These can include look-up tables which provide a "normal" tone scale correction curve, a "high contrast" tone scale correction curve, and a "low contrast" tone scale correction curve. A user selected contrast setting **140** is used by the processor **20** to determine which of the tone

scale correction look-up tables to use when performing the tone scale correction step **135**.

The color image data is also manipulated by an image sharpening step **145**. In some embodiments, this can be provided using the methods described in commonly-assigned U.S. Pat. No. 6,192,162 entitled "Edge enhancing colored digital images" to Hamilton, et al., the disclosure of which is incorporated herein by reference. In some embodiments, the user can select between various sharpening settings, including a "normal sharpness" setting, a "high sharpness" setting, and a "low sharpness" setting. In this example, the processor **20** uses one of three different edge boost multiplier values, for example 2.0 for "high sharpness", 1.0 for "normal sharpness", and 0.5 for "low sharpness" levels, responsive to a sharpening setting **150** selected by the user of the digital camera **10**.

The color image data is also manipulated by an image compression step **155**. In some embodiments, the image compression step **155** can be provided using the methods described in commonly-assigned U.S. Pat. No. 4,774,574, entitled "Adaptive block transform image coding method and apparatus" to Daly et al., the disclosure of which is incorporated herein by reference. In some embodiments, the user can select between various compression settings. This can be implemented by storing a plurality of quantization tables, for example, three different tables, in the firmware memory **28** of the digital camera **10**. These tables provide different quality levels and average file sizes for the compressed digital image file **180** to be stored in the image memory **30** of the digital camera **10**. A user selected compression mode setting **160** is used by the processor **20** to select the particular quantization table to be used for the image compression step **155** for a particular image.

The compressed color image data is stored in a digital image file **180** using a file formatting step **165**. The image file can include various metadata **170**. Metadata **170** is any type of information that relates to the digital image, such as the model of the camera that captured the image, the size of the image, the date and time the image was captured, and various camera settings, such as the lens focal length, the exposure time and f-number of the lens, and whether or not the camera flash fired. In a preferred embodiment, all of this metadata **170** is stored using standardized tags within the well-known Exif-JPEG still image file format. In a preferred embodiment of the present invention, the metadata **170** includes information about camera settings **185**.

The present invention will now be described with reference to FIG. 3, which is a flowchart illustrating a method for using the power control **35** (FIG. 1) on a digital camera **10** (FIG. 1) to select a photography mode according to an embodiment of the present invention. In FIG. 3, a detect power control activation step **300** detects a press of the power control **35** (FIG. 1). A power on test **305** checks whether the power is already on and makes a decision. If the power is already on, a turn camera off step **310** is executed, turning the camera power off (Note that when the digital camera **10** (FIG. 1) is in the power off mode, the digital camera **10** may not be totally powered down, but may be in a sleep mode which uses a minimal level of power consumption.) If the power on test **305** determines that the power is not already on, the process continues to a turn camera on step **315**, turning the camera power on. A determine current digital camera context step **320** is next used to determine a current digital camera context **325**. The digital camera context is a set of information characterizing the picture-taking environment. As will be discussed in more detail later, the digital camera context can include information such as a date/time, a camera location, sensed scene

11

characteristics, sensed audio signals, and event calendar entries. One or more previous digital camera context(s) **335** are stored in a persistent memory, together with information specifying corresponding previously selected photography modes that the digital camera user had selected to use with the previous digital camera context(s) **335**. A similar contexts test **330** determines whether the current digital camera context **325** is sufficiently similar to one of the previous digital camera context(s) **335**. If the current digital camera context **325** is sufficiently similar to one of the previous digital camera context(s) **335**, then a set previously selected photography mode step **340** is used to set the digital camera **10** to operate in the corresponding previously selected photography mode. Otherwise, a set default photography mode step **345** is executed, setting the digital camera **10** to operate in a default photography mode. In this way, the previous user-selected photography mode is respected when the digital camera **10** is powered up, but only if the digital camera context is sufficiently similar.

In some embodiments of the present invention, the power control **35** is a pressure-sensitive button, or some other form of touch-sensitive surface. There are a variety of different types of pressure-sensitive buttons. Some pressure-sensitive buttons are spring-loaded mechanical buttons that depress to different positions depending on the depress pressure. When the button is depressed with a light pressure, the button depresses to a first position and gives a first signal (S1); and when the button is depressed with a heavy pressure, the button depresses to a second position and gives a second signal (S2). Other types of pressure-sensitive buttons use electronic pressure sensors which produce a variable electrical signal according to the applied pressure. There are a variety of different electronic pressure sensors known in the art, including piezoresistive pressure sensors, piezoelectric pressure sensors, electromagnetic pressure sensors or capacitive pressure sensors.

Digital cameras typically provide a variety of photography modes that the user can select from according to the photography conditions and their personal preferences. A wide variety of photography modes are known in the art. Examples of typical photography modes include smart capture, portrait, sport, landscape, close-up, sunset, backlight, children, bright, self-portrait, night portrait, night landscape, high-ISO, panorama, color boost, grayscale, sepia tone, aperture priority and shutter priority. Typically the photography mode can be selected using interactive menus provided as part of the user controls **34**. Often it may be necessary to navigate through several levels of menus in order to select a particular photography mode.

In a preferred embodiment, the default photography mode selected by the set default photography mode step **345** is an automatic mode which is designed to produce good results under a wide variety of photography conditions. Such automatic modes go by a variety of different names such as "auto mode," "default mode," "smart capture mode" or "program mode." In this automatic mode, the digital camera **10** typically analyzes the photography conditions to automatically determine various image capture settings such as the exposure index, the lens F/#, the exposure time and the electronic flash setting, as well as other user settings **175**, such as those discussed with reference to FIG. **2**. In other embodiments, some other photography mode can be used as the default photography mode. In some embodiments, the user can be allowed to designate a preferred photography mode to be the default photography mode.

As an example of a scenario where the method of the present invention is valuable, consider the case where a user

12

is capturing images at a soccer game, and has manually set the camera to operate in a sport photography mode. The sport photography mode would generally choose appropriate image capture settings to minimize the motion blur associated with moving subjects. The user may then choose to power down the digital camera **10** to save the battery life (or the digital camera **10** may automatically power itself down after a period of inactivity). If the user then desires to resume capturing additional images at the soccer game, they would typically desire to power the camera back on directly into the sport photography mode rather than the default photography mode in order to save the trouble of navigating through the various user control menus to select the appropriate photography mode. According to the method of the present invention, this is done automatically at power on by comparing the current digital camera context **325** with the previous digital camera context **335** when the sport photography mode was previously selected. If the digital camera contexts are sufficiently similar, the digital camera **10** is automatically returned to the previously selected sport photography mode.

As was discussed earlier, according to the method of the present invention, the similar contexts test **330** compares the current digital camera context **325** to one or more previous digital camera contexts **335**. The previous digital camera contexts **335** are recorded in a persistent memory, together with indications of the corresponding user-selected photography mode.

In some embodiments, only a single previous digital camera context **335** is stored corresponding to the most recent user-selected photography mode.

In other embodiments, provision is made for storing a plurality of previous digital camera contexts **335**. For example, the previous digital camera contexts **335** can be stored corresponding to the five most recent user-selected photography modes. Alternately, the previous digital camera contexts and the corresponding user-selected photography modes are stored for a predefined period of time (e.g., 48 hours). Storing a plurality of digital camera contexts can provide a number of advantages, especially with recurring events. For example, the sports photography mode can be selected while at a soccer game, then the portrait mode selected during a family party. When the camera is powered up again for another soccer game, the current digital camera context can be determined to be similar to the previous digital camera context associated with the sport photography mode and this mode can be automatically selected even though it was not the most recent user-selected photography mode.

In some embodiments, the digital camera context and the corresponding photography mode are stored at the time when a user selects a particular photography mode as illustrated in FIG. **4**. An interactive photography mode selection process **400** is used by a user to select a photography mode **405**. The interactive photography mode selection process **400** can use any method known in the art for selection of a photography mode using the user controls **34** of the digital camera **10**. For example, the user can select the photography mode **405** by navigating a series of interactive menus, or by using a photography mode dial. A set photography mode step **410** is used to set the digital camera **10** to operate in the selected photography mode **405**. A determine current digital camera context step **415** is then used to determine a current digital camera context **420**. An indication of the photography mode **405** and the current digital camera context **420** are then stored in a persistent memory using a record photography mode and current digital camera context step **425**. In some implementations, the current digital camera context **420** is stored only at the time that the user first selects the photography mode. In

other implementations, the current digital camera context **420** is updated and stored every time a digital image is captured using the user-selected photography mode. In this case, the stored current digital camera context **420** will correspond to the most recent image capture. When the digital camera context information includes a time/date factor, this approach may be preferable to ensure that the stored previous digital camera context **335** is most relevant for comparison with the current digital camera context **325** using the similar contexts test **330**.

In some embodiments, the digital camera context and the corresponding user-selected photography mode are updated and stored at the time that the digital camera **10** is powered off. In this case, the process of storing the digital camera context and the corresponding photography mode can be incorporated into the turn camera off step **310** (FIG. 3). Additional details for a version of the turn camera off step **310** adapted for this purpose are illustrated in FIG. 5. When the process of turning the digital camera **10** to an OFF state is initiated, a user selected photography mode test **505** determines whether or not the current photography mode **500** was user-selected. If not, execution proceeds to a power down camera step **510**, which executes a power down procedure to put the digital camera **10** into an OFF state. Otherwise, the determine current digital camera context step **415** is used to determine the current digital camera context **420**. An indication of the current photography mode **500** and the current digital camera context **420** are then stored in a persistent memory using the record photography mode and current digital camera context step **425**. Finally, the power down camera step **510** is executed to complete the process of putting the digital camera **10** into an OFF state. In some embodiments, only one digital camera context is stored corresponding to the user-selected photography mode that was active when the digital camera was most recently powered down. In other embodiments, multiple digital camera contexts can be stored as was discussed above.

The process shown in FIG. 5 makes the assumption that the user would only be concerned with returning to the previous photography mode if it is one that was manually user-selected. In alternate embodiments, indications of the current photography mode **500** and the current digital camera context **420** are then stored in memory whether or not the current photography mode **500** was user-selected.

It should be noted that the processes for storing the digital camera context described in FIGS. 4 and 5 are not mutually exclusive. In some embodiments, the photography mode and the digital camera context could be recorded both when a photography mode is manually user-selected and also at the time when the digital camera **10** is powered down. The digital camera context and the photography mode could also be recorded at other times as well. For example, they could be recorded at fixed time intervals (e.g., every 10 minutes) during an extended photography session, or they could be recorded if a substantial change in the digital camera context is detected (e.g., a significant change in the lighting level).

According to the present invention, the current digital camera context **325** associated with a photography mode selection includes one or more context factors characterizing the picture-taking environment. One skilled in the art will recognize that there are many different context factors that can be useful for characterizing the digital camera context. For example, useful context factors would include a time/date factor, a camera location factor, a scene similarity factor, a scene information factor, an audio similarity factor and a scheduled event factor. Each of these types of factors will be described in more detail below.

In some embodiments, the similar contexts test **330** (FIG. 3) considers only one type of context factor (e.g., time/date) in order to determine whether the current digital camera context **325** is sufficiently similar to one of previous digital camera contexts **335**. In other cases, the similar contexts test **330** uses a plurality of independent context factors (e.g., both the camera location as well as the time/date).

In a preferred embodiment of the present invention, one context factor that is used by the similar contexts test **330** is the time/date. Generally, if a short length of time has transpired between the time that the digital camera **10** was operated in the previous photography mode and the current time, then it is reasonable to assume that the user would desire to return to the previously selected photography mode. For example, if the digital camera **10** was powered down for 5 minutes, the probability is high that the photography environment would be similar to the previous photography environment, and therefore that it would be appropriate to set the digital camera **10** to operate in the previously selected photography mode.

According to one embodiment of the present invention, the similar contexts test **330** determines that the current digital camera context **325** is sufficiently similar to a previous digital camera context **335** by determining a time interval between the current time/date and the time/date associated with the previous digital camera context and comparing it to a predetermined threshold (e.g., one hour). If the time interval is less than the predetermined threshold, then the digital camera **10** is set to operate in the previously selected photography mode, otherwise it is set to operate in the default photography mode.

In some embodiments, the similar contexts test **330** considers a camera location factor in the process of comparing the digital camera contexts. In this case, the digital camera context includes a camera location value. If a distance between camera locations is less than a predetermined threshold (e.g., 100 meters), then the digital camera can be set to operate in the previously selected photography mode. In some implementations, the camera location is a geographic location (e.g., longitude and latitude) determined using a global positioning system (GPS) sensor. In alternate implementations, the camera location is a relative location determined using an inertial sensing system including one or more accelerometers or gyroscopes. While such inertial sensing systems can not determine an absolute geographic location (unless they are provided with a known reference location), they can be used to effectively determine distances between two locations.

In some embodiments, the scene itself, as sensed by the image sensor **14** (FIG. 1), can also be used to provide context information. If a currently sensed scene is sufficiently similar to a previously captured scene, then this can provide a valuable clue that the digital camera is being operated in a similar image capture environment. For example, consider the case where the user was previously capturing images of a soccer game and then powered down the digital camera. When the user powers the digital camera back on and captures a preview image of the current scene, if the user is still at the soccer game then the currently sensed image will generally have a very similar appearance to the previously captured scene.

To provide the scene context information for the previously captured scene, a context image, preferably of low resolution, such as the same size as a preview image or smaller, can be stored as part of the previous digital camera context **335** and can be compared with a currently sensed context image, generated from a currently sensed preview image. In some embodiments, a captured full-resolution digital image that

was captured using the previous user-selected photography mode can be used to provide the scene context information.

Any method for assessing image similarity known in the art can be used to assess the similarity between the sensed scenes. In some embodiments, scene similarity can be assessed by determining a difference image between the currently sensed scene and a previously captured scene. If the average difference signal is less than a predetermined threshold, then the digital camera contexts can be designated as being similar.

Directly comparing the previously captured scene to the currently sensed scene will often show differences due to differences in the camera orientation or changes in the scene content. To improve the scene comparison, some embodiments can use motion compensation to compensate for small differences in the camera orientation before computing the difference image signal.

Because image differences, even with motion compensation, will often be significant even with subtle scene changes, it will generally be preferable to utilize more sophisticated image similarity algorithms to assess scene similarity. Such algorithms typically assess scene similarity by analyzing the scene to determine feature vectors representing various scene attributes (e.g., color histograms, scene texture features and scene motion features). An example of an algorithm that can be used to determine a scene similarity value according to the present invention is the scale-invariant features (SIFT) algorithm described by Lowe in the article "Distinctive image features from scale invariant keypoints" (Intl. Journal of Computer Vision, Vol. 60, pp. 91-110, 2004), which is incorporated herein by reference.

In other embodiments, a semantic scene classification algorithm can be used to analyze the sensed scene and classify it into one of a set of predetermined scene classification categories. For example, the scenes can be classified according to scene type (e.g., beach, sunset), event type (e.g., birthday, wedding), location (e.g., museum, playground) or object type (e.g., animal, boat). One such classification algorithm that can be used in accordance with the present invention is disclosed in commonly-assigned, co-pending U.S. Patent Application Publication 2009/0297032, to Loui et al., entitled "Semantic event detection for digital content records," which is incorporated herein by reference. A current digital camera context **325** can be designated to be similar to a previous digital camera context **335** if it is classified according to the same classification category.

In some embodiments, the similar contexts test **330** assesses digital camera context similarity by considering one or more scene information factors related to sensed information about the scene. For example, the sensed scene information can include a scene brightness level, a scene color balance and a focus distance. If the currently sensed scene has a similar brightness level, a similar color balance, and a similar focus distance to the previously sensed scene, it can be inferred that the current digital camera context is similar to the previous digital camera context. In some embodiments, a scene brightness difference, a scene color balance difference and a scene focus distance difference are determined. A total difference is then determined by performing a weighted sum of these difference values. If the total difference is less than a predetermined threshold, then the current digital camera context **325** can be designated to be sufficiently similar to the previous digital camera context. In other embodiments, only a subset of these scene information attributes are considered, or alternately other pieces of information can be included.

Audio signals associated with an image-capture environment can provide important clues about the digital camera

context. For example, beach scenes, or sporting event scenes or birthday party scenes are typically associated with very different sound characteristics. In some embodiments, the similar contexts test **330** assesses digital camera context similarity by considering an audio similarity factor. Any techniques known in the art for comparing audio signals can be used to assess a similarity of the digital camera context. Such techniques often involve computing frequency spectrum representations of the audio signals and computing differences between the frequency spectrums. In some embodiments, frequency spectrum associated with the previous digital camera contexts are determined and are stored as part of the digital camera context representation. The frequency spectrum of an audio signal captured in the current environment can then be determined for comparison.

Another type of factor that can be considered by the similar contexts test **330** is a scheduled event factor. Scheduled event factors are useful for digital cameras **10** that have access to an event calendar used to store scheduled events associated with the digital camera user. In some embodiments, the event calendar can be stored locally within the digital camera **10**. This is commonly the case for applications such as smart phones, PDAs or laptop computers that include digital cameras. In other embodiments, the digital camera **10** can access an externally stored event calendar through a communications network, either wired or wireless. As described in commonly assigned U.S. Patent Application Publication 2007/0008321 entitled "Identifying collection images with special events" to Gallagher et al., the disclosure of which is incorporated herein by reference, an event calendar can be used to associate digital images with events on an event calendar.

In some embodiments, the current digital camera context **325** is determined to be sufficiently similar to the previous digital camera context **335** if both the current time/date and a time/date associated with the previous digital camera context fall within a time interval associated with a stored scheduled event. For example, if the event calendar shows a soccer game being scheduled between 6-8 PM on a particular date, and if both digital camera contexts have time/dates that fall within this range, then it can be inferred that they have similar digital camera contexts. Therefore, if a user-selected sport photography mode was associated with the previous digital camera context, the same photography mode can be automatically selected.

In some implementations, the digital camera context can be designated to be sufficiently similar to one of the stored previous digital camera contexts if the current time/date corresponds to a current scheduled event on the event calendar that is of a same event type as a scheduled event corresponding to a time/date associated with one of the stored previous digital camera contexts. For example, if a previous digital camera context is associated with a time/date corresponding to a soccer game, and the current time/date also corresponds to a soccer game, then the same photography mode can be automatically selected.

In some cases, an event type can be associated with a previously captured digital image, or set of digital images. The associated event type can then be associated with the digital camera context. The event type can be determined using an event calendar, or alternatively can be manually user-designated or can be determined by automatically analyzing the captured digital images. In some cases, it may be possible to infer an event type from the user-selected photography mode (e.g., if a sport photography mode is selected, it can be assumed that the digital camera is being used to photograph a sporting event). In such cases, the digital camera context can be designated to be sufficiently similar to a pre-

vious digital camera context if the current time/date corresponds to a current scheduled event that is of a same event type as the event type associated with the previous digital camera context.

As mentioned earlier, the similar contexts test **330** can be based on a single context factor (e.g., a time/date factor), or alternately can consider a plurality of context factors. In such cases, the plurality of context factors can be combined using any method known in the art to determine a combined context similarity value that is representative of the differences between the current digital camera context and the previous digital camera context. In some embodiments, factor similarity values can be determined for a plurality of different context factors (e.g., a time/date similarity value and a location similarity value). The factor similarity values can then be combined using an appropriate mathematical relationship to determine the combined context similarity value. For example, the combined context similarity value can be computed using a weighted summation of the individual factor similarity values. Alternately, the combined context similarity value can be determined based on the individual factor similarity value indicating the highest degree of similarity. In this way, the digital camera contexts would be indicated to be similar if the time/date is similar or the location is similar, even if both the time/date and location attributes are not similar.

The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

PARTS LIST

2 flash
 4 lens
 6 adjustable aperture and adjustable shutter
 8 zoom and focus motor drives
 10 digital camera
 12 timing generator
 14 image sensor
 16 ASP and A/D Converter
 18 buffer memory
 20 processor
 22 audio codec
 24 microphone
 26 speaker
 28 firmware memory
 30 image memory
 32 image display
 34 user controls
 35 power control
 36 display memory
 38 wired interface
 40 computer
 44 video interface
 46 video display
 48 interface/recharger
 50 wireless modem
 52 radio frequency band
 58 wireless network
 70 Internet
 72 photo service provider
 90 white balance setting
 95 white balance step
 100 color sensor data
 105 noise reduction step
 110 ISO setting

115 demosaicing step
 120 resolution mode setting
 125 color correction step
 130 color mode setting
 135 tone scale correction step
 140 contrast setting
 145 image sharpening step
 150 sharpening setting
 155 image compression step
 160 compression mode setting
 165 file formatting step
 170 metadata
 175 user settings
 180 digital image file
 185 camera settings
 300 detect power control activation step
 305 power on test
 310 turn camera off step
 315 turn camera on step
 320 determine current digital camera context step
 325 current digital camera context
 330 similar contexts test
 335 previous digital camera contexts
 340 set previously selected photography mode step
 345 set default photography mode step
 400 interactive photography mode selection process step
 405 photography mode
 410 set photography mode step
 410 set photography mode step
 415 determine current digital camera context step
 420 current digital camera context
 425 record photography mode and current digital camera context step
 500 current photography mode
 505 user selected photography mode test
 510 power down camera step
 What is claimed is:
 1. A method of automatically selecting a photography mode comprising:
 40 storing, in a memory, a plurality of predetermined digital contexts, each digital context comprising a scene classification;
 storing in the memory a plurality of photography modes and information associating each pre-determined digital context with a photography mode;
 45 sensing a current digital context, the current digital context corresponding to a current sensed scene;
 using a semantic scene classification algorithm to associate the current sensed scene with a current scene classification;
 50 accessing the memory to determine if the current digital context, including the current scene classification, matches a stored predetermined digital context;
 if the current digital context matches a stored predetermined digital context, selecting the photography mode associated with the stored predetermined digital context;
 55 if the current digital context does not match a stored predetermined digital context, storing, in the memory, the current digital context as a new predetermined digital context and further storing, in the memory, an association between the new predetermined digital context and a photography mode indicated by receipt of user interface information associated with the current sensed scene.
 60 2. The method of claim 1, wherein the current digital context and each predetermined digital context comprise a plurality of scene information factors.

19

3. The method of claim 2, wherein determining if the current digital context matches a stored predetermined digital context comprises determining whether a plurality of scene information factors match between the current digital context and a predetermined digital context.

4. The method of claim 2, wherein the plurality of scene information factors are chosen from the group of a time/date factor, a camera location factor, an audio similarity factor, and a scheduled event factor.

5. The method of claim 1, further comprising, if the current digital context matches a stored predetermined digital context, using the photography mode associated with the stored predetermined digital context to capture an image of the current sensed scene.

6. The method of claim 1, further comprising, if the current digital context does not match a stored predetermined digital context, using a default photography mode to capture an image of the current sensed scene.

7. The method of claim 6, wherein the default photography mode is an automatic photography mode.

8. A non-transitory computer memory storing instructions that when executed by a processor cause the processor to:

store, in a memory, a plurality of predetermined digital contexts;

store, in the memory, a plurality of photography modes and information associating each pre-determined digital context with a photography mode;

sense a current digital context, the current digital context corresponding to a current sensed scene;

access the memory to determine if the current digital context matches a stored predetermined digital context;

select the photography mode associated with the stored predetermined digital context if the current digital context matches a stored predetermined digital context;

store, in the memory, the current digital context as a new predetermined digital context and further store, in the memory, an association between the new predetermined digital context and a photography mode indicated by receipt of user interface information associated with the current sensed scene if the current digital context does not match a stored predetermined digital context.

9. The non-transitory computer memory of claim 8, wherein the current digital context and each predetermined digital context comprise a plurality of scene information factors.

10. The non-transitory computer memory of claim 9, wherein determining if the current digital context matches a stored predetermined digital context comprises determining whether a plurality of scene information factors match between the current digital context and a predetermined digital context.

11. The non-transitory computer memory of claim 9, wherein the plurality of scene information factors are chosen from the group of a time/date factor, a camera location factor, an audio similarity factor, and a scheduled event factor.

12. The non-transitory computer memory of claim 8, wherein the instructions further cause the processor to use the photography mode associated with the stored predetermined digital context to capture an image of the current sensed scene if the current digital context matches a stored predetermined digital context.

13. The non-transitory computer memory of claim 8, wherein the instructions further cause the processor to use a default photography mode to capture an image of the current

20

sensed scene if the current digital context does not match a stored predetermined digital context.

14. The non-transitory computer memory of claim 13, wherein the default photography mode is an automatic photography mode.

15. A digital image capture device, comprising:

an image sensor;

an optical system communicatively coupled to the image sensor;

memory communicatively coupled to the image sensor; and

one or more processors communicatively coupled to the image sensor and the memory and configured to execute instructions stored in the memory to cause the one or more processors to:

store, in a memory, a plurality of predetermined digital contexts;

store, in the memory, a plurality of photography modes and information associating each pre-determined digital context with a photography mode;

sense a current digital context, the current digital context corresponding to a current sensed scene;

access the memory to determine if the current digital context matches a stored predetermined digital context;

select the photography mode associated with the stored predetermined digital context if the current digital context matches a stored predetermined digital context;

store, in the memory, the current digital context as a new predetermined digital context and further store, in the memory, an association between the new predetermined digital context and a photography mode indicated by receipt of user interface information associated with the current sensed scene if the current digital context does not match a stored predetermined digital context.

16. The digital image capture device of claim 15, wherein the current digital context and each predetermined digital context comprise a plurality of scene information factors.

17. The digital image capture device of claim 16, wherein determining if the current digital context matches a stored predetermined digital context comprises determining whether a plurality of scene information factors match between the current digital context and a predetermined digital context.

18. The digital image capture device of claim 15, wherein the instructions further cause the one or more processors to use the photography mode associated with the stored predetermined digital context to capture an image of the current sensed scene if the current digital context matches a stored predetermined digital context.

19. The digital image capture device of claim 15, wherein the instructions further cause the one or more processors to use a default photography mode to capture an image of the current sensed scene if the current digital context does not match a stored predetermined digital context.

20. The digital image capture device of claim 19, wherein the default photography mode is an automatic photography mode.

* * * * *