

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 October 2002 (03.10.2002)


PCT

(10) International Publication Number
WO 02/078381 A1

- (51) International Patent Classification⁷: **H04Q 7/38** [SE/SE]; Obnex Technologies HB, Vera Sandbergs allé 8, S-412 96 Göteborg (SE).
- (21) International Application Number: PCT/SE02/00504
- (22) International Filing Date: 15 March 2002 (15.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0101087-5 26 March 2001 (26.03.2001) SE
- (71) Applicant (for all designated States except US): **OBNEX TECHNOLOGIES HB** [SE/SE]; Vera Sandbergs allé 8, S-412 96 Göteborg (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **FRIES, Henrik**
- (74) Common Representative: **OBNEX TECHNOLOGIES HB**; Vera Sandbergs Allé 8, S-412 96 Göteborg (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: SYSTEM FOR DELIVERING LOCATION RELATED INFORMATION TO MOBILE TELECOMMUNICATION DEVICES

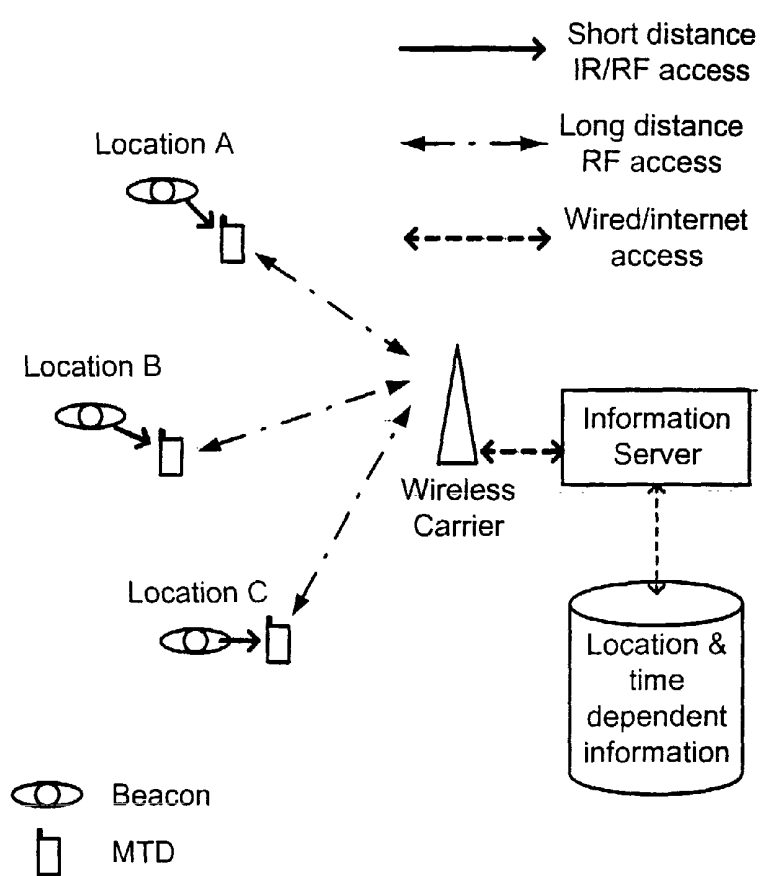

(57) Abstract: The present invention relates to a system for delivering location related information, or location and time related information, to mobile telecommunication devices, said system including one or more localization devices arranged in predetermined key locations, at least one telecommunication device, and at least one information server having interface to a mobile telecommunication network for communication with said at least one mobile telecommunication device, the system being characterized in that each of said one or more localization devices includes an interaction unit for interacting with a mobile telecommunication device when said mobile telecommunication device is located within a predetermined detection range of said localization device, to remotely activate said mobile telecommunication device so as to initiate a communication between said mobile telecommunication device and said at least one information server.

WO 02/078381 A1



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

— *with international search report*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

System for delivering location related information to mobile telecommunication devices

Field of the invention

The present invention relates to a system for delivering location related information, or location and time related information, to a mobile telecommunication device by means of one or more localization devices, arranged in predetermined key locations, which are used to detect the presence of a mobile telecommunication device within a predetermined vicinity of such a key location, and instruct the detected mobile telecommunication device to initiate a communication with an information server. The information server is then able to select data information related to that specific key location and deliver the selected information to the mobile telecommunication device.

The present invention also relates to a method for delivering location related information, or location and time related information, to a mobile telecommunication device using the aforementioned system.

Background of the invention

The field of telecommunication messaging has recently been experiencing a period of explosive growth. Of the various technologies that allow text messages to be received and sent over mobile devices, such as palmtops, handhels or cellular phones, the most familiar and widely utilized is commonly known as short message service (SMS) messaging. One of the reasons is that SMS is a very inexpensive method of communication. Short messaging generally involves the transmission of short (generally up to 140 octets carrying up to 160 characters of text) alphanumeric messages which can be delivered immediately. While the short messages were originally utilized primarily for paging purposes, various additional applications, such as advertising, stock quotations, weather forecast, traffic information, news, or sports broadcasting are now common or expected to be shortly available.

SMS messages can be sent to a huge group of people with the single press of a button. SMS technology also allows for unified messaging as SMS can take on a number of different message formats, including voice mail, e-mail and fax, and allows users to access them from their mobile device.

However, when delivering information to mobile devices, it has to be noticed that some information messages differ from others in that they are strictly associated to a specific location of the recipient, and would appear totally irrelevant when delivered somewhere else. For instance, one can expect a user standing at a bus station to be interested in receiving information on arrival or departure time of the next bus. Such a location and time related information can be delivered, for example in the form of a short message to the user's mobile device, provided that the user is able to address an information request to an appropriate information server, in that case a traffic information center associated to the local bus company. Even if such an information request is properly addressed, the user is still required to provide correct indications on its actual location, in that case from which bus stop he is calling. This operation can be unnecessarily troublesome, particularly if the user is visiting a foreign city, where he is not familiar with the environment. Even assuming that a user knows exactly where he is and which information server he should call to get advised, the task is perhaps hard enough to discourage the user. What is needed, therefore, is to provide a system that allows location related information data to be immediately delivered by an information server to a user's mobile device without the need for the user to previously dial the server's number. More particularly, it would be advantageous to provide a system that spare the user the task of contacting an information server and indicating its actual location.

Various kinds of time and location based computing systems have been proposed, such as, for example, the system disclosed in US Patent No. 5,642,303, wherein a plurality of beacons are disposed in different key locations where they can interact with a user's mobile computer device. By utilizing that system, users are able to establish lists of different things or

tasks to be done, and that they wishes to be reminded about when coming to a particular key location, (i.e. his home, his office or his car). By placing their own personal beacons at key locations, users are allowed to build their own infrastructure to provide intelligent location awareness. This location awareness can be leveraged by the computer electronic equipment that the user is carrying, needs no networking or server infrastructure, works indoors, has no line-of-sight restrictions, is compact and inexpensive. However, such a system is obviously intended to be used as a personal location based notebook, in which all information is of personal character, and has to be programmed in advance by the users themselves. Such a system is certainly very useful for busy or absent-minded users, but it is still adapted to situations where the information source and the information destination is a same entity, namely the user himself.

What is still needed, instead, is a system in which an information source, for example a traffic information center, a tourist information center or the like, is allowed to build its own infrastructure of strategically located beacons that can interact with any kind of properly equipped mobile devices. A user of such a device is then able to place his device in a vicinity of a particular beacon, whereby his device is instructed by the beacon to automatically contact a corresponding server which, in turn, immediately replies that contact by delivering an information message, for example a SMS message, whose content is specific to the actual location of the beacon.

Objects of the invention

A main object of the present invention is to provide a system that meets the aforementioned requirements. That is, a system that allows any information delivery entity to build an infrastructure of localization devices constructed to remotely interact with mobile telecommunication devices (MTD's), such as electronic notebook, portable computers, personal digital assistants (PDA), cellular telephones or any other devices used for communication via mobile telecommunication networks.

An advantage of a system in accordance with the present invention is that it does not require the MTD's to be equipped with any system-specific hardware or software features. Most of the MTD's available today include an interfacing unit for wireless, bidirectional interaction with external devices. Generally, such an interfacing unit consists of a transceiver, for example a IR transceiver, for emission and reception of pulsed digital signals which are encoded in accordance with a commonly accepted protocol, or standard. Thus, for enabling an interaction with a localization device, a user only needs to enable the transceiver function of his MTD.

An object of the present invention, according to a preferred embodiment, is to provide a system in which the interaction between a MTD and a localization device is based on IR communication technology. Accordingly, each localization device includes an interaction unit which mainly consists of a IR transceiver for emission and reception of pulsed IR signals encoded in accordance with a widely utilized protocol, such as for example an IrDA protocol or a Direct IR protocol. In an alternate embodiment of the present invention, a system is provided in which the interaction between a MTD and a localization device is based on so called BlueTooth technology, such that each localization device is equipped with a BlueTooth transceiver for emission and reception of pulsed R/F radiation signals encoded in accordance with a BlueTooth protocol.

Regardless of the manner in which the present invention is implemented, the basic function of a system in accordance with the present invention is to allow an interaction between a localization device and a MTD, which interaction results in that the MTD is instructed to initiate a communication with an information server supported by an information delivery entity. Generally, an instruction signal is sent by the localization device, which instruction signal typically contains at least the address code of the information server to be called, and an identification code specific to the

localization device, and on basis of which the location of the MTD can be determined by the information server.

An important feature of the present invention is that the localization devices have no connection to the information server, and are solely used for entering necessary instructions into the MTD. The communication with the server is initiated by the MTD. As a result, a localization device for use in a system in accordance with the present invention does not require any complex hardware or software features nor complicated manufacturing arrangements. Therefore, a localization device can be implemented as a simple, small sized, low cost badge that can be mounted at a huge number of key locations.

In a preferred embodiment of the present invention, the communication between the MTD's and the information server is based on short message service (SMS) messaging. That is, the MTD is instructed by the localization device to send a first SMS message to the information server. That first SMS message is interpreted by the information server as an information request. The first SMS message typically contains the identification code of the localization device that brought the MTD to initiate the communication, the subscription number of the sender, the incoming time of the message, and, if necessary, indications about the kind of information required. The information server can then reply the information request by sending a second SMS message containing the required information selected with respect to the actual location of the recipient.

According to another embodiment of the present invention, the communication between the MTD's and the information server is based on internet applications. For example, the localization device will instruct the MTD to establish an internet connection and pick up the URL associated with the information server, whereby the requested information is made available to the user, for example as a WAP-configured page displayed on the MTD. Regardless of the form in which the communication is established, it is a basic object of the present invention to provide a system in which a

MTD is, preferably on demand of its user, directly brought into cooperation with an information source without active participation of the user. Even if it departs of the main purpose of the invention, it can also be conceived that hidden localization devices can be used, for example for advertising purposes, to initiate a communication without the user being aware of it.

Another object of the present invention is to provide a system in which an information server includes a memory unit for storing information data specific to the key location of every localization device coupled to the system, a recognition unit that allows the server to determine, on basis of a unique identification code, the actual location of a requesting MTD, and a selection unit that selects, from the memory unit, the information specifically related to that actual location. In an alternate embodiment of the present invention, the information server even includes means for identifying the equipment properties of a MTD, for example specific protocols, or internet connection capabilities, in order to select a communication mode suitable for a particular kind of MTD.

Still another object of the present invention is to provide a method for delivering location related information to MTD's utilizing the system described above.

Summary of the invention

The present invention relates to a system for delivering location related information, or location and time related information, to mobile telecommunication devices, said system including one or more localization devices arranged in predetermined key locations, at least one telecommunication device, and at least one information server having interface to a mobile telecommunication network for communication with said at least one mobile telecommunication device, the system being characterized in that each of said one or more localization devices includes an interaction unit for interacting with a mobile telecommunication device

when said mobile telecommunication device is located within a predetermined detection range of said localization device, to remotely activate said mobile telecommunication device so as to initiate a communication between said mobile telecommunication device and said at least one information server.

In a system in accordance with a preferred embodiment of the present invention, said at least one mobile telecommunication device includes an infrared (IR) interfacing unit for reception and emission of IR radiation signals encoded in accordance with a predetermined standard, the system being characterized in that each of said one or more localization devices includes an interaction unit for reception and emission of IR radiation signals encoded in accordance with said predetermined standard, for enabling interaction with a mobile telecommunication device through said IR interfacing unit when said mobile telecommunication device is located within a predetermined detection range of a localization device, and said interaction unit includes means for emitting an instruction signal to said mobile telecommunication device through said IR interfacing unit in order to instruct said mobile telecommunication device to transmit an information request through said mobile telecommunication network to said at least one information server.

In a system in accordance with a preferred embodiment of the present invention, said at least one information server includes memory means for storing information data specific to each of said key locations where said one or more localization devices are located; reception means for receiving an information request from a mobile telecommunication device; recognition means for reading a unique identification code, specific to a localization device, from said information request and, upon basis thereof, determining a corresponding key location; selection means for selecting information data specific to the determined corresponding key location; and communication means for replying said information request by delivering selected

information data specific to said determined corresponding key location to said mobile telecommunication device.

The present invention also relates to a method for delivering location related information, or location and time related information, to mobile telecommunication devices, including the steps of providing a mobile telecommunication device connected to a mobile telecommunication network, and equipped with a interfacing unit for emission and reception of radiation signals encoded in accordance with a predetermined standard; positioning a localization device at a key location, said localization device having an interaction unit for emission and reception of radiation signals encoded in accordance with said predetermined standard; locating said mobile telecommunication device within a predetermined detection range of said localization device so as to enable an interaction between said interfacing unit and said interaction unit; emitting an instruction signal from said interaction unit, said instruction signal including a unique identification code specific to said localization device, and an address code specific to an information server connected to said mobile telecommunication network; and, according to said instruction signal, initiating a communication through said mobile telecommunication network between said mobile telecommunication device and said information server.

The objects, features and advantages of the present invention will become more apparent from the following description when read in conjunction with the accompanying figure in which a preferred embodiment of the invention is shown by way of an illustrative example.

Brief description of the drawing

Fig. 1 is a schematic overview of a system in accordance with the present invention

Detailed description of the preferred embodiments

Fig.1 shows an embodiment of the present invention, in which a plurality of beacons are arranged in predetermined locations (A, B, C) and are brought into interaction with mobile telecommunication devices (MTD) to initiate a communication between the MTD and an information server via a wireless carrier included in a telecommunication network, in such a manner that the information server is able to select time and location related information data from a database and deliver relevant information to the MTD. The interaction between the beacon and the MTD is achieved by means of a short distance IR or R/F access. The communication between the MTD and the wireless carrier is achieved by means of a long distance R/F access. The data transfer between the wireless carrier and the information server is achieved by means of wire or internet access.

An embodiment of the present invention is described herein, in which the communication between a mobile telecommunication device (MTD), such as for example a mobile phone, and a central information server is effected through a cellular telephony network, such as a GSM network, and based on a text messaging technology, such as short message service (SMS), enhanced message service (EMS), multimedia message service (MMS) or the like.

Further, the interaction between the MTD and a localization device is based on IR technology, in which pulsed IR light signals are at least partially encoded in accordance with IrDA protocols, which are commonly utilized in conventional mobile phones or electronic notebook today.

However, it will be understood by anyone skilled in the art that a system in accordance with the present invention may be implemented in various manner or in accordance with various standards or protocols, in use today or in the future, without departing from the scope of protection of the invention. For instance, although the following description refers to GSM networks and all basic components thereof, it should be remembered that the scope of the invention is not limited to a particular form of cellular network, and can be applicable to any other cellular communication system,

such as for example UMTS, or other standards such as CDMA or TDMA mostly used in the US. Similarly, the short message service SMS is a standard specifically adapted to GSM networks, and it is therefore obvious that such a standard could be replaced by another corresponding standard suitable for another form of cellular network, without departing from the scope of the present invention. Similarly, the choice of using IR technology and IrDA protocols is made principally due to the built-in IR transceivers widely utilized in many cellular phones or other devices. Future implementations of the system can be adapted to the development or spread of new technologies, such as for example R/F based transmitters encoded in accordance with BlueTooth standards. Hence, regardless of the particular technical features on which it is based, the novel feature of the present invention is to provide a system in which a localization device interacts with a MTD so as to introduce the MTD to an information server for further communication therebetween.

In a first embodiment of the present invention, a system for delivering location related information to mobile telecommunication devices (MTD) includes a plurality of stationary localization devices, or beacons, arranged in an infrastructure created by an information delivery service. The beacons are placed at key locations where a user is supposed to be particularly interested in receiving information or advises about an event or an object specifically related to that key location. For instance, an information delivery service may be supported by a public transport company, in which case the beacons are suitably disposed at every station or stop deserved by the company. The beacons may also be placed at different frequently visited points in a city, for example by a taxi company, a restaurant chain, a tourist information center, etc. Preferably, the beacons have a easily recognizable shape and are arranged in a such manner that they easily draw attention, for example as a part of a notice board on which a label of the company, or any other sign that indicates the kind of information that is made available, is clearly disclosed. In other applications, the beacons can be hidden in such a way that a user is not necessarily aware of that a communication is

initiated with a server. In that case, the user receives unsolicited information messages such as advertising or any kind of information that the user is supposed to need at a particular location, without actively searching for that information. For example, the MTD can be a vehicle multimedia device arranged in a car, and the beacon can be arranged on or along a highway for traffic information, such as for warning a driver for risk for traffic jam or the like. In general, the beacons are preferably stationary devices arranged in fixed key locations. However, the beacons are not bound to a particular location, since they are assigned a unique identification code which, in turn, can be identified by the server, for example on basis of the latest registered location of the beacon. In some cases, the beacons can be arranged in a vehicle or any other movable device moving in a predetermined path, whereby the server is able to determine the actual position of the beacon in that predetermined path at every given time.

A beacon in accordance with the present invention includes generally a detection function which is adapted to detect external device equipped with a wireless interface designed in accordance with a particular interaction protocol. A beacon can also include several detection functions, each of which being specifically aimed to detect a particular interaction protocol. For example, a beacon can be provided with several IR detection function for detecting different IR protocols such as IrDA, direct IR or other commonly used protocols. Similarly, a beacon can include both IR and R/F detection functions, for detecting both IrDA-featured devices and BlueTooth-featured devices. A detection function is implemented in accordance with the actual protocol, and comprises generally a periodical emission of a specifically configured detection signal characteristic for that protocol. The detection signal is sent with a predetermined frequency, for example every five or ten seconds, and the emission is repeated until a properly featured device is caused to reply the detection signal in accordance with the actual protocol. That reply includes generally some form of device identification, in which the beacon is made aware of the presence of a device and the type of interaction expected to take place. In order to reduce power consumption, the detection

function of a beacon can, in some case, be set in an inactive mode, or sleep mode in the absence of mobile telecommunication device. In that case, the beacon advantageously includes a passive receiver unit that can react when electromagnetic radiation from a MTD is detected in the vicinity of the beacon. For example, the MTD can be a cellular phone continuously or periodically interacting with a base station or a mobile switching center associated with the cellular telecommunication network, which communication generates electromagnetic radiations that can be registered by the receiver unit. As soon as such a radiation is detected by the receiver, the detection function of the beacon is immediately set onto an active mode in order to enable detection of the mobile device.

A beacon further includes a control function configured in accordance with a given protocol. The control function is started upon identification of an external device, and comprises generally the transmission of an instruction signal to the identified device. The instruction signal mainly includes a command of the type <get info at (server address) from (ID code)>. The instruction signal comprises indications about the communication mode in which the information is to be transferred. For example, the MTD can be instructed to send a text message, such as a SMS message, to the information server. Optionally, the MTD can be instruct to establish an internet connection and pick up a URL corresponding to the web representation of the information server in which the requested information is available. This is preferably achieved by downloading a WAP configured site directly displayed on the MTD. Depending of equipment properties and ability of the MTD, the communication mode may also vary from device to device. For example, the beacon is able to select a communication mode on basis of device identification. Although SMS messaging is preferred, other forms of text messaging can also be implemented, such as e-mail or even fax. Common for all embodiments of the present invention, is that the control function of the beacon instructs a MTD to initiate a communication with the server by sending an information request. The information request can be sent with or without confirmation from the user of the MTD, depending on

the case in which information is requested. Typically, the information request is not made visible for the user. Preferably, a short question of the type <get info about...?> can be displayed on the MTD, whereby the user is able to confirm or cancel the query by depressing a YES-key or a NO-key, receptively. The information is preferably delivered as a new SMS message replying the information request. That SMS message may contain optional alternatives for further communication. The SMS message sent by the information server may also include a link to a URL which can be accessed upon confirmation from the user. The communication can also be achieved in several steps in which the server sends menus comprising several optional alternatives that can be easily selected by the user.

An information server for use in a system according to the present invention includes generally an interface to a SMS center coupled to the cellular network. The server includes an intern database for storing information data relative to every location where a beacon is coupled to the system, to ensure entire coverage of the beacon infrastructure associated to the system. The information data stored in the database is classified with respect to location and time of incoming information request. The information server includes a reception unit that reads, from the incoming SMS messages, several parameters such as <caller ID>, <incoming time>, and <beacon ID>. All parameters are embedded into predetermined configurations according to SMS protocols. The server is programmed to match these parameters with an information data stored in the database and to reply the information requests with SMS messages containing the selected information data. Optionally, the server further includes an equipment identification function that is able to determine the communication mode which is optimally adapted to the originating device. For example, the equipment identification function is able to determine, on basis of parameters contained in a SMS message, whether the sending MTD is equipped with internet access capabilities or not, and if it is, to deliver the selected information via an internet connection by directing the MTB to a particular URL associated to the information server.

Hereinafter, three concrete examples will be given to illustrate different fields of applications in which the system can be advantageously used.

Example 1

In a first application example, given only for illustrative purposes, a beacon is arranged at a bus stop deserved by a public transport company, or at a taxi station deserved by a taxi company, for traffic information purposes. A user is invited to point his MTD toward the beacon, for example at a distance that may vary from contact to up to 20cm. The beacon comprises a detection function for detecting the presence of a MTD in an immediate vicinity of the beacon. Such a detection function is preferably part of IrDA Link Access Protocol and used to search for IrDA-featured devices. Depending on the context in which the beacon is utilized, the detection range for IrDA data signaling can be varied on a case to case basis, typically from contact up to approximately two meters. To reduce the power consumption, a low power version relaxes the range objective for operation from contact through at least 20 cm between low power devices and 30 cm between low power and standard power devices. A IrDA detection signal is emitted periodically, for example every five seconds, until a reply is received from a IrDA-featured device, whereby the device is identified by the beacon, according to IrDA protocols. The beacon is programmed to transfer an IrDA configured instruction signal to the device, by the mean of which the device is instructed to send a SMS message to the information server. The SMS message contains an identification code specific to the location of the beacon, i.e a particular bus stop or taxi station. The information server is then able to read the identification code and, on basis thereof, determine the location of the user and select an information specific to that location. In the case of a public transport information, the selected information is typically the estimated time remaining until the next vehicle will arrive at the bus stop. The information is selected with respect to both location and time, on basis of the identification code and the incoming time of the SMS message. The selected information is then immediately delivered to the user in the

form of a new SMS message. In the case of taxi information, the information server will contact the taxi traffic center in order to localize the nearest taxi in a neighborhood of the identified beacon, and provide an estimation of the time required for that taxi to arrive at the corresponding station. The user then receives an indication about the estimated waiting time, and a question on whether he wants to reserve the taxi or not. Upon confirmation from the user, the taxi is sent to the actual station. All communication steps are preferably achieved by means of SMS messages between the user and the server while sparing the user the task of typing any message or manually dialing any number.

Example 2

In a second application example, even this given only for illustrative purposes, a beacon is installed in a queue number ticket distributor, that provides customers with queue number tickets, for example at a store or a bank office. While picking up a queue number ticket, a user is invited to point his MTD toward the beacon, whereby the beacon initiates a communication between the MTD and a server coupled to the customer queue system. The MTD sends a SMS message containing the queue number given the customer. On basis of the incoming time of the information request, the server is able to calculate an approximate remaining waiting time. The server will keep the customer informed about the actual remaining waiting time by periodically sending new messages with indications on the time remaining until the actual queue number will appear on the distribution display. When the remaining waiting time is less than a predetermined value, the server sends a signal for alerting the customer.

Example 3

In a third application example, still given only for illustrative purposes, a beacon is mounted in a door lock handling device, and arranged outside a locked door. In that case, a door lock handling server includes a database

containing a list of telephone numbers corresponding to the users which are authorized to unlock the actual door. By directing his phone toward the beacon, a user will enable an interaction between the phone and the beacon, resulting in that the phone sends a SMS message to the door lock handling server, which message contains the sender's phone number and the beacon identification code corresponding to the actual door. The server is then able to compare the sender's phone number with the list of authorized numbers stored in the database section corresponding to the actual door. If the sender's number is found among the authorized numbers, the door lock handling server unlocks the actual door. For increased security, an algorithm can advantageously be implemented in the beacon in order to generate new coded information depending on time, the telephone number, other information or combination thereof, that is also available in the door lock handling server. The sent SMS message contains the coded information. The door lock handling server comprises the same algorithm and is then able to compare the coded information contained in an incoming SMS message with the coded information generated by the algorithm in the door lock handling server. If the information is identical with that generated by the algorithm, the door lock handling server unlocks the door.

The examples given above illustrates different way to utilize a system in accordance with the present invention, and makes apparent that the system can be exploited in various other purposes without departing from the scope of protection of the present invention as it is defined in the following, appended claims.

Claims

1. A system for delivering location related and/or time related information to mobile telecommunication devices, said system including one or more localization devices arranged in predetermined key locations, at least one telecommunication device, and at least one information server having interface to a mobile telecommunication network for communication with said at least one mobile telecommunication device, characterized in that each of said one or more localization devices includes an interaction unit for interacting with a mobile telecommunication device when said mobile telecommunication device is located within a predetermined detection range of said localization device, to remotely activate said mobile telecommunication device so as to initiate a communication between said mobile telecommunication device and said at least one information server.
2. A system as defined in claim 1, characterized in that each of said one or more localization devices includes detection means for detecting the presence of a mobile telecommunication device within said predetermined detection range of said localization device.
3. A system as defined in claim 2, characterized in that each of said one or more localization devices includes detection means for continuously or intermitently emitting a detection signal, and said at least one mobile telecommunication device includes a transceiver unit which can receives said detection signal from a localization device when said mobile telecommunication device is located within said predetermined detection range of said localization device, whereby an interaction is enabled between said mobile telecommunication device and said localization device.

4. A system as defined in claim 2, in which said at least one telecommunication device emits electromagnetic radiation signals for interaction with said mobile telecommunication network, characterized in that each of said one or more localization devices includes detection means for detecting said electromagnetic radiation signals from a mobile telecommunication device when said mobile telecommunication device is located within said predetermined detection range of said localization device, whereby an interaction is enabled between said mobile telecommunication device and said localization device.

5. A system as defined in any one of claims 1 to 4, characterized in that said interaction unit includes control means for transmitting an instruction signal to a mobile telecommunication device, to instruct said mobile telecommunication device to transmit an information request through said mobile telecommunication network to said at least one information server.

6. A system as defined in claim 5, in which each of said one or more localization device is assigned a unique identification code, characterized in that said unique identification code is comprised in said instruction signal and forwarded within said information request to said at least one information server, whereby an actual location of said mobile telecommunication device originating said information request can be determined by said at least one information server upon basis of said unique identification code.

7. A system as defined in any one of claims 1 to 6, characterized in that said interaction unit is constructed for emission and reception of electromagnetic radiation signals within infrared frequency range, and said at least one mobile telecommunication device includes a transceiver unit comprising an infrared linking device.

8. A system as defined in any one of claims 1 to 6, characterized in that said interaction unit is constructed for emission and reception of electromagnetic radiation signals within radiowave frequency range, and said at least one mobile telecommunication device includes a transceiver unit comprising an radiowave linking device.

9. A system as defined in claim 7, characterized in that said infrared electromagnetic radiation signals are at least partially encoded in accordance with a predetermined standard, preferably a IrDA standard.

10. A system as defined in claim 8, characterized in that said radiowave electromagnetic radiation signals are at least partially encoded in accordance with a predetermined standard, preferably a BlueTooth standard.

11. A system for delivering location related and/or time related information to mobile telecommunication devices, said system including one or more localization devices arranged in predetermined key locations, at least one telecommunication device, and at least one information server having interface to a mobile telecommunication network for communication with said at least one mobile telecommunication device, and said at least one mobile telecommunication device includes an infrared (IR) interfacing unit for reception and emission of IR radiation signals encoded in accordance with a predetermined standard, characterized in that each of said one or more localization devices includes an interaction unit for reception and emission of IR radiation signals encoded in accordance with said predetermined standard, for enabling interaction with a mobile telecommunication device through said IR interfacing unit when said mobile telecommunication device is located within a predetermined detection range of a localization device, and said interaction unit includes means for emitting an instruction signal to said mobile telecommunication device through said IR interfacing unit in order to instruct said mobile telecommunication device to transmit an

information request through said mobile telecommunication network to said at least one information server.

12. A system as defined in claim 11, characterized in that said instruction signal is an IR radiation signal encoded in accordance with IrDA standard.

13. A system as defined in any one of claims 11 and 12, characterized in that each of said one or more localization device is assigned an unique identification code, such that each instruction signal originated from a particular localization device comprises said unique identification code specific to said particular localization device.

14. A system as defined in any one of claims 11 to 13, in which said at least one information server is coupled to a text message handling system, such as a short message service center (SMSC), characterized in that said instruction signal instructs said mobile telecommunication device to send a text message, such as a short message service (SMS) message, to said at least one information server.

15. A system as defined in any one of claims 11 to 14, in which said at least one information server is coupled to a text message handling system, such as a electronic mail server, characterized in that said instruction signal instructs said mobile telecommunication device to send a text message, such a electronic mail, to said at least one information server.

16. A system as defined in any one of claims 11 to 14, in which said at least one information server is coupled to an internet server, characterized in that said instruction signal instructs said mobile telecommunication device to establish an internet connection to access a predetermined address location corresponding to said at least one information server.

17. A system as defined in any one of claims 11 to 16, characterized in that said at least one telecommunication device is a cellular telephone equipped with a IR interfacing unit.

18. A system as defined in any one of claims 11 to 16, characterized in that said at least one telecommunication device is a portable computer or "personal digital assistant" (PDA) equipped with a IR interfacing unit.

19. A system as defined in any one of claims 11 to 16, characterized in that said at least one telecommunication device is a vehicle multimedia device equipped with a IR interfacing unit.

20. A system as defined in any one of claims 11 to 19, characterized in that said mobile telecommunication network is a GSM cellular network.

21. A system as defined in any one of claims 11 to 19, characterized in that said mobile telecommunication network is a UMTS cellular network.

22. A system as defined in any one of claims 11 to 19, characterized in that said mobile telecommunication network is a CDMA cellular network.

23. A system as defined in any one of claims 11 to 19, characterized in that said mobile telecommunication network is a mobile internet network.

24. A system as defined in any one of claims 1 to 23, characterized in that said at least one information server includes

memory means for storing information data specific to each of said key locations where said one or more localization devices are located,

reception means for receiving an information request from a mobile telecommunication device,

recognition means for reading a unique identification code, specific to a localization device, from said information request and, upon basis thereof, determining a corresponding key location,

selection means for selecting information data specific to the determined corresponding key location, and

communication means for replying said information request by delivering selected information data specific to said determined corresponding key location to said mobile telecommunication device.

25. A system as defined in claim 24, in which said information data specific to each of said key locations is time dependent, characterized in that said selection means includes a clock function for determining an incoming time of an information request, and, upon basis thereof, selecting information data specific to said incoming time.

26. A system as defined in any one of claims 24 and 25, in which said one or more localization devices are caused to move according to a predetermined routing program, characterized in that said recognition means includes a clock function for determining an incoming time of an information request including a unique identification code, and, upon basis of said incoming time and said unique identification code, determining a corresponding key location.

27. A system as defined in any one of claims 24 to 26, characterized in that said reception means includes a caller identification function for determining, upon reception of an information request, an address or subscription number of the originating mobile telecommunication device.

28. A system as defined in any one of claims 24 to 27, characterized in that said reception means includes a equipment identification function for determining, upon reception of an information request, equipment properties specific to the originating mobile telecommunication device.

29. A system as defined in claim 28, characterized in that said communication means includes a equipment selection function for selecting

a communication mode adapted to said equipment properties specific to said originating mobile telecommunication device.

30. A system as defined in any one of claims 24 to 29, characterized in that said communication means replies said information request by sending an information message containing said selected information data specific to said determined corresponding key location to said mobile telecommunication device.

31. A system as defined in any one of claims 24 to 30, characterized in that said communication means replies said information request by sending an information message containing a link to an internet address location in which said selected information data specific to said determined corresponding key location is available.

32. A method for delivering location related and/or time related information to mobile telecommunication devices, including the steps of:

providing a mobile telecommunication device connected to a mobile telecommunication network, and equipped with a interfacing unit for emission and reception of radiation signals encoded in accordance with a predetermined standard,

positioning a localization device at a key location, said localization device having an interaction unit for emission and reception of radiation signals encoded in accordance with said predetermined standard,

locating said mobile telecommunication device within a predetermined detection range of said localization device so as to enable an interaction between said interfacing unit and said interaction unit,

emitting an instruction signal from said interaction unit, said instruction signal including a unique identification code specific to said localization device, and an address code specific to an information server connected to said mobile telecommunication network,

according to said instruction signal, initiating a communication through said mobile telecommunication network between said mobile telecommunication device and said information server.

33. A method as defined in claim 32, in which said communication initiated through said mobile telecommunication network between said mobile telecommunication device and said information server, includes the steps of:

 sending an information request from said mobile telecommunication device to said address code specific to said information server, said information request including said identification code,

 enabling said information server to read said identification code from said information request and, on basis thereof, determining said key location,

 from information data stored in said information server, selecting information data specific to said key location, and

 replying said information request by delivering the so selected information data through said mobile telecommunication network to said mobile telecommunication device.

34. A method as defined in claim 32, in which said communication initiated through said mobile telecommunication network between said mobile telecommunication device and said information server, includes the steps of:

 establishing a connection between said mobile telecommunication device and an internet server,


 linking said telecommunication device to an internet address location corresponding to said address code specific to said information server, and

 from said internet address location, selecting information data specific to said key location.

35. A method as defined in any one of claims 32 to 34, characterized in that said interfacing unit is a IR transceiver

36. A method as defined in any one of claims 32 and 34, characterized in that said interfacing unit is radiowave transceiver, such as a BlueTooth transceiver unit.

Fig. 1

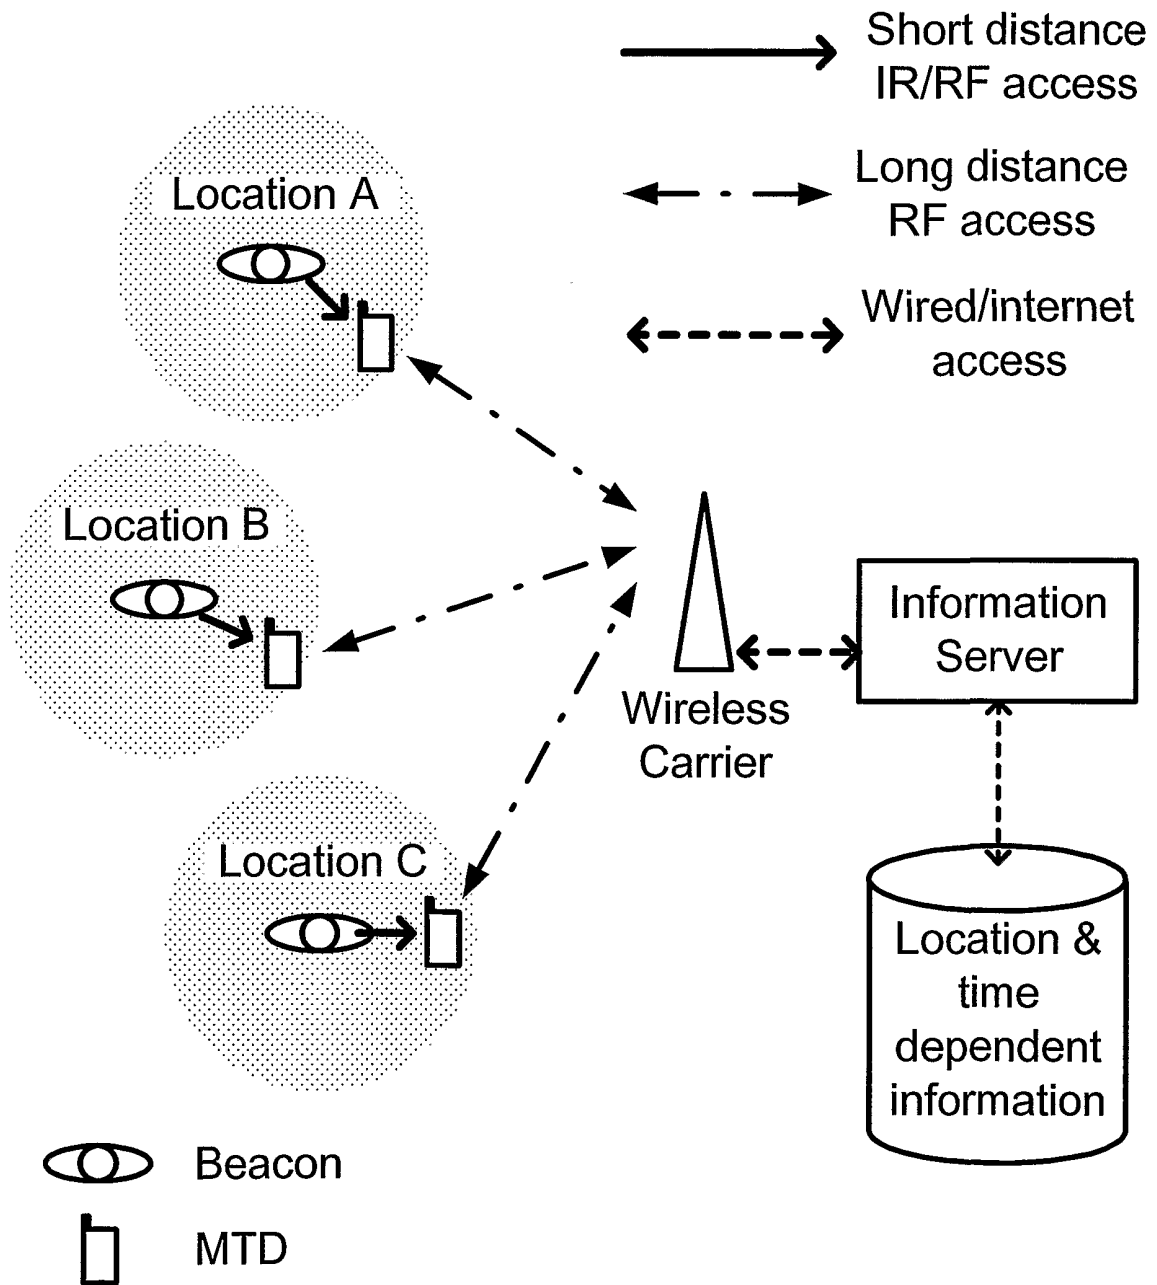

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 02/00504

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0101711 A1 (NOKIA CORPORATION), 4 January 2001 (04.01.01), page 3, line 14 - line 22; page 3, line 33 - page 4, line 16; page 4, line 27 - line 33, page 7, line 12 - 33; page 5, line 33 - page 6, line 12; Figure 1, abstract --	1-36
A	WO 0105184 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 18 January 2001 (18.01.01), abstract -----	1-36

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search	Date of mailing of the international search report
11 June 2002	13-06-2002

Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer STEFAN HANSSON/SN Telephone No. +46 8 782 25 00
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE 02/00504

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0101711 A1	04/01/01	AU 4943300 A EP 1192815 A	31/01/01 03/04/02
WO 0105184 A1	18/01/01	AU 6191300 A EP 1197114 A US 6282427 B	30/01/01 17/04/02 28/08/01