



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B41M 5/025		A1	(11) International Publication Number: WO 99/12743
			(43) International Publication Date: 18 March 1999 (18.03.99)
<p>(21) International Application Number: PCT/US98/19194</p> <p>(22) International Filing Date: 11 September 1998 (11.09.98)</p> <p>(30) Priority Data: 08/928,896 12 September 1997 (12.09.97) US</p> <p>(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).</p> <p>(72) Inventor: BROOKER, Dennis, B.; Route 1, Darby, IA 50068 (US).</p> <p>(74) Agents: HORNICKEL, John, H. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
<p>(54) Title: IMAGE TRANSFER METHOD</p> <p>(57) Abstract</p> <p>An application for an improved method of transferring an ink image from one medium to a second medium at ambient temperature is disclosed. A digitized image is selected to be printed on an ink type printer on a computer device. Prior to printing, the image can be manipulated in various ways on the computer device. The image is printed onto a non-absorbent medium utilizing the ink type printer. The image is then transferred from the non-absorbent medium to the object on which it is desired to have the image. No excess heat is required for the transfer process. Pressure is applied to the back side of the non-absorbent medium to assist in the image transfer. Prior to transferring the ink image, the surface of the object can be prepared by marring or application of a suitable substrate.</p>			

```

graph TD
    12[PREPARE SURFACE OF OBJECT TO RECEIVE IMAGE] --> 14[SELECT DIGITIZED IMAGE ON COMPUTER]
    14 --> 16[MANIPULATE DIGITIZED IMAGE ON COMPUTER]
    16 --> 18[PRINT DIGITIZED IMAGE ONTO A TRANSFER MEDIUM]
    18 --> 20[TRANSFER PRINTED IMAGE FROM TRANSFER MEDIUM TO OBJECT]
    20 --> 22{IMAGE ON OBJECT ACCEPTABLE?}
    22 -- No --> 24[REMOVE TRANSFERRED IMAGE FROM OBJECT]
    22 -- Yes --> 26{APPLY ANOTHER IMAGE?}
    26 -- Yes --> 28[APPLY SEALANT]
    26 -- No --> 28
    24 --> 28
  
```

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

IMAGE TRANSFER METHODTechnical Field

5 The present invention relates generally to the art of applying printed images to objects and specifically to the use of an ink type printer for transferring a computer image onto a target object at an ambient temperature using an intermediate medium.

10 Background Art

Techniques for printing images and words on objects are numerous and include the processes of letterpress, lithography, gravure and screen printing. In order 15 to determine the appropriate process for a particular job, considerations of quality, quantity, complexity of the reproduction, number of colors, characteristics of the target object or medium, and cost must be evaluated and balanced. Additionally, with 20 the development of high quality, economical printers available for connection to economical multimedia computers, the layperson is capable of creating and printing high quality images and documents which include high resolution color.

25 Printers to be attached to computers generally are either a laser type printer or an ink type printer. The laser type printers use heat to bond a toner to the surface of the medium, typically paper, passing through the printer. The ink type printers 30 selectively spray the inks onto the medium, again typically paper, passing through the printer. Both types of printers are capable of high resolution in the order of 600-1200 dots per inch or better. Some types of printers, especially laser types, are capable of a 35 resolution which is much higher.

40 While these types of printers offer tremendous savings over the traditional processes of printing discussed above in terms of economy and time, they have the 45 disadvantages of limiting the type and size of medium which can be passed through the printer. For example, virtually every printer requires that the medium be a relatively flat surface. It would not be possible to feed a baseball through the printer. Additionally, the size of the medium is limited to the size of the printer and the feeding mechanism. Most economical printers are not capable of feeding though a medium much wider than a sheet of legal paper. Also, the medium usually must be

5 flexible due to the fact that many printers do not allow the medium to pass through
the printer in a planer fashion. Thus, a piece of card-board may not be a suitable
medium because it may be too wide, too thick, or too rigid to pass through the printer.
10 The use of a type of printer known as a plotter may address some of these issues,
primarily the width and secondarily the rigidity, but for the most part a plotter is
encumbered with the same limitations as the other printers.

15 In order to print upon a medium which will not pass through a computer
printer, one of the other previously mentioned printing processes must be used. The
other printing processes also have their own disadvantages which include additional
time and cost. This is especially true in the initial stages of the printing process
20 known as the set-up. If the quantity of objects to be printed is sufficiently large, the
increased investment of time and resources for set-up may, and most likely will,
warrant the use of one of the traditional printing processes. However, if the quantity
25 of objects to be printed is small, the high initial set-up investment may make overall
printing cost per object too high.

30 An additional drawback to the traditional printing processes and the high set-
up investment is that it makes it impractical to view how the printed object will look
prior to the time when the process is ready for mass production. In other words, the
printing processes make it very difficult to make corrections or adjustments after
35 viewing the first printed object because the initial set-up investment already has been
made and a significant duplication of that investment would be required to make any
changes.

40 Thus, there is a need for a printing process generally which overcomes the
drawbacks of the previously discussed printing process and specifically which is
economical even when done in relatively small quantities, which allows for the use of
45 an ink type printer and which allows for printing on a wide variety of media which
cannot be passed through a printer

Disclosure of the Invention

5 The present invention relates generally to the art of applying printed images to
objects and specifically to the use of an ink type printer for transferring a computer
image onto a target object using an intermediate medium. Preferably, the method of
10 transferring requires only ambient temperature and hand pressure. However, in some
instances it may be desirable to provide more than hand pressure. But no elevated
temperature is required for the use of the present invention. The present invention
15 comprises a process wherein a digitized image is selected on a computer device for
printing on an ink-type printer. Preferably, the image is printed with water-based inks
and the non-absorbent medium has properties that receive the water-based inks in a
20 precise image pattern. Use of transparency film for laser type printers or other
translucent or opaque films having similar compositions provides these properties.
The side of the first medium which receives the ink image is the front side. The film
25 is then applied to a second medium and pressure is applied to the back of the first
medium such that the ink image is substantially transferred to the second medium.

30 The pressure used to transfer the ink image from the first medium to the
second medium can be accomplished by burnishing, rollers, stamps or any other
means of applying pressure which provides for a substantial vertical pressure applied
to the back side of the first medium. A high density transferred image can be
35 accomplished by repeating the process one or more times with care being given to
precisely overlay the ink images. Preferably, a high density transferred image can be
accomplished with one act of transferring if one selects the appropriate non-absorbent
40 medium. the appropriate settings of the computer image, is discussed below.

45 The second medium can be comprised of virtually any material such as wood,
plastic, glass, metal, ceramic, acrylic, vinyl, self-adhesive vinyl, paint, paper,
cardboard. The second medium surface must be suitable for receiving the ink image.
If the surface of the second medium is not naturally suitable, it may need to be
prepared either by marring or by applying an appropriate substrate. The preparation

of the surface need only be in the portion of the surface which is to receive the ink
5 image.

After the ink image has been transferred to the second medium, a sealant can
be applied over the transferred image to protect the ink image. Various types of ink
10 can be used in the ink type printer including water soluble ink, non-water soluble ink,
high pigment density ink, and ink with sealant.

Sources for images to be selected on the computer include the use of a
15 scanner, the use of a digital camera, downloading an image from a remote source
(such as a disk or network), and creating a new image on the computer. Prior to
printing the selected computer image, the image can be manipulated. Manipulation of
20 the image can include adjusting brightness, colors, orientation, size, background,
foreground, shape and various other visual effects. A variety of image manipulation
computer programs are available to those skilled in the art. Among these are Adobe
25 PageMaker, Adobe Photoshop, Adobe Illustrator, 3M Graphic Maker Ink Jet Software
(Minnesota Mining and Manufacturing Company (3M)), and many others. The ability
to manipulate the image is important to the ability to control the image received by
30 the non-absorbent medium for its transfer on the second medium.

An object of the present invention is to provide an image transferring process
which allows for the use of a computer and ink type printer to print and transfer an
35 image onto virtually any surface.

Another object of the present invention is to provide an image transferring
process which allows for transferring an image onto a target surface with no
40 temperature elevation during the process.

A further object of the present invention is to provide an image transferring
process which allows for transferring an image onto surface which can not be passed
45 through a typical ink type printer.

Another object of the present invention is to provide an image transferring
process which allows for preparation of a medium which typically is not a suitable

5 surface for receiving a printed image.

10 Still another object of the present invention is provide an image transferring process which allows for transferring computer selected images onto virtually any surface in a manner which is fast, effective and economical even when used for 15 printing small quantities.

15 Other objects, advantages, and novel features of the present invention will become apparent from the following detailed description of the invention when 20 considered in conjunction with the accompanying drawings.

Brief Description of the Drawings

20 Fig. 1 is a flow chart for a method of image transfer detailing the various steps of the present invention;

25 Fig. 2 is a block diagram detailing the steps and methods used in surface preparation;

30 Fig. 3 is a block diagram detailing the various methods of selecting a digitized image;

35 Fig. 4 is a block diagram detailing the various ways in which the digitized image can be manipulated;

40 Fig. 5 is a block diagram detailing the various types of ink which can be used in the printer; and

45 Fig. 6 is a block diagram detailing the various methods of transferring the image to a second medium.

Best Modes for Carrying Out the Invention

40 To assist in a better understanding of the invention, a description of different forms and embodiments of the invention will now be described in detail. Reference will be made to the accompanying drawings. Reference numbers and letters will be 45 used in the drawings to indicate specific parts and locations on the drawings. The same reference numerals and letters will be used throughout the drawings unless otherwise indicated.

5 Referring now to Fig. 1, a flow chart diagram of the image transferring method (10) of the present invention is shown. In order to facilitate a better understanding of the image transferring method (10), a general discussion of the process will be discussed followed by a more detailed discussion of the various steps.

10 The first step of the image transferring method of the present invention is to prepare the surface (12) of the object or item which ultimately is to receive the image. This step (12) may not always be necessary and will be discussed in greater detail 15 below. After preparing the surface (12) of the object to receive a transferred image, if necessary, the image to be transferred must be selected on a computer (14). After the image has been selected on the computer (14), the image is manipulated or modified 20 on the computer (16). The two most common types of image manipulation (16) are reversing the image and adjusting the brightness of the image.

25 After the image has been manipulated (16) and is in its final form, the image is printed onto a non-absorbent medium (18), such as a film transparency made for use with a laser type printer, hereinafter referred to as "laser transparency film." The 30 printing on the laser transparency film is done, however, utilizing an ink type printer connected to the computer. Using a laser type printer will not work with the present invention. The printer must be of the type which essentially sprays the ink or inks 35 onto the medium passing through the printer.

35 The laser transparency film is a non-absorbent medium having properties which allow it to relieve the ink image in a precise image pattern. Any translucent or opaque film having similar properties may be used.

40 The laser transparency film, also known as the transfer medium, includes a front side and a back side. For the sake of discussion, it should be assumed that the 45 ink image is positioned on the front side of the transparency film. Using a non-absorbent medium allows the ink image to remain on the surface of the transfer medium. It may sound unusual and surprising that a laser transparency film is being used in an ink type printer, but despite warnings not to do this on at least the 3M

brand of laser transparency films, that is precisely what is being done in this case.

This process will work even if the laser transparency film is made to be
5 opaque. Other smooth non-absorbent mediums (18), besides laser transparency film
can also be used. The transparency film made for ink type printers, hereinafter called
"ink transparency film" having a solution on one surface cannot be used in this
10 process unless the smooth, back side is used, contrary to the instructions on the
transparency package which warns against reversing the transparencies. Reversing
the ink transparency film may, however, cause the ink type printer to malfunction and
15 that is why the use of laser transparencies are used as a preferred embodiment.

The transparency film, or transfer medium, with the ink image on the front
side is then placed front side down onto the object or item, also called the target
20 object, which is to receive the image. The image is then substantially transferred (20)
from the transfer medium to the target object by applying pressure on the back side of
the transparency film. The transparency film is then carefully removed from the
25 target object.

The transfer occurs without application of heat. Mere ambient temperature
with hand or manual tool pressure is sufficient to transfer the image from the transfer
30 medium to the target object or second medium. Unlike other transfer processes
known to those skilled in the art, such as the transfer of images to cloth (especially T-
shirts) which require the application of elevated temperatures, the method of present
35 invention avoids the necessity of heated transfer. This provides several advantages to
those using the present invention. No excess energy is required for the transfer. No
heat is present, allowing transfer with danger of burns to human skin or damage to
40 other items including the second medium or target object which itself can be heat-
sensitive. Most importantly, the avoidance of heat removes a complicating factor to
the transfer step that makes the method of the present invention more convenient, less
45 costly, safer, and more versatile than methods known in the art that involve or require
heated transfer of image. For this reason, the present method is a "cold transfer
process" in that it does not require heat to work.

5 The target object is then inspected to see if the image is satisfactory (22). If the image is not satisfactory, then the image may be removed from the target object (24). Removal of the image typically only requires that the target object be washed with water because most of the inks used in ink type printers are water soluble. If the image is acceptable the image is allowed to dry. If it is determined that another image
10 should be applied (26), the steps of printing the image (18) and transferring the image (20) are repeated. Applying another image is essentially just applying another coat of ink which provides for brighter and more defined colors in the image.

15 When all of the images have been transferred and dried, a sealant can be applied (28). The type of sealant is dependent upon the type of material used as the target object. The sealant provides a layer of protection as well as providing the opportunity to select various finished looks such as flat, semi-gloss, gloss and satin.
20 At this time, the best known sealant for most plastics is Krylon #1312 spray, also referred to as KAMAR Varnish, available from Krylon Products Group, Specialty Division, of the Sherman Williams Company of Solon, Ohio. Alternatively, rather than applying a sealant, the image can be protected by an adhesive laminate that is clear and protects the image. Commercial sources for such over laminates include
25 Minnesota Mining and Manufacturing Company (3M).
30

35 Referring now to Fig. 2, in order to insure that the target object will properly receive the ink image from the transfer medium, the surface of the target object may need to be prepared. In order to properly receive the ink image, the surface of the target object must either be absorbent, porous, or sufficiently abrasive. All target object surfaces must be clean (32) and dry (33). Whether the surface of the target object needs additional preparation depends upon the type material of which the medium is made.
40

45 If the target object, or second medium, is made of a material such as wood, paper, cardboard or another similarly absorbent material, the surface need not be prepared other than to be clean (32) and dry (22). However, if the target object is made of a material such as plastic, glass, acrylic, metal, vinyl, self-adhesive vinyl, or

another similarly non-absorbent, smooth material, the surface must be prepared such that it will properly receive the ink image. Obviously, it is only necessary to further 5 prepare the portion of the surface which will actually receive the ink image.

One method of preparing the surface is to roughen or mar the surface (34) of the target object. By roughening or marring the surface of the target object, the 10 surface will become abrasive and will then properly receive the ink image. One method of marring the surface is sand blasting (35). In one method of the present invention, the marring occurs using a 150 grit aluminum oxide in the sand blasting 15 process. The sand blasting process can benefit from construction of a suitable container for the sand blasting, according to methods known in the art. Another method of marring the surface is to use sand paper (36). Still another method of 20 marring the surface is to use an emery cloth or emery board (37). A still further method is burnishing the surface with a rough roller.

Another method of preparing the surface of the target object is to apply a 25 suitable substrate to the surface (38). A suitable substrate is any substrate that will adhere to the surface of the target object and is sufficiently absorbent, porous, or abrasive such that it will properly receive the ink image. In a preferred use of the 30 substrate, the substrate is transparent and provides for a slightly abrasive surface after applied. Another common but excellent substrate is latex paint. Different colors of latex paint can be utilized to add another visual dimension to the transferred image.

Referring now to Fig. 3, the various sources of images to be selected (14) are 35 shown. Prior to printing an image, it must either be acquired or created. An image can be acquired from many sources including the use of a scanner (42), the use of a 40 digital camera (44) or by downloading an image (46) from another source such as a disk, hard drive, cd-rom, application program or network. An image can also be created (48) on the computer using any one of the many word processing, graphics, 45 paint, draw programs available or virtually any other program which allows the user the option of printing. These programs are well known to one skilled in the art. When the image is actually selected, it need not necessarily be viewed.

Referring now to Fig. 4, the various methods of manipulating an image (16) are shown. Many of the programs discussed above are capable of performing the following manipulations. As discussed above, the two most common manipulations are brightness adjustment (50) and reversal of the image (51). Adjusting the brightness of the image (50) can be done for visual effect but is more often used to 5 lighten the image. By lightening the image, less ink is sprayed onto the transfer medium. If too much ink is used on the transfer medium, the risk of having the image smear as it is transferred onto the target object is increased. It is better to apply two 10 thinner coats of ink than to apply one heavy coat. Reversal of the image (51) is used simply so that the image will be correctly oriented after the image is transferred from 15 the transfer medium to the target object. This is typically necessary when the image to be transferred includes text.

Many other image manipulations can be accomplished and relate solely to the 20 visual aspects of the image. These manipulations include rotating (52), enlarging 25 (53), reducing (54), color adjustment (55), background removal (56), foreground removal (57), background addition (58), foreground addition (59), image addition 30 (60) and image removal (61). Many other visual effects such as stretching, twisting, spiraling and the like can be accomplished with various graphics programs.

During the manipulation of the image, alignment guides can be added outside 35 of the image which can be used to help align images when multiple coats are applied. Alignment guides can be virtually any shape but in a preferred embodiment comprise to small dots on opposite sides of the image.

Referring now to Fig. 5, a sampling of the various types of inks which can be 40 used in the printing step (18) of the present invention are shown. The printer used in the printing step (18) must be an ink type printer which sprays out the ink such as 45 printers which use Hewlett Packard InkJet Cartridges or Canon BubbleJet Cartridges. As mentioned previously, the inks used in ink type printers are in liquid form (64) and are water soluble (65). However, two variations on the ink types could be used to help counter the potential for smearing as discussed above. First, a high pigment

density ink (67) could be used. This type of ink would allow for brighter colors without the need of applying a heavy coat or multiple coats. Second, ink with a higher viscosity, such as an ink in gel form, would also allow thicker coats to be applied while reducing the likelihood of smearing. Preferably, inks in the ink type printer can be pigmented thermal inkjet inks, pigmented piezo inkjet inks, or dye-based inkjet inks. A number of commercial sources for these inks are known, including Hewlett Packard Corporation, Encad Corporation, Canon Corporation, Minnesota Mining and Manufacturing Company (3M), and others. One advantage of the present invention is ability to use the transfer method of the present invention with a variety of inkjet inks and printheads in a number of ink type printers. For example, one can use the transfer method on desktop inkjet printers or floor mounted printers that print images up to about 50 inches wide. These "large format" printers produce images which also benefit from the transfer without application of heat to a second medium.

Two other types of ink may be used to reduce the need for applying the sealant coat in the final step. First, a non-water soluble ink could be used which is less likely to deteriorate without a protective sealant. Second, an ink with an included sealant (68) could be used. These types of inks would self seal as they dry. It is even possible that these inks could be washed off prior to the time they dry but before becoming permanent after drying. These two types of ink greatly enhance the method of the present invention when the material of the target object is cloth which is difficult to seal.

Referring now to Fig. 6, the types of pressure which can be applied during the transfer process (20) are shown. The application of pressure to the back side of the transfer medium greatly assists in the substantial transfer of the image from the transfer medium to the target object, essentially another medium. The important aspect of applying pressure is that it must be substantially vertical or perpendicular to the transfer medium. Applying pressure which tends to slide across the transfer medium will likely cause the ink image to smear. The preferred method of applying

pressure (70) is by using a burnishing tool (72). Rollers (75) and stamps (76) can also be used to apply pressure.

5 As stated previously, the types of pressure used in the transfer process (20) do not require the presence or use of heat. Therefore, the transfer process (20) operates at ambient temperature, usually room temperature. If the transfer process (20) is to
10 occur in outdoor conditions, then one must consider the change in temperature on the ink being transferred and the effect of ambient temperature upon the target object. However, any application of heat to an outdoor target object should not exceed
15 normally room temperatures (less than about 75°-80° F) because of the advantages to be gained from avoiding elevated heating of the transfer medium or second medium, as discussed above.

20 With suitable instruction, one can employ a personal computer, an inkjet printer, and the media discussed with respect to this invention to provide a beautiful and precise image on a target object that could not have previously displayed such an
25 image. This invention opens the possibilities of inkjet imaging to many target objects that could not otherwise be imaged with inkjet inks or through ink type printers.

30 Those using the method of this invention can produce imaged three-dimensional objects, where all three dimensions provide shape to the object. Prior to the present invention, one was limited to the flat three-dimensional sheets of media that could reliably fit through an ink type printer. With the present invention, the
35 transfer process operates on any suitable three-dimensional object that has been prepared as discussed above. Because the types of pressure to be applied during the transfer process (20), the three-dimensional object should not have compound curves that could interfere with the transfer step using pressure. However, a three-
40 dimensional object with flat surfaces and/or simple curves can be imaged using the present invention.

45 With the absence of heat being required for transfer, the process is safe for use by commercial and personal users of personal computers and ink type printers of various sizes, speeds, production capacities etc.

5 Although only a few exemplary embodiments of this invention have been
described in detail above, those skilled in the art will readily appreciate that many
modifications are possible in the exemplary embodiments without materially
departing from the novel teachings and advantages of this invention. Accordingly, all
10 such modifications are intended to be included within the scope of this invention as
defined in the following claims.

15

20

25

30

35

40

45

Claims

I CLAIM:

5

1. A method of transferring an ink image; comprising the steps of:
printing an image onto a non-absorbent first medium; and
transferring said printed image from said first medium to a second medium
10 wherein said transferring occurs without the application of heat.

10

15

2. The method of claim 1 wherein said step of transferring said printed
image occurs at ambient temperature.

20

3. The method of claim 1 wherein said step of transferring said printed
image occurs at room temperature.

25

4. The method of claim 1 including the step of preparing said second
medium by marring the portion of the surface of said second medium which is to
receive the transferred image.

30

5. The method of claim 1 including the step of applying a sealer on top of
said printed image transferred onto said second medium.

35

6. The method of claim 1 including the step of manipulating said selected
image utilizing said computer prior to printing said selected image.

40

7. The method of claim 1 including the step of applying pressure to said
first medium during the step of transferring said printed image to said second
medium.

45

8. The method of claim 1 including the step of using a transparency film
as said first medium.

9. The method of claim 1 including the step of preparing the portion of
5 the surface which is to receive the transferred image on said second medium by
applying a substrate.

10 10. The method of claim 1 wherein said step of printing said image onto
said first medium includes the step of depositing ink from an ink-type printer onto
said first medium.

15 11. The method of claim 10 wherein said ink is deposited onto said first
medium without the application of heat.

20 12. The method of claim 11 wherein said ink is deposited onto said first
medium at ambient temperature.

25 13. The method of claim 11 wherein said ink is deposited onto said first
medium at room temperature.

30 14. The method of claim 10 wherein said ink used in said ink type printer
is standard ink-type printer ink.

35 15. The method of claim 1 wherein said second medium comprises an
article which is not planer in shape.

40 16. The method of claim 15 wherein said article includes multiple flat
surfaces.

45 17. The method of claim 15 wherein said article includes surfaces with
simple curves.

18. The method of claim 15 wherein said article is of such a shape that
5 said article is incapable of feeding through an ink-type printer.

19. The method of claim 1 including the step of applying an overlaminant
10 on top of said printed image transferred onto said second medium.

15

20

25

30

35

40

45

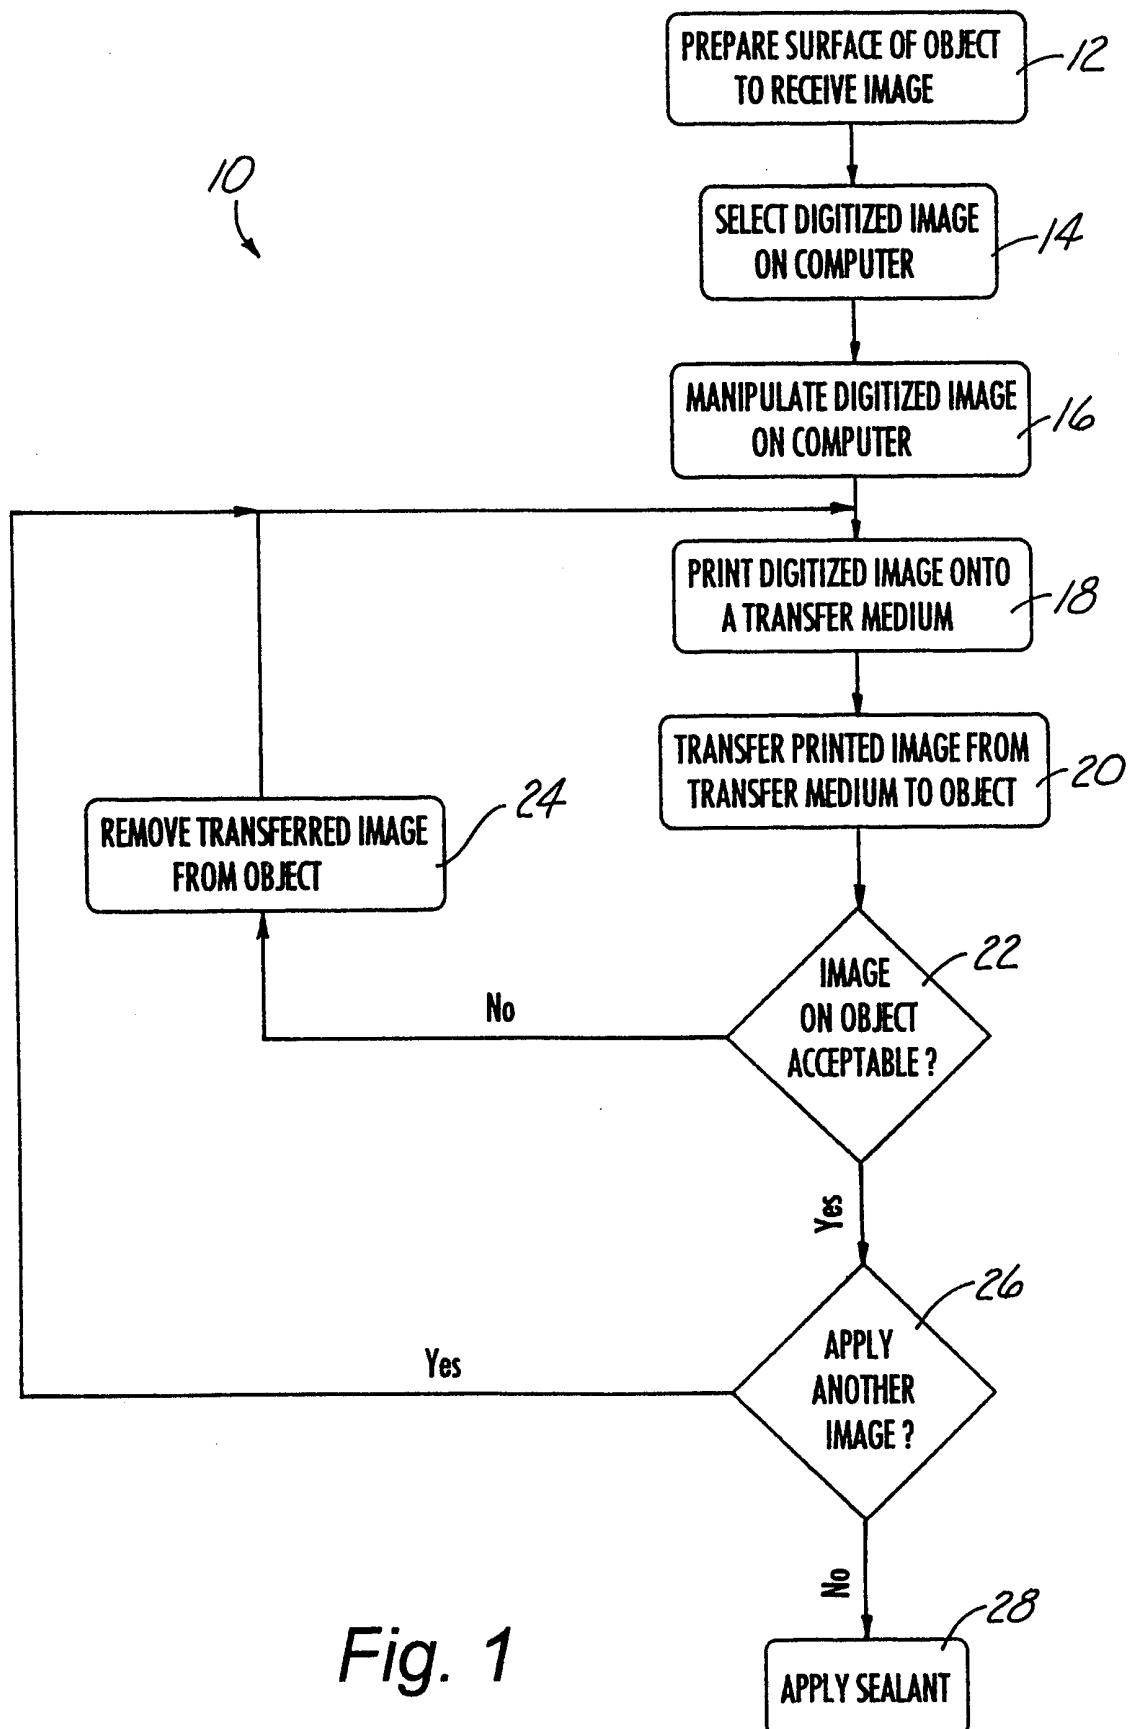


Fig. 1

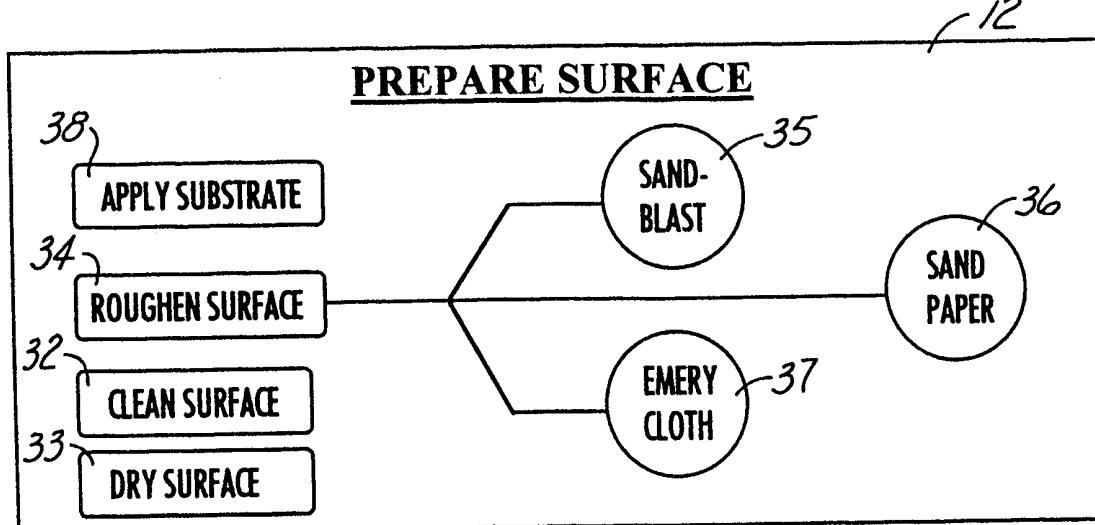


Fig. 2

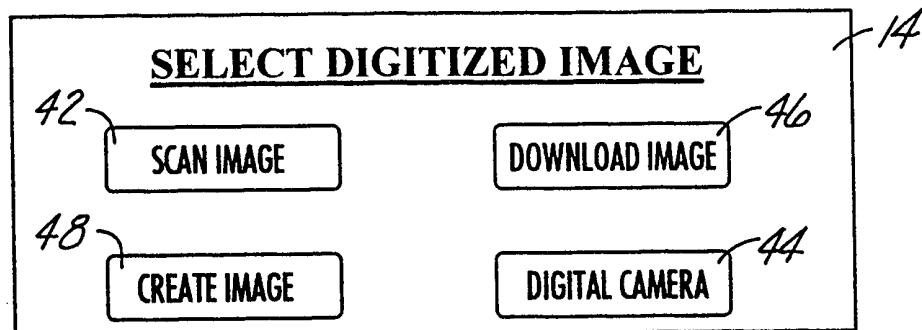


Fig. 3

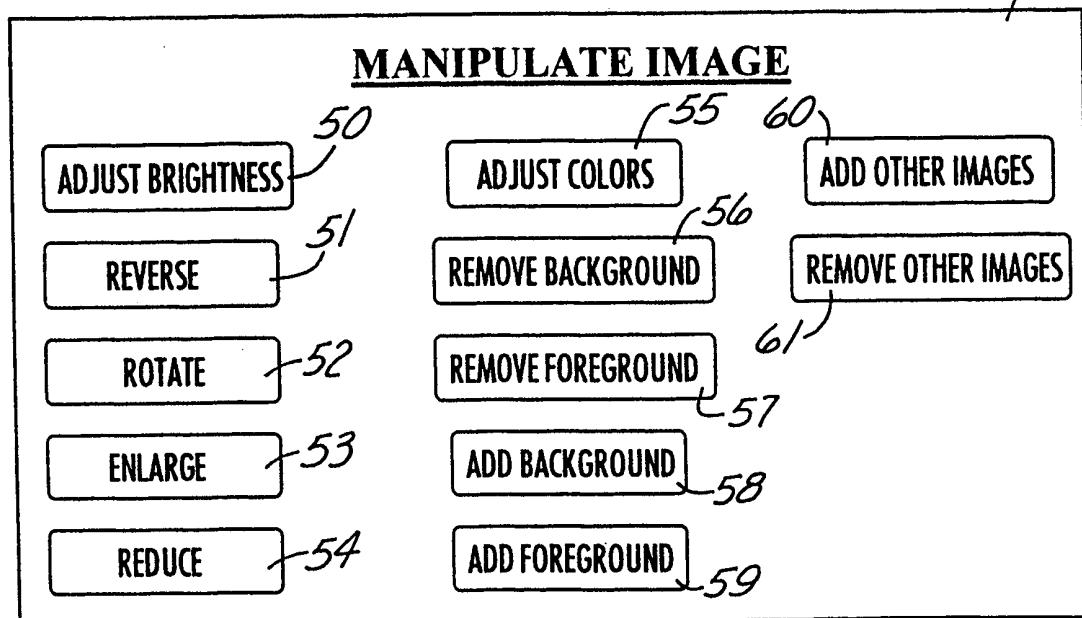


Fig. 4

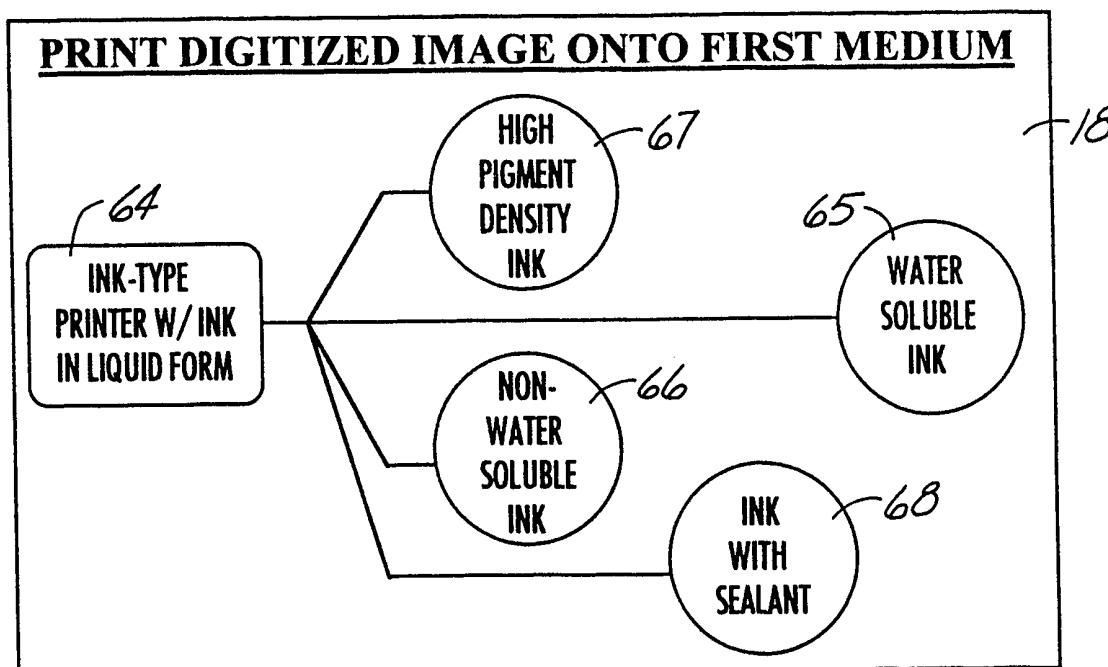


Fig. 5

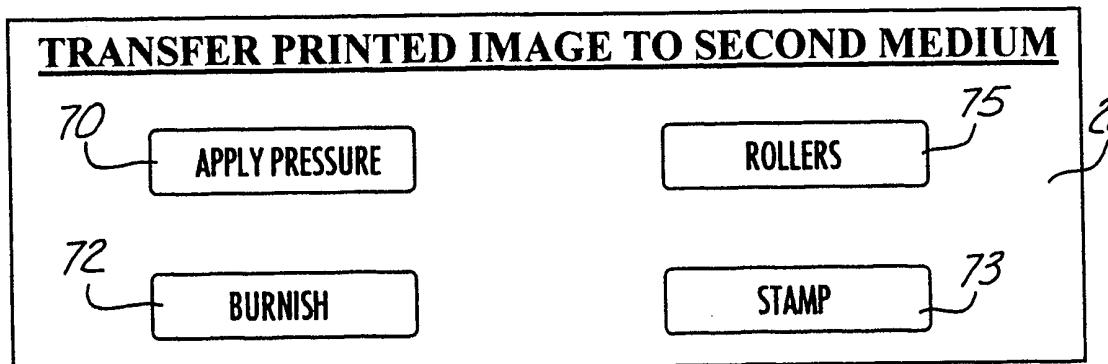


Fig. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/19194

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B41M/025

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B41M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category ^o	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 97 33752 A (BROOKER DENNIS B) 18 September 1997 see the whole document ---	1-19
X	WO 95 23705 A (SALLMETALL BV ;REINDERS JOHANNES ANTONIUS MAR (NL)) 8 September 1995 see page 2, line 2 - line 3; claims ---	1-19
X	EP 0 461 796 A (MAYNARD ARTHUR W) 18 December 1991 see column 1, line 5 - line 24; claim 5; figures ---	1-19
X	US 4 595 931 A (ARAI RYUICHI ET AL) 17 June 1986 see claim 1 ---	1-19
		-/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

^o Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

21 December 1998

Date of mailing of the international search report

08/01/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Rasschaert, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/19194

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 97 42040 A (TULLIS RUSSELL BRITTAINS DECAL ;GRAND PREMIER LIMITED (GB); SMITH) 13 November 1997 see claims ---	1-14
X	WO 97 07991 A (AVERY DENNISON CORP ;POPAT GHANSHYAM H (US); MIEKKA FRED (US); KUB) 6 March 1997 see claims; figure 2 ---	1-14
X	GB 2 289 866 A (BRITISH CERAMIC RES ASS) 6 December 1995 see claims ---	1,15-19
X	WO 95 06564 A (REXHAM GRAPHICS INC) 9 March 1995 see figure 1 ---	1,10
X	FR 2 407 085 A (MECANORMA SA) 25 May 1979 see the whole document ---	1
X	US 4 342 614 A (VANDEN BERGH JAN D) 3 August 1982 see the whole document -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/19194

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 9733752	A	18-09-1997	AU	7382596 A		01-10-1997
WO 9523705	A	08-09-1995	NL	9400325 A		02-10-1995
			AU	1824895 A		18-09-1995
EP 0461796	A	18-12-1991		NONE		
US 4595931	A	17-06-1986	JP	59171658 A		28-09-1984
			DE	3409769 A		20-09-1984
			GB	2139949 A, B		21-11-1984
			HK	39191 A		31-05-1991
WO 9742040	A	13-11-1997		NONE		
WO 9707991	A	06-03-1997	AU	6960596 A		19-03-1997
			CA	2230387 A		06-03-1997
			EP	0855962 A		05-08-1998
GB 2289866	A	06-12-1995	WO	9533626 A		14-12-1995
WO 9506564	A	09-03-1995	US	5795425 A		18-08-1998
			US	5766398 A		16-06-1998
			AU	7674794 A		22-03-1995
			DE	716633 T		28-11-1996
			EP	0716633 A		19-06-1996
			JP	9503168 T		31-03-1997
			US	5837375 A		17-11-1998
FR 2407085	A	25-05-1979		NONE		
US 4342614	A	03-08-1982		NONE		