




- (51) International Patent Classification:  
*B65H 19/26* (2006.01)    *B26D 5/00* (2006.01)  
*B24C 5/02* (2006.01)    *B65H 35/00* (2006.01)  
*B26D 1/04* (2006.01)
- (21) International Application Number: PCT/CA2013/050056
- (22) International Filing Date: 28 January 2013 (28.01.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/592,545    30 January 2012 (30.01.2012)    US  
13/490,747    7 June 2012 (07.06.2012)    US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
US    13/490747 (CON)  
Filed on    7 June 2012 (07.06.2012)
- (71) Applicant: PAPRIMA INDUSTRIES INC. [CA/CA]; 75 av. Guthrie, Dorval, Québec H9P 2P1 (CA).
- (72) Inventor: HILKER, Dieter, H.; 804 Chemin des Anglais, Mascouche, Québec J7L 3R6 (CA).
- (74) Agents: ANGLEHART ET AL. et al.; 1939 de Maison-neuve Ouest, Montreal, Québec H3H 1K3 (CA).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: WEB TURN-UP CUTTING APPARATUS AND METHOD

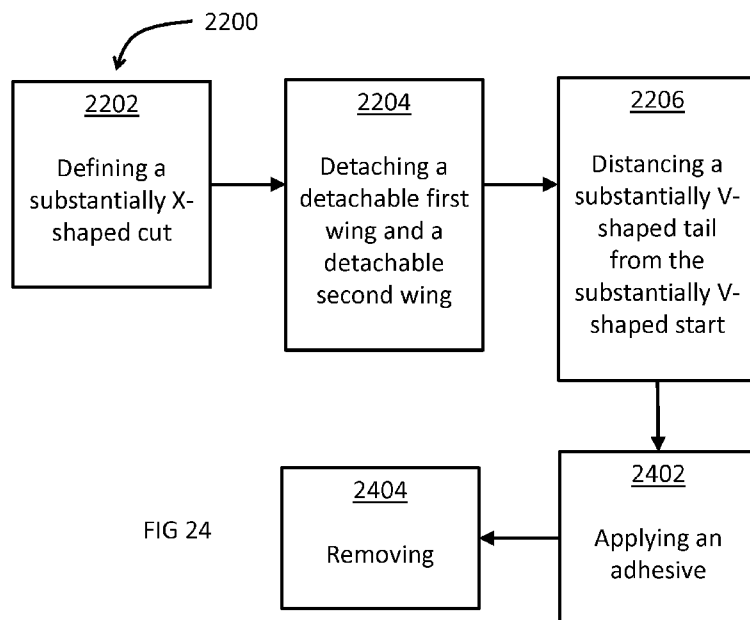

(57) Abstract: A web turn-up cutting method and apparatus for severing a continuous web has a water jet controller adapted to activate a water supply of first and second water nozzles and a carriage controller adapted to actuate the nozzle carriages to provide a transversal movement of the first and second water nozzles. The first and second nozzles are adapted to define together a substantially X-shaped cut on the traveling continuous web defining at least a substantially V-shaped tail for ending a forming roll, an opposite substantially V-shaped start for starting a new spool, a detachable first wing and a detachable second wing.

WO 2013/113110 A1

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

## WEB TURN-UP CUTTING APPARATUS AND METHOD

**Technical Field**

The present invention relates to a web cutting apparatus of a papermaking machine and, in particular, to a web cutting apparatus for transferring a continuous  
5 web from a forming roll to a new spool.

**Background**

The manufacturing of paper has evolved over the last centuries. Modern papermaking began in the early 19<sup>th</sup> century in Europe with the development of the Fourdrinier machine, consisting in the production of a continuous roll of paper  
10 rather than individual sheets. With the aim of reducing paper making manufacturing costs, the papermaking machine has further evolved and is capable of forming at very high speeds (i.e. around 100 km/h), a large band of paper web typically measuring up to 11 meters wide. At a final step of the paper making process, the continuous paper web is wound as a roll that is used in post-  
15 processing or distribution of paper.

The papermaking process is a continuous process which cannot be readily started and stopped without incurring considerable expense. Therefore, the rolls of paper which are formed must be started and cut off from the continuously formed web without interrupting the continuous production of paper.

20 When the roll is fully formed, the continuous paper web is severed and redirected onto a new spool. It is common practice to use a web cutting apparatus for cutting or notching the continuous paper web so as to form a tail end and a turn-up start for assisting in the re-threading of the web from a forming roll to a new spool. As the web travels at a very high speed, the web cutting apparatus must produce a  
25 cut of the web for effectively re-threading the new spool without causing a jam in the machine and interrupting production.

In PCT patent application No. PCT/US97/07615 to Beloit Technologies inc., there is disclosed a web turn-up apparatus that uses two water jets and an adhesive material dispenser such as a tape or glue dispenser. The two water jets are  
30 oriented to cut the web as it is led over a winder drum. The jets are initially

positioned above the web at a center portion and each jet travels toward an opposite edge portion of the web. The two jets form a turn-up start having substantially a V-shape. The dispenser applies the adhesive material onto the turn-up start so as to provide an instant engagement of the start with the new  
5 spool, thereby assuring thereon a tight, uniform and consistent initiation of the web.

In European patent application No. EP0997417 to Voith Paper Patent GmbH, there is disclosed a method and device for severing a running web. A cutter unit is movable relative to the plane of the web and is positioned at an underside of the  
10 web. In one example, there is a cutter unit with a single cutter, the cutter is adapted to travel from one edge of the web to the opposite edge. As the web is being wound onto the forming reel, the cutter produces an oblique cut line across the web. In another example, the cutter unit has two cutters, the cutters are each adapted to travel from a center portion of the web toward opposite edges. There is  
15 presented the cut lines produced by each of the cutters as the web is being wound onto the forming reel, the cut lines cross at a middle portion and extend toward the opposite edges of the web.

In US patent No. 6,135,000 to Paprima Industries Inc., there is disclosed a water jet cutting apparatus mounted on a beam. The beam spans across the web and is transversal to the travel direction of the web. The cutting apparatus has water jet  
20 nozzles located on opposite sides of the beam. In one example, each jet is adapted to travel along the beam from a middle portion of the beam toward an outer portion of the beam forming a pointed start on the web. Paprima further presents the cut lines formed by each water jet, as the web travels the water jets  
25 initially positioned above a middle portion form cut lines that cross and extend to opposite edges of the web. In yet another example, there is a single water jet that travels from one edge of the web to an opposite edge of the web. A skilled person would understand that with such displacement of the water jet, as the web travels there would be formed an oblique start.

30 As presented in Figures 1A and 1B, the cutting apparatus in the above mentioned references form either a pointed start 100a or an oblique cut start 100b for re-

threading around a new spool and form respectively a complementary notched tail 102a or an oblique cut tail 102b for the forming spool.

The web portions (100a and 102a) of Figure 1A, each travel at high speed in the direction indicated by the arrow, an adhesive being placed on the pointed start  
5 100a causes this web portion to tightly engaging a new spool. However, the notched tail 102a is a loose end that has a tendency to uncontrollably flutter as it is pulled around the forming spool. The uncontrolled fluttering of the notched tail 102a can cause a rip and/or a complete detachment of a portion of the notched tail 102a thereby possibly jamming the papermaking machine, disrupting further  
10 processing operations as pieces of paper get wrapped in the forming roll and causing production loss.

In Figure 1B, the oblique cut start 100b and tail 102b both have a shape that is possibly less prone to uncontrollably flutter as it is pulled around the forming spool. However, the complementary oblique cut start 100b may cause alignment  
15 problems when re-threading a new spool. The shape of an oblique cut start 100b is such that at re-threading, as the prominent edge of the web engages the new spool, a pulling force is initially applied only at that prominent edge. A pulling force being applied at only one edge portion does not provide a symmetric pulling force across the web, thereby possibly causing web edge alignment problems and  
20 wrinkles on the forming roll and this can be a cause for production loss.

Therefore, there is a need for a web cutting apparatus that forms a web tail portion for ending a forming spool and a web start portion for re-threading a new spool that are stable when traveling at high speed. Also there is a need for a web cutting  
25 apparatus that forms a web start portion for re-threading a new spool in a uniform edge alignment.

### **Summary**

Applicant has discovered that it is possible in a paper making machine to perform a turn-up cut of a high speed traveling paper web by defining a shaped tail for ending a forming roll and also a shaped start for starting a new spool which are  
30 both shaped to remain effectively stable after the cut.

According to one aspect there is a web turn-up cutting apparatus for severing a continuous web that is traveling at very high speed in a travel direction. The speed of the traveling web can differ from one paper making machine to another, in common paper making machines, the web travels at speeds as high as 2000  
5 meters per minute.

The web turn-up cutting apparatus comprises a first and second nozzles that are each connectable to a respective water supply hose and adapted to produce a respective water cutting jet. The nozzles are each mountable on a respective nozzle carriage and are transversely movable with respect to the travel direction of  
10 the web.

The web turn-up cutting apparatus further comprises a jet controller and a carriage controller. The jet controller is adapted to activate a water supply of each water supply hose to produce with the first and second nozzles a respective water cutting jet. The carriage controller is adapted to actuate the nozzle carriages to  
15 provide a transversal movement of the first and second nozzles.

Together, the first and second nozzles are adapted to define a substantially X-shaped cut on the traveling continuous web. The substantially X-shaped cut defines at least a substantially V-shaped tail for ending a forming roll, an opposite substantially V-shaped start for starting a new spool, a detachable first wing and a  
20 detachable second wing.

According to one embodiment, the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first and second nozzles from a respective edge of the continuous web to a middle portion of the continuous web and from the middle portion of the continuous web back to the  
25 respective edge of the continuous web.

In one example of this embodiment, each nozzle carriage is actuated to cross the continuous web from edge to edge. The second nozzle is positioned upstream from the first nozzle and the nozzle controller is adapted to actuate a first nozzle carriage to provide a transversal movement of the first nozzle from a first edge of  
30 the continuous web to a middle portion thereof and from the middle portion to a second edge of the continuous web. Simultaneously, the nozzle controller is

adapted to actuate a second nozzle carriage to provide a transversal movement of the second nozzle from the second edge of the continuous web to a middle portion thereof and from the middle portion to the first edge of the continuous web, the second edge being opposite to the first edge.

- 5 In an alternate example of this embodiment, each nozzle carriage is actuated to cross only up to a middle portion of the continuous web and cross back to a respective edge of the continuous web and. The nozzle controller is adapted to actuate the first nozzle carriage to provide a transversal movement of the first nozzle from the first edge of the continuous web to a middle portion thereof and  
10 from the middle portion back to the first edge of the continuous web. Simultaneously, the nozzle controller is adapted to actuate the second nozzle carriage to provide a transversal movement of the second nozzle from the second edge of the continuous web to a middle portion thereof and from the middle portion back to the second edge of the continuous web, the second edge being  
15 opposite to the first edge.

According to another embodiment, the web turn-up cutting apparatus is further adapted to form a detachable middle strip. There is a second nozzle that is positioned upstream from a first nozzle and the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first and  
20 second nozzles for defining respectively a first cut line and a second cut line that cross in the middle portion of the continuous web. The first cut line and the second cut line cross at a first middle portion point and at a second middle portion point, wherein the first middle portion point is upstream from the second middle portion point. The detachable middle strip being defined by the first cut line and the  
25 second cut line between the first and second middle portion points.

According to another embodiment, the web turn-up cutting apparatus is a further adapted to form a single center cut line. The nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of a first nozzle and of a second nozzle for creating respectively a first cut line and a second cut  
30 line that join in the middle portion of the continuous web. The single center cut line being defined by the joining of the first and the second cut lines.

According to another embodiment, the web turn-up cutting apparatus is further adapted to define a middle strip connecting the substantially V-shaped tail and the substantially V-shaped start. The nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of a first nozzle and of a second  
5 nozzle for creating respectively a first cut line and a second cut line that remain separate in the middle portion of the continuous web, thereby forming the middle strip.

In an alternate embodiment, the web turn-up cutting apparatus comprises an adhesive applicator that is adapted to apply an adhesive on at least a portion of  
10 the middle strip and allow the at least portion of the middle strip to adhere on a winding surface of the new spool thereby causing the substantially V-shaped tail to sever from the continuous paper web for ending the forming roll.

According to another embodiment, the web turn-up cutting apparatus comprises an adhesive applicator. The adhesive applicator is adapted to apply an adhesive  
15 on at least a portion of the substantially V-shaped tail and allow the V-shaped tail to adhere on a winding surface of the forming roll as the substantially V-shaped tail is wound thereon.

In an alternate embodiment, the adhesive applicator is further adapted to apply an adhesive on at least a portion of the substantially V-shaped start and allow the V-  
20 shaped start to adhere on a winding surface of the new spool as the substantially V-shaped start is wound thereon.

According to another embodiment, the web turn up cutting apparatus comprises a wing adhesive applicator. The wing adhesive applicator is adapted to apply an adhesive on at least a portion of the first and the second detachable wings and  
25 allow the first and second detachable wings to engageably adhere to a driving drum of the papermaking machine and detach from the continuous paper web.

According to another embodiment, the carriage controller is adapted to actuate the nozzle carriages to provide a transversal movement of the nozzles, whereby the nozzles define together the substantially X-shaped cut on the traveling continuous  
30 web in less than 1 to 3 seconds.

According to another embodiment, the carriage controller is adapted to actuate each of the nozzle carriages from an initial position to a final position for defining with the nozzles the substantially X-shaped cut, wherein the final position is a subsequent initial position for performing a subsequent substantially X-shaped cut.

- 5 According to another aspect there is a method of performing a turn-up in a paper making machine. The method comprises defining a substantially X-shaped cut in a traveling continuous paper web. The substantially X-shaped cut forming at least a substantially V-shaped tail for ending a forming roll, an opposite substantially V-shaped start for starting a new spool, a detachable first wing and a detachable
- 10 second wing. The method further comprises detaching the detachable first wing and the detachable second wing from the traveling continuous paper web. The method further comprises distancing the substantially V-shaped tail from the substantially V-shaped start by allowing the substantially V-shaped start to engage a new spool.
- 15 According to one embodiment, the method of performing a turn-up further comprises applying an adhesive on at least a portion of the traveling continuous paper web.

In one alternative, the adhesive is applied so that following the defining of the substantially X-shaped cut, there is adhesive on at least the detachable first wing

20 and the detachable second wing.

The adhesive may allow the detachable first and second wings to engage a surface of a driving drum of the papermaking machine and detach from the continuous web as a respective detached first wing and a respective detached

25 second wing. The method may further comprise removing the detached first wing and the detached second wing from the surface of the driving drum. The removal of the detached first and second wings may be done in various ways, one way is to remove the wings by scraping a surface of the driving drum.

In another alternative, the adhesive is applied so that following the defining of the substantially X-shaped cut, there is adhesive applied on the substantially V-

30 shaped start, thereby allowing the substantially V-shaped start to engage the new spool.

In the embodiment in which the substantially X-shaped cut forms a middle strip that connects the V-shaped tail and the V-shaped start, the method may further comprise applying an adhesive on at least a portion of the middle strip. As the applied adhesive on the at least portion of the middle strip contacts the new spool,  
5 the middle strip severs and this allows the at least portion of the middle strip and the connected V-shaped start to engage the new spool.

According to one embodiment, the defining the substantially X-shaped cut is made in accordance with a method of controlling nozzle carriages as further described below.

10 According to another aspect there is a method of controlling nozzle carriages in a web turn-up cutting apparatus of a paper making machine. The nozzle carriages are adapted to provide a transversal movement to a respective first nozzle and second nozzle with respect to a traveling direction of a paper web.

The method comprises positioning a first nozzle carriage near a first edge portion  
15 of the paper web and positioning a second nozzle carriage near a second edge portion of the paper web.

The method further comprises displacing the first nozzle carriage from near the first edge portion of the paper web to near a center portion of the paper web and defining at least in-part a V-shaped tail for ending a forming roll and in-part a first  
20 detachable wing, when a water supply to the first nozzle is activated. In addition, method comprises displacing the second nozzle carriage from near the second edge portion of the paper web to near a center portion of the paper web and defining at least in-part the V-shaped tail and in-part a second detachable wing, when a water supply to the second nozzle is activated.

25 The method further comprises moving one of the first and second nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and defining at least in-part a V-shaped start for re-threading a new spool and in-part one of the first and second detachable wings, when a water supply to the respective nozzle is activated. In addition, method comprises moving  
30 another one of the first and second nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web and defining at

least in-part the V-shaped start end and in-part another one of the first and second detachable wings, when a water supply to the respective nozzle is activated.

According to one embodiment, each carriage is adapted to move back to its respective originating edge. In the method, the moving one of the first and second  
5 nozzle carriage is the moving of the first nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and the moving another one of the first and second nozzle carriage is the moving of the second nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web.

10 According to another embodiment, each carriage is adapted to cross over the width of the paper web. In the method, the moving one of the first and second nozzle carriage is the moving of the second nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and the moving another one of the first and second nozzle carriage is moving of the first  
15 nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web.

According to another embodiment, the carriages are adapted to displace the nozzles so as to define at least a center portion cut line. In the method, the displacing the first nozzle carriage and the second nozzle carriage comprises  
20 aligning the first nozzle carriage and the second nozzle carriage at an alignment line near the center portion of the paper web. The displacing thereby defines at least a center portion cut line and in-part the first and second detachable wings.

In one alternative, the carriages are adapted to displace the nozzles so as to define a detachable middle strip. In the method, the displacing the first nozzle  
25 carriage and the second nozzle carriage further comprises displacing the first nozzle carriage and the second nozzle carriage beyond the alignment line while remaining near the center portion of the paper web. The displacing thereby defines two center portion cut lines and forms a detachable middle strip.

According to another embodiment, the carriages are adapted to displace the  
30 nozzles so as to define a middle strip that connects the V-shaped tail and the V-shaped start. In the method, the displacing the first nozzle carriage and the

second nozzle carriage comprises maintaining a distance between the first nozzle carriage and the second nozzle carriage near the center portion of the paper web. This displacing thereby forms a middle strip that connects the V-shaped tail and the V-shaped start.

- 5 According to another aspect there is a machine-readable data storage medium. The machine-readable data storage medium comprises machine-executable instructions for controlling a definition of a substantially X-shaped cut in a traveling continuous paper web of a papermaking machine. The substantially X-shaped cut forms at least a substantially V-shaped tail for ending a forming roll, an opposite  
10 substantially V-shaped start for starting a new spool, a detachable first wing and a detachable second wing. The controlling is made in accordance with the method of controlling the nozzle carriages as described above.

According to yet another aspect there is a method of manufacturing paper in a papermaking machine. The method comprises producing a continuous web of paper, displacing the continuous web of paper in a predetermined travel direction  
15 and winding the continuous web of paper around a forming roll. The method further comprises performing a turn-up as defined above, positioning a new spool near the forming roll, accelerating a rotation of the new spool up to a winding speed and threading the turn-up around the new spool. In addition, the method  
20 comprises ending the winding of the continuous web of the paper around the forming roll as a formed roll, displacing the formed roll away from the new spool and decelerating a rotation of the formed roll until a full stop. Paper made using the turn-up technique of the embodiments described herein is typically of a reduced cost and/or of better quality due to the benefits of the improved turn-up  
25 technique.

### **Brief Description of the Drawings**

The invention will be better understood by way of the following detailed description of embodiments of the invention with reference to the appended drawings, in which:

- 30 Figure 1A presents a diagram of a severed paper web having a pointed start and a notched tail defined by a prior art turn-up cutting apparatus;

Figure 1B presents a diagram of a severed paper web having an oblique cut start and an oblique cut tail defined by a prior art turn-up cutting apparatus;

Figure 2 presents a turn-up cutting apparatus mounted in a paper making machine for severing a paper web and defining a substantially X-shaped cut and forming a substantially V-shaped start, a substantially V-shaped tail and two wings, according to one embodiment;

Figure 3 presents a bloc diagram of a control system for the web turn-up cutting apparatus, according to one embodiment;

Figure 4A presents a diagram of a severed paper web defining a substantially X-shaped cut and forming a substantially V-shaped start, a substantially V-shaped tail and two wings, according to one embodiment;

Figure 4B presents a side view of the paper making machine with the turn-up cutting apparatus and a doctor and an air-blower for directing formed wings into a chute for re-pulping, according to one embodiment;

Figure 5A presents a top view of the turn-up cutting apparatus with two nozzle carriages that are movable from a respective edge to a center portion with respect to a traveling paper web, according to one embodiment;

Figure 5B presents a top view of the turn-up cutting apparatus with two nozzle carriages that are movable from a center portion to a respective edge with respect to a traveling paper web, according to one embodiment;

Figure 6A presents a top view of a turn-up cutting apparatus with two nozzle carriages that are movable from a respective edge to an opposite edge with respect to a traveling paper web, according to one embodiment;

Figure 6B presents a top view of a turn-up cutting apparatus with two nozzle carriages that are movable from a respective edge to an opposite edge with respect to a traveling paper web, each of the nozzle carriages being guided by a respective guide and each of the nozzles being adapted to direct a cutting jet toward a center portion between the guides, according to one embodiment;

Figure 6C presents a top view of a turn-up cutting apparatus with two nozzle carriages that are movable from a respective edge to an opposite edge with respect to a traveling paper web, each of the nozzle carriages being guided by a respective guide that are positioned one above another, according to one  
5 embodiment;

Figure 7A presents a top view of a turn-up cutting apparatus with two nozzle carriages that are movable from a respective edge to a middle portion, each of the nozzle carriages being guided by a respective guide, according to one embodiment;

10 Figure 7B presents a top view of the turn-up cutting apparatus of Figure 7A with the two nozzle carriages that are movable from a center line of the middle portion to a respective edge, according to one embodiment;

Figure 7C presents a top view of the turn-up cutting apparatus of Figure 7A with the two nozzle carriages that are movable from the middle portion to a respective  
15 edge, according to one embodiment;

Figure 7D presents a top view of the turn-up cutting apparatus of Figure 7A with the two nozzle carriages that are movable from slightly beyond the center line of the middle portion to a respective edge, according to one embodiment;

Figure 8A presents a diagram of a severed paper web defining a substantially X-shaped cut and forming a substantially V-shaped start, a substantially V-shaped  
20 tail and two wings, according to one embodiment;

Figure 8B presents a diagram of a severed paper web defining a substantially X-shaped cut and forming a substantially V-shaped start, a substantially V-shaped tail two wings and a detachable middle strip, according to one embodiment;

25 Figure 8C presents a diagram of a severed paper web defining a substantially X-shaped cut and forming a substantially elongated V-shaped start, a substantially V-shaped tail and two wings, according to one embodiment;

Figure 8D presents a diagram of a severed paper web defining a substantially X-shaped cut and forming a substantially elongated V-shaped start, a substantially  
30 elongated V-shaped tail and two wings, according to one embodiment;

Figure 8E presents a diagram of a severed paper web defining a substantially X-shaped cut and forming a substantially V-shaped start, a substantially V-shaped tail and two wings and a middle strip, according to one embodiment;

5 Figure 9 presents a diagram of a paper making machine having a web turn-up cutting apparatus and an adhesive applicator for applying an adhesive on at least a portion of the middle strip, according to one embodiment;

10 Figure 10 presents an diagram of the severed paper web of Figure 8E with adhesive applied on at least a portion of the middle strip, according to one embodiment;

Figure 11 presents a diagram of a paper making machine having a web turn-up cutting apparatus and an adhesive applicator for applying an adhesive on at least a portion of the substantially V-shaped tail or substantially V-shaped start, according to one embodiment;

15 Figure 12 presents a diagram of the severed paper web of Figure 8A with adhesive applied on at least a portion of the substantially V-shaped tail, according to one embodiment;

20 Figure 13 presents a diagram of a paper making machine having a web turn-up cutting apparatus and an adhesive applicator for applying an adhesive on at least a portion of the substantially V-shaped start, according to one embodiment;

Figure 14A presents a diagram of the severed paper web of Figure 8A with adhesive applied on at least a portion of the substantially V-shaped tail and on at least a portion of the substantially V-shaped start, according to one embodiment;

25 Figure 14B presents a diagram of the severed paper web of Figure 8A with adhesive applied on at least a portion of the substantially V-shaped start, according to one embodiment;

Figure 15 presents a diagram of a paper making machine having a web turn-up cutting apparatus and an adhesive applicator for applying an adhesive on at least a portion of the two wings, according to one embodiment;

5 Figure 16A, presents a diagram of the severed paper of Figure 8A with adhesive applied on an underside of at least a portion of the two wings, according to one embodiment;

Figure 16B, presents a diagram of the severed paper of Figure 8B with adhesive applied on an underside of at least a portion of the two wings, according to one embodiment;

10 Figure 16C, presents a diagram of the severed paper of Figure 8B with adhesive applied on an underside of at least a portion of the two wings and the detachable middle strip, according to one embodiment;

15 Figure 16D, presents a diagram of the severed paper of Figure 8B with adhesive applied on at least an underside portion of the two wings and the detachable middle strip, according to one embodiment;

Figure 17 presents a diagram of a paper making machine having a web turn-up cutting apparatus, an adhesive applicator for applying an adhesive on at least a portion of the middle strip and an adhesive applicator for applying an adhesive on at least a portion of the two wings, according to one embodiment;

20 Figure 18 presents a diagram of the severed paper of Figure 8E with adhesive applied on an underside of at least a portion of the two wings and on at least a portion of the middle strip, according to one embodiment;

25 Figure 19 presents a diagram of a paper making machine having a web turn-up cutting apparatus, an adhesive applicator for applying an adhesive on at least a portion of the substantially V-shaped start and an adhesive applicator for applying an adhesive on at least an underside portion of the two wings, according to one embodiment;

30 Figure 20A presents a diagram of the severed paper of Figure 8A with adhesive applied on an underside of at least a portion of the two wings and on at least a portion of the substantially V-shaped start, according to one embodiment;

Figure 20B presents a diagram of the severed paper of Figure 8B with adhesive applied on an underside of at least a portion of the two wings and on at least a portion of the substantially V-shaped start, according to one embodiment;

5 Figure 21A presents a diagram of a paper making machine having a web turn-up cutting apparatus, an adhesive applicator for applying an adhesive on at least a portion of the middle strip, an adhesive applicator for applying an adhesive on at least an underside portion of the two wings and an adhesive applicator for applying an adhesive on at least a portion of the substantially V-shaped tail, according to one embodiment;

10 Figure 21B presents a diagram of a paper making machine having a web turn-up cutting apparatus, an adhesive applicator for applying an adhesive on at least a portion of the substantially V-shaped start, an adhesive applicator for applying an adhesive on at least a portion of the two wings and an adhesive applicator for applying an adhesive on at least a portion of the substantially V-shaped tail,  
15 according to one embodiment;

Figure 22 presents a method of performing a turn-up in a paper making machine, according to one embodiment;

Figure 23 presents a diagram of a paper making machine having a collector for collecting the wings, according to one embodiment;

20 Figure 24 presents a method of performing a turn-up in a paper making machine comprising applying an adhesive, according to one embodiment;

Figure 25A presents an underside view of the driving drum whereon there is adhered the two wings, according to one embodiment;

25 Figure 25B presents an underside view of the driving drum whereon there is adhered the two wings and the detachable middle strip, according to one embodiment;

Figure 26A presents an underside view of the driving drum and a doctor positioned in proximity with the surface of the driving drum for scrapping the two wings away from the surface of the driving drum, according to one embodiment;

Figure 26B presents an underside view of the driving drum and a doctor positioned in proximity with the surface of the driving drum for scrapping the two wings and the detachable middle strip away from the surface of the driving drum, according to one embodiment;

- 5 Figure 27 presents a method of controlling the nozzle carriages in a web turn-up cutting apparatus, according to one embodiment;

Figure 28 presents a diagram of a machine-readable data storage medium comprising machine-executable instructions for controlling the definition of the substantially X-shaped cut, according to one embodiment;

- 10 Figure 29 presents a diagram of the data storage medium of Figure 28 accessible by the control system of Figure 3, according to one embodiment; and

Figure 30 presents a method of manufacturing paper in a paper making machine, according to one embodiment.

15 **Detailed Description**

Presented in Figure 2, there is a paper making machine 200 that allows a continuous paper web 202 to travel at very high speed in a predetermined travel direction 204. In the paper making machine 200, the paper web 202 travels typically at up to around 100km/h and is initially wound around a forming roll 206  
20 at the same high travelling speed. When the forming roll 206 is complete, the paper making machine 200 allows the forming roll 206 to be replaced by a new spool 208.

Although the present is described according to a paper making machine that provide a paper web travelling speed of up to around 100km/h, the present is not  
25 limited to such paper making machines. The present also applies to paper making machines that provide a slower or even faster paper web travelling speed.

Further presented in Figure 2, there is a driving drum 209 for rotatably driving the forming roll 206 and/or rotatably driving the new spool 208, according to the traveling speed of the paper web 202. The forming roll 206 and/or the new spool

are adapted to be frictionally driven by the rotational movement of the driving drum, when in contact therewith.

5 A skilled person will understand that the forming roll 206 and the new spool 208 may each be independently driven by a motor while in friction contact with the driving drum 209. This allows a better control of the paper winding process so as to produce a tighter winding of the paper web around forming roll 206 or new spool 208.

To replace the forming roll 206, the new spool 208 is gradually brought to a suitable rotational speed as it is lowered onto the surface of the driving drum 209. 10 When the new spool 208 contacts the driving drum 209, the rotational speed of the two is similar and slowing down of the driving drum is thereby prevented. Also, as the new spool is gradually brought to speed there is less of a choc that is being absorbed by the new spool 208 and by the supporting means thereof. When the forming roll 206 reaches its full capacity, the paper web 202 is severed to define a web turn-up for starting a winding of the web around the new spool 208. The 15 formed roll 206 is then gradually moved away from the driving drum and its rotational speed is gradually slowed down to a full stop thereby preventing unspooling of the roll 206. As the forming roll 206 is moved away from the driving drum, the new spool 208 is gradually brought around the driving drum 209 while 20 remaining in contact therewith so as to be positioned in place of the forming roll 206.

For severing the continuous paper web 202, the paper making machine 200 has a web turn-up cutting apparatus 210, as further presented in Figure 2. In this 25 embodiment, the cutting apparatus 210 is mounted on a beam that transversally spans across the paper web 202. The cutting apparatus 210 may be positioned right above the driving drum 209 as presented in Figure 2 or slightly upstream from the driving drum 209 to leave room for the cutting nozzles to perform a cut right on the driving drum 209.

30 As will be appreciated by those skilled in the art, cutting apparatus 210 can be controlled by a programmable hardware, such as a microprocessor, FPGA or DSP, and in such case, the definition of the X-shaped cut can be done through machine-executable instructions. Such instructions can be provided to the cutting

apparatus using a data storage medium and communications, either using a local data connection or a network connection.

In Figure 2, the driving drum 209 is a support for the paper web 202 as it is being severed. When the paper web 202 is being severed, the surface of the driving drum 209 counters pressure being applied by the cutting jets of the cutting apparatus 210 and thereby supports the forming web-start. Moreover as the paper web 202 is being severed in proximity with a nip formed by the new spool 208 and the drum 209, the formed web-start may be controllably guided onto the new spool 208 while maintaining a desirable tension on the paper web for a uniform wind.

10 According to one aspect, the cutting apparatus 210 has a first nozzle 212A and a second nozzle 212B that are each connectable to a respective water supply hose and adapted to produce a respective water cutting jet. The nozzles (212A and 212B) are each mounted on a respective nozzle carriage (214A and 214B) and are transversely movable with respect to the travel direction of the web.

15 A skilled person will understand that the first and second nozzles (212A and 212B) may be replaced by any other paper web cutting means or multidirectional paper cutting means such as a laser beam emitter, a knife, etc. without departing from the scope of the present web turn-up cutting apparatus 210.

Moreover, it is understandable that the cutting apparatus 210 may be mounted on any other kind of suitable support that allows a transversal displacement of the nozzles (212A and 212B) across a width of the travelling paper web 202.

Presented in Figure 3, is a block diagram of a control system 300 for the web turn-up cutting apparatus 210. The control system 300 has a jet controller 302 and a carriage controller 304. The jet controller is adapted to activate a water supply of each water supply hose to produce with the first and second nozzles (212A and 212B) a respective water cutting jet. The carriage controller is adapted to actuate the nozzle carriages (214A and 214B) to provide a transversal movement of the first and second nozzles (212A and 212B).

As presented in Figure 4A, the carriage controller is adapted to actuate the nozzle carriages (214A and 214B) to provide a transversal movement of the first and second nozzles for defining a substantially X-shaped cut 402 on the traveling

continuous web 202. The substantially X-shaped cut 402 defines at least a substantially V-shaped tail 404 for ending a forming roll, an opposite substantially V-shaped start 406 for starting a new spool, a detachable first wing 408 and a detachable second wing 410.

- 5 The substantially V-shaped tail 404 has a single tip and is cut to shape for remaining effectively stable as it is pulled over the drum 209 and wound around the forming roll 206. The desirable length and profile of the substantially V-shaped tail 404 may vary from one application to another and depends on the type of paper web 202 being produced as well as the sized of the formed roll 206.
- 10 The substantially V-shaped start 406 has also a single tip and is also cut to shape for remaining effectively stable as it travels over the drum 209 for engaging the new spool 208. The length and shape of the V-shaped start 406 is dependent on the traveling speed of the paper-web 202 and also on the traversing speed of the nozzles (214A and 214B).
- 15 It is important to recognize that as the V-shaped start 406 is being cut in the paper web 202, the V-shaped tail 404 is fully formed and severed from the continuous paper web 202. Consequently, the remaining portions of the continuous paper web 202 that include the two wings 408 and 410 and the V-shaped start 406 must have enough momentum to evenly and stably travel up to the nip formed by the
- 20 driving drum 209 and the new spool 208. Note that in one example, as the cut 402 begins, the tips of the two wings 408 and 410 have enough momentum to carry them to the nip and when the tail 404 is fully severed the start 406 has enough moment to carry it to the nip. As the start is being severed, the tips of the two wings 408 and 410 are under tension as they are being pulled by the nip thereby
- 25 allowing maintaining sheet tension until the cut 402 is completed. When the single tip of the V-shaped start 406 reaches the nip it is adapted to engage the new spool 208 and an even pull is then applied to the rest of the paper web 202 as it is being wound around the new spool 208.

- In one embodiment as presented in Figure 4B, the severed two wings (408 and
- 30 410) are directed by the rotating driving drum 209 into a chute 422 for re-pulping.

In another embodiment and as further presented in Figure 4B, an adhesive is previously applied on an underside of at least a portion of each of the two wings or directly on the driving drum 209 for allowing the two wings to adhere thereon. The adhesive may be a non-permanent adhesive such as water or a removable sealant. The wings (408 and 410) adhere to the driving drum 209 and are guided  
5 toward the chute 422. A doctor 424 is positioned for scraping the wings off from the surface of the driving drum 209 for allowing the wings to drop into the chute 422.

In yet another embodiment and as further presented in Figure 4B, an air blower  
10 420 is positioned for applying an air pressure on the surface of the formed roll 206 for guiding the wings (408 and 410) into the chute 422 and preventing the wings from clinging to the formed roll 206. In one instance, the air blower is positioned for applying an air pressure on the surface of the formed roll 206 below the nip area defined by the driving drum 209 and the formed roll 206.

15 In yet another embodiment, there is a de-ionizer for de-ionizing the paper web surface of the formed roll 206 and removing static on the surface thereof. This prevents the wings (208 and 210) from sticking onto the formed roll 206 and facilitates the directing of the wings into the chute 422.

It shall be understood that the various ways of directing the wings (408 and 410)  
20 into the chute 422 as described above may be performed separately or in combination, without departing from the scope of the present invention.

There are various ways of defining the substantially X-shaped cut 402 with the cutting apparatus 210. Presented in Figures 5A and 5B is a top view of the cutting apparatus 210 that spans across the paper web 202 from edge 500A to edge  
25 500B. One way of defining the substantially X-shaped cut 402 is to allow the nozzle controller to actuate the nozzle carriages (214A and 214B) to provide a transversal movement of the first and second nozzles (212A and 212B) from a respective edge (500A and 500B) to a middle portion 502 of the continuous web 202 and from the middle portion 502 back to the respective edges (500A and  
30 500B) as represented by the carriage movement arrows.

It shall be understood that the middle portion 502 may have a determined width and that the carriages (214A and 214B) may be controlled to travel up to an edge of the middle portion 502 or in proximity of the middle portion 502. Moreover the carriages may overlap at a center line 504 of the middle portion 502 or even go  
5 slightly beyond the center line 504.

Another way of defining the substantially X-shaped cut 402 is to allow the nozzle controller to actuate the nozzle carriages (214A and 214B) for them to cross over the continuous web 202 from edge to edge. Presented in Figure 6A is a top view of the cutting apparatus 210 that spans across the paper web 202 from edge 600A  
10 to edge 600B. The cutting apparatus 210 has two tracks, each track is adapted to guide one of the two nozzle carriages (214A and 214B).

There are various ways of positioning the two tracks. For instance, a first track may be positioned upstream and another may be positioned downstream with respect to the traveling direction of the paper web. In this case, as there is  
15 normally limited space near the driving drum 209, it may be desirable that the two tracks be positioned as close as possible to each other. Moreover, the positioning of the tracks as close as possible to each other may further be desirable for obtaining a symmetric X-shaped cut 402 and assuring an adequate level of symmetry in the substantially V-shaped start 406 for evenly re-threading the new  
20 spool 208.

For defining a symmetrical X-cut it may be desirable to orient the nozzle with a slight angle so that the nozzle may direct a water jet on a center portion 610 or right on a center line 612 between the two tracks such as presented in Figure 6B. Alternatively, it may be desirable to control the carriage positioned on the  
25 upstream track to be activated with a slight delay, for crossing over to the opposite edge, with respect to the activation of the carriage positioned on the downstream track and thereby defining a symmetrical X-cut.

In another instance, the first tract may be positioned above the other track, as presented in Figure 6C. A first tract is decentered with respect to the other track  
30 for allowing water jet produced by the nozzle of the first tract to hit the traveling paper web 202.

A skilled person will understand that any combination of the embodiments described in the Figures 6A, 6B and 6C is possible without departing from the scope of the claimed apparatus.

5 It is to be understood that as the cutting apparatus of Figure 5A and 5B, the cutting apparatus of Figure 6A, 6B and 6C may allow the nozzle controller to actuate the nozzle carriages (214A and 214B) to travel only up to a middle portion 702 and then back to the respective edges as presented in Figures 7A, 7B, 7C, 7D. In Figure 7B, the nozzle controller actuates the nozzle carriages to travel up to a center line 704 of the middle portion 702 by longitudinally aligning the  
10 nozzle carriages with respect to the paper web 202 travel direction. In Figure 7C, the nozzle controller actuates the nozzle carriages to travel to the middle portion 702 without longitudinal alignment of the nozzle carriages. In Figure 7D, the nozzle controller actuates the nozzle carriages to travel up to slightly beyond the center line 704.

15 In the above described web turn-up cutting apparatus 210, it is possible for the carriage controller 304 to actuate the nozzle carriages (214A and 214B) and allow the nozzles (212A and 212B) to define together the substantially X-shaped cut on the traveling continuous web 202 in less than 3 seconds. It is however understandable that the substantially X-shaped cut may take longer than 3  
20 seconds to be defined, depending on the width of the paper web, the speed of the nozzles or the speed of the paper web.

It shall further be understood by the various embodiments of the web turn-up cutting apparatus 210 described herein that the carriage controller is adapted to actuate each of the nozzle carriages (214A and 214B) from an initial position to a  
25 final position for defining with the nozzles the substantially X-shaped cut. Once in the final position the nozzle carriages are readily positioned for performing a subsequent cut. The nozzle carriages do not require being controlled for returning to an initial position for performing a subsequent cut. As the nozzle carriages do not require being re-positioned for performing a subsequent cut, the nozzle  
30 carriage traveling distance on the track is limited and this may extend the operational life of the track and nozzle carriage. Moreover, this prevents water

dripping from the nozzles to unnecessarily wet a span of the traveling web as it normally may when being re-positioned for a subsequent cut.

The shape of the substantially X-shaped cut 402 differs depending on a trajectory and speed of each carriage. The trajectory and speed of each carriage may be  
5 controlled for defining a desired start and tail profile according to a property of the paper web. Presented in Figures 8A, 8B, 8C, 8D and 8E are examples of the various possible cut shapes that the apparatus may be adapted to define.

According to one embodiment and as presented in Figure 8A , the web turn-up cutting apparatus is adapted to form a substantially X-shaped cut 802A for only  
10 defining a substantially V-shaped tail 404, an opposite substantially V-shaped start 406, a detachable first wing 408 and a detachable second wing 410. This cut may be defined by various types of cutting apparatus 210 such as the one presented in Figures 5A and 5B. For defining such a cut with the cutting apparatus 210 of  
15 Figures 5A and 5B, the carriage controller is adapted to actuate the nozzle carriages (214A and 214B) to travel from the respective edge to the middle portion 502 and in proximity to the center line 504 and then back to the respective edge. In this embodiment, each of the nozzles (212A and 212B) are mounted on a corresponding one of the carriages (214A and 214B) so as to direct a water jet  
20 right on the center line 504 when the carriages reach the furthest traveling limit within the middle portion 502. The nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of a first nozzle and of a second nozzle for creating respectively a first cut line and a second cut line that  
25 join in the middle portion of the continuous web. There is a single center cut line being defined by the joining of the first and the second cut lines. This cut may further be defined by the cutting apparatus 210 of Figures 7A and 7B.

According to another embodiment and as presented in Figure 8B, the web turn-up cutting apparatus is adapted to form a substantially X-shaped cut 802B for  
30 additionally defining a detachable middle strip 804. This cut may be defined by various types of cutting apparatus 210 such as the one presented in Figures 7A and 7D There is a second nozzle that is positioned upstream from a first nozzle and the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first and second nozzles for defining respectively a

first cut line and a second cut line that cross in the middle portion of the continuous web. The first cut line and the second cut line cross at a first middle portion point and at a second middle portion point, wherein the first middle portion point is upstream from the second middle portion point. The detachable middle  
5 strip being defined by the first cut line and the second cut line between the first and second middle portion points.

According to another embodiment and as presented in Figure 8C, the web turn-up cutting apparatus is adapted to form a substantially X-shaped cut 802C for defining an elongated start 406. The controller is adapted to reduce the speed of  
10 the carriages from a predetermined high speed to a predetermined low speed when the carriages travel from a middle portion of the web toward an edge. The controller is further adapted to increase the speed of the carriages from the predetermined low speed to a predetermined high speed when the carriages approach an edge of the web. When producing a paper web of a heavier weight,  
15 such an elongated start may be desirable for facilitating a tight winding of the start around the new spool.

In an alternate embodiment and as presented in Figure 8D, the web turn-up cutting apparatus is adapted to form a substantially X-shaped cut 802D for defining an elongated tail 404 and an elongated start 406. The controller is  
20 adapted to reduce the speed of the carriages from a predetermined high speed to a predetermined low speed when the carriages reach a middle portion of the web. The controller is further adapted to increase the speed of the carriages from the predetermined low speed to a predetermined high speed when the carriages approach an edge of the web. When producing a paper web of a heavier weight,  
25 such an elongated tail and start may be desirable for facilitating a tight winding of the tail around the formed roll and a tight winding of the start around the new spool.

A skilled person will understand that the carriages may be controlled at a number of various predetermined speeds for defining the substantially X-shaped cut  
30 without departing from the scope of the present invention.

According to another embodiment and as presented in Figure 8E, the web turn-up cutting apparatus 210 is further adapted to define a middle strip 806 connecting

the substantially V-shaped tail 404 and the substantially V-shaped start 406. This cut may be defined by various types of cutting apparatus 210 such as the ones presented in Figures 5A and 5B, and Figures 7A and 7C. The nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of a first nozzle and of a second nozzle for creating respectively a first cut line and a second cut line that remain separate in the middle portion of the continuous web, thereby forming the middle strip 406.

Presented in Figure 9 according to one embodiment, there is a paper making machine 900 with the web turn-up cutting apparatus 210 that is adapted to define the middle strip 806 as concurrently presented in Figure 10. This web turn-up cutting apparatus 210 comprises an adhesive applicator 902 that is adapted to apply an adhesive 904 on at least a portion of the middle strip 806 and allow the at least portion of the middle strip 806 to adhere on a winding surface of the new spool 208. This causes the substantially V-shaped tail 404 to sever from the continuous paper web 202 for ending the forming roll 206 and further causes the substantially V-shaped start 406 to wind around the new spool 208.

Presented in Figure 11 according to one embodiment, there is a paper making machine 1100 that comprises an adhesive applicator 1102 that is positioned in proximity of a travel path of the paper web 210 between the new spool 208 and the forming roll 206. As presented in Figures 12, the adhesive applicator 1102 is adapted to apply an adhesive 1104 on at least a portion of the substantially V-shaped tail 404. This allows the V-shaped tail 404 to adhere on a winding surface of the forming roll 206 as the substantially V-shaped tail 404 is wound thereon.

Presented in Figure 13 according to one embodiment, there is a paper making machine 1300 with the web turn-up cutting apparatus 210 comprising an adhesive applicator 1302.

As presented in Figure 14A, the adhesive applicator 1302 is adapted to apply an adhesive 1304 on at least a portion of the substantially V-shaped tail 404 and on at least a portion of the substantially V-shaped start 406. This allows the V-shaped tail 404 to adhere on a winding surface of the forming roll 206 as the substantially V-shaped tail 404 is wound thereon and allows the V-shaped start 406 to adhere on a winding surface of the new spool as the substantially V-shaped start 406 is

wound thereon. In one example, the adhesive applicator 1302 is activated to spray adhesive right at the end of the V-shaped tail 404 and to overspray adhesive onto a very tip portion of the V-shaped start 406.

5 In another embodiment, the adhesive applicator 1302 of Figure 13 is adapted to apply an adhesive 1304 on at least a portion of the substantially V-shaped start 406, as presented in Figures 14B.

Presented in Figure 15 according to one embodiment, there is a paper making machine 1500 with the web turn-up cutting apparatus 210 comprising a wing adhesive applicator 1502. The wing adhesive applicator 1502 is adapted to apply  
10 an adhesive 1504 on at least a portion of the first and the second detachable wings (408 and 410) and allow the first and second detachable wings to engageably adhere to the driving drum 209 of the papermaking machine and detach from the continuous paper web 202, as concurrently presented in Figures 16A and 16B. It is understandable that the adhesive requires being applied on a  
15 side of the paper web 220 that can contact the driving drum 209. In this embodiment, as the driving drum is positioned at an underside of the travelling paper web 202, the adhesive applicator 1502 is also positioned in proximity with the travelling paper web 202 on an underside thereof.

According to an alternate embodiment, the wing adhesive applicator 1502 is  
20 further adapted to apply the adhesive 1504 on at least a portion of the detachable middle strip 804 and allow the detachable middle strip 804 to engageably adhere to the driving drum 209, as concurrently presented in Figure 16C. In Figure 16C, it is noticeable that the adhesive applicator 1502 is adapted to apply the adhesive 1504 separately on at least a portion of each of the first and second detachable  
25 wings (408 and 410) and middle strip 804. However, it is understandable that the adhesive applicator 1504 may further apply the adhesive 1504 in any other suitable way such as by an adhesive 1504 that is applied right across at least a portion of each of the first and second detachable wings (408 and 410) and middle strip 804 as presented in Figure 16D.

30 In anyone of the embodiments illustrated in Figures 16A to 16D the adhesive applicator 1502 of Figure 15 may be activated to apply adhesive on the very tip of

the wings (408 and 410) or middle strip 804. In this case, some adhesive may be applied onto the tail 404 without departing from the scope of the present invention.

Presented in Figure 17 according to an alternate embodiment, there is a paper making machine 1700 with the web turn-up cutting apparatus 210 comprising the  
5 the wing adhesive applicator 1502 and adhesive applicator 902 for applying adhesive on the middle strip 806. In this embodiment, the adhesive applicator 902 is positioned above and in proximity with the traveling paper web 200 for applying the adhesive 904 on an upper side of the paper web 202 and engaging the new spool 208 as concurrently presented in Figure 18. The wing adhesive applicator  
10 1502 is positioned under and in proximity with the traveling paper web 202 for applying the adhesive 1504 on an underside of the paper web 202 and engaging the driving drum 209 as further presented in Figure 18.

Presented in Figure 19 according to an alternate embodiment, there is a paper making machine 1900 with the web turn-up cutting apparatus 210 comprising the  
15 the wing adhesive applicator 1502 and adhesive applicator 1302 for applying adhesive on the substantially V-shaped start 406. The adhesive applicator 1302 is positioned above and in proximity with the traveling paper web 200 for applying the adhesive 1304 on an upper side of the paper web 202 and engaging the new spool 208 as concurrently presented in Figure 20A and 20B. The wing adhesive  
20 applicator 1502 is positioned under and in proximity with the traveling paper web 202 for applying the adhesive 1504 on an underside of the paper web 202 and engaging the driving drum 209 as further presented in Figure 20A and 20B.

In anyone of the embodiments illustrated in Figures 20A, 20B, 16A, 16B, 16C and 16D the adhesive applicator 1502 of Figure 15 may be activated to apply adhesive  
25 on the very tip of the wings (408 and 410) or middle strip 804. In this case, some adhesive may be applied onto the tail 404 without departing from the scope of the present invention. Also, the adhesive applicator 1302 may be activated to apply adhesive on the very tip of the start 406. In this case some adhesive may also be applied on the wings (410 and 408) or middle strip 804 without departing from the  
30 scope of the present invention.

A skilled person would understand that any of the above described paper making machine can further have the adhesive applicator 1102 for additionally applying

adhesive 1104 onto the substantially V-shaped tail 404 as presented in Figure 12 and as concurrently presented in the paper making machines 2100A and 2100b of Figures 21A and 21B.

It shall be understood that one or more of the adhesive applicators (902, 1102, 5 1302 and 1502) may be replaced by an electric charge applicator for electrically charging at least a part of a corresponding portion defined by the substantially X-shaped cut. The electrically charged part then being adapted to statically adhere to a respective new spool, driving drum or formed roll.

In an alternate embodiment, the adhesive applicator 1502 is replaced by the 10 driving drum 209 defining a perforated surface for applying a controllable air suction force on the surface of the driving drum. The controllable air suction force may be activated for allowing the wings (408 and 410) or middle strip 804 to adhere on the surface of the driving drum. The controllable air suction force may further be deactivated for allowing the wings (408 and 410) or middle strip 804 to 15 fall off from the surface of the driving drum and to fall into a collector for re-pulping.

In yet another embodiment as presented in Figure 21C, the adhesive applicator 1502 is replaced by an adhesive applicator 2102 that is adapted to apply adhesive on a surface of the driving drum for allowing the wings (408 and 410) or middle strip 804 to adhere thereon.

20 It shall be understood that the adhesive applicators (902, 1102, 1302 and 1502, 2102) may be adapted to apply a permanent adhesive or a non-permanent adhesive such as water or a removable sealant. Note that for re-pulping purposes, it may be required that the adhesive applicators only apply a re-pulpable adhesive.

According to another aspect, there is a method of performing a turn-up in a paper 25 making machine, as presented in Figure 22. The method 2200 comprises defining 2202 a substantially X-shaped cut in a traveling continuous paper web 202, as described above in Figures 8A, 8B, 8C, 8D and 8E. It shall be understood that the defining 2202 is not restricted to the defining of the substantially X-shaped cut as previously presented and can be the defining of any suitable substantially X- 30 shaped cut that forms at least a substantially V-shaped start 406, a substantially V-shaped tail 408, a detachable first wing 408 and a detachable second wing 410.

The method further comprises detaching 2204 the detachable first wing 408 and the detachable second wing 410 from the traveling continuous paper web 202 as concurrently presented in Figures 8A, 8B, 8C, 8D and 8E. There are various ways of detaching the wings (408 and 410), one of the ways is to allow the wings to drop into a collector 2302 such as a bin or a chute, as in the paper making machine 2300 of Figure 23. The dropping of the wings into the collector 2302 may be provoked by gravitational force or by any other type of force such as by a vacuum, an air blower, a fluid jet, etc.

The method further comprises distancing 2206 the substantially V-shaped tail 404 from the substantially V-shaped start 406 by allowing the substantially V-shaped start 406 to engage the new spool 208. There are various ways of distancing the substantially V-shaped tail and start (404 and 406) from each other, one way is to apply an adhesive onto the start 406 and thereby allowing the start 406 to engage the new spool 208 and wind thereon. The forming roll 206 continues to rotate and the tail 404 is wound thereon. Another way of distancing the substantially V-shaped tail and start (404 and 406) is by severing a middle strip 806 as presented in Figure 8E. When an adhesive is applied onto the middle strip 806 as in Figure 10, the middle strip 806 engages the new spool 208 thereby drawing the start 406 to wind around the new spool 208. As the middle strip 806 engages the new spool 208, the tail 404 is pulled away by the rotating forming roll 206 and there is severing of the tail 404 from the middle strip 806.

Presented in Figure 24 according to one embodiment, the method 2200 further comprises applying 2402 an adhesive. The adhesive may be applied on various portions (404, 406, 408, 410, 804 and 806) formed by the substantially X-shaped cut, as presented in Figures 8A, 8B, 8C, 8D and 8E. In one instance, the adhesive could be applied for allowing the start 406 or the middle strip 806 to engage the new spool 208. In another instance, the adhesive could be applied for allowing the tail 404 to contact a surface of the forming roll 206.

In yet another instance the adhesive could be applied for allowing the detachable wings (408 and 410) or the detachable middle strip 804 to engage a surface of a driving drum 209 of the papermaking machine and detach from the continuous web 202 as a respective detached first wing, a respective detached second wing

and a detached middle strip, as presented in Figures 16A, 16B, 16C and 16D. According to one embodiment and as presented in Figure 25A, there is a bottom view of the driving drum 209 whereon there is engaged on the surface the detached first wing 2502 and the detached second wing 2504. According to  
5 another embodiment and as presented in Figure 25B, there is a bottom view of the driving drum 209 whereon there is engaged on the surface the detached first wing 2502, the detached second wing 2504 and the detached middle strip 2506.

It should be understood that applying 2402 an adhesive could also mean applying 2402 an electric charge for the various portions (404, 406, 408, 410, 804 and 806)  
10 formed by the substantially X-shaped cut to statically engage a respective one one of the new spool 208, formed roll 206 or driving drum 209.

When the driving drum 209 defines a controllable air suction force on its surface for allowing the wings (408 and 410) or the detachable middle strip 804 to adhere thereon, the applying 2402 an adhesive on the wings (408 and 410) or the  
15 detachable middle strip 804 could be replaced by activating the controllable air suction force on the surface of the drum 209.

The method 2200 may further comprise removing 2404 the detached first wing 2502, the detached second wing 2504 or the detached middle strip 2506 from the surface of the driving drum 209. The removal of the detached first and second  
20 wings may be done in various ways, one way is to remove the wings by scraping a surface of the driving drum with a doctor 2602, as presented in Figure 26A and 26B. When the driving drum 209 defines a controllable air suction force on its surface, the removing 2404 of the detached wings may be replaced by deactivating the air suction force on the surface of the driving drum 209.

According to another aspect and as presented in Figure 27, there is a method of  
25 controlling 2700 nozzle carriages in a web turn-up cutting apparatus of a paper making machine. The nozzle carriages are adapted to provide a transversal movement to a respective first nozzle and second nozzle with respect to a traveling direction of a paper web. The method 2700 comprises positioning 2702 a  
30 first nozzle carriage 214A near a first edge portion 500A of the paper web and positioning 2704 a second nozzle carriage 214B near a second edge portion 500B of the paper web as concurrently presented in Figure 5A.

The method 2700 further comprises displacing 2706 the first and second nozzle carriages from near the respective edge portions of the paper web to near a center portion of the paper web. When a water supply to the first and second nozzles is activated the displacing 2706 of the two carriages (214A and 214B) defines at least in-part a V-shaped tail 404 for ending a forming roll and in-part a first and second detachable wings (408 and 410), as concurrently presented in Figures 4 and 5A.

The method 2700 further comprises moving 2708 one of the first and second nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and moving 2708 another one of the first and second nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web. When a water supply to the first and second nozzles is activated the moving 2708 of the two carriages (214A and 214B) defines at least in-part a V-shaped start 406 for re-threading a new spool and in-part the first and second detachable wings (408 and 410), as concurrently presented in Figures 4 and 5B.

In one embodiment, each carriage is adapted to move back to its respective originating edge, such as presented in Figures 5A and 5B. There is a single track that allows to guide the displacing 2706 and the moving back 2708 of the two carriages (214A and 214B). A single track that uses a limited amount of space may be appreciated when space is limited near the driving drum 209 as concurrently presented in Figure 2.

In another embodiment, each carriage is adapted to cross over the width of the paper web from a respective edge to an opposite respective edge, such as presented in Figure 6A. In paper making machines that have enough space near the driving drum 209, it is possible to have two tracks that allow to guide the displacing 2706 and the moving 2708 of the two carriages (214A and 214B).

According to another embodiment as presented in Figure 27, the displacing 2706 of the nozzles are done so as to define at least a center portion cut line, as concurrently presented in Figures 8A and 8B.

In one alternative as presented in Figures 27 and 8A, the method 2700 comprises the displacing 2706 the first nozzle carriage and the second nozzle carriage by aligning the first nozzle carriage and the second nozzle carriage at an alignment line near the center portion of the paper web. As shown by cut-lines 802A, there is defined at least a center portion cut line and in-part the first and second detachable wings.

In another alternative as presented in Figures 27 and 8B, the carriages are adapted to displace the nozzles so as to define a detachable middle strip 804. There is displacing 2706 of the first nozzle carriage and the second nozzle carriage by allowing the first nozzle carriage and the second nozzle carriage to go beyond the alignment line while remaining near the center portion of the paper web. As shown by cut-lines 802B, there is defined two center portion cut lines that form the detachable middle strip 804.

In another alternative as presented in Figures 27 and 8E, the carriages are adapted to displace the nozzles so as to define a middle strip 806 that connects the V-shaped tail 404 and the V-shaped start 406. There is displacing 2706 of the first nozzle carriage and the second nozzle carriage by maintaining a distance between the first nozzle carriage and the second nozzle carriage near the center portion of the paper web. As shown by cut-lines 802C, there is formed a middle strip 806 that connects the V-shaped tail 404 and the V-shaped start 406.

According to another aspect as presented in Figure 28, there is a machine-readable data storage medium 2802. The machine-readable data storage medium 2802 comprises machine-executable instructions 2804 for controlling the definition of the substantially X-shaped cut in the traveling continuous paper web of the papermaking machine, as concurrently presented in Figures 8A, 8B, 8C, 8D and 8E.

According to one embodiment as presented in Figure 29, the data storage medium 2802 is used by the control system 300. The jet controller 302 and the carriage controller 304 are adapted to execute the machine-executable instructions 2804. In one instance, the instructions 2804 are to activate a water supply of each water supply hose to produce with the first and second nozzles (212A and 212B) a respective water cutting jet. In another instance, the instructions 2804 are to

actuate the nozzle carriages (214A and 214B) to provide a transversal movement of the first and second nozzles (212A and 212B), in accordance with the method 2700 of controlling the nozzle carriages as presented in Figure 27.

5 The machine readable data storage medium 2802 and the machine-executable instructions 2804 may have various forms. In one instance the, machine-executable instructions 2804 is a script for being uploaded into the controller (302 and/or 304). According to another instance, the machine-executable instructions 2804 is an upgrade to a script that is uploadable into the controller (302 and/or 304).

10 In Figure 30, according to yet another aspect there is a method of manufacturing paper 3000 in a papermaking machine. The method 3000 comprises producing a continuous web of paper 3002, displacing the continuous web of paper 3004 in a predetermined travel direction and winding the continuous web of paper 3006 around a forming roll. The method 3000 further comprises performing a turn-up  
15 3008 as defined above, positioning a new spool 3010 near the forming roll, accelerating a rotation of the new spool 3012 up to a winding speed and threading the turn-up around the new spool 3014. In addition, the method 3000 comprises ending the winding of the continuous web 3016 of the paper around the forming roll as a formed roll, displacing the formed roll away 3018 from the new spool and  
20 decelerating a rotation 3020 of the formed roll until a full stop.

What is claimed is:

1. A web turn-up cutting apparatus for severing a continuous web that is traveling in a travel direction, the apparatus comprising:

a first nozzle connectable to a first water supply hose and adapted to produce a first water cutting jet and a second nozzle connectable to a second water supply hose and adapted to produce a second water cutting jet, the first nozzle and the second nozzle each being mountable on respective nozzle carriages and being transversely movable with respect to the travel direction of the continuous web;

a jet controller adapted to activate a water supply of the first water supply hose for the first nozzle to produce the first water cutting jet and to activate a water supply of the second water supply hose for the second nozzle to produce the second water cutting jet; and

a carriage controller adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle and of the second nozzle;

wherein the first nozzle and the second nozzle define together a substantially X-shaped cut on the traveling continuous web, the substantially X-shaped cut defining at least a substantially V-shaped tail for ending a forming roll, an opposite substantially V-shaped start for starting a new spool, a detachable first wing and a detachable second wing.

2. The web turn-up cutting apparatus of claim 1, wherein the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle and of the second nozzle from a respective edge of the continuous web to a middle portion of the continuous web and from the middle portion of the continuous web back to the respective edge of the continuous web.
3. The web turn-up cutting apparatus of claim 2, wherein the second nozzle is positioned upstream from the first nozzle and wherein the nozzle controller

is adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle and of the second nozzle for creating respectively a first cut line and a second cut line that cross in the middle portion of the continuous web, thereby forming a detachable middle strip.

4. The web turn-up cutting apparatus of claim 2, wherein the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle and of the second nozzle for creating respectively a first cut line and a second cut line that join in the middle portion of the continuous web.
5. The web turn-up cutting apparatus of claim 2, wherein the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle and of the second nozzle for creating respectively a first cut line and a second cut line that remain separate in the middle portion of the continuous web, thereby forming a middle strip connecting the substantially V-shaped tail and the substantially V-shaped start.
6. The web turn-up cutting apparatus of claim 1, wherein the second nozzle is positioned upstream from the first nozzle and wherein the nozzle controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle from a first edge of the continuous web to a second edge of the continuous web and of the second nozzle from the second edge of the continuous web to the first edge of the continuous web.
7. The web turn-up cutting apparatus of claim 1, further comprising a first adhesive applicator that is adapted to apply an adhesive on at least a portion of the substantially V-shaped tail and allow the V-shaped tail to adhere on a winding surface of the forming roll as the substantially V-shaped tail is wound thereon.
8. The web turn-up cutting apparatus of claim 1, further comprising a second adhesive applicator that is adapted to apply an adhesive on at least a

portion of the first and the second detachable wings and allow the first and second detachable wings to engageably adhere to a driving drum of the papermaking machine and detach from the continuous paper web.

9. The web turn-up cutting apparatus of claim 7, wherein the first adhesive applicator is further adapted to apply an adhesive on at least a portion of the substantially V-shaped start and allow the V-shaped start to adhere on a winding surface of the new spool as the substantially V-shaped start is wound thereon.
10. The web turn-up cutting apparatus of claim 5, further comprising a first adhesive applicator that is adapted to apply an adhesive on at least a portion of the middle strip and allow the at least portion of the middle strip to adhere on a winding surface of the new spool thereby causing the substantially V-shaped tail to sever from the continuous paper web for ending the forming roll.
11. The web turn-up cutting apparatus of claim 1, wherein the carriage controller is adapted to actuate the nozzle carriages to provide a transversal movement of the first nozzle and of the second nozzle, whereby the first nozzle and the second nozzle define together the substantially X-shaped cut on the traveling continuous web in less than 3 seconds.
12. The web turn-up cutting apparatus of claim 1, wherein the carriage controller is adapted to actuate each of the nozzle carriages from an initial position to a final position for defining with the first nozzle and the second nozzle the substantially X-shaped cut, wherein the final position is a subsequent initial position for performing a subsequent substantially X-shaped cut.
13. A method of manufacturing paper in a papermaking machine, the method comprising:

defining a substantially X-shaped cut in a traveling continuous paper web of the papermaking machine, the substantially X-shaped cut forming at least a substantially V-shaped tail for ending a forming roll, an opposite substantially V-shaped start for starting a new spool, a detachable first wing and a detachable second wing;

detaching the detachable first wing and the detachable second wing from the traveling continuous paper web; and

distancing the substantially V-shaped tail from the substantially V-shaped start by allowing the substantially V-shaped start to engage a new spool.

14. The method of manufacturing paper of claim 13, further comprising applying an adhesive on at least a portion of the traveling continuous paper web so that following the defining of the substantially X-shaped cut, there is adhesive applied on at least the detachable first wing and the detachable second wing.
15. The method of manufacturing paper of claim 13, wherein the detaching is done by allowing the detachable first wing and the detachable second wing to engage a surface of a driving drum of the papermaking machine as a respective detached first wing and a respective detached second wing.
16. The method of manufacturing paper of claim 15, further comprising removing the detached first wing and the detached second wing from the surface of the driving drum.
17. The method of manufacturing paper of claim 16, wherein the removing is done by scraping a surface of the driving drum.
18. The method of manufacturing paper of claim 14, wherein the applying an adhesive is so that following the defining of the substantially X-shaped cut,

there is adhesive applied on the substantially V-shaped start, thereby allowing the substantially V-shaped start to engage the new spool.

19. The method of manufacturing paper of claim 13, wherein the substantially X-shaped cut further forms a middle strip that connects the V-shaped tail and the V-shaped start.

20. The method of claim 19, further comprising applying an adhesive on at least a portion of the middle strip, thereby allowing the at least portion of the middle strip and the connected V-shaped start to engage the new spool.

21. A method of controlling a first nozzle carriage and a second nozzle carriage in a web turn-up cutting apparatus of a papermaking machine, each of the first and second nozzle carriages being adapted to provide a transversal movement to a respective first nozzle and second nozzle with respect to a traveling direction of a paper web, the method comprising:

positioning the first nozzle carriage near a first edge portion of the paper web;

positioning the second nozzle carriage near a second edge portion of the paper web;

displacing the first nozzle carriage from near the first edge portion of the paper web to near a center portion of the paper web and defining at least in-part a V-shaped tail for ending a forming roll and in-part a first detachable wing, when a water supply to the first nozzle is activated;

displacing the second nozzle carriage from near the second edge portion of the paper web to near a center portion of the paper web and defining at least in-part the V-shaped tail and in-part a second detachable wing, when a water supply to the second nozzle is activated;

moving one of the first and second nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and defining at least in-part a V-shaped start for re-threading a new spool and in-part one of the first and second detachable wings, when a water supply to the respective nozzle is activated; and

moving another one of the first and second nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web and defining at least in-part the V-shaped start end and in-part another one of the first and second detachable wings, when a water supply to the respective nozzle is activated.

22. The method of claim 21, wherein the moving one of the first and second nozzle carriage is moving of the first nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and the moving another one of the first and second nozzle carriage is the moving of the second nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web.

23. The method of claim 21, wherein the moving one of the first and second nozzle carriage is moving of the second nozzle carriage from near the center portion of the paper web to near the first edge portion of the paper web and the moving another one of the first and second nozzle carriage is moving of the first nozzle carriage from near the center portion of the paper web to near the second edge portion of the paper web.

24. The method of claim 22, wherein the displacing the first nozzle carriage and the second nozzle carriage comprises aligning the first nozzle carriage and the second nozzle carriage at an alignment line near the center portion of the paper web, thereby defining at least a center portion cut line and in-part the first and second detachable wings.

25. The method of claim 23, wherein the displacing the first nozzle carriage and the second nozzle carriage further comprises displacing the first nozzle carriage and the second nozzle carriage beyond the alignment line while remaining near the center portion of the paper web, thereby defining two center portion cut lines and forming a detachable middle strip.
26. The method of claim 21, wherein the displacing the first nozzle carriage and the second nozzle carriage comprises maintaining a distance between the first nozzle carriage and the second nozzle carriage near the center portion of the paper web, thereby forming a middle strip that connects the V-shaped tail and the V-shaped start.
27. A machine-readable data storage medium comprising machine-executable instructions for controlling a definition of a substantially X-shaped cut in a traveling continuous paper web of a papermaking machine, the substantially X-shaped cut forming at least a substantially V-shaped tail for ending a forming roll, an opposite substantially V-shaped start for starting a new spool, a detachable first wing and a detachable second wing.
28. The data storage medium of claim 27, wherein said instructions are for controlling the papermaking machine to perform the method of any one of claims 21 to 26.

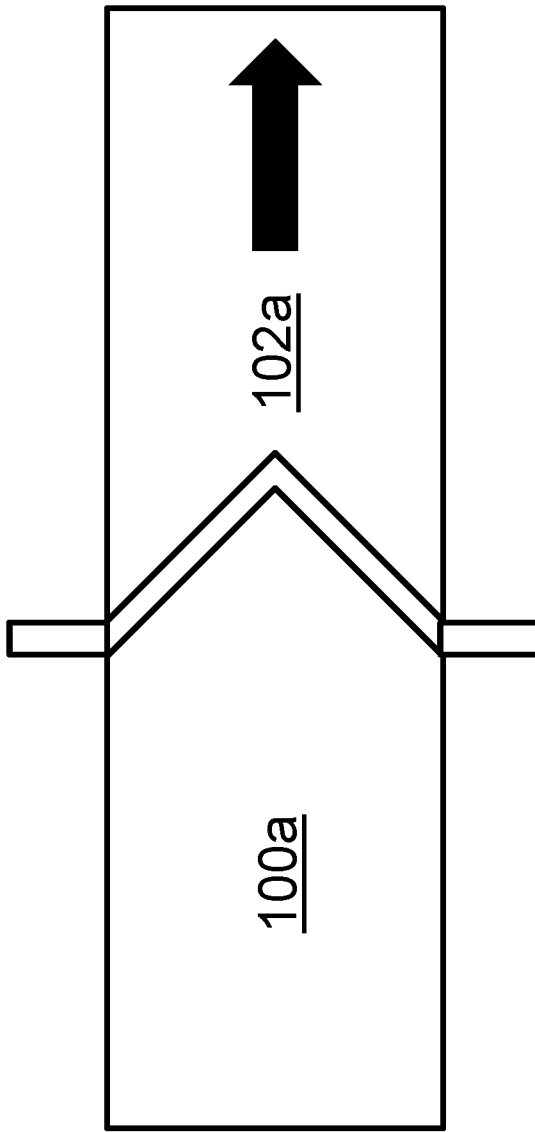


FIG. 1A  
PRIOR ART

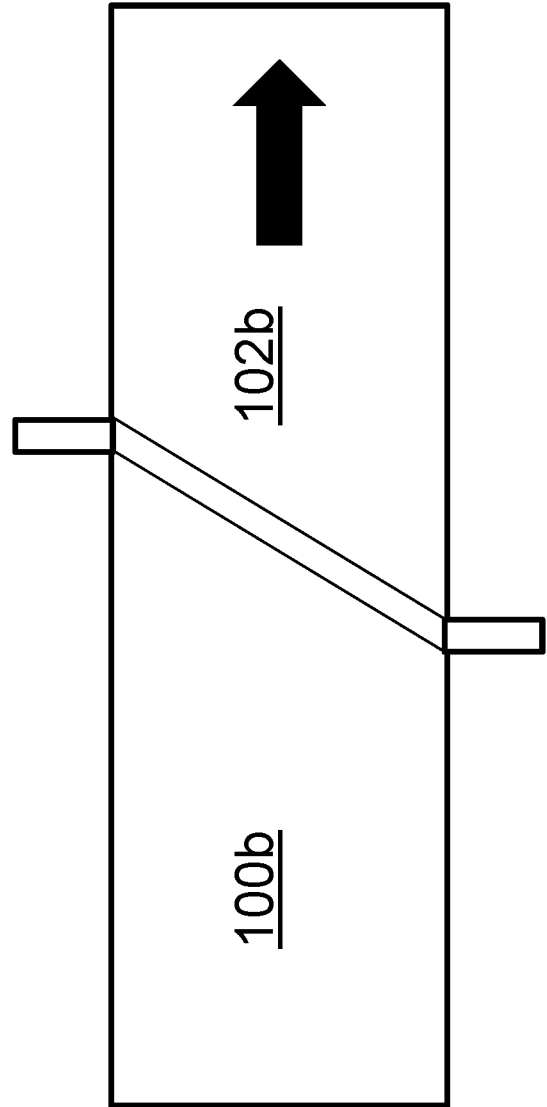


FIG. 1B  
PRIOR ART

2/38

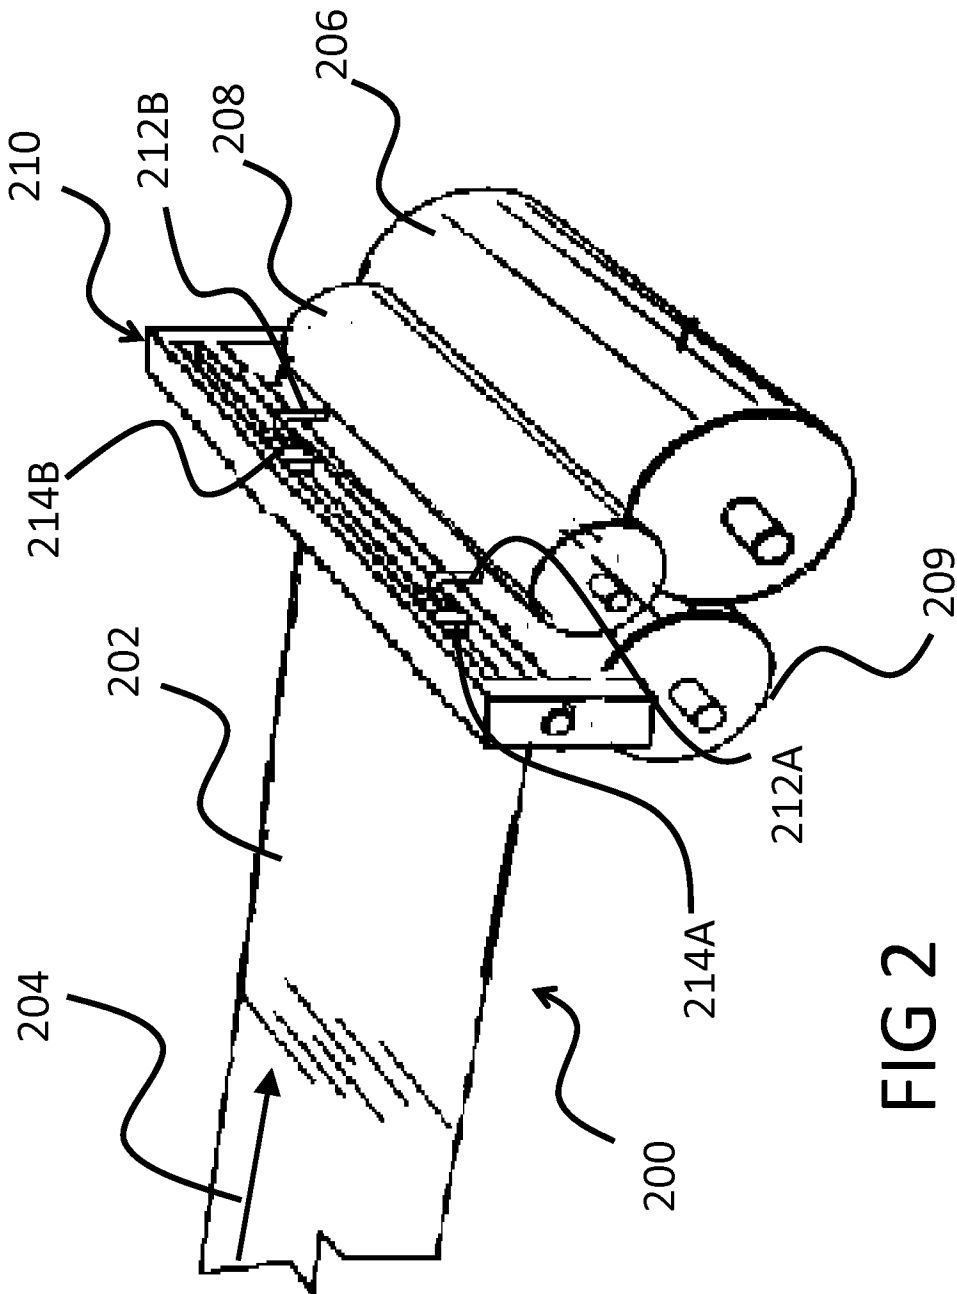


FIG 2

3/38

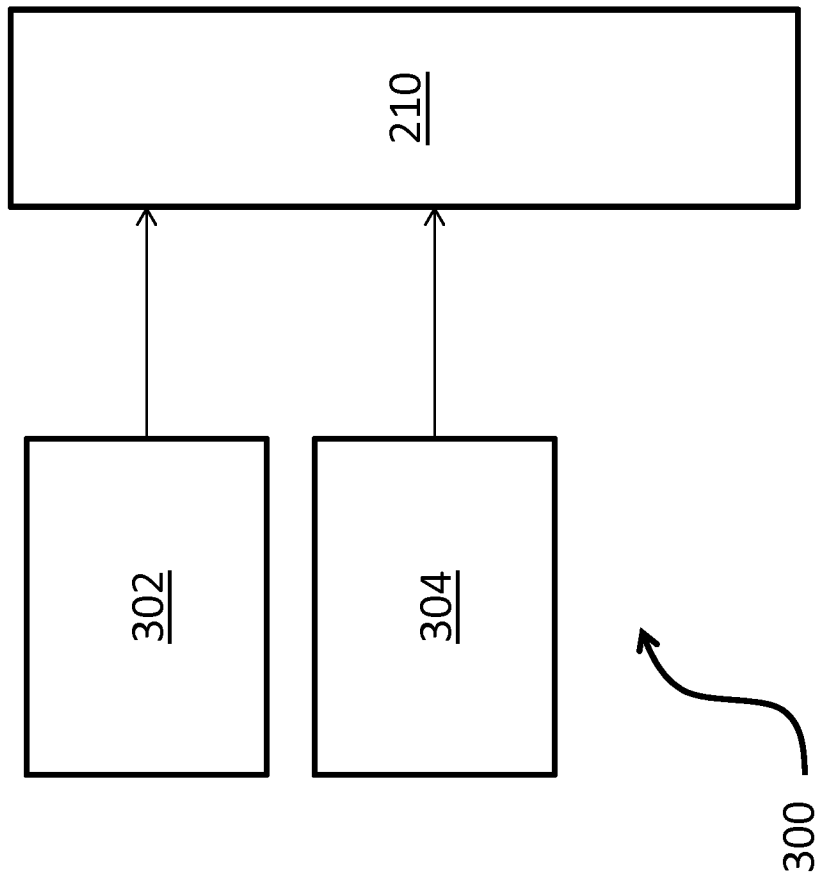


FIG 3

4/38

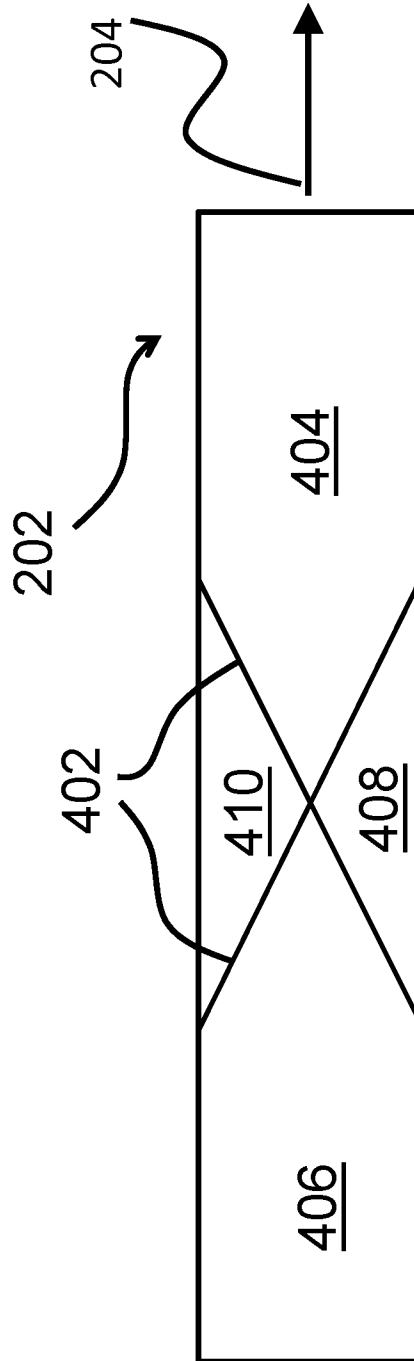


FIG 4A

5/38



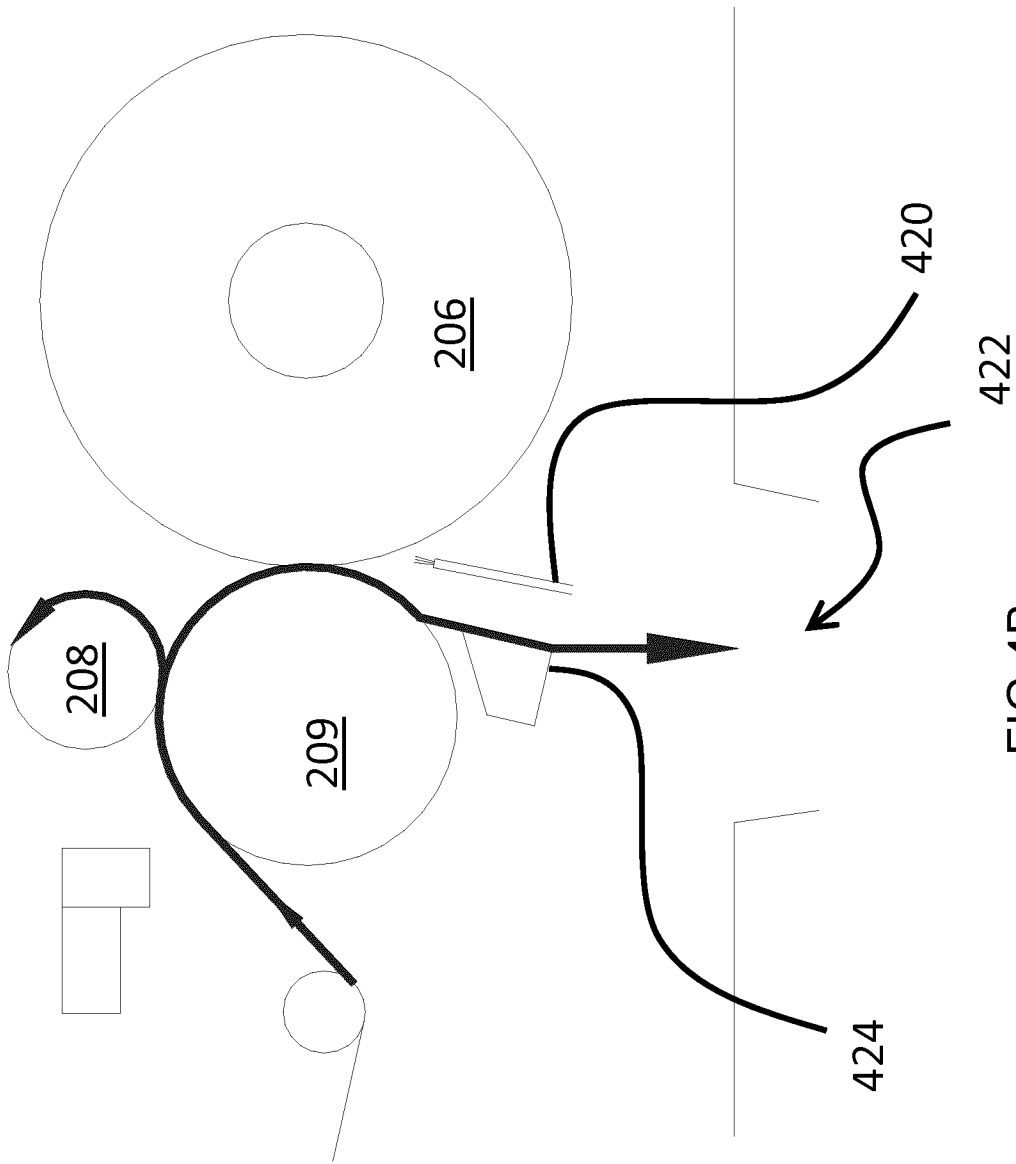


FIG 4B

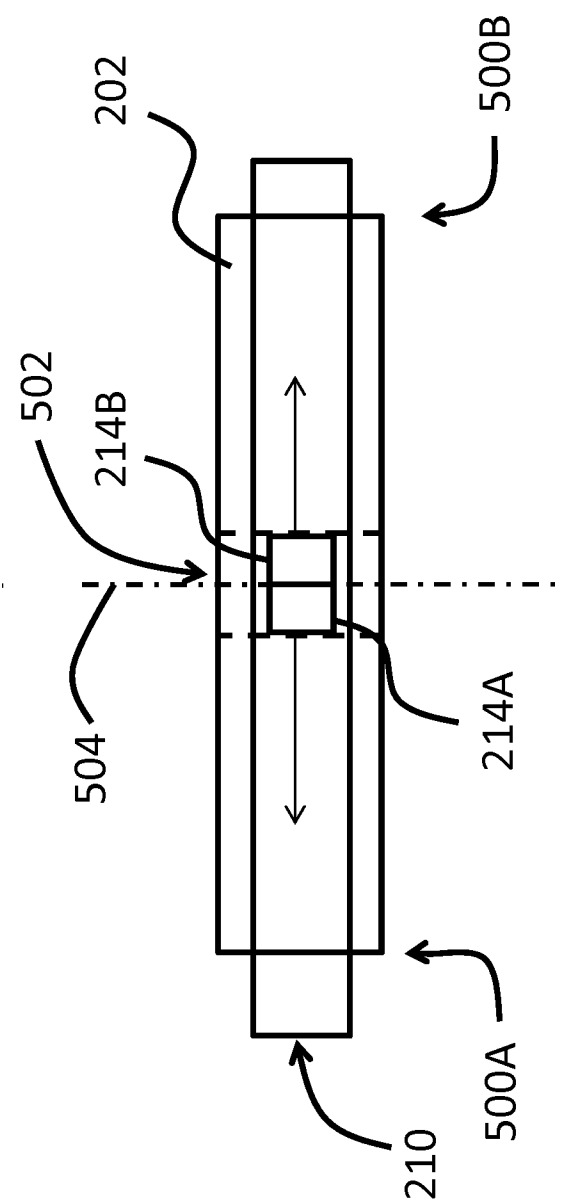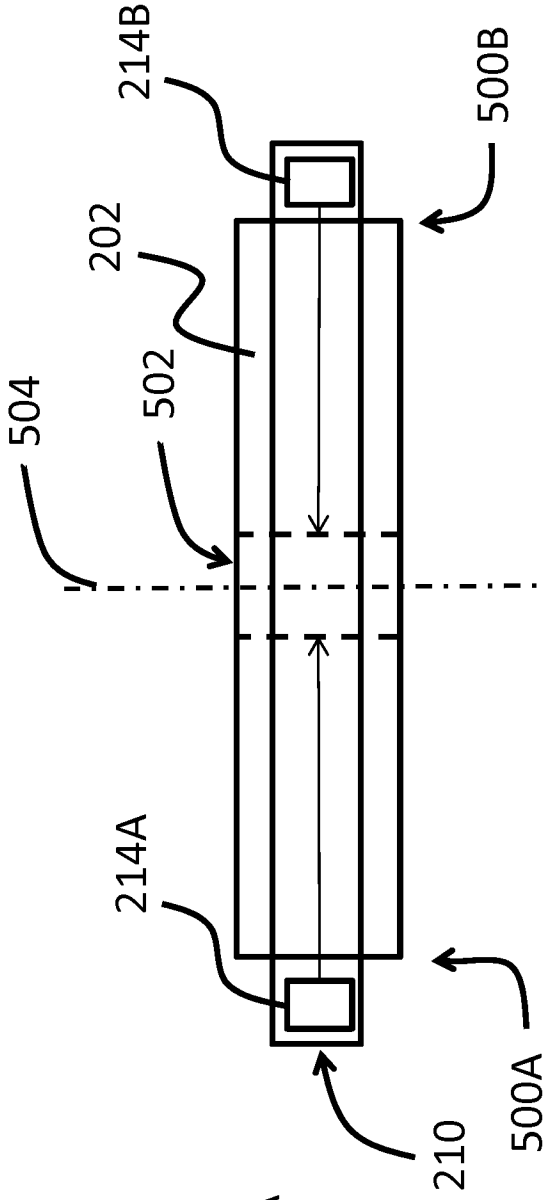

7/38

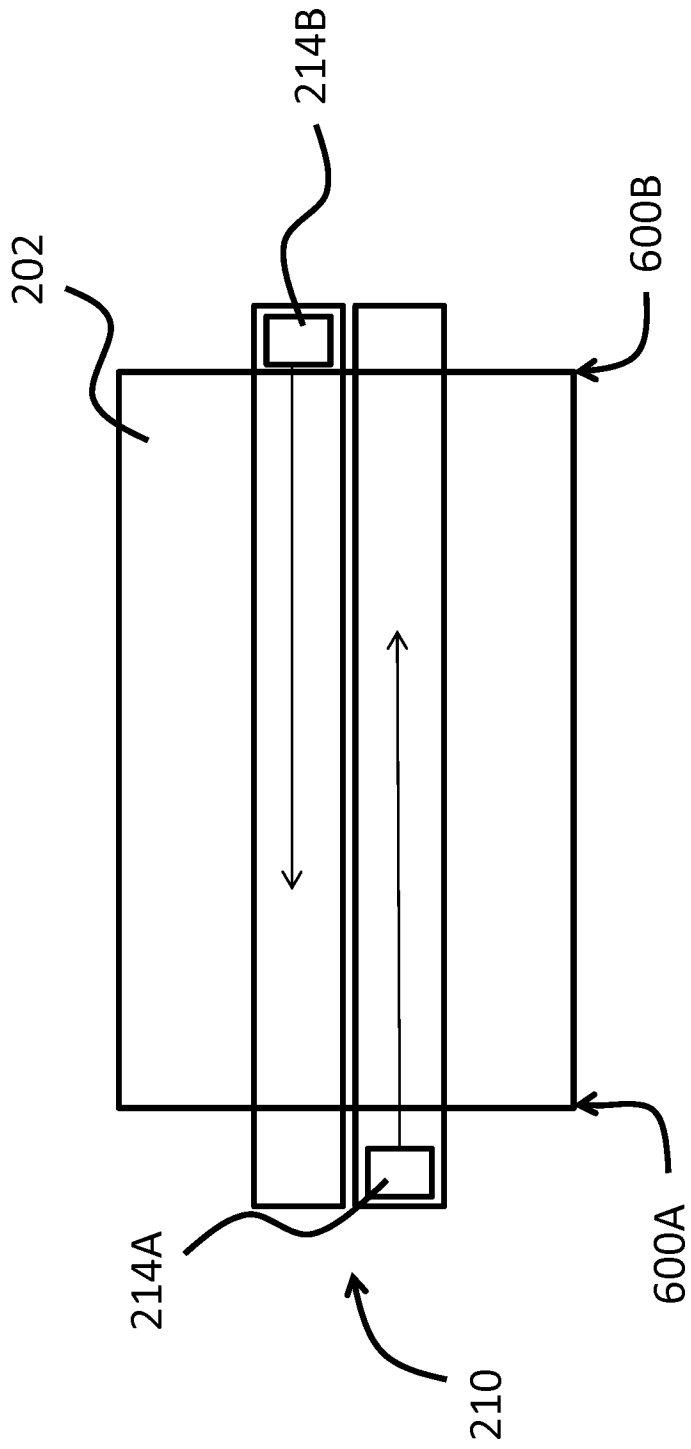


FIG 6A

8/38

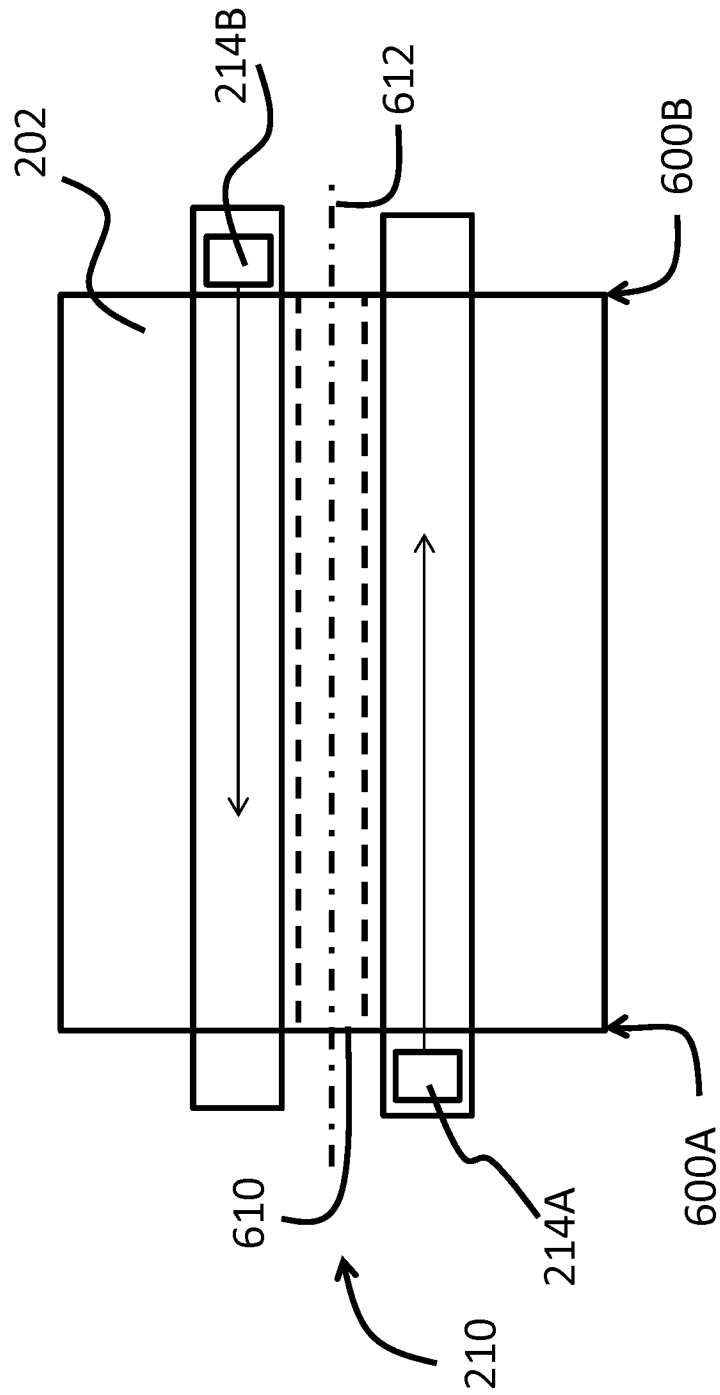


FIG 6B

9/38

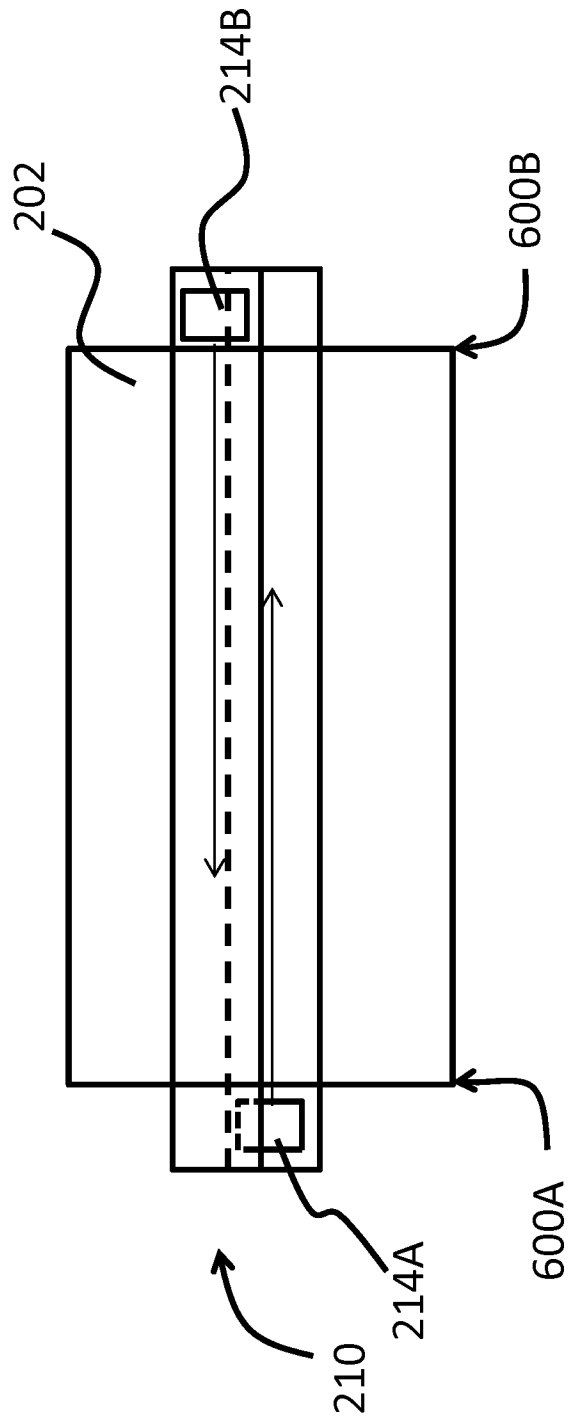


FIG 6C

10/38

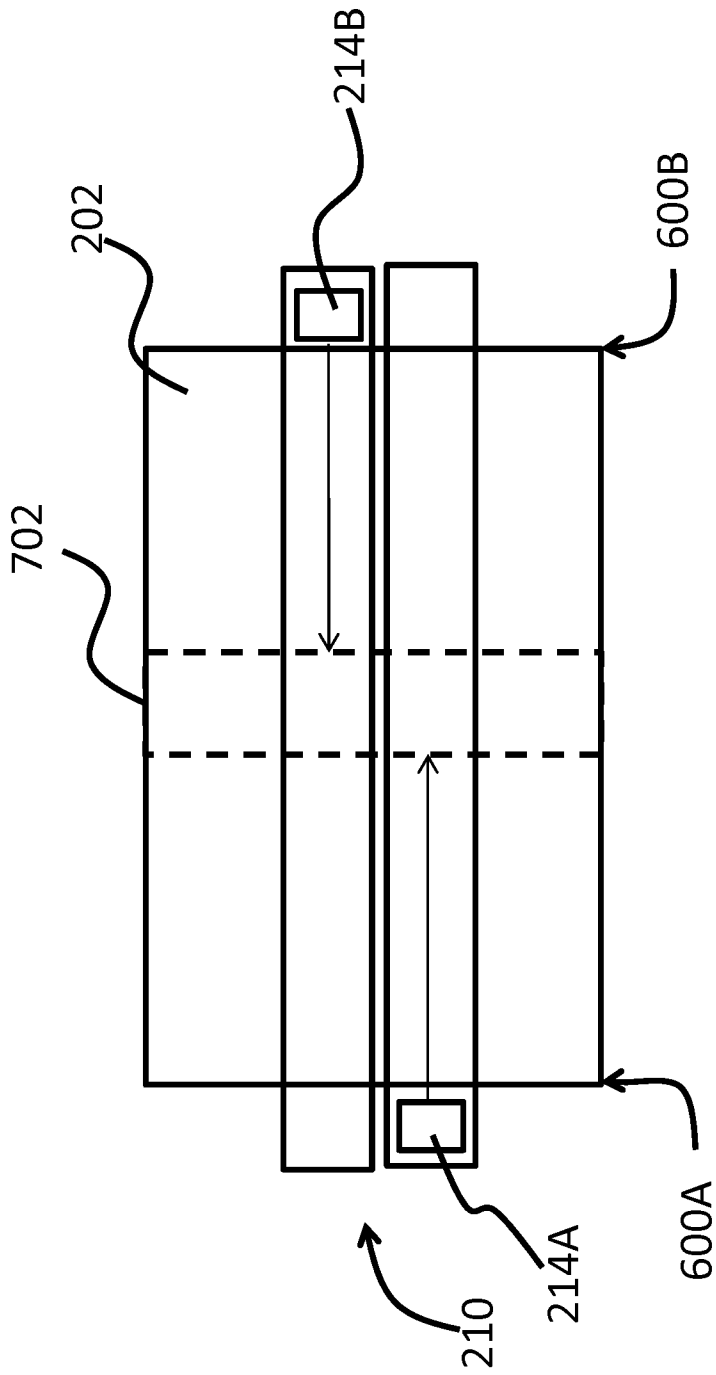


FIG 7A

11/38

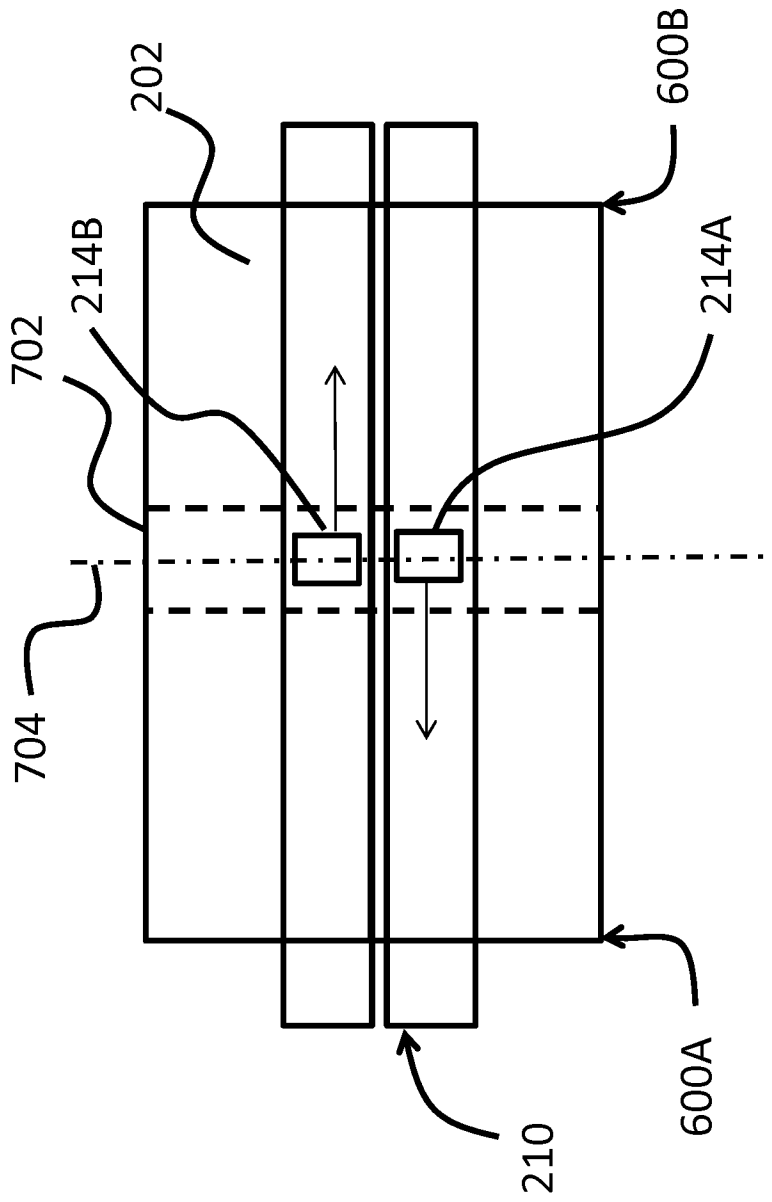


FIG 7B

12/38

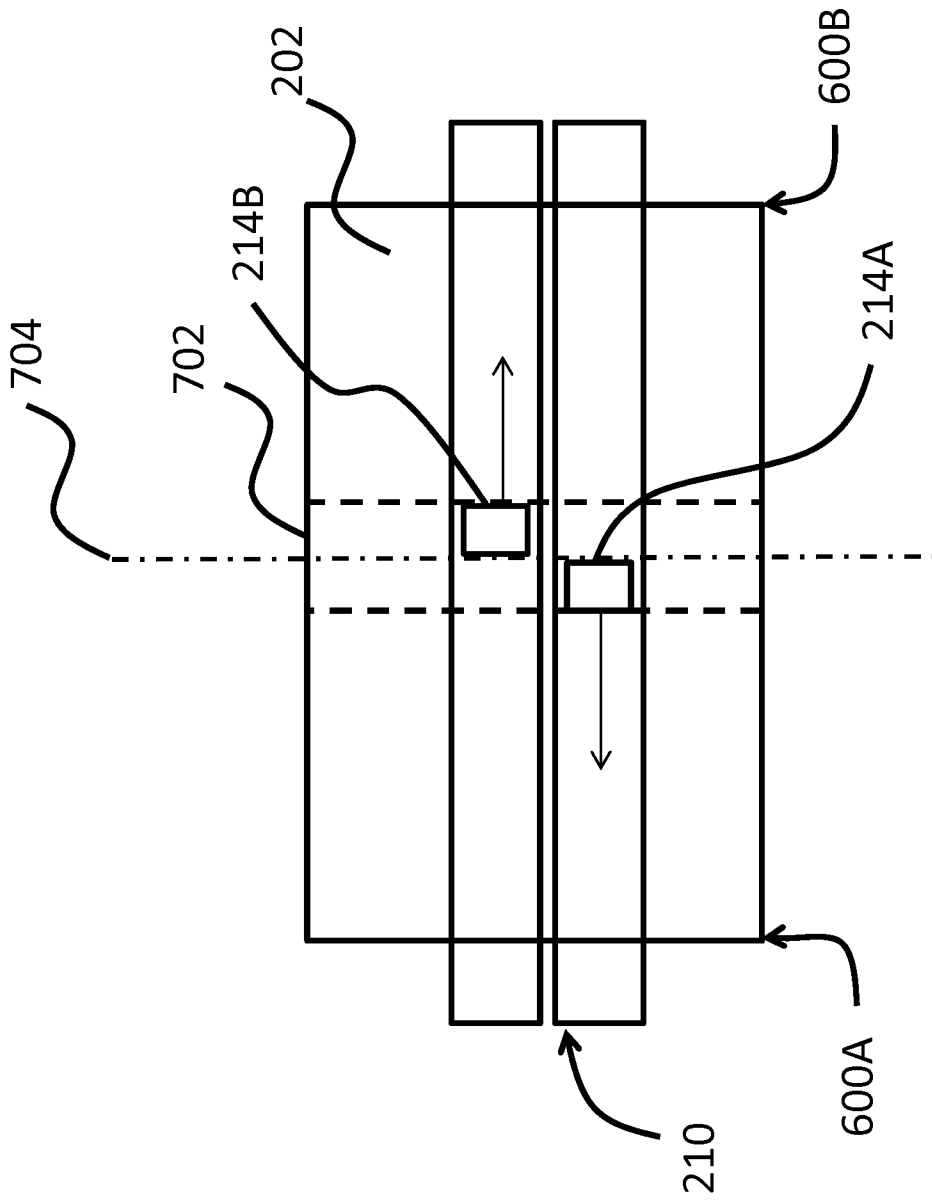


FIG 7C

13/38

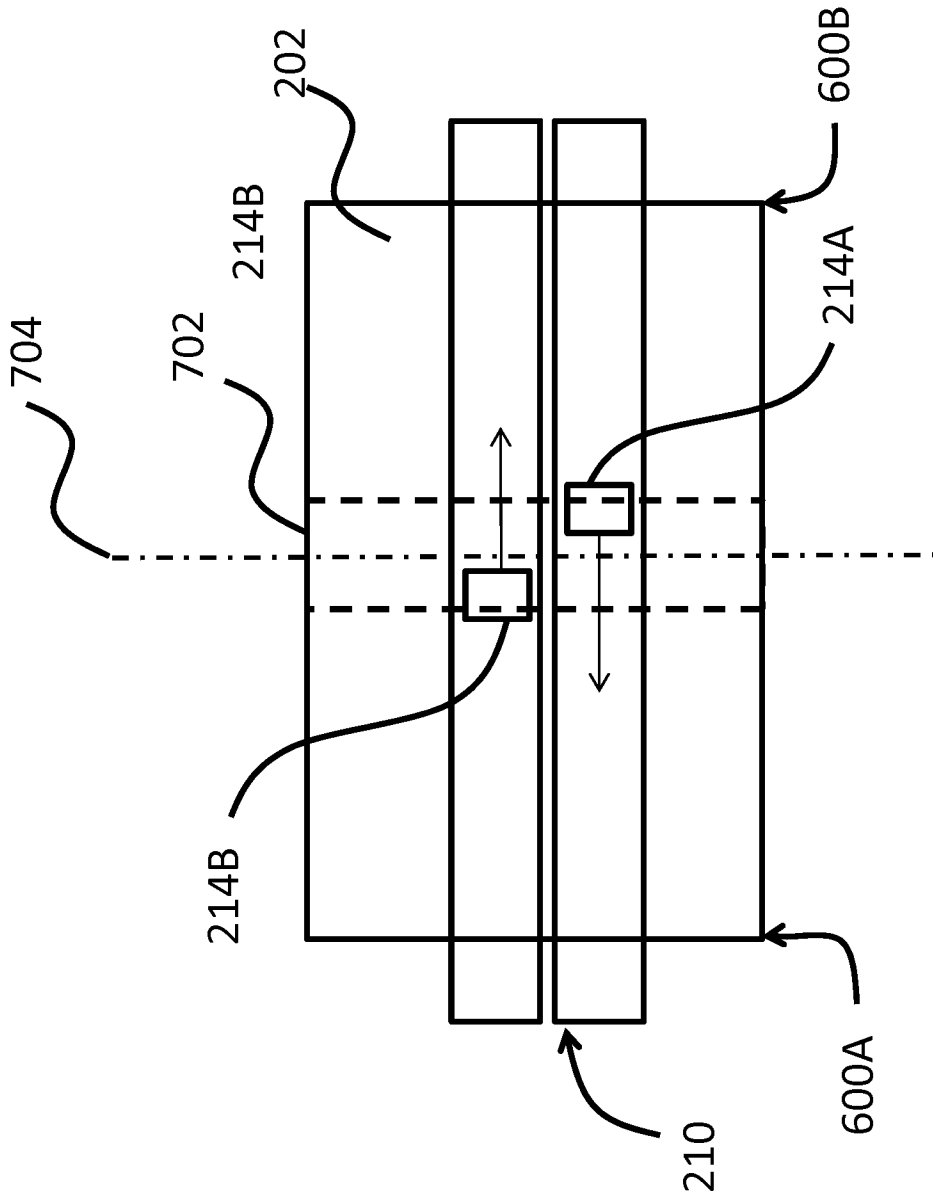


FIG 7D

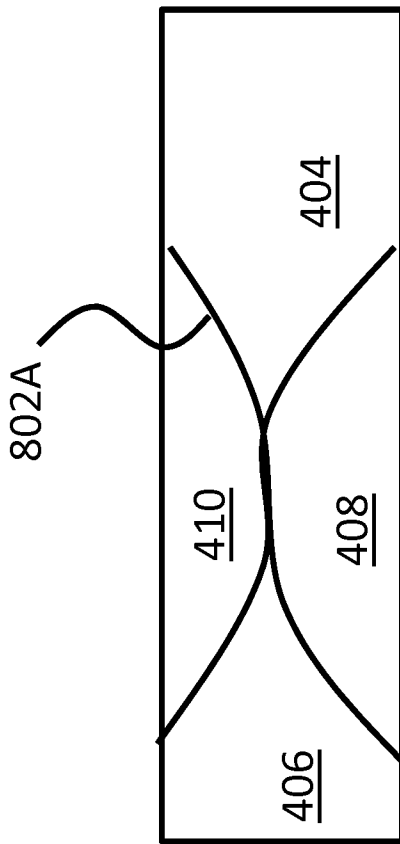


FIG 8A

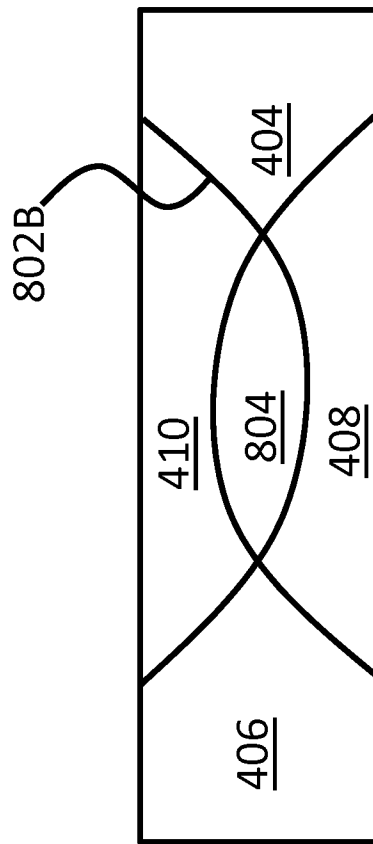


FIG 8B

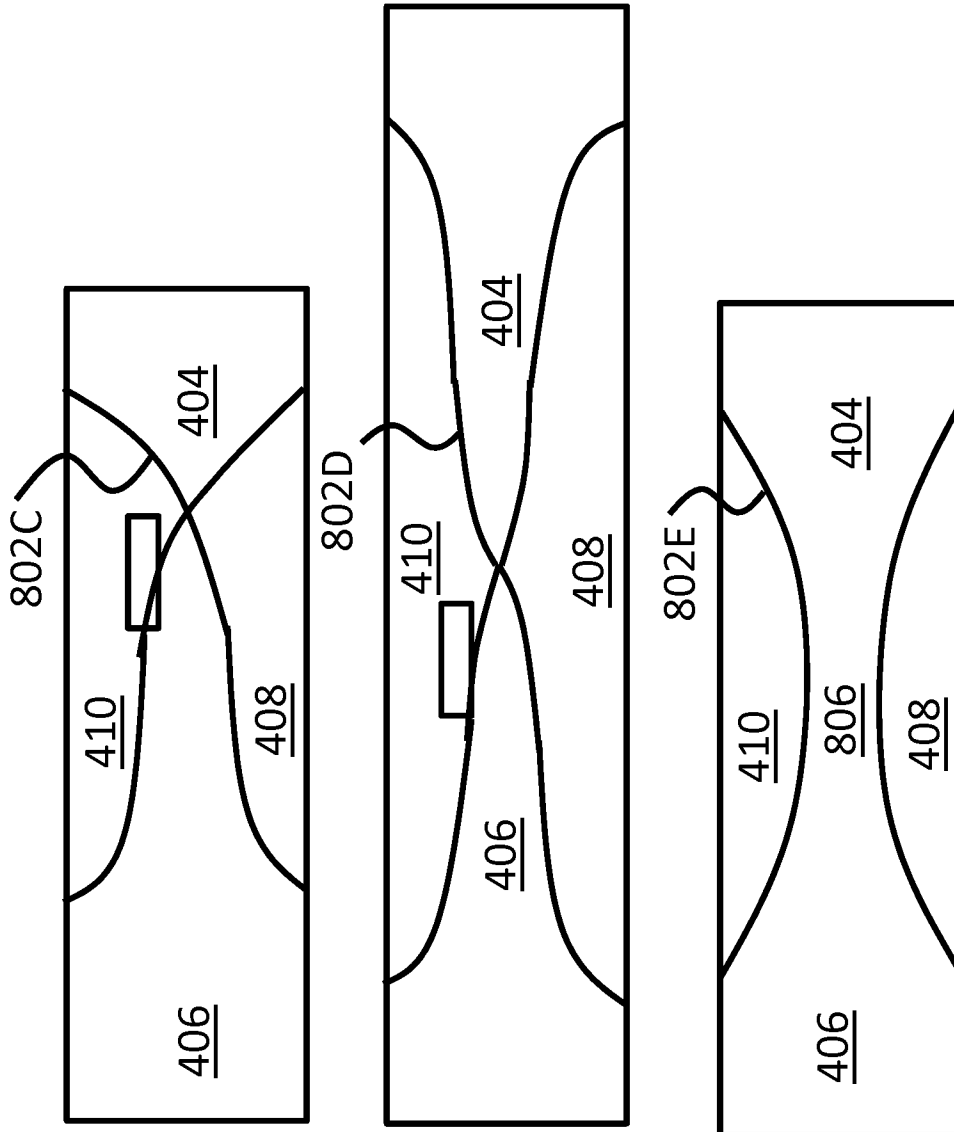


FIG 8C

FIG 8D

FIG 8E

16/38

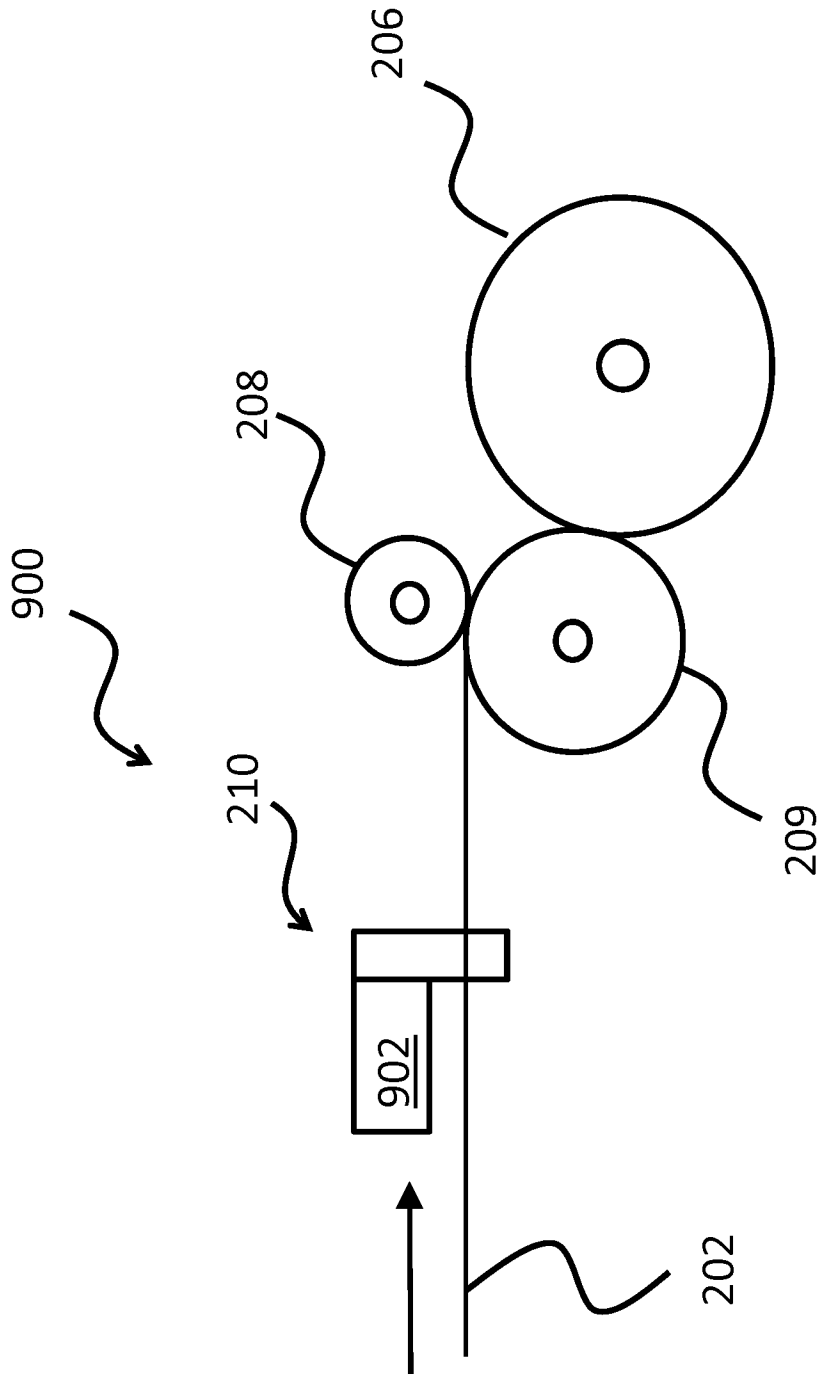


FIG 9

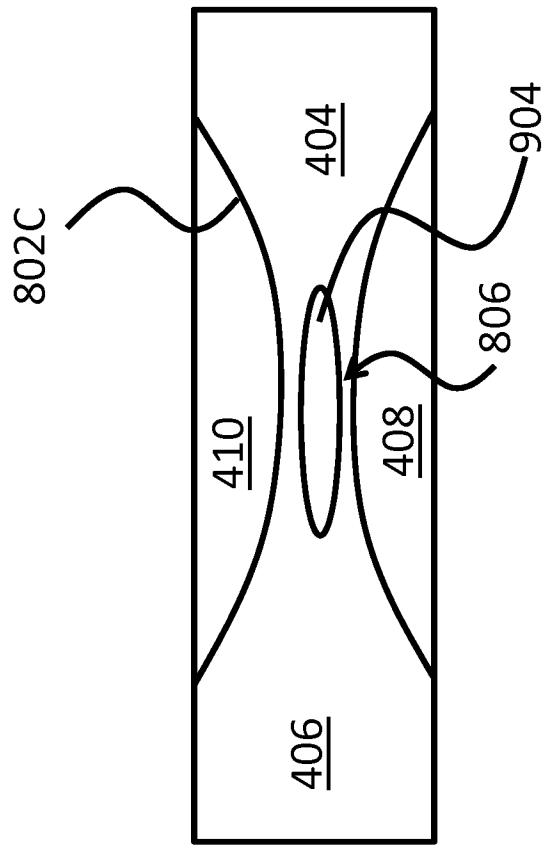


FIG 10

18/38

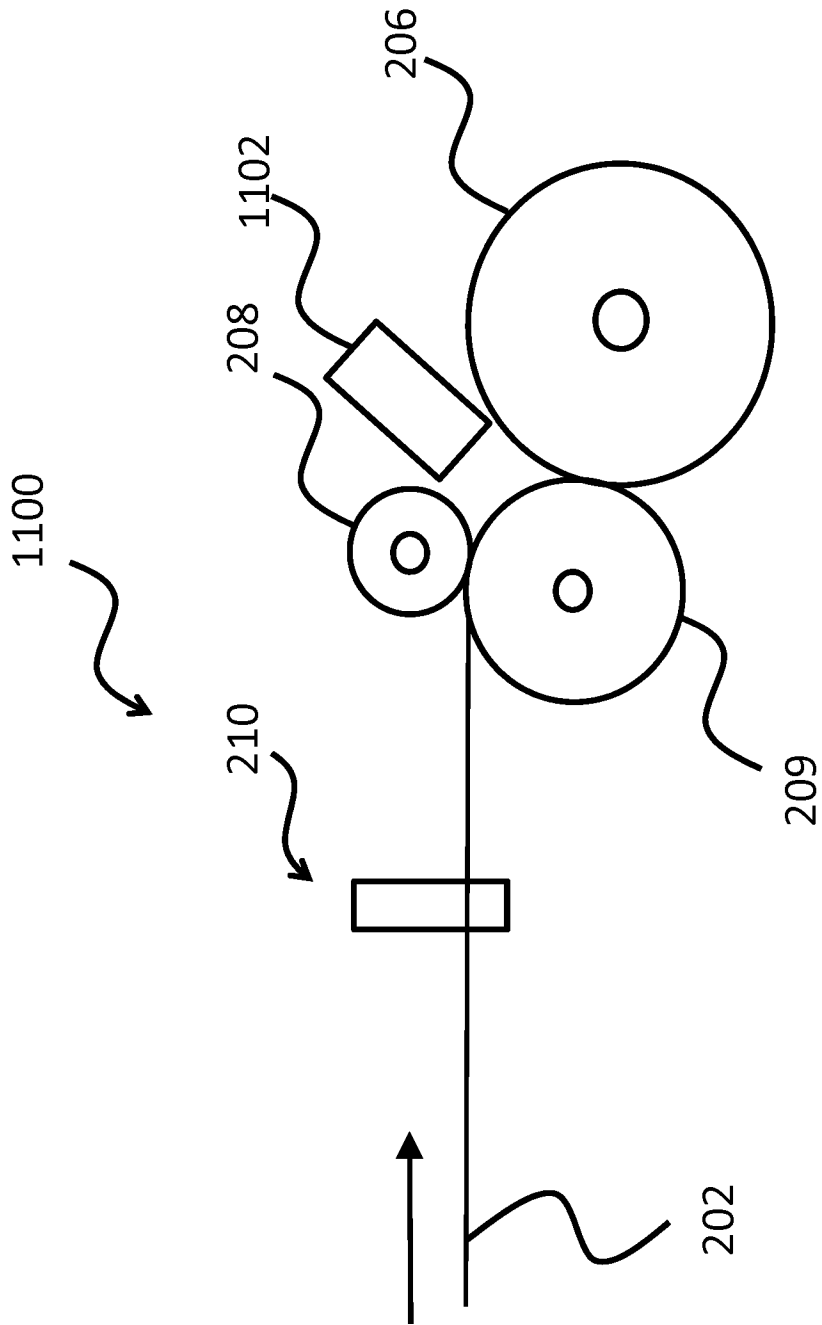
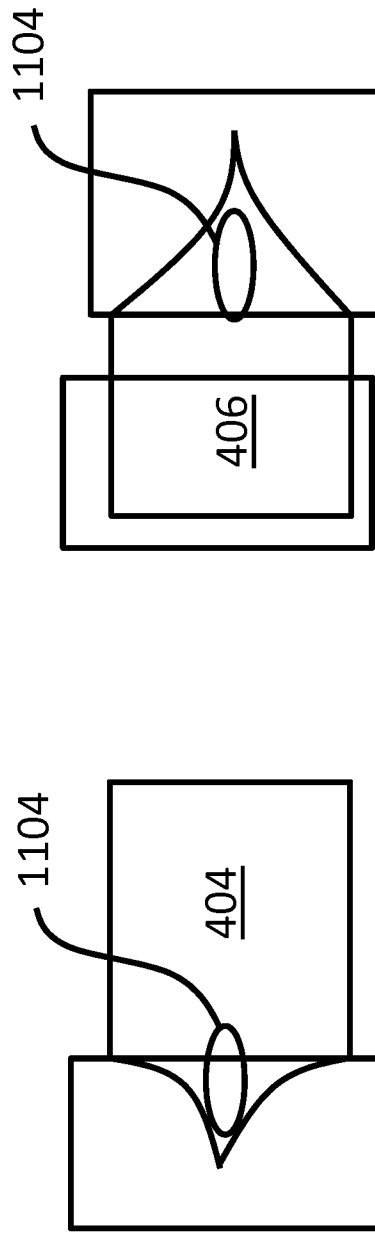
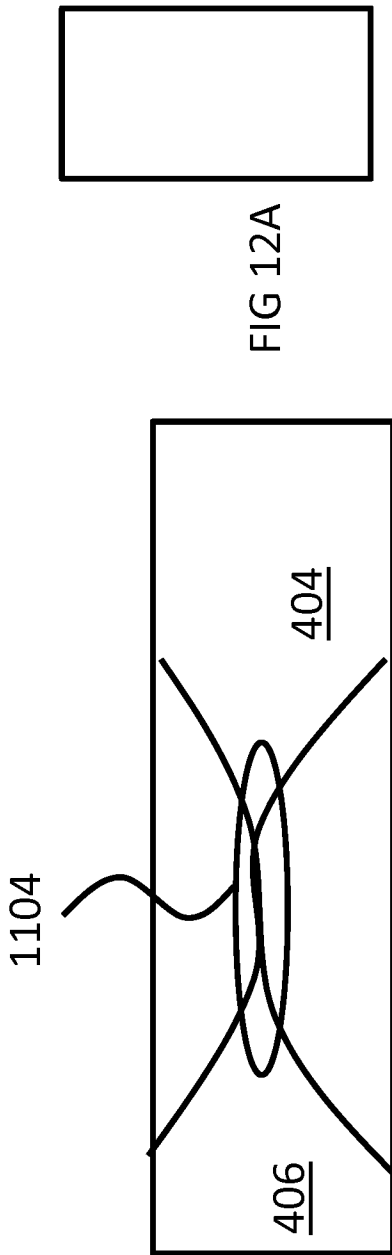


FIG 11



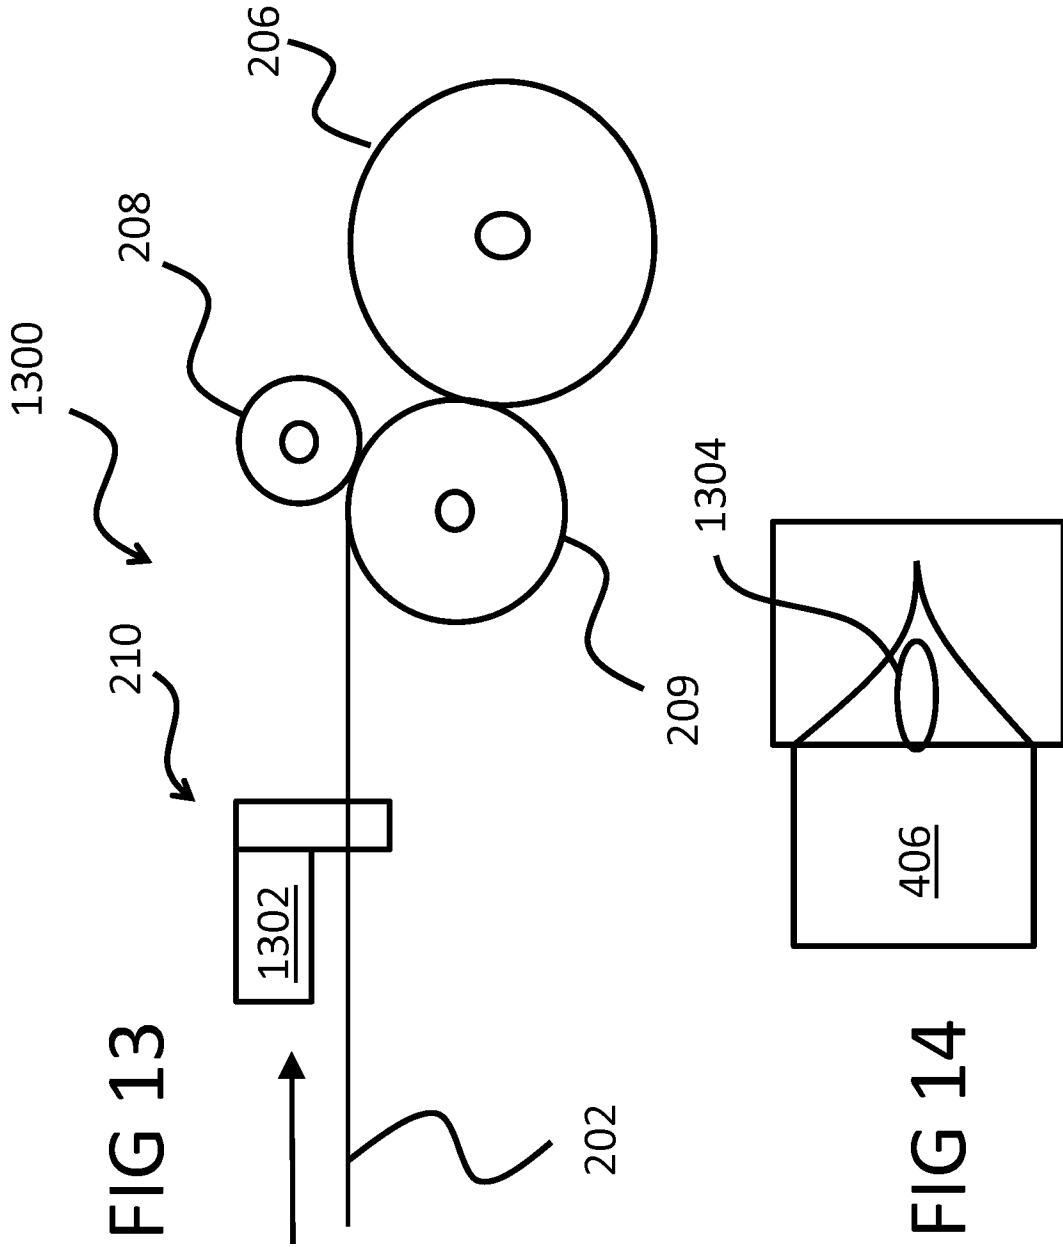


FIG 13

FIG 14

21/38

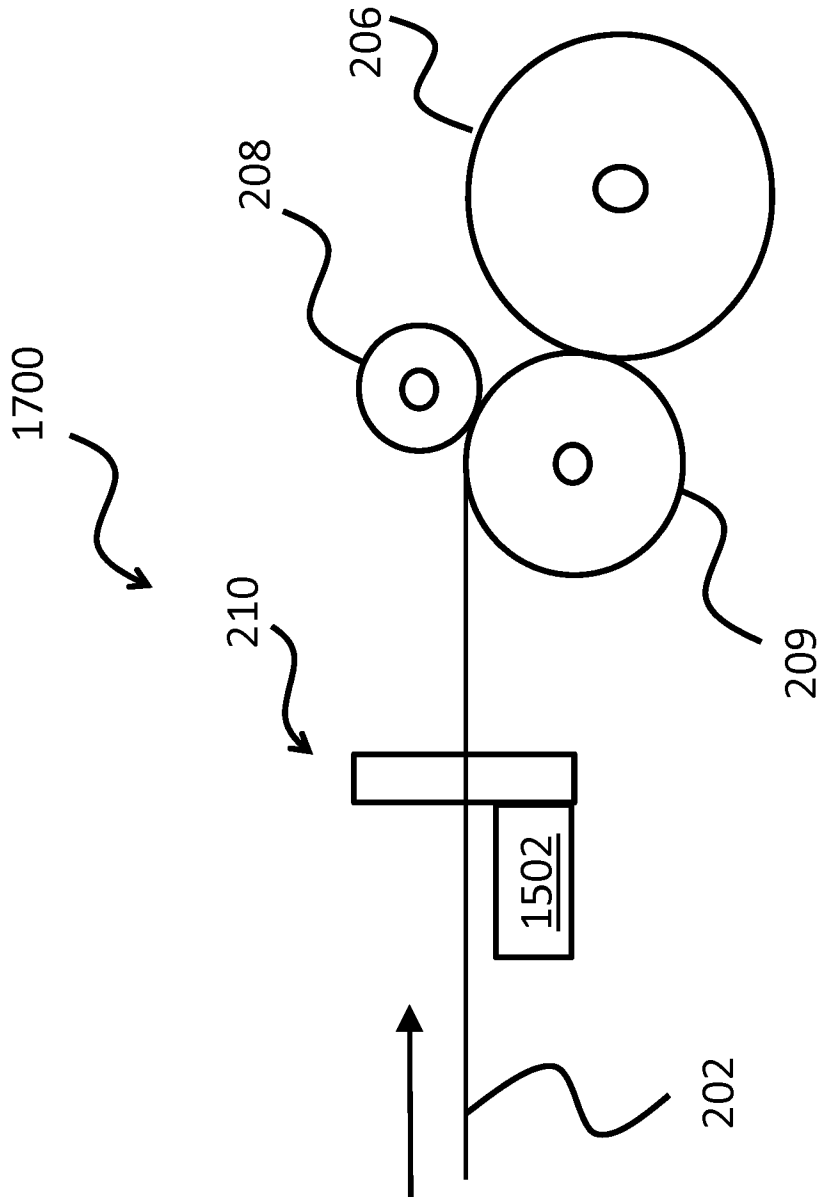


FIG 15

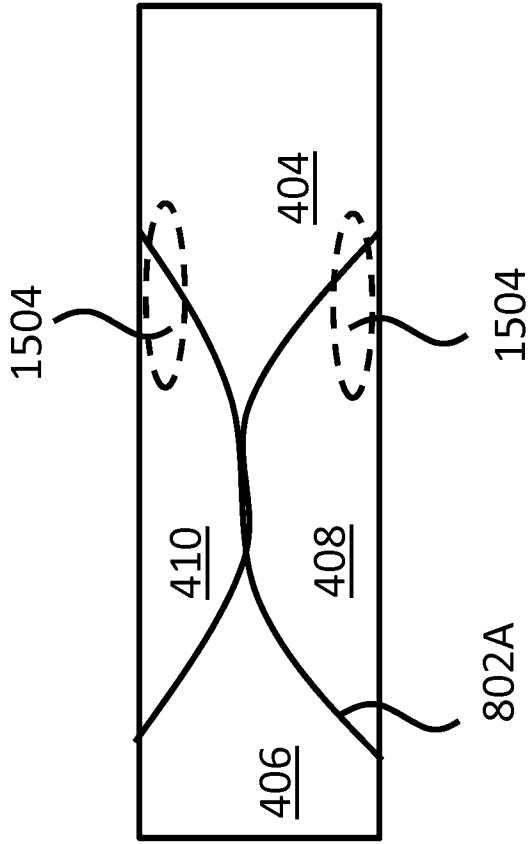


FIG 16A

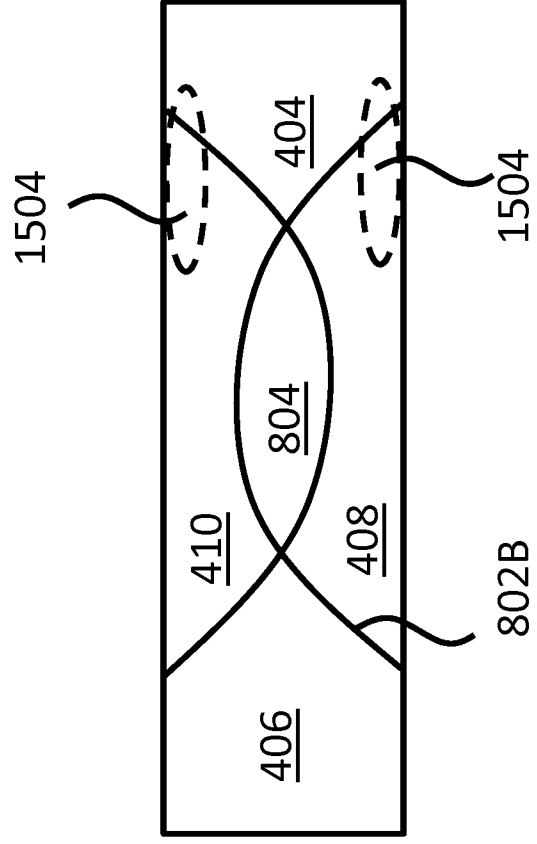


FIG 16B

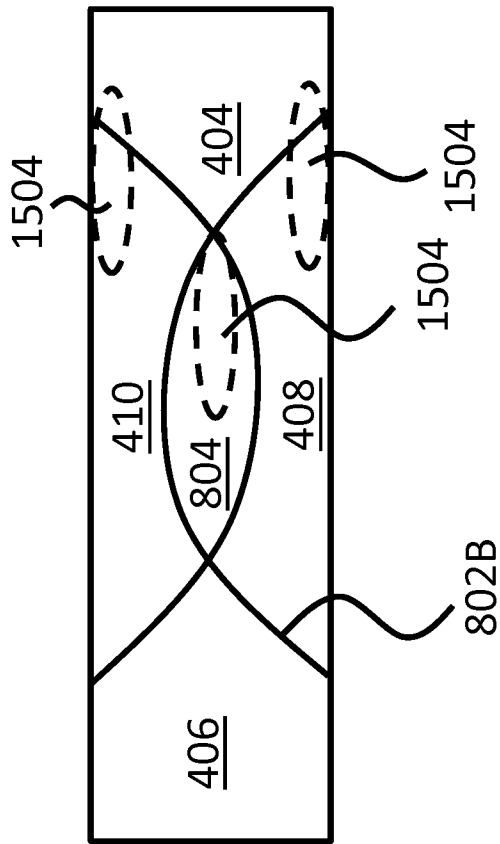


FIG 16C

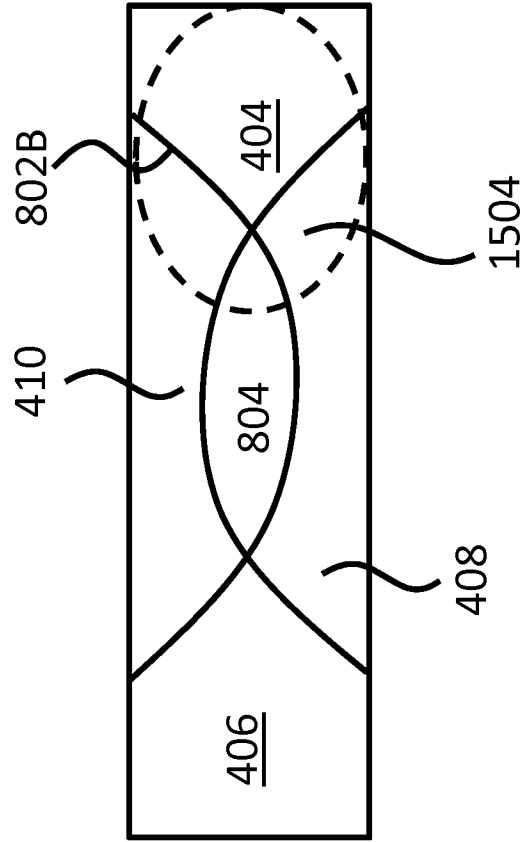


FIG 16D

24/38

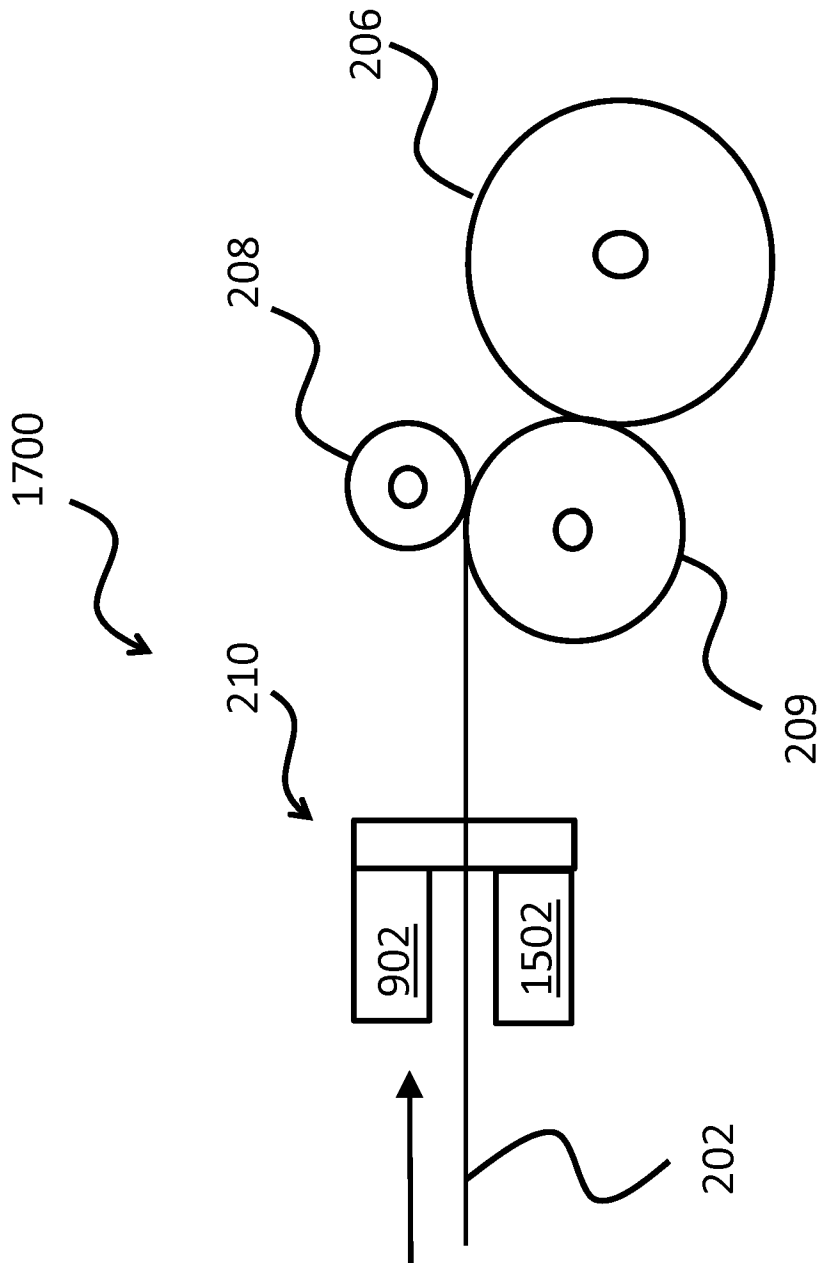


FIG 17

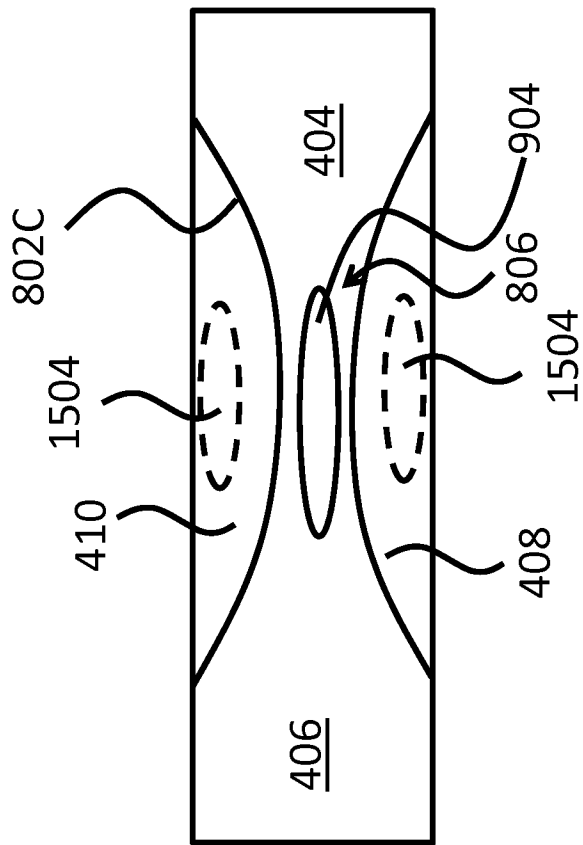


FIG 18

26/38



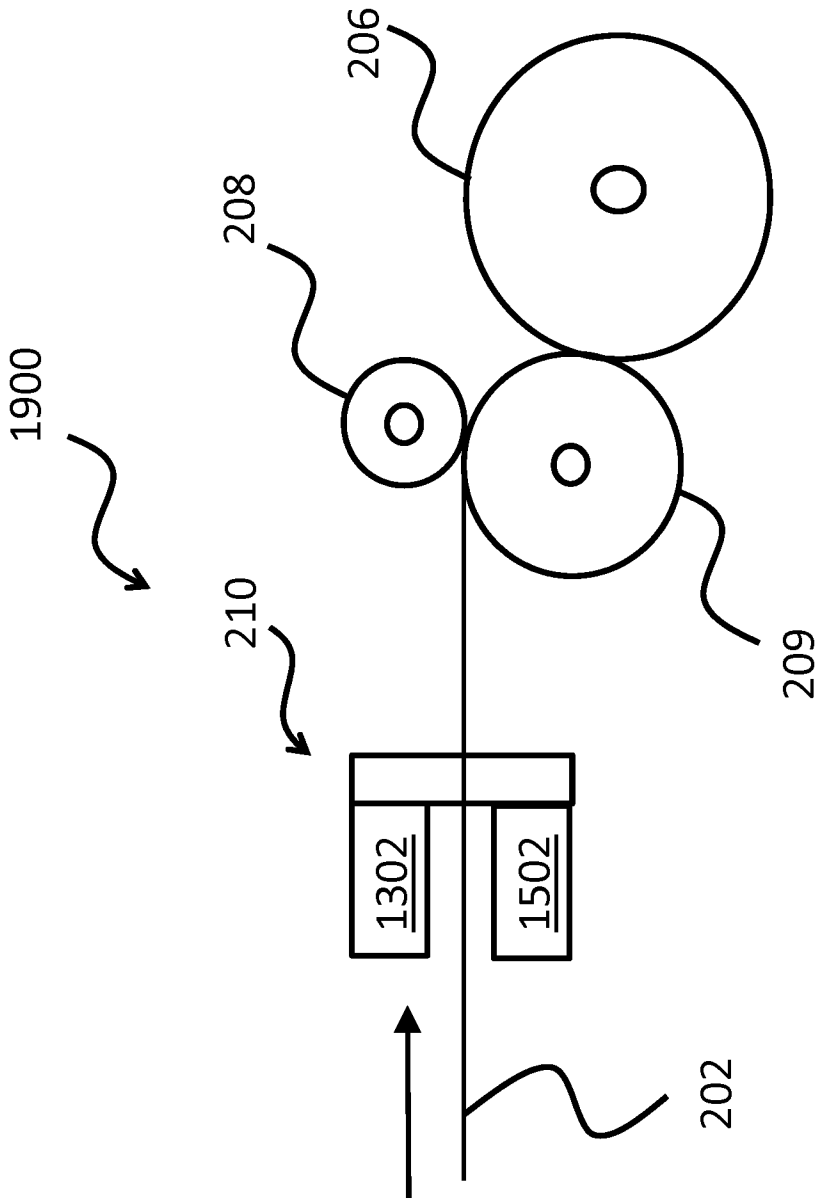


FIG 19

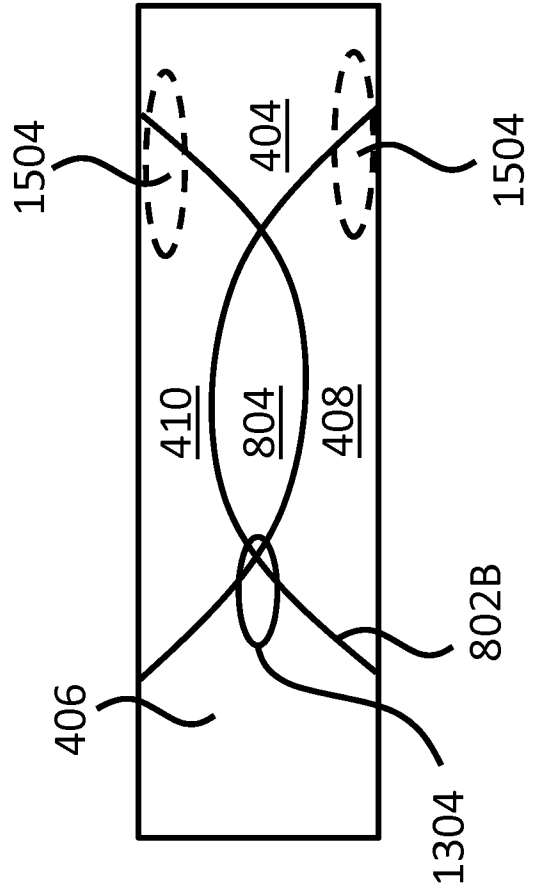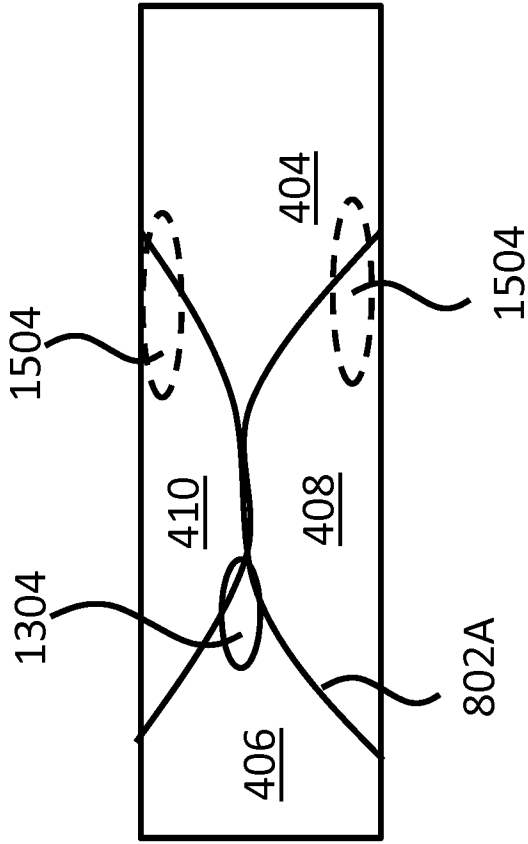

28/38

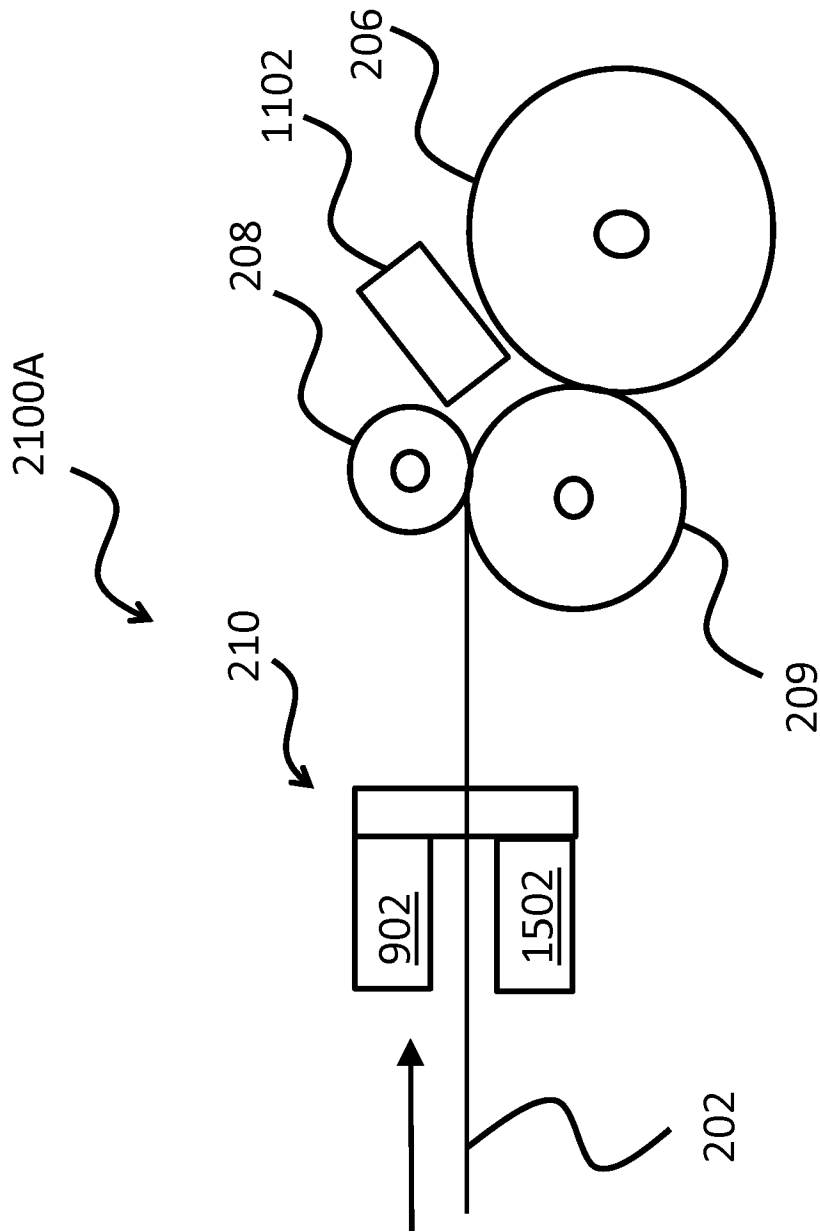


FIG 21A

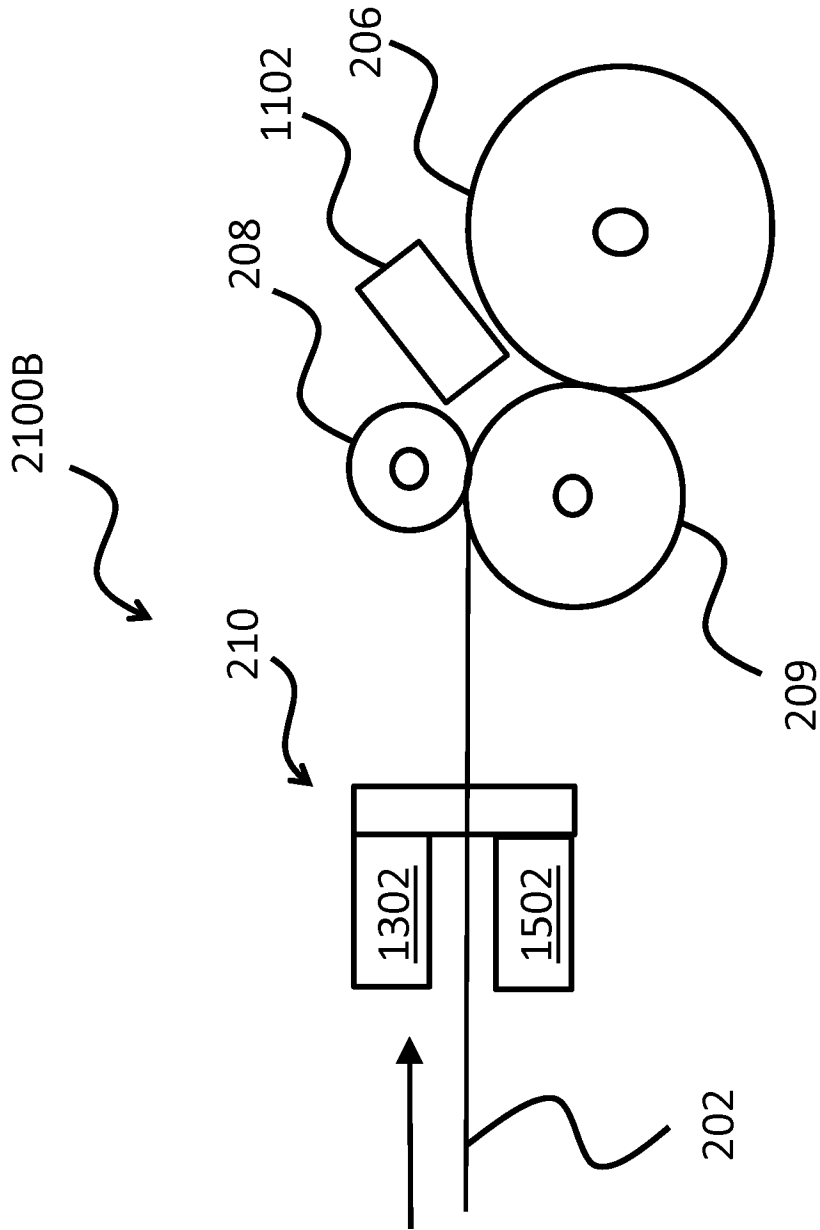


FIG 21B

30/38

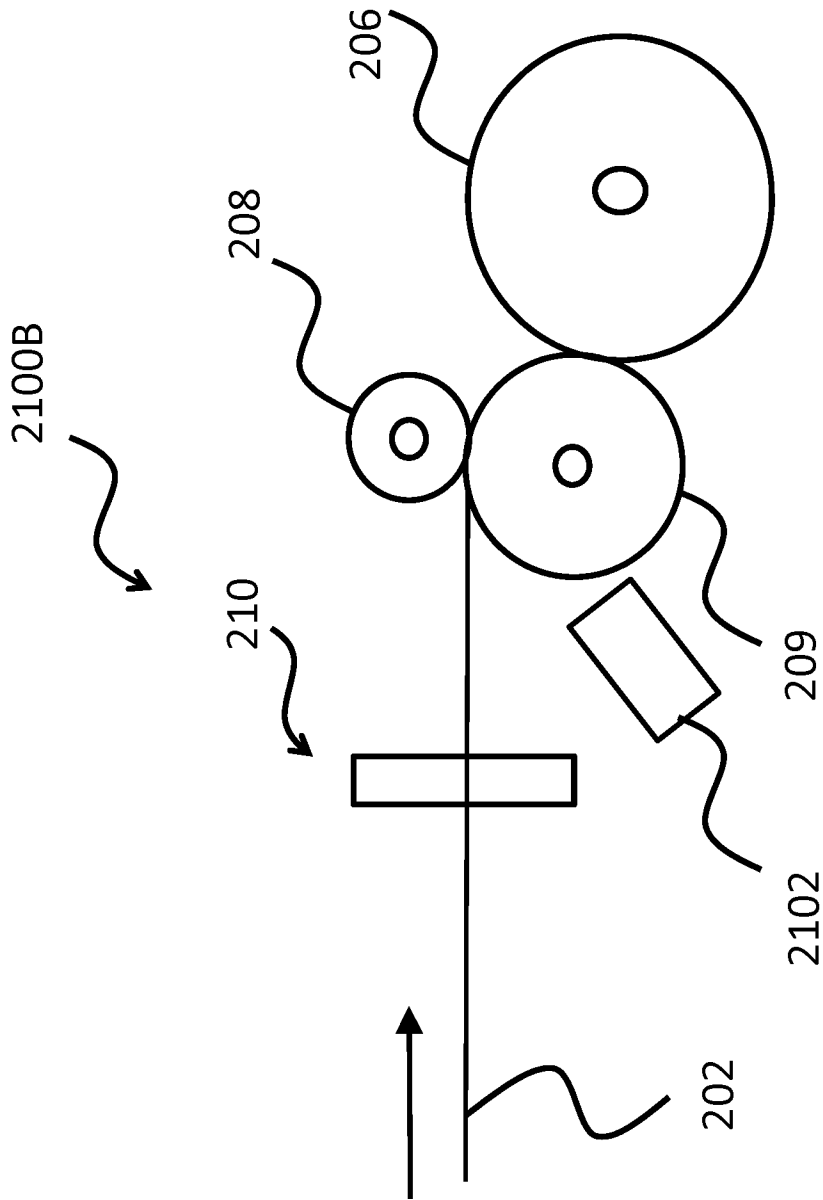


FIG 21C

31/38

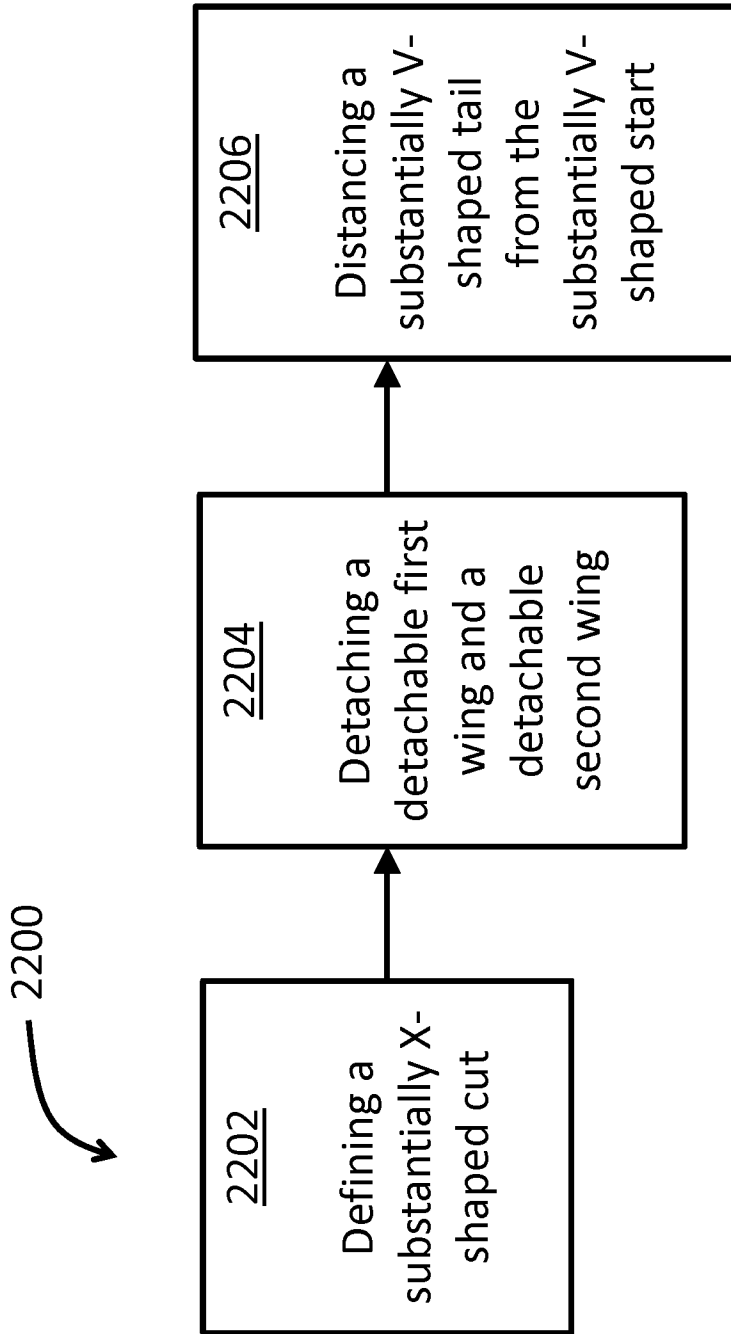


FIG 22

32/38

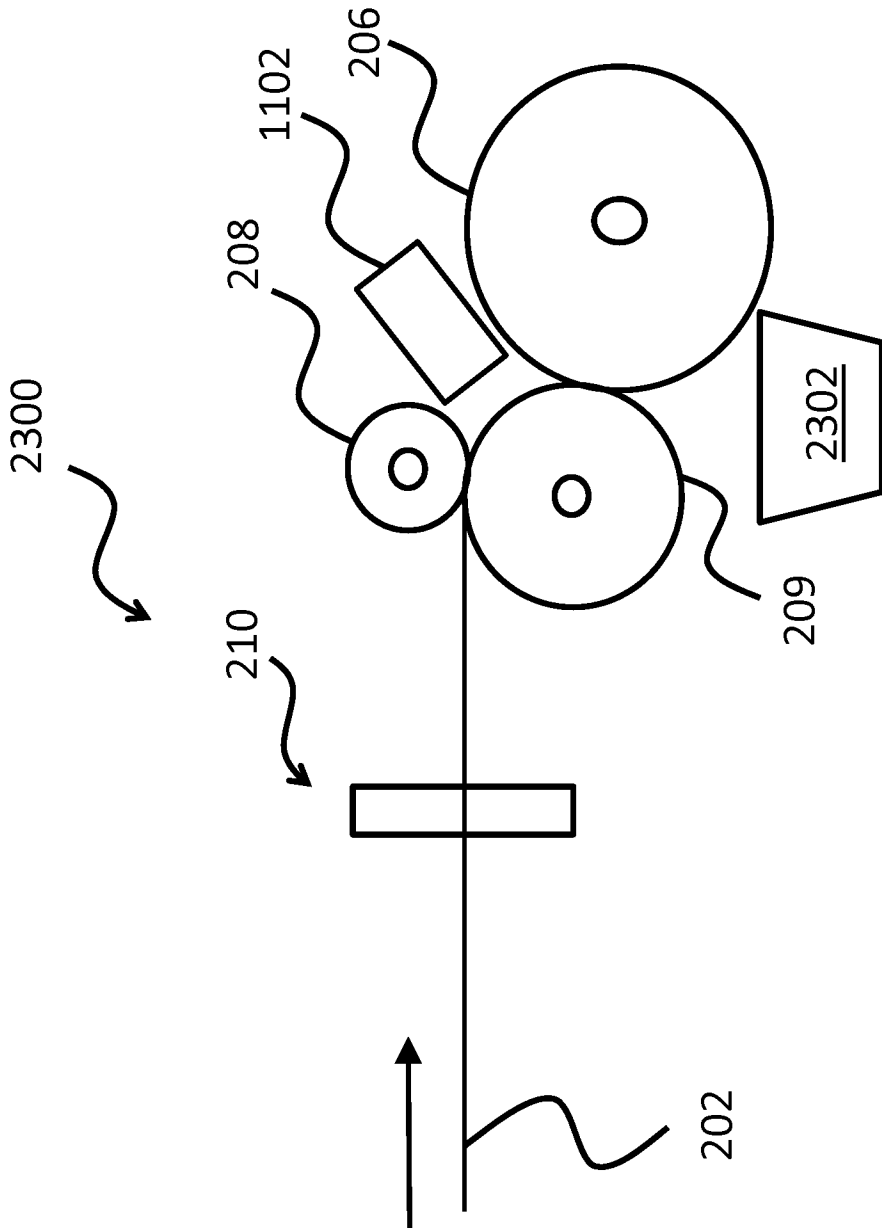


FIG 23

33/38

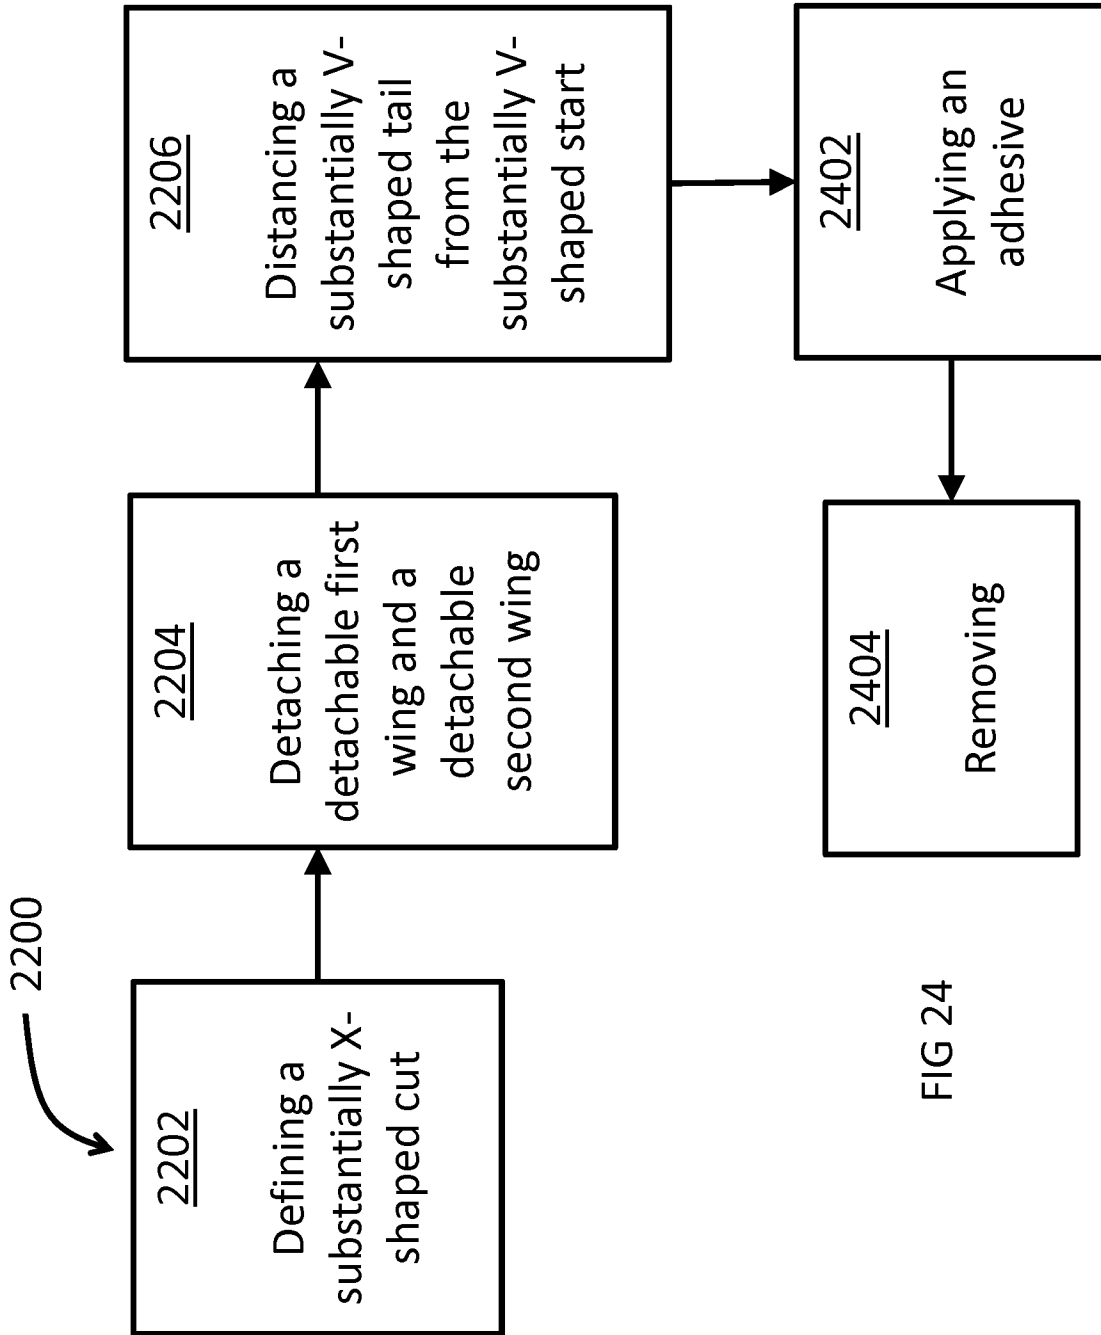


FIG 24

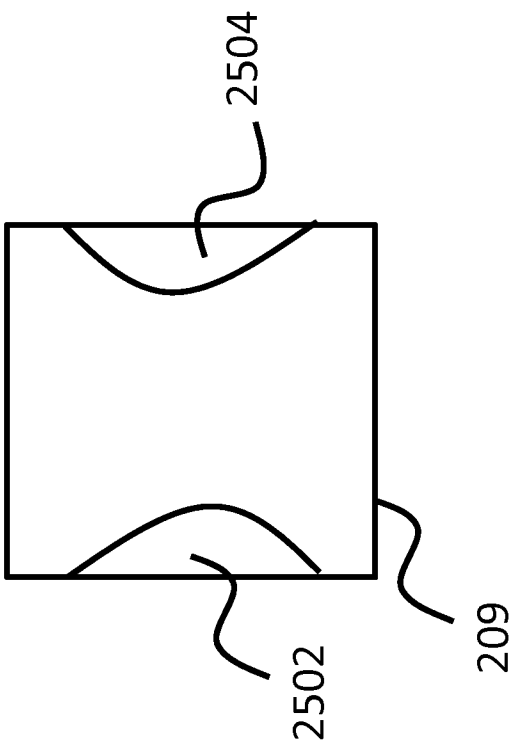


FIG 25A



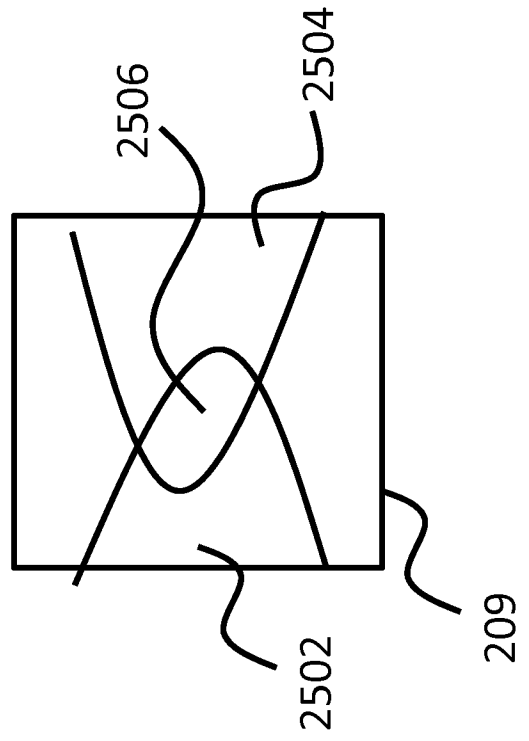


FIG 25B

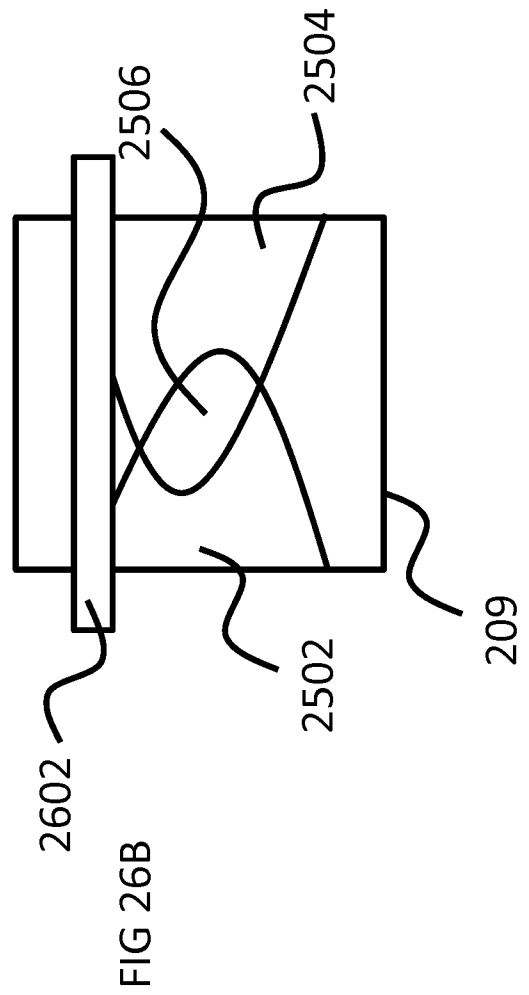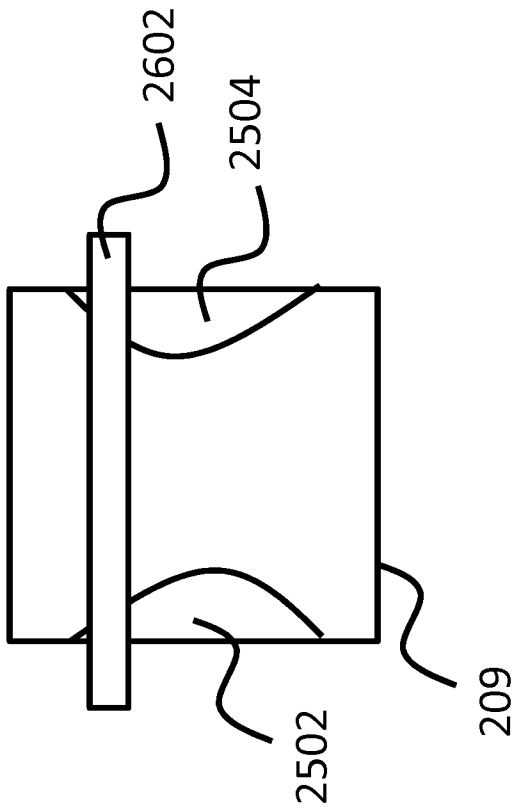

36/38

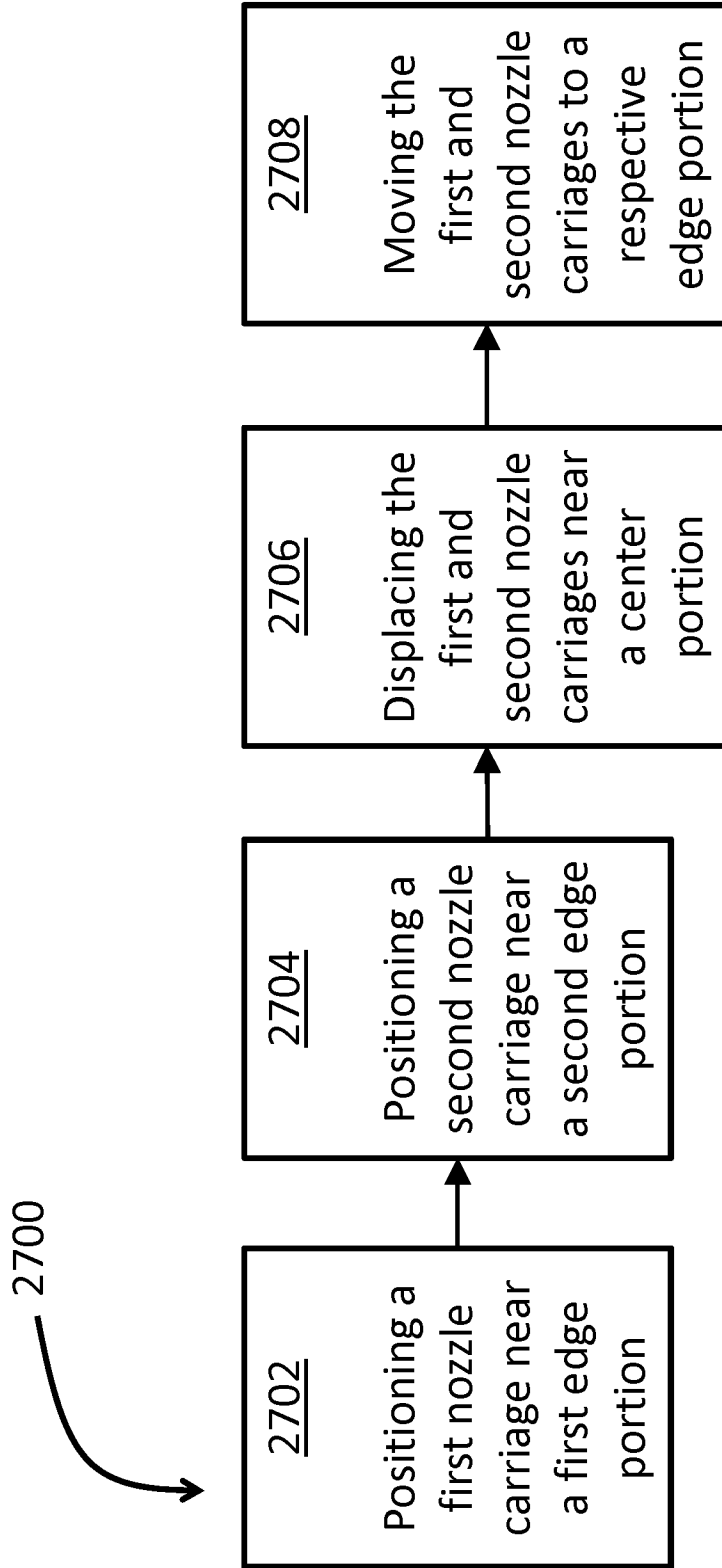


FIG 27

37/38

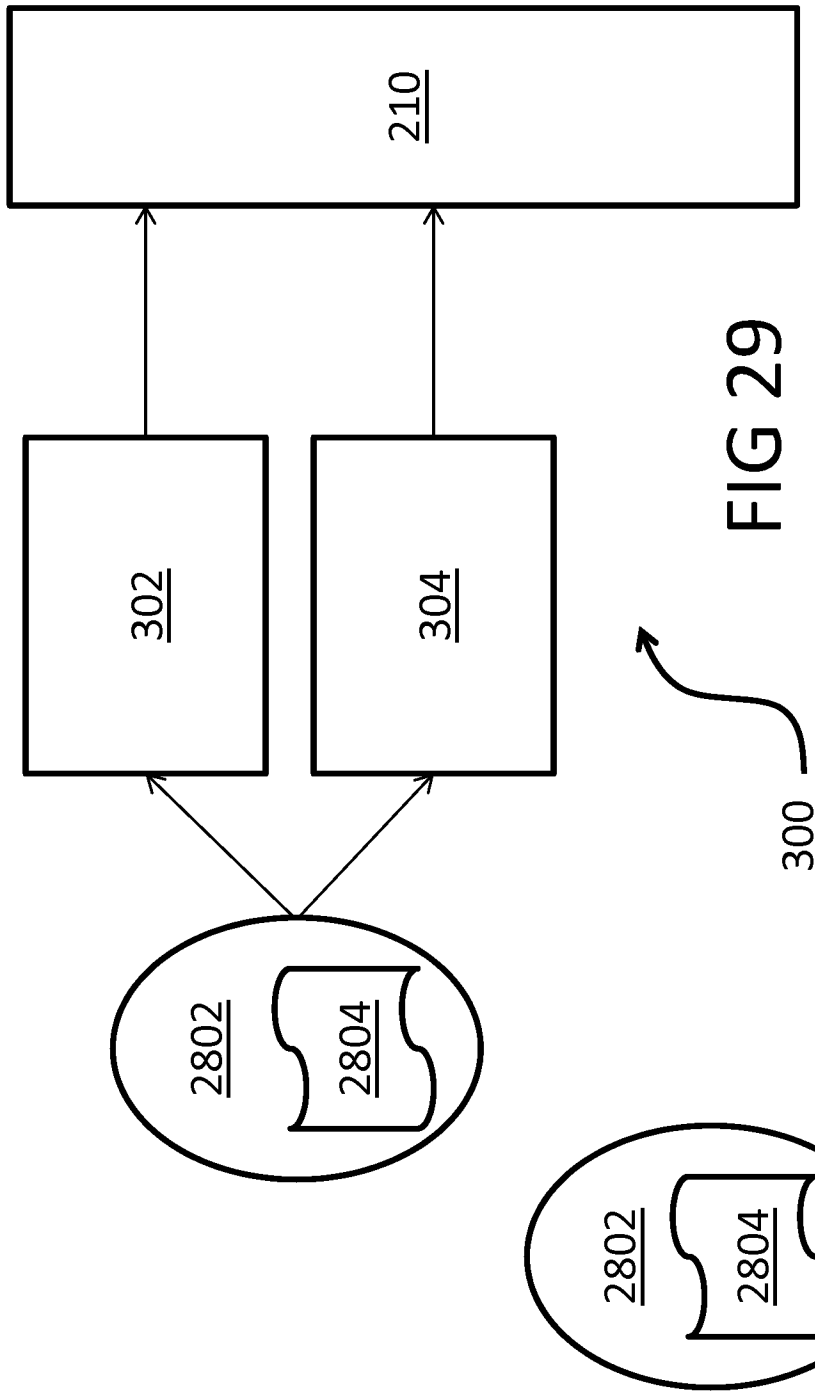


FIG 29

FIG 28

38/38

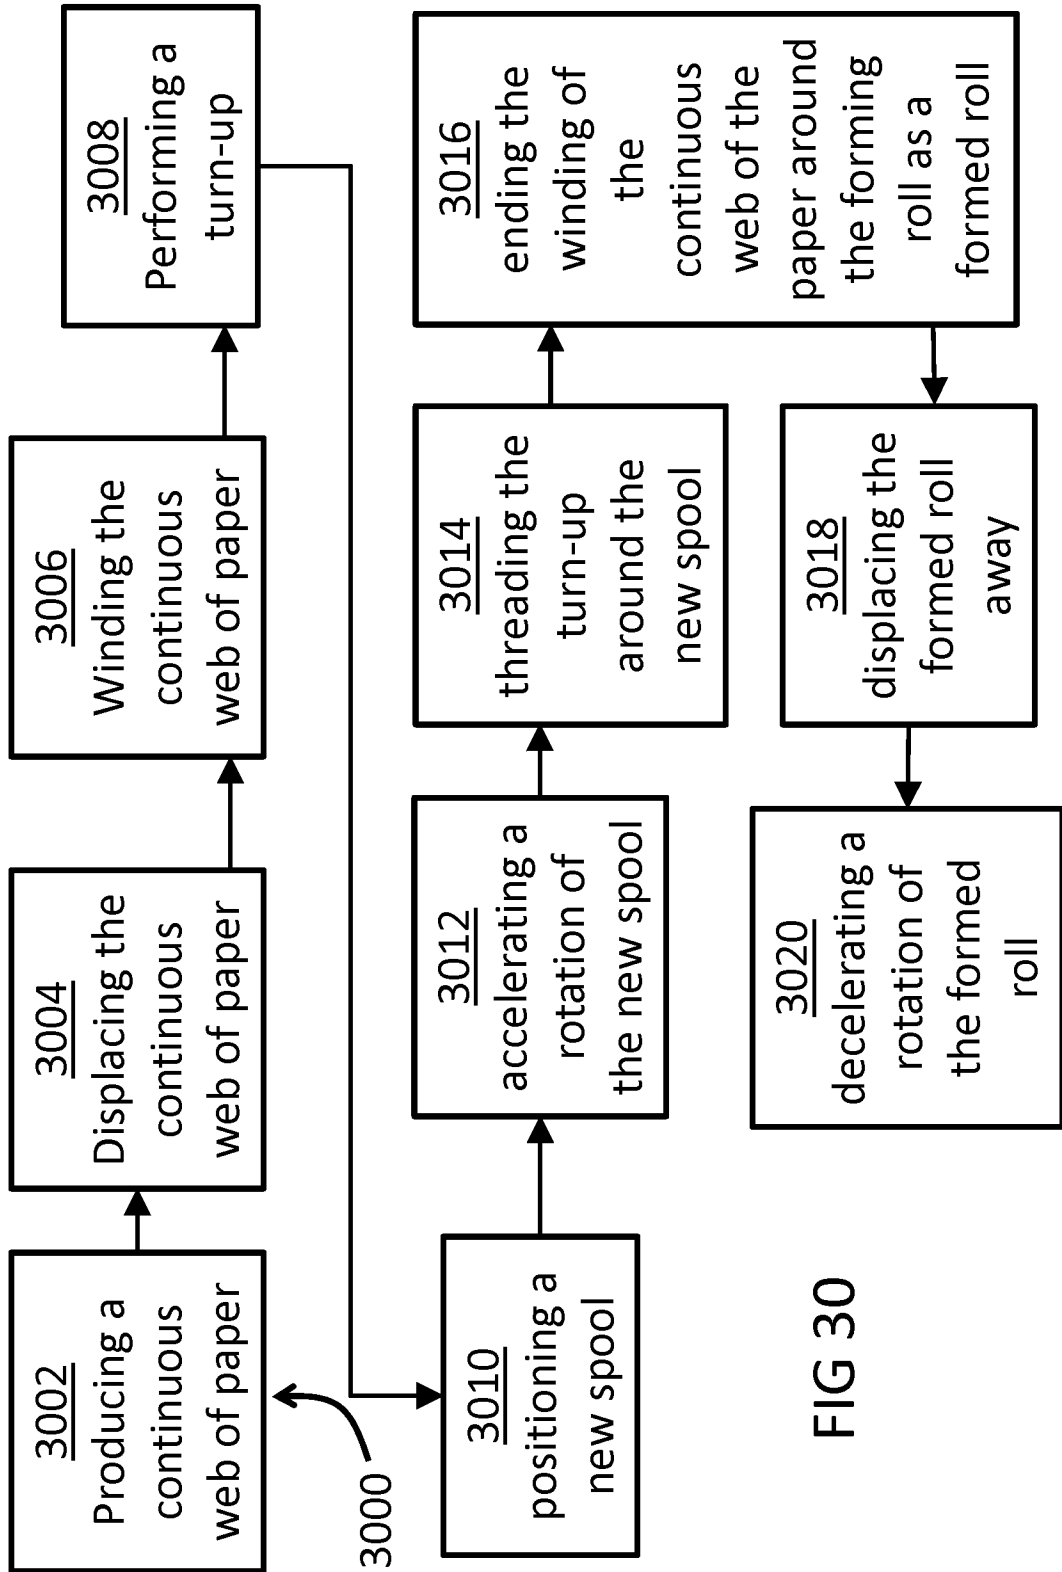


FIG 30

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2013/050056

A. CLASSIFICATION OF SUBJECT MATTER IPC: <b>B65H 19/26</b> (2006.01) , <b>B24C 5/02</b> (2006.01) , <b>B26D 1/04</b> (2006.01) , <b>B26D 5/00</b> (2006.01) , <b>B65H 35/00</b> (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC: <b>B65H 19/26</b> (2006.01) , <b>B24C 5/02</b> (2006.01) , <b>B26D 1/04</b> (2006.01) , <b>B26D 5/00</b> (2006.01) , <b>B65H 35/00</b> (2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Epoque (Epodoc, Full text) & Canadian Patent Database (Intellect). Keywords: web, cut*, tail*, end*, start*, spool*, water*, jet*, nozzle*, etc.		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CA 2 354 303 A1 (CASPAR, R.C.) 26 January 2003 (26-01-2003) *Whole document*	1-28
A	US 5,782,426 A (KINNUNEN J. et al.) 21 July 1998 (21-07-1998) *Whole document*	1-28
A	US 6,464,161 B1 (KAIPF W.) 15 October 2002 (15-10-2002) *Whole document*	1-28
A	US 6,709,549 B2 (BERGLUND C. M. et al.) 23 March 2004 (23-03-2004) *Whole document*	1-28
A	WO 2004/110910 A1 (BERGLUND C. M. et al.) 23 December 2004 (23-12-2004) *Whole document*	1-28
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 13 May 2013 (13-05-2013)	Date of mailing of the international search report 15 May 2013 (15-05-2013)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Authorized officer  Stephane Ouellette (819) 934-0089	

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/CA2013/050056

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CA2354303A1	26 January 2003 (26-01-2003)	CA2354303A1 CA2395034A1 WO03010076A1	26 January 2003 (26-01-2003) 26 January 2003 (26-01-2003) 06 February 2003 (06-02-2003)
US5782426A	21 July 1998 (21-07-1998)	AT215046T CA2186811A1 CA2186811C DE69620089D1 DE69620089T2 EP0765832A2 EP0765832A3 EP0765832B1 FI954631A FI102826B FI102826B1 JPH09124198A	15 April 2002 (15-04-2002) 30 March 1997 (30-03-1997) 16 July 2002 (16-07-2002) 02 May 2002 (02-05-2002) 22 August 2002 (22-08-2002) 02 April 1997 (02-04-1997) 19 November 1997 (19-11-1997) 27 March 2002 (27-03-2002) 30 March 1997 (30-03-1997) 26 February 1999 (26-02-1999) 26 February 1999 (26-02-1999) 13 May 1997 (13-05-1997)
US6464161B1	15 October 2002 (15-10-2002)	AT260216T DE19848808A1 DE59908631D1 EP0997418A1 EP0997418B1	15 March 2004 (15-03-2004) 27 April 2000 (27-04-2000) 01 April 2004 (01-04-2004) 03 May 2000 (03-05-2000) 25 February 2004 (25-02-2004)
US6709549B2	23 March 2004 (23-03-2004)	AT306452T BR0208715A CA2441196A1 CN1500058A DE02704040T1 DE60206608D1 DE60206608T2 EP1373113A1 EP1373113B1 US2002139499A1 WO02079063A1	15 October 2005 (15-10-2005) 20 July 2004 (20-07-2004) 10 October 2002 (10-10-2002) 26 May 2004 (26-05-2004) 08 July 2004 (08-07-2004) 23 February 2006 (23-02-2006) 03 August 2006 (03-08-2006) 02 January 2004 (02-01-2004) 12 October 2005 (12-10-2005) 03 October 2002 (03-10-2002) 10 October 2002 (10-10-2002)
WO2004110910A1	23 December 2004 (23-12-2004)	WO2004110910A1 WO2004110910A9	23 December 2004 (23-12-2004) 28 July 2005 (28-07-2005)