



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2126330 C 2004/09/28

(11)(21) **2 126 330**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 1993/01/21
(87) Date publication PCT/PCT Publication Date: 1993/07/22
(45) Date de délivrance/Issue Date: 2004/09/28
(85) Entrée phase nationale/National Entry: 1994/06/20
(86) N° demande PCT/PCT Application No.: US 1993/000543
(87) N° publication PCT/PCT Publication No.: 1993/014166
(30) Priorités/Priorities: 1992/01/21 (07/823,512) US;
1992/01/21 (07/823,511) US; 1992/01/21 (07/823,416) US

(51) Cl.Int.⁵/Int.Cl.⁵ C09D 5/08, C09D 5/24, C09D 179/02

(72) Inventeurs/Inventors:
MILLER, GRANVILLE G., US;
SHACKLETTE, LAWRENCE W., US;
ELSENBAUMER, RONALD L., US;
WESZLING, BERNHARD, DE;
WHANG, PETER, US;
KULKARNI, VAMAN G., US

(73) Propriétaire/Owner:
ORMECON GMBH, DE

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PREPARATIONS DE PEINTURE A BASE DE POLYMERES CONJUGUES RENDANT LES SURFACES
METALLIQUES RESISTANTES A LA CORROSION
(54) Title: CONJUGATED POLYMER PAINT FORMULATIONS WHICH PROVIDE CORROSION RESISTANCE TO
METAL SURFACES

(57) **Abrégé/Abstract:**

This invention relates to an anti-corrosive paint comprising a binder and one or more neutral or electrically conductive conjugated homopolymer or copolymers, dispersed or dissolved in a liquid medium.



PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C09D 5/08, 5/24	A1	(11) International Publication Number: WO 93/14166 (43) International Publication Date: 22 July 1993 (22.07.93)
(21) International Application Number: PCT/US93/00543 (22) International Filing Date: 21 January 1993 (21.01.93) (30) Priority data: 823,416 21 January 1992 (21.01.92) US 823,511 21 January 1992 (21.01.92) US 823,512 21 January 1992 (21.01.92) US (71) Applicant: ALLIED-SIGNAL INC. [US/US]; 101 Columbia Road, P.O. Box 2245, Morristown, NJ 07962-2245 (US). (72) Inventors: MILLER, Granville, G. ; 1322 16th Avenue South, Birmingham, AL 35205 (US). SHACKLETTE, Lawrence, W. ; 11 Alden Place, Maplewood, NJ 07040 (US). ELSENBAUMER, Ronald, L. ; 500 W. First Street, Arlington, TX 76019-0023 (US). WESZLING, Bernhard ; Wiesenweg 38, D-2072 Bargteheide (DE). WHANG, Peter ; 1 Tanger Drive, Livingston, NJ 07039 (US). KULKARNI, Vaman, G. ; 9944 Deer Spring Lane, Charlotte, NC 28210 (US).		2126330 (74) Agent: FUCHS, Gerhard, H.; Allied-Signal Inc., Att: Law Dept. (C.A. McNally), 101 Columbia Road, P.O. Box 2245, Morristown, NJ 07962-2245 (US). (81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: CONJUGATED POLYMER PAINT FORMULATIONS WHICH PROVIDE CORROSION RESISTANCE TO METAL SURFACES (57) Abstract This invention relates to an anti-corrosive paint comprising a binder and one or more neutral or electrically conductive conjugated homopolymer or copolymers dispersed or dissolved in a liquid medium.		

2126330

- 1 -

5 **CONJUGATED POLYMER PAINT FORMULATIONS WHICH
PROVIDE CORROSION RESISTANCE TO METAL SURFACES**

10

BACKGROUND OF THE INVENTION

1. Field of the Invention

15 This invention relates to anti-corrosive paints for metals. More particularly, this relates to paints containing conjugated polymers as corrosion preventive agents.

2. Prior Art

20 Corrosion inhibiting primers for metals such as steel are known. Various mentions have been made of the possible use of conductive conjugated polymers as corrosion inhibitors. See for example, (F.L. Jain et al. "Corrosion Prevention in Metals using Layered
25 Semiconductor/Insulator Structures Forming an Interfacial Electronic Barrier" in Adhesives, Sealants, and Coatings for Harsh Space Environments, Polym. Sci. and Tech., Vol. 37, PP. 381-404, (Plenum, 1988); L.E.A. Berlouis and D.J. Schiffrin, "Recent Advances in
30 Electrochemical Polymerization for Surface Coating", Trans IMF, Vol 64, p42 (1986) and "Anodic Synthesis of Polyaniline Coating Onto Fe Sheets", G. Mengoli, et al., J. Appl. Polym Sci., 26, 4247 (1981); PCT 88/00798; and "Conductive Organic Polymers as Corrosion
35 Control Coatings", NASA Technical Memorandum 103811, pp. 3-5, (1990).

 Blends of polyaniline and one or more thermosetting and thermoplastic resins are known. See for example, PCT-WO 89/01694 and PCT-WO 90/10297.

40

SUMMARY OF THE INVENTION

 This invention relates to an improved anti-corrosion resistant paint of the type comprising one or

- 2 -

more binders and optionally one or more pigments or colorants, dispersed in a liquid medium, wherein said improvement comprises an anti-corrosion effective amount of one or more doped conjugated polymers said paint on drying has an equal to or greater than about 10^{-9} S/cm, an anti-corrosion effective amount of one or more neutral conjugated polymers said paint on drying forms a coating which has an electrical conductivity of less than about 10^{-9} S/cm or a combination thereof.

10

The paints of this invention exhibit several unique properties which make these paints suitable for protection against corrosion. For example, the materials have good adhesion and relatively low to moderate cost. Moreover, while the dispersion of the conductive polymer in the paint may not provide a continuous coating phase of electrically conductive polymer, corrosion inhibition is surprisingly observed. Furthermore, this corrosion inhibition is observed without the use of metal additives and thus these paints are more environmentally sound than conventional anti-corrosive paints which include such additives.

25

DETAILED DESCRIPTION OF THE INVENTION

As an essential ingredient, the paint of this

30

35

2126330

- 3 -

invention includes a neutral or electrically conductive "conjugated polymer". As used herein a "conjugated polymers" are homopolymers or copolymers which are comprised of alternating carbon-carbon double bonds (either singly or as part of an aromatic ring structure), and optionally heteroatoms such as oxygen, nitrogen, sulfur, selenium, phosphorous and the like along the polymer conjugated backbone or conjugated side chains thereof and can be rendered to an electrically conductive state (equal to or greater than about 10^{-9} S/cm as determined by the four-in-line probe method described in "Laboratory Notes on Electrical and Galvanometric Measurements" by H.H. Wieder, Elsevier Scientific Publishing Co., New York, New York, 1979) by doping with some dopants known in the art. As used herein, "electrically conductive conjugated polymers" are such polymers which have been doped to an electrical conductivity equal to or greater than about 10^{-9} ohm⁻¹cm⁻¹, and as used herein "neutral conjugated polymers" are such polymers which are undoped or which have been doped to an electrical conductivity of less than about 10^{-9} ohm⁻¹cm⁻¹. Illustrative of conjugated polymers are poly(unsaturated) polymers such as substituted and unsubstituted polyacetylene; substituted or unsubstituted poly(heteroaromatics), such as poly(thienylenes), poly(pyrroles), poly(quinolines), poly(isothianaphthenes), poly(carbazoles), poly(alkyl thiophenes) and the like; substituted or unsubstituted poly(aromatics) such as poly(phenylene sulfides), poly(anilines), poly(phenylenes), poly(naphthalenes), poly(naphthols), and poly(perinaphthalenes); poly (benzoquinones); poly(azulenes); polyacenes; and substituted or unsubstituted poly(aromatic vinylenes) such as poly(phenylene vinylenes), poly(dimethoxyphenylene

2126330

- 4 -

vinylenes), poly(naphthalene vinylenes) and the like; and substituted or unsubstituted poly(heteroaromatic vinylenes) such as poly(thienylene vinylenes), poly(furylene vinylenes), poly(carbazole vinylenes),
5 poly(pyrrole vinylenes) and the like.

Preferred conjugated homopolymers or copolymers are "conjugated backbone homopolymers or copolymers". As used herein, "conjugated backbone homopolymers or copolymers" are conjugated homopolymers or copolymers
10 in which all or substantially all of the conjugation is in the main backbone of the homopolymer or copolymer.

Preferred conjugated homopolymer or copolymers are substituted or unsubstituted polyanilines, poly(heterocycles), and aromatic or heteroaromatic
15 vinylenes. Illustrative of preferred homopolymers or copolymers of poly(heterocycles), and aromatic or heteroaromatic vinylenes are those described in more detail in U.S. Patent Nos. 4,711,742 and 5,068,060 and PCT/W088/00954. More preferred for the practice of
20 this invention are conjugated polymers which have relatively low acidity ($pK_a > 2$, preferably > 4 and most preferably > 6) and which are readily doped by protonic acids as for example, polyaniline, poly(benzoquinone), polypyrrole, and poly(azobenzene).

25 More preferred conjugated backbone homopolymers or copolymers are poly(anilines). As used herein, "poly(anilines)" are homopolymers or copolymers in which the recurring backbone monomeric units are selected from the group consisting of substituted or
30 unsubstituted phenyl rings and amine linkages ($-NH-$ or $-NR-$ where R is a substituent other than hydrogen) which may contain varying amounts of substituted or unsubstituted quinoid rings and imine ($-N=$) linkages. As used herein, "neutral or undoped polyaniline" is
35 characterized by an uncharged backbone, "polyaniline

- 5 -

base" is a particular form of undoped polyaniline which contains at least one quinoid diimine linkage in the backbone and "electrically conductive or doped poly(aniline)" is characterized by a charged backbone
 5 which may be formed by a partial or complete protonation of the amine and/or imine nitrogen atoms.


Any form of such poly(anilines) can be conveniently used in the practice of this invention. Illustrative of useful forms are those described in
 10 Green, A.G. and Woodhead, A.E., CXVII-Aniline-black and Allied Compounds, Part II", J. Chem. Soc., 101 pp. 1117 (1912) and Kobayashi, et al., "Electrochemical Reactions... of Polyaniline Film-Coated Electrodes", J. Electroanal. Chem., 177, pp. 281-91 (1984) and in
 15 Shacklette, L.W., et al. "Structure and Properties of Polyaniline as Modeled by Single-Crystal Oligomers", J. Chem. Phys. 88 P 3955 (1988).

In the preferred embodiments of the invention,
 20 poly(anilines) for use in the invention are homopolymers and copolymers of the type derived from the polymerization of unsubstituted and substituted anilines of the Formula I:

FORMULA I

25

30

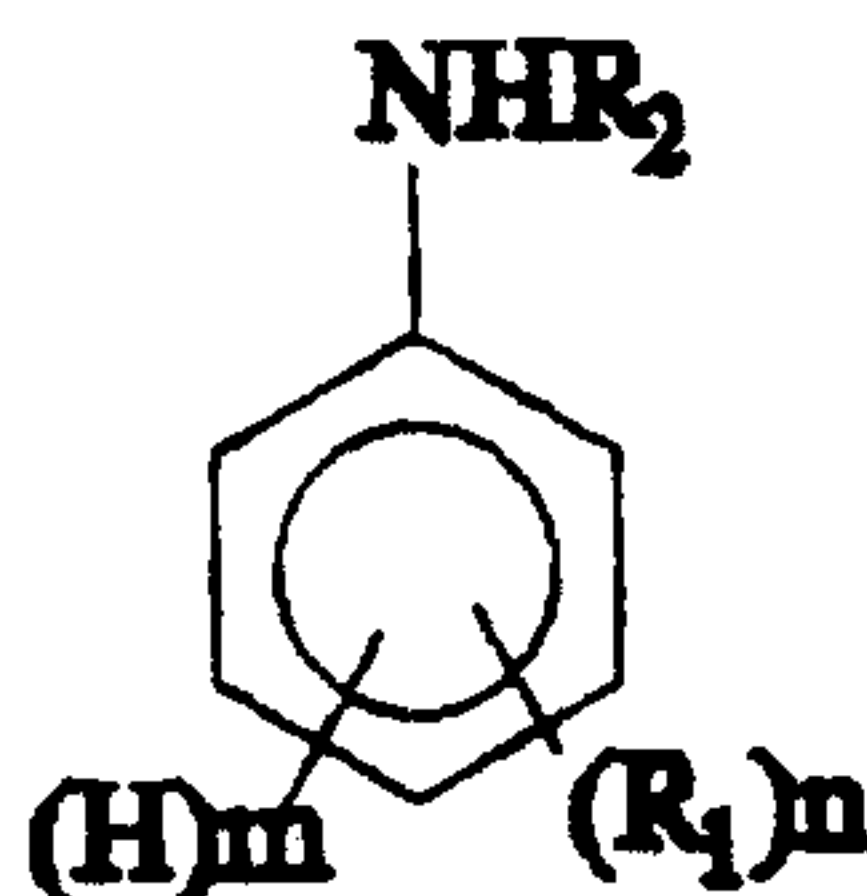

wherein:

n is an integer from 0 to 5;
 35 m is an integer from 0 to 5, with the proviso that

2126330

- 6 -

the sum of n and m is equal to 5 and with the further proviso that at least one position on the aniline ring, preferably at the para position, is substituted with a substituent which will allow coupling of the aniline units, such halo, hydrogen or other leaving group;

R_1 is the same or different at each occurrence and is selected from the group consisting of alkyl, deuterium, alkenyl, alkoxy, cycloalkyl, cycloalkenyl, alkanoyl, alkylthio, aryloxy, alkylthioalkyl, alkylaryl, arylalkyl, amino, alkylamino, dialkylamino, arylamino, diarylamino, alkylaryl amino, aryl, alkylsulfinyl, aryloxyalkyl, alkylsulfinylalkyl, alkoxyalkyl, alkylsulfonyl, arylthio, alkylsulfonylalkyl, boric acid or salts or esters thereof, phosphoric acid or salts or esters thereof, sulfinate salts, arylsulfinyl, alkoxycarbonyl, arylsulfonyl, carboxylic acid or salts or esters thereof, phosphonic acid or salts or esters thereof, halo, hydroxy, cyano, sulfinic acid or salts or esters thereof, phosphinic acid or salts or esters thereof, sulfonic acid or salts or esters thereof, nitro, alkylsilane, or any of the foregoing aryl, aliphatic or cycloaliphatic groups substituted with one or more phosphonic acid or salts or esters thereof, sulfonic acid or salts or esters thereof, phosphoric acid or salts or esters thereof, boric acid or salts or esters thereof, sulfinic acid or salts or esters thereof, phosphinic acid or salts or esters thereof, carboxylic acid or salts or esters thereof, halo, nitro, amino, alkylamino, dialkylamino, arylamino, diarylamino, alkylaryl amino, cyano or epoxy moieties; or any two R_1 groups together or any R_1 group together with any R_2 group may form a substituted or unsubstituted alkylene, alkenylene or alkynylene chain completing a 3, 4, 5, 6, 7, 8, 9 or 10 membered aromatic, heteroaromatic,


- 7 -

heteroalicyclic or alicyclic ring, which ring may optionally include one or more divalent nitrogen, sulfur, sulfinyl, or salts or esters thereof, carbonyl, sulfonyl, or oxygen atoms wherein permissible

5 substituents are one or more phosphonic acid or salts or esters thereof, sulfonic acid or salts or esters thereof, phosphoric acid or salts or esters thereof, boric acid or salts or esters thereof, phosphinic acid or salts or esters thereof, carboxylic acid or salts or

10 esters thereof, halo, nitro, amino, alkylamino, sulfinic acid or salts or esters thereof, dialkylamino, arylamino, diarylamino, alkylarylamino, cyano or epoxy moieties ; or R_1 is an aliphatic moiety having repeat units of the formula:

15

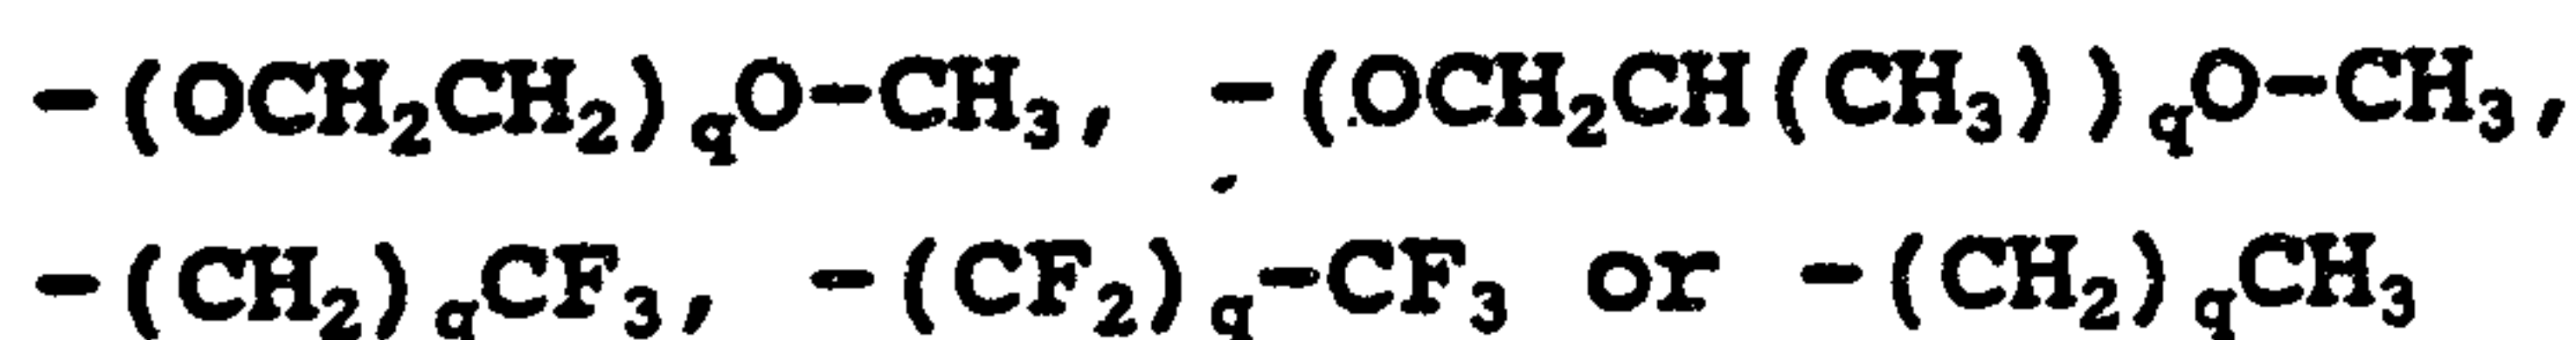

wherein q is a positive whole number; and

20

R_2 is selected from the group consisting of permissible R_1 substituents and hydrogen.

Illustrative of useful R_1 groups are hydrogen, alkyl, such as methyl, ethyl, octyl, nonyl, tert-butyl, neopentyl, isopropyl, sec-butyl, dodecyl and the like,

25 alkenyl such as 1-propenyl, 1-butenyl, 1-pentenyl, 1-hexenyl, 1-heptenyl, 1-octenyl and the like; alkoxy such as propoxy, butoxy, methoxy, isopropoxy, pentoxy, nonoxy, ethyloxy, octoxy, and the like; cycloalkenyl such as cyclohexenyl, cyclopentenyl and the like;

30 alkanoyl such as butanoyl, pentanoyl, octanoyl, ethanoyl, propanoyl and the like; amino; alkylamino, such as methylamino, ethylamino, butylamino and the like; dialkylamino, such as dimethylamino, methylethylamino and the like; arylamino such as

35 phenylamino, p-methylphenylamino and the like;

2126330

- 8 -

diarylamino, such as diphenylamino,
p-nitrophenyl-p'-methylphenylamino and the like;
alkylarylamino, such as 2-phenyl-4-methylamino and the
like; alkylsulfinyl, alkylsulfonyl, alkylthio,
5 arylthio, arylsulfinyl, and arylsulfonyl such as
butylthio, neopentylthio, methylsulfinyl,
benzylsulfinyl, phenylsulfinyl, propylthio, octylthio,
nonylsulfonyl, octylsulfonyl, methylthio,
isopropylthio, phenylsulfonyl, methylsulfonyl,
10 nonylthio, phenylthio, ethylthio, benzylthio,
phenethylthio, sec-butylthio, naphthylthio and the
like; alkoxycarbonyl such as methoxycarbonyl,
ethoxycarbonyl, butoxycarbonyl and the like; cycloalkyl
such as cyclohexyl, cyclopentyl, cyclo-octyl,
15 cycloheptyl and the like; alkoxyalkyl such as
methoxy-methyl, ethoxymethyl, butoxymethyl,
propoxyethyl, pentoxybutyl and the like; aryloxyalkyl
and aryloxyaryl such as phenoxyphenyl, phenoxymethyl
and the like; and various substituted alkyl and aryl
20 groups such as 1-hydroxybutyl, 1-aminobutyl,
1-hydroxypropyl, 1-hydroxypentyl, 1-hydroxyoctyl,
1-hydroxyethyl, 2-nitroethyl, trifluoromethyl,
3,4-epoxybutyl, cyanomethyl, 3-chloropropyl,
4-nitrophenyl, 3-cyanophenyl, and the like; acid and
25 acid salts such as sulfonic acid, carboxylic acid and
salts thereof; aliphatic or aryl groups substituted
with an acid or salt thereof such as phosphonic acid,
phosphinic acid, sulfonate salt, sulfinic acid, borate salt,
sulfonic acid, sulfinic acid, boric acid, or carboxylic acid groups such as
30 ethylsulfonic acid, propylsulfonic acid, 4-nitrobenzene
sulfonic acid, butylsulfonic acid, phenylsulfonic acid,
and the like.

Also illustrative of useful R_1 groups are divalent
35 moieties derived from any two R_1 groups or a R_1 group

- 9 -

with a R₂ group such as moieties having from about 2 to about 7 repeat units of the formula:



wherein R₃ is the same or different at each occurrence and is hydrogen or alkyl, as for example -(CH₂)₄-, -(CH₂)₃-, -(CH=CH-CH=CH)-, -[CH₂-CH(CH₃)-CH₂]- and

10 -(CH₂)₅-, and groups comprised of such moieties which include one or more heteroatoms of oxygen, nitrogen, ester, sulfonyl, carbonyl, sulfinyl, and/or sulfur, such as -CH₂SCH₂-, -CH₂NHCH₂-, -SCH₂NHCH₂-, -O-CH₂-CH₂O-

15 -O-CH₂-S-CH₂-, -CH₂S(O₂)CH₂-, -CH₂S(O)CH₂-, -OC(O)CH₂CH₂-, -CH₂C(O)CH₂- and -CH₂-O-CH₂- to form heterocyclic amino compounds such as tetrahydronaphthylamine, dihydrobenzopyrroleamine, benzofuranamine, dihydrobenzopyranamine, dihydrobenzofuranamine, dihydrobenzoparaoxazineamine,

20 dihydrobenzoparadiazineamine, dihydrobenzotriazoleamine, dihydro-benzothiazineamine, benzothiopyranamine, dihydro-benzoxazoleamine and the like. Exemplary of useful R₃ groups are divalent alkenylene chains

25 containing 1 to about 3 unsaturated bonds such as divalent 1,3-butadiene and like moieties which may also include one or more divalent oxygen, nitrogen, sulfinyl, sulfonyl, carbonyl, ester, and/or sulfur groups which form such compounds as benzodiazineamine,

30 benzodiazoleamine, benzotriazepine-amine, benzimidazolylamine, benzisoxazoleamine, benzoxazolylamine, benzothiazineamine, benzoxazineamine, naphthaleneamine, benzopyranamine, benzothiazineamine, anthraceneamine,

35 aminobenzothio-pyran, aminobenzodiazine, benzthiopyrone



2126330

- 10 -

amine, amino-coumarin, benzthiopheneamine, benzothiodiazoleamine, and the like.

Exemplary of useful R_2 groups are hydrogen and the above-referenced representative R_1 groups described above such as alkyl as for example, methyl, ethyl, isopropyl, butyl, isobutyl, hexyl, octyl and the like; alkylsulfonyl such as methylsulfonyl, ethylsulfonyl, propylsulfonyl and the like; arylsulfonyl such as phenylsulfonyl, p-methyl phenylsulfonyl, naphthylsulfonyl and the like.

Preferred polyaniline consists of repeat units of the Formulas II and/or III:

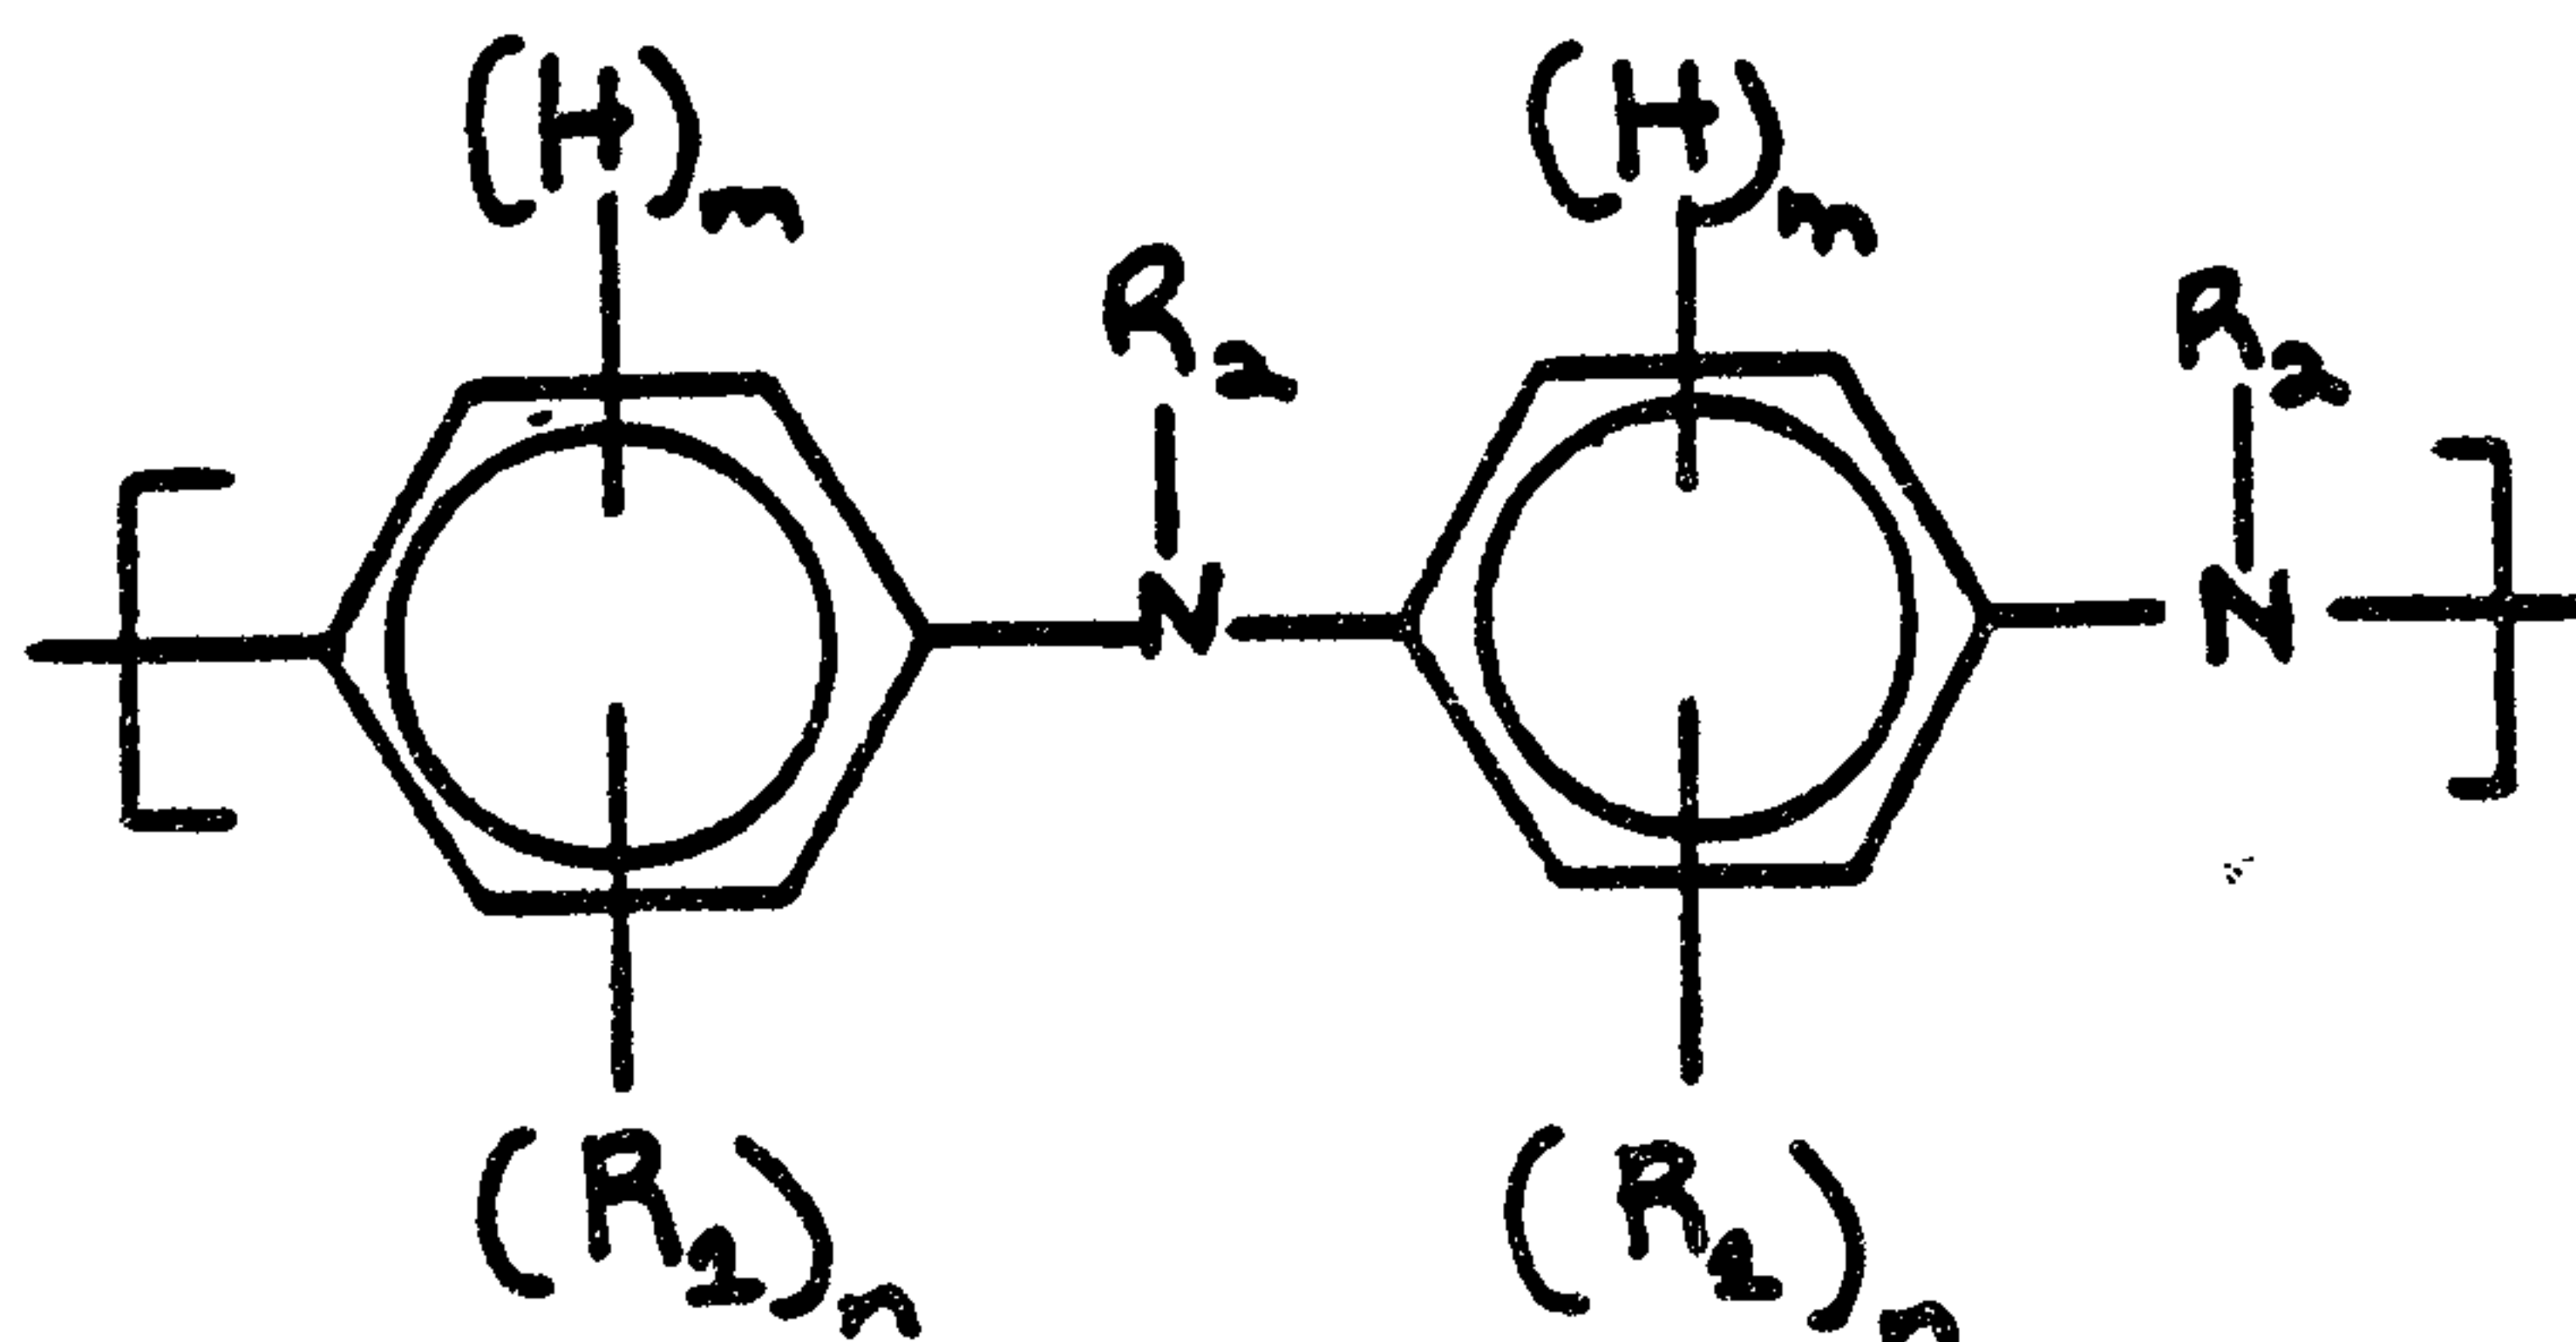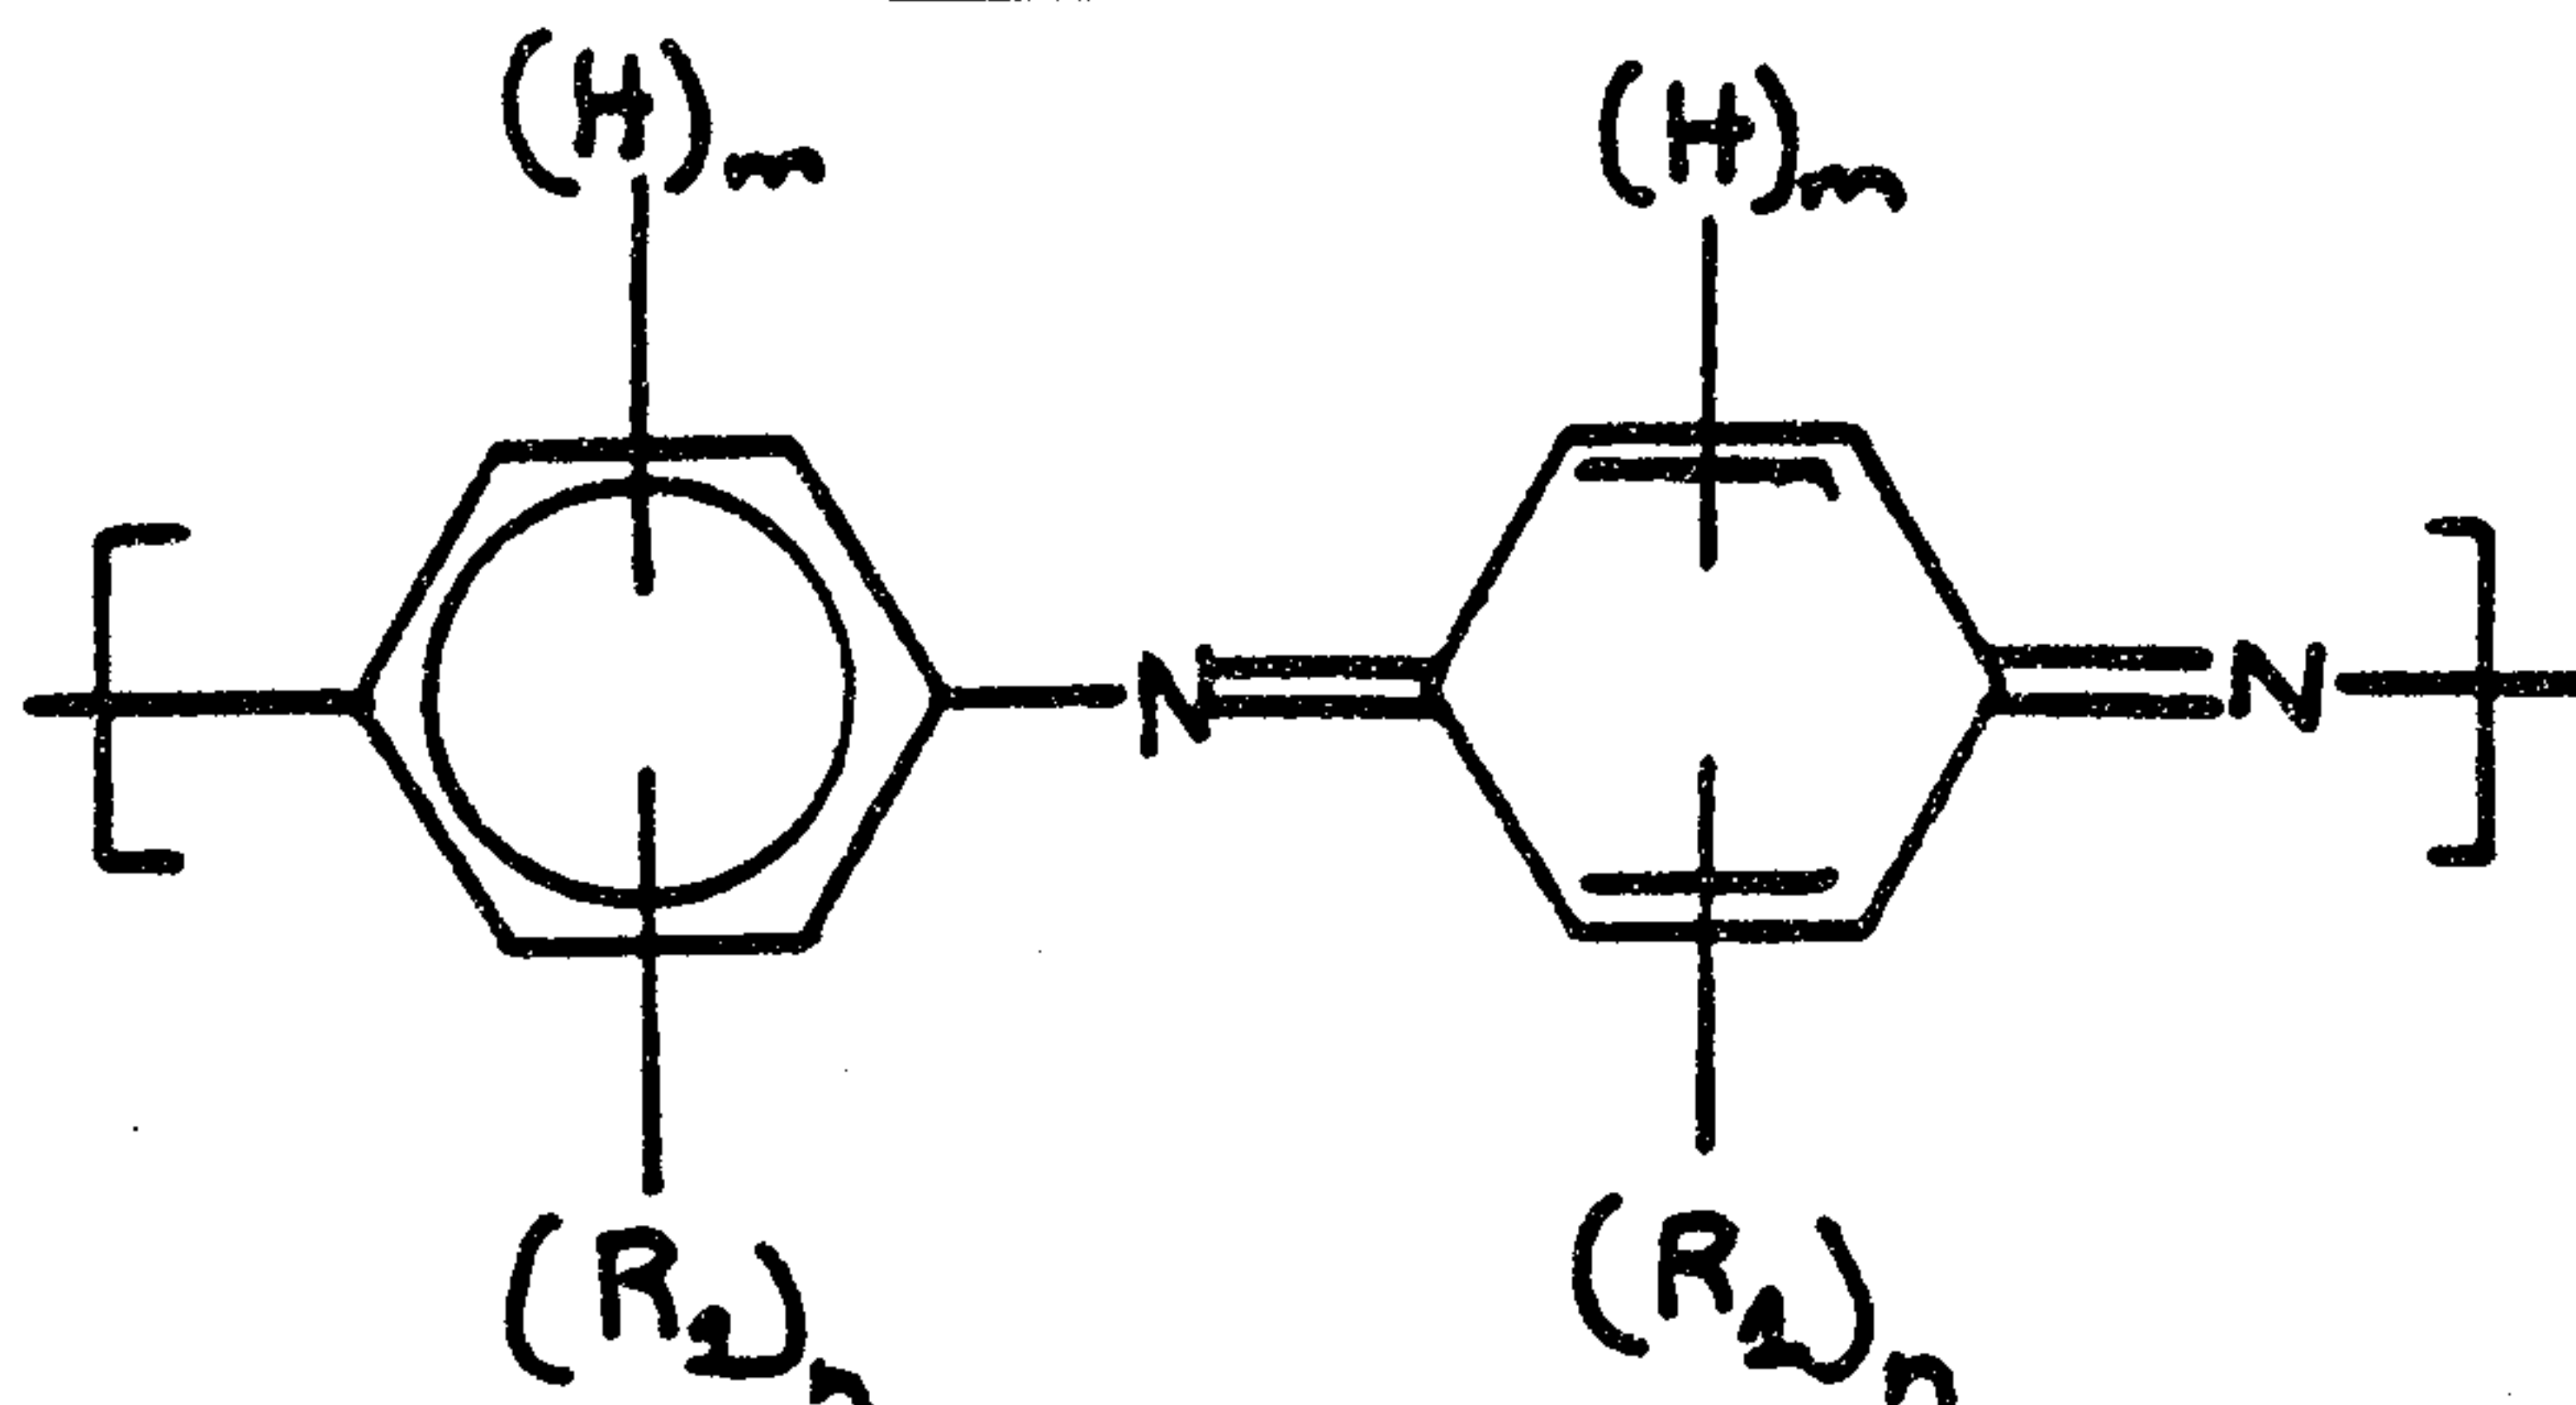Formula IIFormula III


a combination thereof having various ratios of the above repeat units in the polyaniline backbone such as

2126330

- 11 -

leucoemeraldine, protoemeraldine, emeraldine, nigraniline and pernigraniline. Poly(anilines) useful in the practice of this invention are more preferably those of the Formula IV:

5

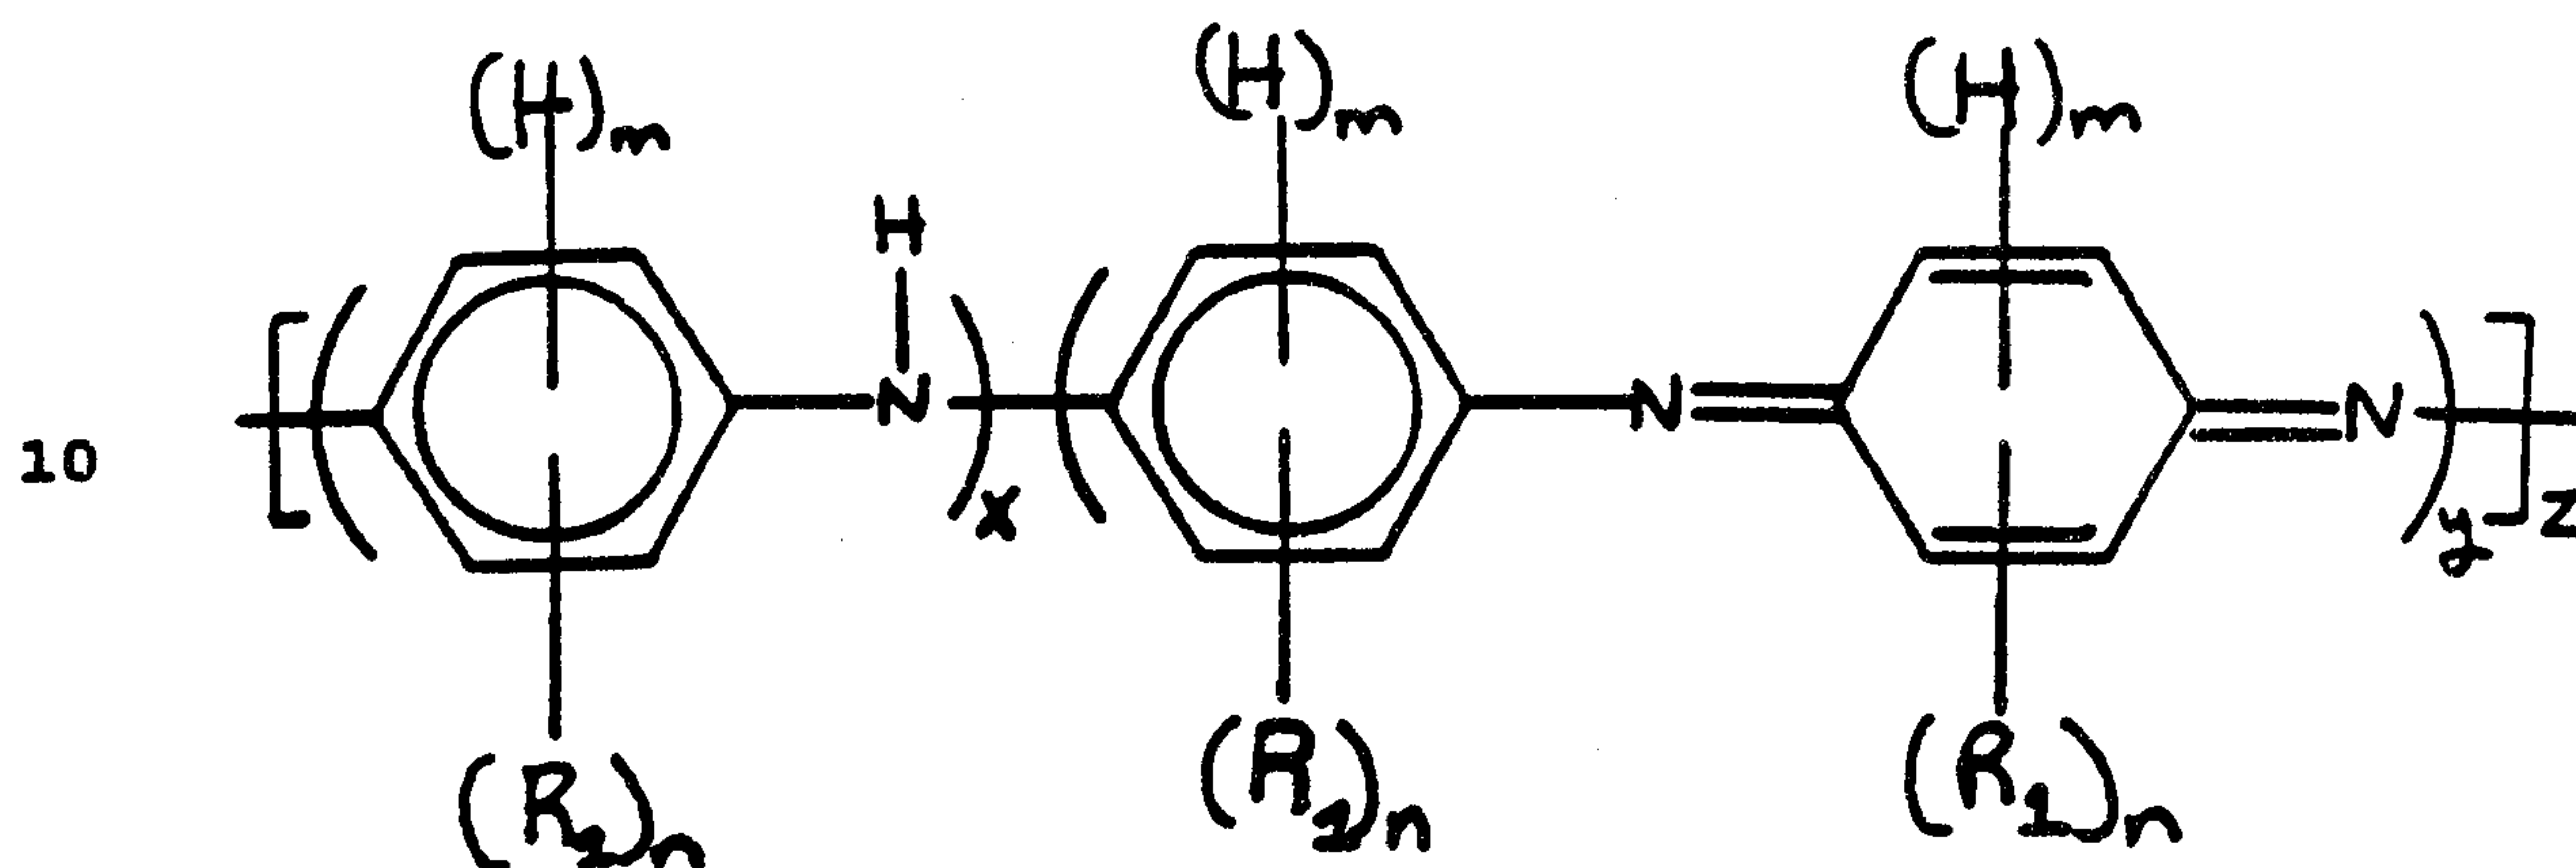FORMULA IV

wherein:

n, m, R₁ and R₂ are as described above;

x and y are the same or different at each occurrence and are integers equal to or greater than 0, with the proviso that the sum of x and y is greater than 0, preferably where x is an integer equal to or greater than 0 and/or that the ratio of x to y is greater than or equal to about 0, more preferably said ratio is equal to or greater than 0.5 and most preferably said ratio is equal to or greater than about 1; and

z is the same or different at each occurrence and is an integer equal to or greater than about 5.

Preferred for use in the practice of this invention are poly(anilines) of the above Formula IV in which:

n is an integer from 0 or 1;

m is an integer from 3 or 4, with the proviso that the sum of n and m is equal to 4;

R₁ is phenyl, or alkyl or alkoxy having from 1 to

2126330

- 12 -

about 12 carbon atoms, a protonic acid function or a salt or ester thereof, or alkyl, phenyl or alkoxy substituted with one more or protonic acids or salts or esters thereof;

5 x is an integer equal to or greater than 1;

y is equal to or greater than 0,

with the proviso that the ratio of x to y is equal to or greater than 0.5;

z is an integer equal to or greater than about 5;

10 Particularly preferred for use in the practice of this invention are poly(anilines) of the above Formula IV in which:

n is an integer from 0 or 1;

m is an integer from 3 or 4 with the proviso that

15 the sum of n and m is equal to 4;

R₁ is alkyl, or alkoxy having from 1 to about 6 carbon carboxylic acid or salts or esters thereof, phosphinic acid or salts or esters thereof, sulfonic acid or salts or esters thereof, sulfinic acid or salts or esters thereof, phosphonic acid or salts or esters thereof, or alkyl or alkoxy substituted with phosphinic acid or salts or esters thereof, sulfinic acid or salts or esters thereof, halo, phosphonic acid or salts or esters thereof, phosphoric acid or salts or esters thereof, or sulfonic acid or salts or esters thereof;

x is an integer equal to or greater than 2;

y is equal to or greater than 0, with the proviso that the ratio of x to y is greater than about 1; and

z is an integer equal to or greater than about 10.

30 Amongst the preferred embodiments, more preferred for use in the practice of this invention are poly(anilines) of the above Formula IV in which:

n is an integer from 0 or 1;

m is an integer from 3 or 4, with the proviso that

35 the sum of n and m is equal to 4;

2126330

- 13 -

R_1 is alkoxy or alkyl of from 1 to about 6 carbon atoms (preferably from 1 to about 3 carbon atoms), sulfonic acid or salts thereof, phosphoric acid or salts thereof, or phosphonic acid or salts thereof;

5 x is an integer equal to or greater than 0; and
 y is an integer equal to or greater than 1; and
 z is an integer equal to or greater than about 10.
 In the most preferred embodiment of the invention:

n is 0;

10 m is 4;

x is an integer equal to about 2;

y is an integer equal to about 1, with the proviso that the ratio of x to y is equal to or greater than about 2; and

15 z is an integer equal to or greater than about 10.

 In general, the number of conjugated homopolymer or copolymer repeat units are not critical and may vary widely. The greater the number of repeat units the greater the molecular weight of the conjugated

20 homopolymer or copolymer and the greater the viscosity of solutions of the polymer. In the present application where conjugated homopolymers or copolymers of relatively high molecular weight and insolubility are required, then such materials can be used. The

25 number of repeat units is preferably at least about 10. The upper limit can vary widely depending on the desired molecular weight and viscosity and the required degree of processibility, such as melt processibility, solution processibility and the like. In the preferred

30 embodiments of the invention, the number of repeat units is at least about 20, and in the particularly preferred embodiments, the number of repeat units is at least about 30. Amongst the particularly preferred embodiments, most preferred are those embodiments in

35 which the number of repeat units is at least about 40.

- 14 -

In the most preferred embodiments the molecular weight will be sufficiently high to render the conjugated polymer insoluble in the solvent or solvent mixture of the particular paint formulation such that
5 the conjugated polymer will form a dispersion of small particles in the solvent or solvent mixture.

Conjugated homopolymers and copolymers can be conveniently prepared through conventional procedures. Such procedures are well known in the art and will not
10 be described herein in great detail. See for example U.S. Patent Nos. 4,940,640; 4,711,742; 4,521,589; 4,808,681; 4,983,322; 5,006,278 and 4,900,782; PCT WO88/00954; and "The Handbook of Conducting Polymers", edited by Terje A. Skotheim, Marcell Decker, Inc., New
15 York and Basel and references cited therein.

For example, preferred polyanilines can be prepared through use of chemical and electrochemical synthetic procedures. For example, one form of polyaniline can
20 be prepared by treating aniline with ammonium persulfate $(\text{NH}_4)_2\text{S}_2\text{O}_8$ in excess 1M HCl. This powdered form of polyaniline is blue green in color. After methanol washing and air drying this material exhibits a conductivity of about 5 S/cm. This conductive form
25 of polyaniline can be treated with ammonium hydroxide in ethanol to form a non-conductive form of polyaniline which is dark blue in color and which has a conductivity of less than 10^{-8} S/cm. Other chemical procedures for preparation of various chemical forms of
30 polyaniline are described in detail in Green et al and U.S. Patent Nos. 4,855,361, 4,798,685, 4,806,271, 4,822,638, 4,851,487 and 4,940,517 described above.

Useful forms of polyaniline can also be prepared electrochemically. For example, useful forms of
35 polyaniline can be prepared by the electrochemical

2126330

- 15 -

oxidation of aniline in aqueous fluoroboric acid electrolyte on a platinum foil anode.

Other chemical and electrochemical syntheses and transformations of the conductive form of polyaniline
5 may be discovered and are presently contemplated as being useful. Moreover, additional forms or types of polyaniline may be elucidated in the future. Accordingly, no limitation to the syntheses, transformation, or structures herein described or
10 postulated is intended beyond the limitations of the appended claims.

The conjugated homopolymer or copolymer useful in the practice of this invention may be neutral i.e. electrical conductivity of less than about $10^{-9} \text{ ohm}^{-1} \text{ cm}^{-1}$
15 by the four-in-line probe method. Other useful conjugated polymers may be electrically conductive. Such conductive polymers are doped with a suitable dopant to render the polymer electrically conductive, i.e. an electrical conductivity of at least about 10^{-9}
20 $\text{ohm}^{-1} \text{ cm}^{-1}$ by the four-in-line probe method. Any doping procedure may be used. Such methods are conventional and will not be described herein in any great detail. For example, the conjugated homopolymer or copolymer is best doped by contacting the dopant
25 with the polymer for a time sufficient to dope to the desired extent. The polymer can be contacted with the dopant in the gaseous state, in the liquid state, neat, or diluted by some suitable diluent such as a gas as for example air, or liquid such as water, or an organic
30 liquid. The dopant can be contacted with the conjugated homopolymer or copolymer either during polymerization or after polymerization. In a preferred embodiment of the invention, the conjugated homopolymer or copolymer may be doped by carrying out the
35 polymerization in the presence of an acid having a pKa

- 16 -

in the solution equal to or less than that of the homopolymer or copolymer, or by treating. In general, the higher the pKa of the conjugated homopolymer or copolymer, the higher the acid pKa that can be used to provide a conductive polymer; and conversely, the lower the pKa of the conjugated polymer, the lower the pKa of the acid necessary to provide a desired degree of electrical conductivity. The pKa of the acid is preferably equal to or less than about 5, more preferably equal to or less than about 4, and the most preferably equal to or less than about 3.

In another preferred embodiment of the invention, the conjugated copolymer or homopolymer can be doped after polymerization. For example, the conjugated homopolymer or copolymer layer is doped by contact with a solution of the dopant in a suitable solvent such as water.

Dopants for use in the practice of this invention can vary widely and can be such materials which are known in the art for use in doping conjugated homopolymers or polymers to form conductive or semi-conductive polymers, as for example, those described in detail in U.S. Patent Nos. 4,442,187 and 4,321,114.

Illustrative of useful dopant species are oxidizing dopants. Oxidizing dopants are well known in the conductive polymer art, and any of such known oxidizing dopants can be used. Illustrative of useful oxidizing dopants are AsF_5 , MoOCl_4 , MoCl_5 , PCl_5 , POCl_3 , PCl_3 , AlCl_3 , NO^+ and NO_2^+ salts (such as NOBF_4 , NOPF_6 , NOSbF_6 , NOAsF_6 , NOCH_3CO_2 , NO_2BF_4 , NO_2PF_6 , NO_2AsF_6 , NO_2SbF_6 , and $\text{NO}_2(\text{CF}_3\text{SO}_2)$, HClO_4 , HNO_3 , H_2SO_4 , benzoylperoxide, SO_3 , Br_2 , $(\text{FSO}_3)_2$, ZnCl_2 , FSO_3H , and Fe(III) salts (such as $\text{Fe}(\text{BF}_4)_3$, FeBr_3 , $\text{Fe}(\text{CH}_3\text{SO}_3)_3$, $\text{Fe}(\text{ClO}_4)_3$, FeCl_3 , $\text{Fe}(\text{OTs})_3$, and $\text{Fe}(\text{CF}_3\text{SO}_3)_3$ which give rise to doped polymers


2126330

- 17 -

containing dopant ions such as NO_3^- , CH_3SO_3^- , AlCl_4^- , BF_4^- , ZnCl_4^- , PCl_4^- , PF_6^- , AsF_6^- , SbF_6^- , CF_3SO_3^- , ClO_4^- , OTs^- , SO_3^{-2} , $\text{C}_6\text{H}_5\text{CO}_2^-$, CH_3SO_3^- , FSO_3^- , and FeCl_4^- , and Cu(II) salts such as CuCl_2 which may give dopant anions such as Cl^- or CuCl_3^- . Preferred oxidizing dopants for use in the practice of this invention are oxidizing dopants selected from the group consisting of MoOCl_4 , MoCl_5 , PCl_5 , and Fe(III) salts such as $\text{Fe(C}_6\text{H}_5\text{SO}_3)_3$, $\text{Fe(CF}_3\text{SO}_3)_3$, $\text{Fe(ClO}_4)_3$, FeCl_3 , FeBr_3 , $\text{Fe(CH}_3\text{C}_6\text{H}_4\text{SO}_3)_3$ and $\text{Fe(CH}_3\text{SO}_3)_3$. Particularly preferred oxidizing dopants for use in the practice of this invention are dopants selected from the group consisting of MoOCl_4 , $\text{Fe(C}_6\text{H}_5\text{SO}_3)_3$, $\text{Fe(CH}_3\text{C}_6\text{H}_4\text{SO}_3)_3$, $\text{Fe(CH}_3\text{SO}_3)_3$ and $\text{Fe(CF}_3\text{SO}_3)_3$. Amongst these particularly preferred embodiments, most preferred oxidizing dopants are those embodiments in which the oxidizing dopant are $\text{Fe(C}_6\text{H}_5\text{SO}_3)_3$, $\text{Fe(CH}_3\text{C}_6\text{H}_4\text{SO}_3)_3$ and $\text{Fe(CF}_3\text{SO}_3)_3$.

Illustrative of other dopants are protonic acid dopants. Such dopants include inorganic acids, such as hydrofluoric acid, hydriodic acid, inorganic phosphorus acids such as phosphoric acid and the like, nitric acid, boric acid, inorganic sulfur acids such as sulfuric acid and the like.

Illustrative of still other useful dopants are non-oxidizing protonic acids such as those containing anionic moieties of the formula:

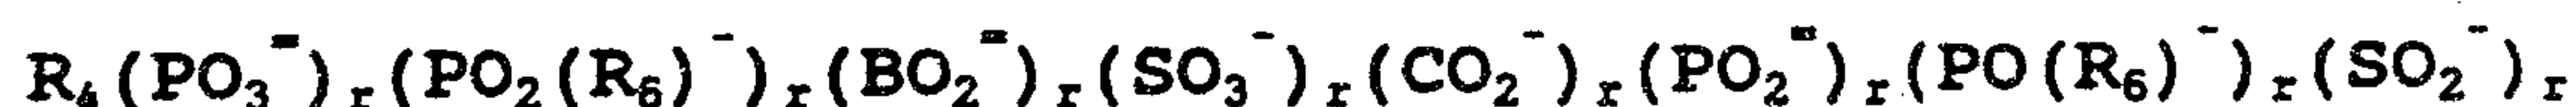

and having one or more cationic moieties selected from the group consisting of:



2126330

- 18 -

wherein:

R_4 and R_6 are the same or different at each occurrence and are organic or inorganic radicals or amino;

5 M is a species having a positive charge equal to s , provided that at least one of M^{+s} is a proton or a moiety which can be transformed by radiation, heat, chemicals and the like, into a proton under use conditions such as NH_4^+ , $^+N(CH_3)_2H_2$, $^+N(C_2H_5)_3$, Ph_3S^+ , and
10 the like;

s is the same or different at each occurrence and is an integer equal to 1 to 8;

r is the same or different at each occurrence and is 0 or a positive integer equal to or greater than 1,
15 with the proviso that at least one of r is other than 0.

The R_4 and R_6 group may vary widely and can be a substituted or unsubstituted aliphatic radical such as alkyl, nitroalkyl, haloalkyl and the like, or a
20 substituted or unsubstituted aromatic radical such as phenyl, halophenyl, nitrophenyl, anthracyl, naphthyl, alkylphenyl, phenanthryl and the like. R_4 and R_6 groups may also be a polymeric radical such as a polymer having recurring pendant phenyl groups in the
25 polymeric backbone substituted with sulfonic acid and derivatives thereof such as salts, phosphoric acid and derivatives thereof such as salts, phosphonic acid and derivatives thereof such as salts, sulfinic acid and derivatives thereof such as salts, carboxylic acid and
30 derivatives thereof such as salts, boric acid and derivatives thereof such as salts, or phosphonic acid and derivatives thereof such as salts; moieties such as sulfonated or phosphonated polystyrene,
poly(2-methylstyrene), poly(4-phenylstyrene),
35 poly(2-vinyl naphthalene), poly(vinyl benzoate),

2126330

- 19 -

poly(benzyl methacrylate) and the like. In the particularly preferred embodiments of the invention, R₄ and R₆ are aromatic radical and in the most preferred embodiments R₄ and R₆ are substituted or unsubstituted phenyl or naphthyl. Such acids include 1-anthracene sulfonic acid, oxalic acid, 9-anthracene sulfonic acid, tartaric acid, 2-phenanthrene sulfonic acid, malonic acid, 3-phenanthrene sulfonic acid, succinic acid, 9-phenanthrene sulfonic acid, glutaric acid, adipic acid, trifluoromethane sulfonic acid, pimelic acid, perflourooctyl sulfonic acid, azelaic acid, perfluorooctyl carboxylic acid, sebacic acid, octyl sulfonic acid, phthalic acid, dodecyl sulfonic acid, isophthalic, cetyl sulfonic acid, terephthalic, toluene sulfonic acid, methyl phosphinic acid, dimethyl phosphinic acid, phenyl phosphonic acid, dodecylbenzene sulfonic acid, naphthalene sulfonic acid, benzene disulfonic acid, benzene sulfonic acid, 1,3-benzene disulfonic acid, 2,5-dihydroxy-1,4-benzene disulfonic acid, camphor sulfinic acid, naphthalene trisulfonic acid, ethylbenzene sulfonic acid, ethane sulfonic acid 1,5-naphthalene disulfonic acid, nickel phthalocyanine tetrasulfonic acid, phenyl phosphonic acid, diphenyl phosphinic acid, phenyl phosphinic acid, ortho boric acid, 3-sulfopropyl acrylate, meta boric acid, 3-sulfopropyl methacrylate, sulfamic acid, 5-sulfosalicyclic acid, trion (4,5-dihydroxy-1,3-benzene disulfonic acid), vinyl sulfonic acid, arsenic acid, arsenous acid, arsinic acid, arsonic acid, sulfanilic acid, 4-sulfophthalic acid, sulfoacetic acid, methyl phosphinic acid, phenylphosphonic acid, methyl phosphonic acid, methyl orange, sulfonated polystyrene, hydroboxofluoric acid, orthophosphoric acid, pyroboric acid, sulfonated poly(2-vinyl naphthalene), naphthol yellow, naphthol

2126330

- 20 -



blue black, 1,2-naphthoquinone-4-sulfonic acid,
naphthylazoxine S, 1-octane sulfonic acid,
pyrophosphoric acid, metaphosphoric acid,
orthophosphorous acid, t-butyl phosphonic acid, ethyl
5 phosphonic acid, butyl phosphonic acid, 1,2-benzene
disulfonic acid, 4-octylbenzene sulfonic acid,
2-mesitylene sulfonic acid, 2,6-naphthalene disulfonic
acid, 2-naphthalene sulfonic acid, 1,3,6-naphthalene
trisulfonic acid, 1,3,7-naphthalene trisulfonic acid,
10 sulfonazo III acid, biphenyl disulfonic acid, biphenyl
sulfonic acid, 1,8-dihydroxynaphthalene-3,6-disulfonic
acid, 3,6-dihydroxynaphthalene-2,7-disulfonic acid,
4,5-dihydroxynaphthalene-2,7-disulfonic acid,
6,7-dihydroxy-2-naphthalene sulfonic acid,
15 1-naphthalene phosphoric acid, 1-naphthalene sulfonic
acid, 1-naphthalene-5,7-dinitro-8-hydroxy,
1-naphthalene-4-hydroxy sulfonic acid, 4-bromo benzene
sulfonic acid, 4-hydroxy-5-isopropyl-2-methyl benzene
sulfonic acid, 3,4-diamino benzene sulfonic acid
20 benzenephosphoric acid, 1,3,5-benzene trisulfonic acid,
2-methyl-5-isopropyl benzene sulfonic acid, 3,4-dinitro
benzene sulfonic acid, 2-methoxy benzene sulfonic acid,
1-naphthalene-5-hydroxy sulfonic acid,
1-naphthalene-7-hydroxy sulfonic acid,
25 1-naphthalene-3-hydroxy sulfonic acid,
2-naphthalene-1-hydroxy sulfonic acid, 4-phenylamino
benzene sulfonic acid, 2,6-naphthalene disulfonic acid,
1,5-naphthalene disulfonic acid, dinonylnaphthalene
sulfonic acid, phenylboronic acid, 1,2-benzene boronic
30 acid sulfonic acid, and 1,3-naphthalene-7-hydroxy
disulfonic acid.

Preferred for use in the practice of this
invention are organic acid dopants, more preferably
those having relatively low water solubilities (less
35 than about 5 g/l at 25°C).

2126330

- 21 -

More preferred for use in the practice of this invention as dopants are acids or acid derivatives of the formula:

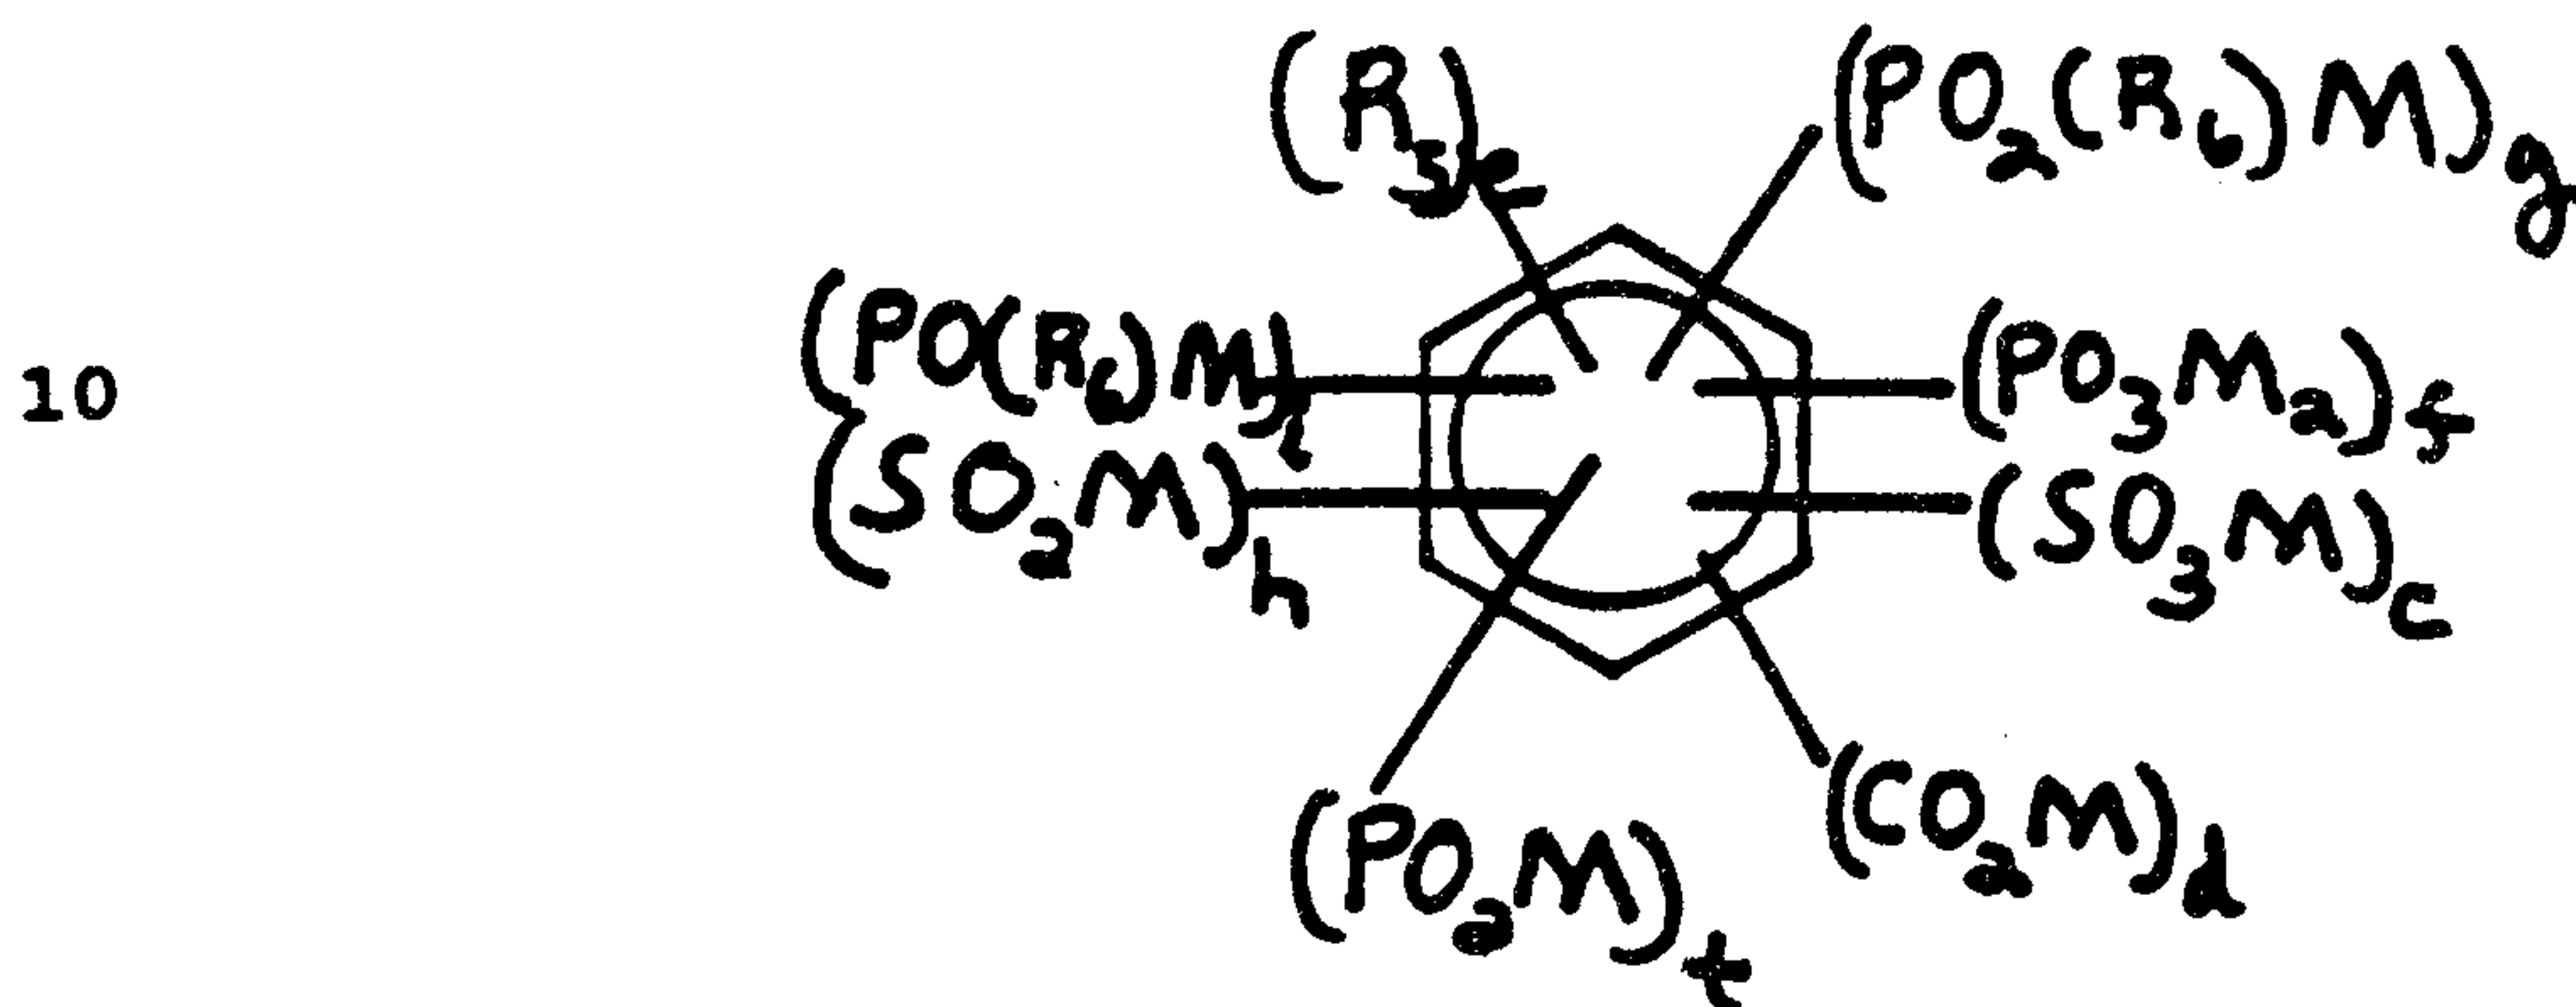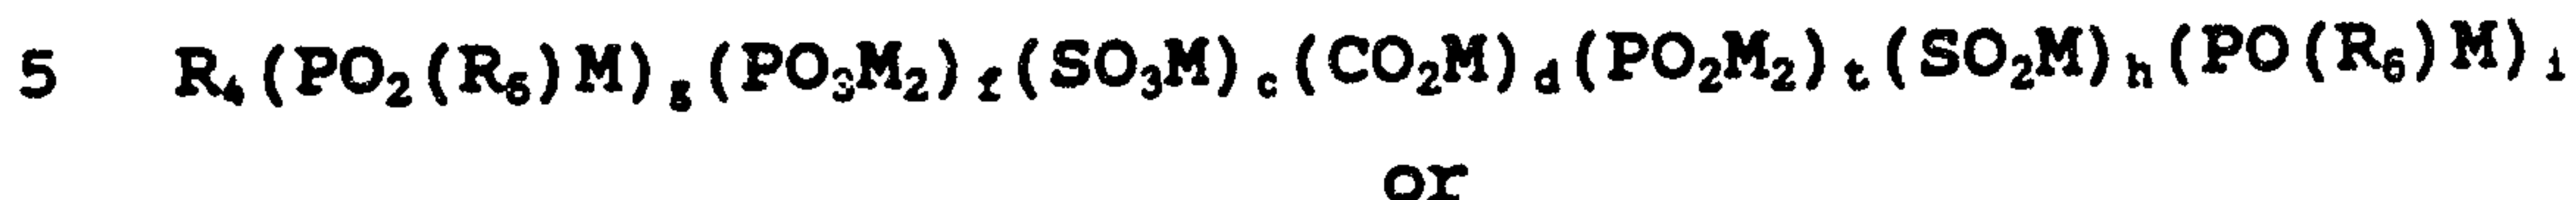

wherein:

M is H^+ , or other metal or non-metal cation with the proviso that at least one of M is H^+ or a moiety which can be thermally or chemically transformed into a proton under use conditions, such as $^+NH_4$, $^+N(CH_3)_2H_2$, Ph_3S^+ , $^+N(C_2H_5)_3$ and the like

t is 0, 1, 2, 3 or 4;
h is 0, 1, 2, 3 or 4;
25 i is 0, 1, 2, 3 or 4;
c is 0, 1, 2, 3 or 4;
d is 0, 1, 2, 3 or 4;
f is 0, 1, 2, 3 or 4;
g is 0, 1, 2, 3 or 4, with the proviso that at least one of c, d, f, g, h, i or t is other than 0;
30 e is 0, 1, 2, 3 or 4.

R_6 is hydrogen, alkyl, aralkyl, alkylaryl, aryloxy arylalkoxy, alkoxyaryl, alkoxyalkyl, or alkoxy;

R_4 is substituted or unsubstituted alkylamino, dialkylamino, arylamino, diarylamino, arylalkoxy,
35

2126330

- 22 -

alkylarylamino, alkylsulfinyl, alkylsulfonyl, alkoxy, alkyl, aralkyl or alkoxyalkyl, wherein permissible substituents include perhaloalkyl, phenyl, alkoxy, halo, cyano, amino, haloalkyl, hydroxy, sulfonic acid
 5 and salts and esters thereof, phosphoric acid and salts and esters thereof, boric acid and salts and esters thereof, sulfinic acid and salts and esters thereof, phosphinic acid and salts and esters thereof, phosphonic acid and salts and esters thereof,
 10 carboxylic acid and salts and esters thereof, nitro, and the like; and

R_5 is the same or different at each occurrence and is selected from the group consisting of amino, hydroxy, or substituted or unsubstituted R_4
 15 substituents, aryl, amino, hydroxy or any two R_5 substituents together may form an unsubstituted or substituted alkylene or alkenylene chain completing a ring system which chain may optionally contain one or more divalent heteroatoms such as -O-, -S-, -S(O₂)-,
 20 N(H)- and the like, wherein permissible substituents are one or more halo, phosphoric acid and salts and esters thereof, hydroxy, boric acid and salts and esters thereof, nitro, cyano, amino, phosphinic acid and salts and esters thereof, alkylamino, dialkylamino,
 25 alkylthio, alkoxyalkyl, alkylsulfinyl, alkylsulfonyl, alkoxy, alkylarylamino, arylamino, diarylamino, sulfinic acid and salts and esters thereof, phosphonic acid and salts and esters thereof, sulfonic acid and salts and esters thereof or carboxylic acid and salts
 30 and esters thereof or R_4 , R_5 or R_6 is a moiety of the formula:



35 wherein:

2126330

- 23 -


q is a positive whole number from 1 to about 10.
In the more preferred embodiments of this invention,
useful dopants are acids and/or acid derivatives of the
formula:

5



or

10

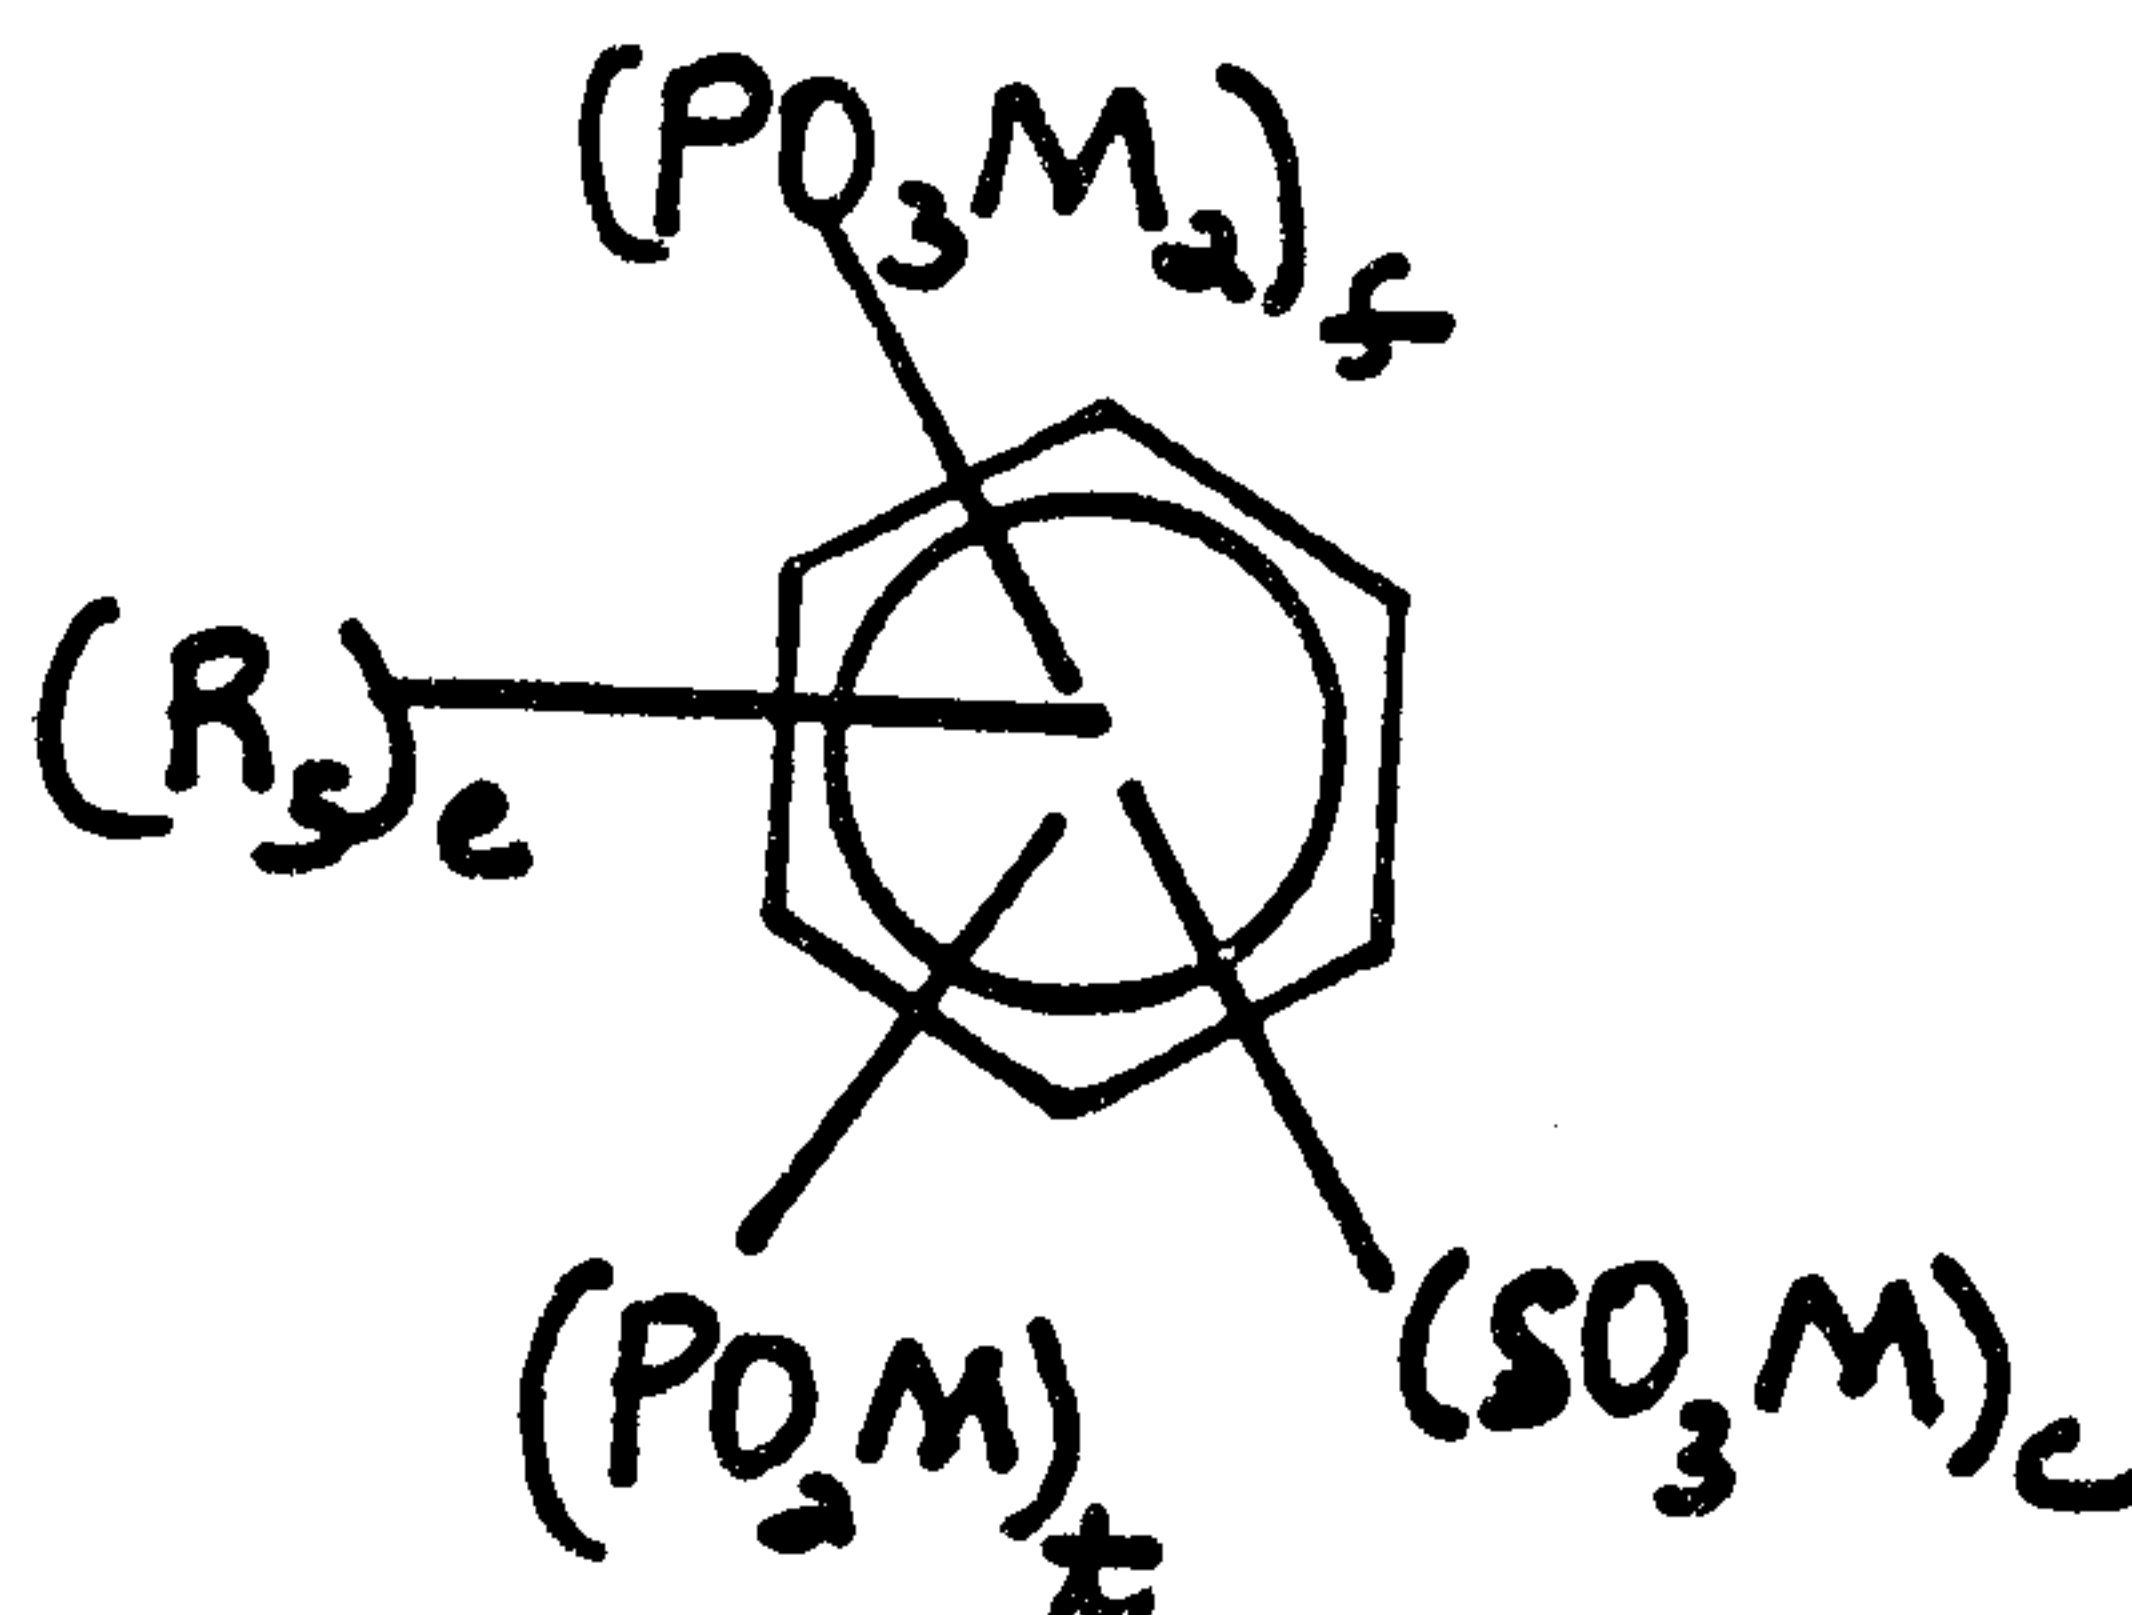

15

wherein:

c, f and t are the same or different and are 0, 1
or 2, with the proviso that at least one of c, f and t
is not 0;

20

e is 0, 1, or 2;

R_4 is alkyl, alkoxy, phenylalkoxy, alkoxyalkyl or
phenylalkyl, either unsubstituted or substituted with
one or more hydroxy, amino, fluoro, sulfonic acid or
salts or esters thereof, or phosphoric acid or a salt
or ester thereof; and

25

R_5 is the same or different at each occurrence and
is selected from the group consisting of halo, hydroxy,
amino, or substituted or unsubstituted alkyl, alkoxy,
alkoxyalkyl, phenyl alkylamino or dialkylamino, wherein
permissible substituents are one or more phenyl,
hydroxy, amino, sulfonic acid or salts or esters
thereof, phosphoric acid or a salt or ester thereof, or
phosphonic acid or a salt or ester thereof, or
phosphonic acid or a salt or ester thereof or any two

30
35


2126330

- 24 -

R_s substituents together may form an alkenylene chain completing a naphthalene, anthracene or phenanthrene fused system that may optionally contain heteroatoms, and which may optionally be substituted with one or more alkyl, alkoxy, fluoro, perfluoroalkyl, amino, hydroxy, phosphonic acid or a salt or ester thereof, phosphoric acid or a salt or ester thereof, fluoroalkyl, sulfonic acid or salts or esters thereof; and

10 M is H⁺ or other metal or non-metal cation, with the proviso that at least one of M is H⁺ or is a moiety which can be thermally transformed into a proton under process conditions.

15 In the especially preferred embodiments of this invention, useful dopants are acids or acid derivatives of the formula:

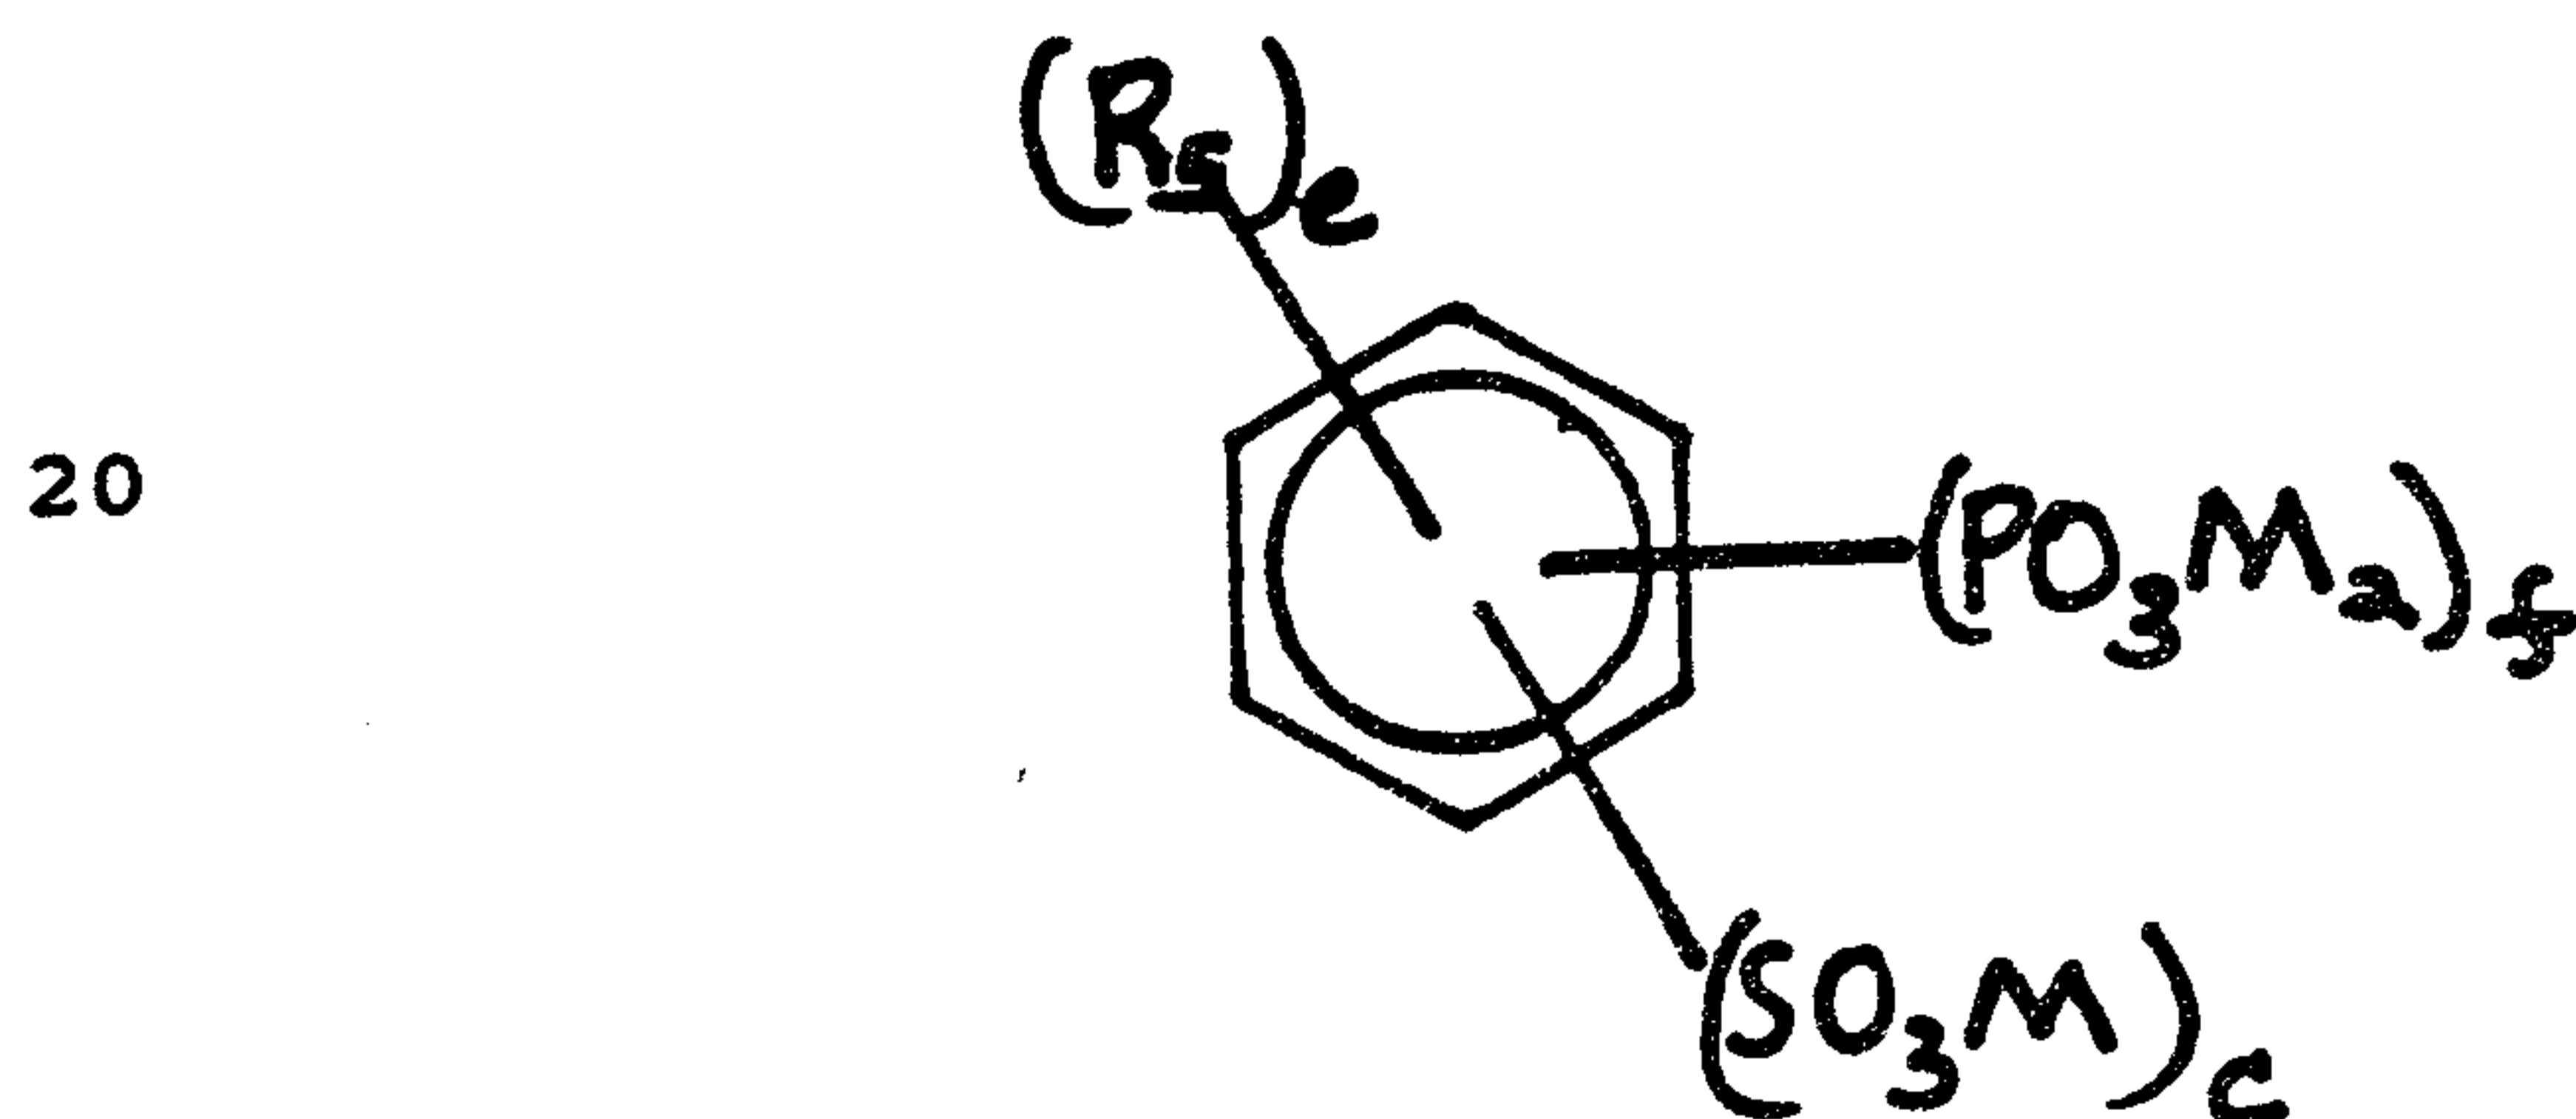

25

wherein:

c and f are the same or different and are 0, 1, 2 or 3, with the proviso that at least one of c and f is not 0;

30 e is 0, 1 or 2;

R_s is the same or different at each occurrence and are hydroxy, amino, substituted or unsubstituted alkyl or alkoxy wherein permissible substituents are one or more fluoro, or any two R_s substituents together may


35

- 25 -

form an alkylene or alkenylene chain completing a naphthalene, anthracene or phenanthrene fused system, that optionally contains heteroatoms, which may be substituted with one or more alkyl, fluoroalkyl, hydroxy, amino, alkoxy, or sulfonic acid or a salt or an ester thereof; and

M is H^+ or other metal or non-metal cation or a moiety which can be thermally transformed into a proton under process conditions.

In the process of the embodiment of this invention of choice, the dopant is a sulfonic acid or sulfonic acid derivative of the formula:

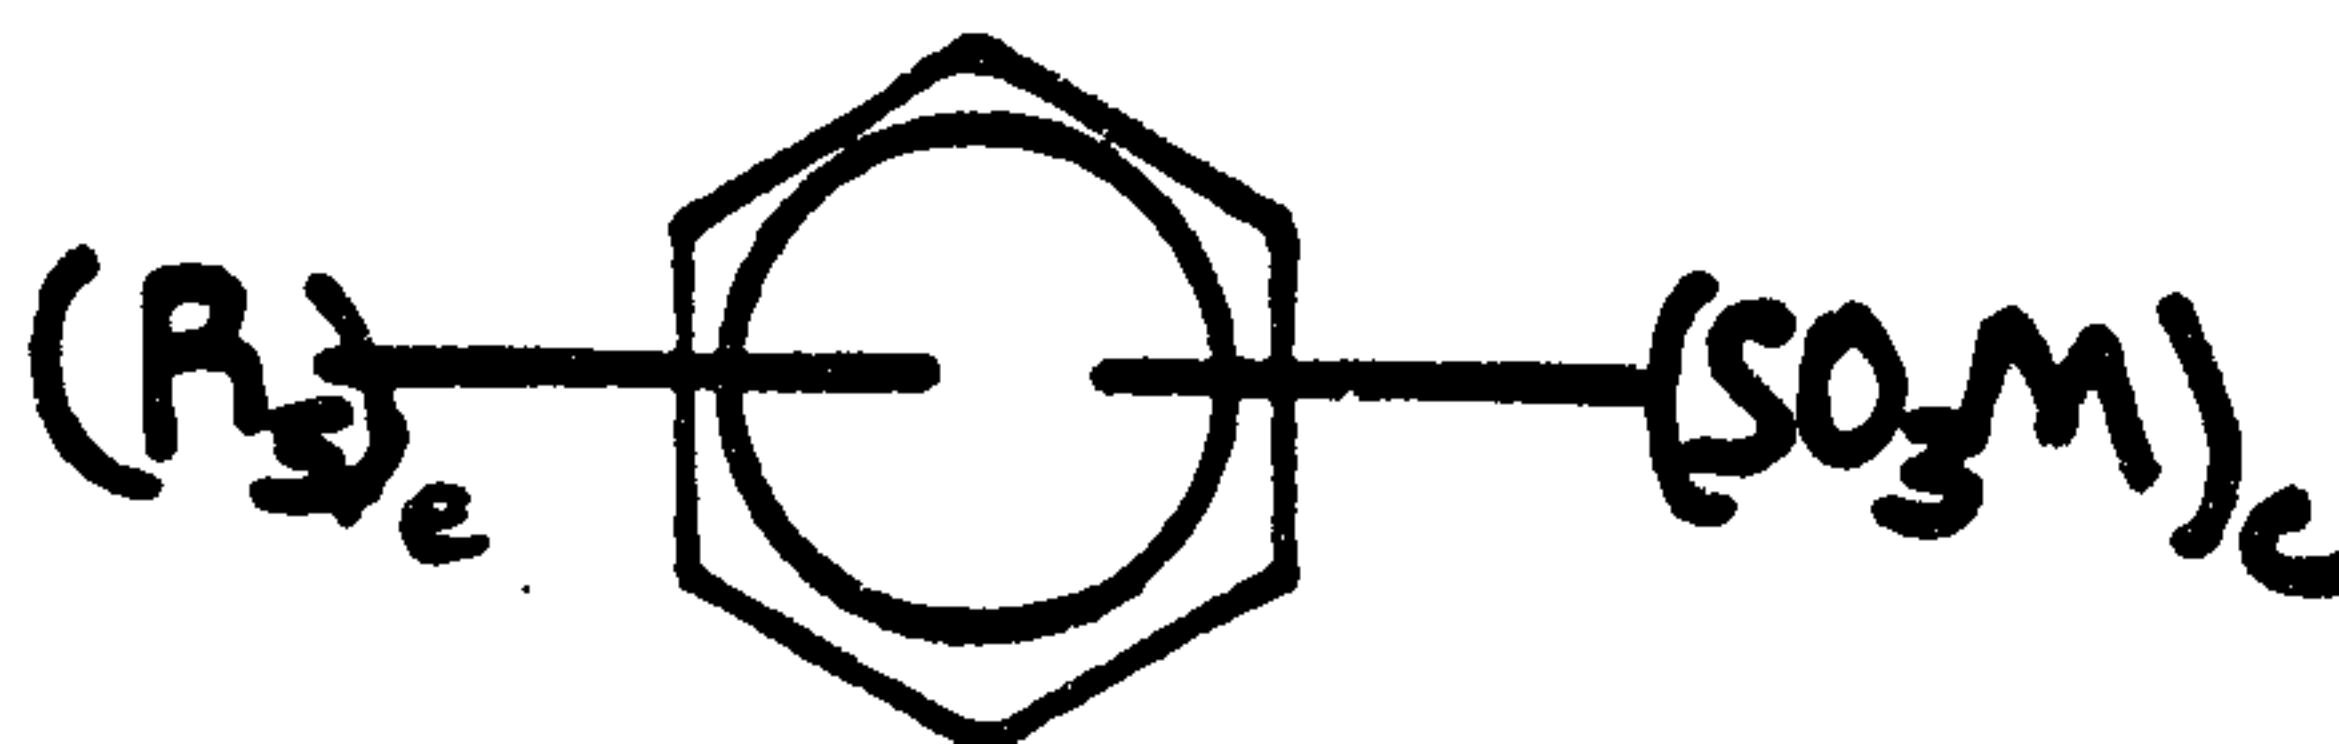

wherein;

c is 1, 2 or 3 (preferably 1);

e is 0, 1 or 2 (preferably 0 or 1, more preferably 1);

R_s is the same or different at each occurrence and is hydroxy, amino, alkyl or alkyl substituted with one or more fluoro groups, or two R_s groups together may form an alkylene or alkenylene chain completing a naphthalene fused ring system which may be substituted with one or more, hydroxy, amino, sulfonic acid or a salt or an ester thereof, alkyl or alkyl substituted by one or more fluoro substituents; and

M is a proton, or other metal or non-metal cation, with the proviso that at least one of M is a proton.

2126330

- 26 -

The amount of dopant and the electrical conductivity of the doped electrically conductive conjugated copolymer or homopolymer may vary widely, provided that the desired electrical conductivity is obtained. In the preferred embodiments of this invention, the amount and conductivity are such that the electrical conductivity of the dried paint coating is equal to or less than about $10^{-2} \text{ ohm}^{-1} \text{ cm}^{-1}$ based on the four-in-line probe method. The amount of dopant and electrical conductivity of the polymer component of the paint are such that the electrical conductivity of the dried paint coating is more preferably from about $10^{-2} \text{ ohm}^{-1} \text{ cm}^{-1}$ to about $10^{-9} \text{ ohm}^{-1} \text{ cm}^{-1}$ and most preferably from about $10^{-6} \text{ ohm}^{-1} \text{ cm}^{-1}$ to about $10^{-10} \text{ ohm}^{-1} \text{ cm}^{-1}$.

The amount of doped, electrically conductive conjugated polymer or neutral conjugated polymer included in the paint composition may vary widely, and any amount which improves the anti-corrosive properties to any extent may be used. The amount of doped polymer employed is preferably at least about 2% by weight, more preferably at least about 6% by weight and most preferably at least about 9% by weight of the dried film formed from the paint containing the polymer.

In the embodiments of choice, the amount of conjugated backbone polymer included in the paint is less than about 20 by weight of the paint, preferably from about 2% to about 20% by weight, more preferably from about 6% to about 15%, most preferably from about 9 to about 15% by weight of the dried film formed from the paint containing the polymer.

As other essential ingredients, the paint of this invention comprises a binder, and a dispersion liquid. Any conventional binder, and dispersion liquid can be used provided that they provide the paint system with desirable coating properties and having an electrical

- 27 -

conductivity of from about 10^{-3} S/cm to about 10^{-10} S/cm.

Any conventional binder which provides this effect can be used. Illustrative of useful binders are those which contain drying oils which react on curing to form a solid polymer. Drying oils include unsaturated compounds such as linseed oil, safflower oil, soya oil, talc oil, cottonseed oil, tung oil and oiticica which usually contain fairly large percentages of unsaturated acids such as oleic, linoleic, linolenic, eleostearic and licanic acids. These unsaturated oils react with oxygen in the air to form solid polymer. Other useful binding agents are materials such as isocyanates, which react with water vapor to polymerize.

Illustrative of other useful binders are thermoset polymers and thermoplastic polymers. Thermoset polymers for use are binders in the practice of this invention may vary widely. Illustrative of such useful thermoset polymers are alkyds derived from the esterification of a polybasic acid such as phthalic acid and a polyhydric alcohol such as glycol; allylics such as those produced by polymerization of dialkyl phthalate, dialkyl isophthalate, dialkyl maleate, and dialkyl chlorendate; amino resins such as those produced by addition reaction between formaldehyde and such compounds as melamine, urea, aniline, ethylene urea, sulfonamide and dicyandiamide; epoxies such as epoxy phenol novolak resins, diglycidyl ethers of bisphenol A and cycloaliphatic epoxies; phenolics such as resins derived from reaction of substituted and unsubstituted phenols such as cresol and phenol with an aldehyde such as formaldehyde and acetaldehyde; polyesters; silicones; and urethanes formed by reaction of a polyisocyanate such as 2,6-tolyene diisocyanate, 2,4-tolyene diisocyanate, 4,4-diphenylmethane diisocyanate, 1,6-hexamethylene diisocyanate and

2126330

- 28 -

- 4,4'-dicyclohexylmethane diisocyanate with a polyol such as polyether polyol (trimethylol propane, 1,2,6-hexanetriol, 2-methyl glycoside, pentaerythritol, poly(1,4-tetramethylene ether) glycol, sorbitol and sucrose), polyester polyols such as those prepared by esterification of adipic acid, phthalic acid and like carboxylic acids with an excess of difunctional alcohols such as ethylene glycol, diethylene glycol, propanediols and butanediols.
- 10 Preferred thermosetting resin binders are alkyds, epoxies, unsaturated polyesters, thermosetting acrylics, phenolics, polyurethanes and coumarene indene. Preferred alkyds are polyester resins made from polybasic acids and polyhydric alcohols.
- 15 Glycerol and pentaerythritol may be used for the polycarboxylic acids. All of the oils described above can be used in alkyds by converting the fatty acid oils to mono-glycerides and then reacting with a dibasic acid such as phthalic anhydride. Alkyd resins vary
- 20 greatly in their properties because of the many different oils, alcohols, and acids that can be used to make them. Alkyds have faster drying, better gloss retention, and better color than oils. Most unmodified alkyds have low chemical and alkali resistance. Alkyds
- 25 can be modified with rosin esterified in place of some oil acids. Phenolic resins, such as o- or p-phenylphenol, can also be used in order to produce greater hardness and better chemical resistance. Styrene and vinyl toluene may also be used to modify
- 30 alkyds for faster dry, better hardness, and toughness. Silicones may be added to alkyds to provide paints having good adhesion, hardness, flexibility, toughness, exterior durability, and resistance to solvents, acids, and alkalis. Acrylic monomers can be copolymerized
- 35 with oils to modify alkyd resins for fast dry, good

- 29 -

initial gloss, adhesion, and exterior durability. Aromatic acids, e.g., benzoic or butylbenzoic, may be used to replace part of the fatty acids for faster air dry, high gloss, hardness, chemical resistance, and
5 adhesion.

Preferred epoxy resins are prepared from epichlorohydrin and a dihydroxy compound, usually a biphenol. Two reactions are involved in the
10 polymerization: condensation to eliminate HCl and addition reactions to open epoxide rings along the chain to produce hydroxyl groups. The polymer has epoxide rings at each end and hydroxyl groups along the chain, which ensure good adhesion to polar surfaces such as metals. There are two types of epoxy resins,
15 catalyzed types and epoxy esters. Catalyzed epoxies must be converted to useful products by reaction with curing agents, e.g., amines, polyamide resins, polysulfide resins, anhydrides, metallic hydroxides, or Lewis acids. These agents are not a component of the
20 paint. Most of these materials are supplied as two-package systems to separate the materials until just before application. Polymer curing takes place by reaction of a curing agent with epoxide rings to cross-link the polymer. Paints made from these polymers have
25 excellent chemical resistance and hardness and are often used for maintenance coatings, trade sales specialties, and industrial finishes. Chalking with exterior exposure and the two-package system limit the use of epoxy finishes. The epoxy resin can also be
30 reacted with drying oils or fatty acids to produce epoxy esters, which cure by air drying or heat. Paints made with epoxy esters do not have as good chemical and solvent resistance as catalyzed epoxies, but they are superior to oils and alkyds in this respect. They also
35 exhibit chalking on exterior exposure.

2126330

- 30 -

Preferred thermosetting acrylic resins have at least one monomer belonging to the acrylic family which will react with itself or other resins at elevated temperatures to cross-link in order to cure. In addition to the acrylic monomers previously listed, acrylonitrile, acrylamide, styrene, and vinyl toluene are often used in these polymers. Polymers which react to crosslink primarily because of hydroxyl groups are usually combined with an epoxy resin; those which react mainly with carboxyl groups usually are combined with an amine resin. Thermosetting acrylic paints, which are hard and stain-resistant and have high gloss, are often used for appliance finishes. Tough flexible finishes can be formulated for coil coatings.

Preferred polyesters are unsaturated thermosetting polyester resins similar to those used for reinforced plastic. Although alkyds can be considered unsaturated polyesters, this term has been reserved for resins which have unsaturated compounds in the backbone of the polymer. These resins are made by reacting unsaturated dibasic acids, e.g. maleic anhydride, citraconic anhydride, fumaric acid, itaconic acid, phthalic anhydride, and adipic acid, with polyhydric alcohols, e.g., propylene glycol. Styrene or some other aromatic vinyl monomer is added to the polyester resin, which is then solubilized and made into a paint. Inhibitors, e.g., hydroquinone, may be added to prevent premature polymerization in the can; organic peroxides or some other catalyst must be added to initiate polymerization of the styrene monomer and the polyester resin for curing, which is often carried out at elevated temperatures. Polyester finishes are very hard, tough, resistant to solvents, and fairly heat-resistant. Silicones may be added to modify polyester for better exterior durability.

- 31 -

Preferred phenolic resins as used in coatings are primarily made from phenol and para-substituted phenols reacted with formaldehyde to form methylol groups on the phenol ring. Condensation polymers are often
5 produced by reacting these groups with phenol. Phenolic coatings have fast dry, high build, and good resistance to moisture and chemicals. Their poor initial color and tendency to yellow after application limit their use. Phenolic coatings may be used for
10 baked can coatings, and oil-modified phenolaldehyde finishes may be used for marine finishes and aluminum paints.

Polyurethanes are based upon reactions of isocyanates, RNCO where R is an organic radical.
15 Urethane coatings have excellent solvent and chemical resistance, abrasion resistance, hardness, flexibility, gloss, and electrical properties. They are, however, rather expensive, and the aromatic isocyanates yellow after application. Polyisocyanates such as toluene
20 diisocyanate react with hydroxylated drying oils to produce resins analogous to alkyds and epoxy esters. Finishes made with these urethane oils air-dry by oxidation of the unsaturated oils. Polyhydroxy materials can be reacted with isocyanates with an
25 excess of the isocyanate so that the polymer will contain NCO groups, which react with moisture in the air after the coating is applied to crosslink the polymer for curing. Moisture-cured urethanes are difficult to pigment since the pigments must be
30 completely dry and nonalkaline. They are used primarily for clear coatings. Phenols will react with an isocyanate to block the isocyanate or prevent it from reacting with hydroxylated materials in the system. When this type of coating is heated to 150°C
35 after application, the phenol volatilizes from the

2126330

- 32 -

film, leaving the isocyanate free to react with the hydroxyl-bearing resin to cure the film. Where a catalyst is employed, two-package systems are also used where a catalyst, e.g., a tertiary amine, is added to
5 cross-link the polymer.

Coumarin-indene resins which are derived from coal tar are used widely to make aluminum paints since they aid leafing of the aluminum and minimize gas formation. They have a yellow color, however, and only fair
10 durability except in aluminum paints.

Urea-formaldehyde, melamine-formaldehyde, and other triazine-formaldehyde resins are all hard, glossy, colorless, brittle, and chemically resistant thermosetting polymers used to modify basic coating
15 vehicles, such as alkyds, thermosetting acrylics, and vinyls. Rosin may be used in making vehicles, such as maleic rosin alkyds, for use in consumer products or industrial finishes. Silicones may be used to modify alkyds and polyesters for better exterior durability.

20 Illustrative of still other polymers which are useful as binders are thermoplastic resins, such as polyesters, polyamides, polycarbonates, polymers derived from the polymerization of α,β -unsaturated monomers and the like. Preferred thermoplastic binders
25 are vinyl polymers and copolymers such as vinyl chloride/vinyl acetate copolymers and the like; cellulosic polymers such as nitrocellulose, ethyl cellulose, ethyl hydroxyethyl cellulose, cellulose acetate, hydroxy ethyl cellulose and the like; rubbers
30 such as styrene-butadiene copolymer, chlorinated natural rubbers, and the like; and acrylic polymers or copolymers such as those derived from methyl methacrylate, butyl methacrylate, methyl acrylates, butyl acrylate, ethyl acrylate, 2-ethylexyl acrylate
35 and the like.

2126330

- 33 -

The liquid dispersion medium used in the practice of this invention may vary widely and any such medium used in conventional paints may be used. Such mediums and the particular binders with which they are used are well known in the art and will not be described in detail. Illustrative of such dispersion mediums are water and organic liquids such as hydrocarbons. Paints are often classified on the bases of the dispersion medium; those which use water as the primary liquid of the paint and those which use organic liquids as the primary liquid of the paint. Many of the same polymeric binders can be used in both types of paint. Water based paints are primarily latex paints, where the polymer particles are a discontinuous phase and water is the continuous phase. The water used to support the latex particles may be basic or acidic. Acidic formulations are preferred for the current invention. More preferably, the pH is equal to or less than about 5. Most preferably the pH is equal to or less than 3. In latex paints, the latex binder consists of very small particles of liquid to semisolid polymer separated by water, which is the continuous phase. When the water evaporates, the polymer particles touch each other and fuse together, or coalesce, into a continuous paint film on drying. When used, pigment particles are also dispersed in the water phase, and the dry paint film consists of a mixture of pigment and polymer particles fused together. If the latex particles are so hard that they will not fuse together when the water evaporates, plasticizers are preferably added, e.g. carbitol acetate or dibutyl phthalate. Rutile titanium dioxide is the primary pigment used in latex paints to obtain opacity, or hiding, in white or pastel paints. Semi-chalking grades are used for interior paints, chalk-resistant

2126330

- 34 -

grades for exterior paints, and fine-particle-size grades for semigloss paints. Zinc oxide is sometimes used for exterior paints to help prevent mildew, but care must be taken in using this pigment because of its chemical reactivity.

A number of pigments, such as calcined clay and delaminated clay, can be used to advantage in latex paints as titanium dioxide extenders to increase opacity. These pigments have large surface areas due to irregular surfaces or fine particle size, and the latex vehicle will not cover all the pigment surface when the paint film is dry, leaving entrapped air in the film. The interfaces of air with pigment and vehicle increase the light scattering within the film and thus the opacity. Good hiding can be obtained with these pigments at a low cost, but the paint film often becomes porous and difficult to clean and is less preferred for the anticorrosion application of the present invention.

Most of the common extenders, e.g., mica, calcium carbonate, clay, talc, silica, and wollastonite, can be used in latex paints. Since these pigments vary in particle size, shape, hardness, color, surface treatment, and water demand, they can affect viscosity, flow, gloss, color, cleanability, scrubbability, enamel holdout, uniformity of appearance, and even opacity to some extent. Extender pigments are selected to obtain the desired properties for each type of paint. Slightly soluble ammonium phosphate compounds are used as the primary pigment in intumescent fire-retardant paints.

Surfactants are used in latex paints to help wet and disperse pigments, emulsify liquids, and function as defoamers. These materials have a balanced polar-nonpolar structure, which in water-base paints is

2126330

- 35 -

usually referred to as a hydrophile-lipophile balance. The chemical composition of surfactants can vary greatly, and they are usually only classified into anionic, cationic, and nonionic types. Anionic surfactants (arylsulfonates, sulfosuccinic acid esters, soaps, water-soluble amines, and sulfonated oils) and nonionic surfactants (partial esters of polyhydric alcohols with long-chain carboxylic acids, long-chain alcohols with free hydroxyl groups, and ethers of poly-hydric alcohols with long-chain fatty alcohols) are used primarily in latex paints.

The more hydrophilic water-soluble surfactants are used to wet and disperse pigments. Surfactants with a lipophilic chain to dissolve in a polar liquid and a hydrophilic group to dissolve in water are used to emulsify varnishes or oils in latex paints. Surfactants which are not water-soluble are used as defoamers.

Thickeners or protective colloids are used in latex paints to produce the desired viscosity and help stabilize emulsions and pigment dispersions. Water-soluble protein or casein dispersions and cellulosic polymers (carboxymethyl, hydroxyethyl, and methyl cellulose) are the most commonly used. Soluble polyacrylates, starches, natural gums, and inorganic colloidal materials have also been used.

Protective colloids can affect many properties of a paint, such as washability, brushability, rheological properties, and color acceptance. Since latex paints are susceptible to bacterial attack, they should contain preservatives. Several different types of preservatives can be used: phenolic, mercuric, arsenic, or copper compounds, formaldehyde, and certain quaternary chlorinated compounds. Some of these compounds are chemically active, and some are toxic,

2126330

- 36 -

facts which must be considered in selecting a preservative. Many of the polymers used in the plastics industry and in solution coatings previously described can also be obtained in latex form. An
5 advantage of using polymers in this form is that high-molecular-weight fully cured polymers can be made to flow well whereas in solution form they would have high solution viscosities. The main types of latex polymers used in latex paints are styrene-butadiene, vinyl homo-
10 or copolymers, and acrylic polymers or copolymers.

In the preferred embodiments of the invention, the dispersion medium is an organic liquid, because unmodified thermosetting polymeric binders such as alkyds can be dissolved in such liquids. However, in
15 other embodiments many of the synthetic polymers now used in solvent or latex paints can be solubilized in water. Carboxylic, hydroxyl, epoxy, or amine groups on a polymer in conjunction with coupling solvents, such as alcohols, alcohol ethers, or glycol ethers, are the
20 primary mechanisms by which resins are solubilized. Maleic or fumaric acids can be reacted with drying oils to produce resins with some carboxyl groups which can be solubilized in water with ammonia or amines. Alkyds can be solubilized in water by leaving a reactive
25 carboxylic group on the resin instead of terminating the reaction with a monobasic acid or drying-oil acid. Dimethylol propionic acid, $\text{CH}_3\text{C}(\text{CH}_2\text{OH})_2\text{COOH}$, and trimellitic anhydride have been used for this reaction. A styrene-alkyl alcohol copolymer esterified by a fatty
30 acid and reacted with maleic anhydride to provide solubility can be used as a water-soluble paint vehicle. Amine-solubilized water soluble polyesters, acrylics, epoxy esters, and phenolics can also be prepared. Water-soluble resins are usually solubilized
35 by volatile alkalis, such as amines, to prevent the

2126330

- 37 -

paint resin from remaining water-soluble after application.

As a preferred optional ingredient, the paint of this invention includes a colorant or pigment. Since
5 conjugated backbone polymers are most often colored, they may provide a color function. In other instances, additional pigments or colorants may be required. Such materials are well known in the art and will not be described in any great detail. Illustrative of useful
10 pigments are metal oxides, such as titanium oxide, zinc oxide, lead oxide, iron oxide and the like; and metal sulfides such as zinc sulfide, cadmium sulfide and the like.

In addition to the pigment, binder, and liquid, a
15 paint also may contain many optional additives, such as defoamers, extenders, thickeners, flow agents, drying agents catalysts, preservatives, wetting agents, barrier enhancers such as clay and mica, and surfactants, viscosity modifiers and plasticizers to
20 improve various properties of the paint. These optional additives are well known in the art and will not be described herein in any great detail. The selection of the pigments, binder, and additives depends, of course, upon the properties desired in the
25 paint to be made.

The paint of this invention can be conveniently manufactured using conventional procedures well known to those of skill in the art. Illustrative of such procedures are those described in detail in U.S. Patent
30 Nos. 4,403,866, 2,923,438, 3,601,589, and 3,916,168; and British Pat. No. 1,589,705.

A primary concern in the manufacture of paint is the dispersion of pigments in the liquid portion of the paint. The paints of this invention may optionally
35 contain pigments to act as colorants, extenders,

2126330

- 38 -

diffusion barriers and the like, in addition to the conjugated polymers of this invention. Since the conjugated polymers of this invention are present as a fine particle dispersion, a similar art may be employed to achieve the requisite dispersion of the conjugated polymer and the optional pigment alike. Pigments used in paint contain aggregates of fine particles, which are held together by strong forces of attraction. Work is required in the form of high shear or attrition applied to the pigment liquid slurry in order to reduce the pigments to their ultimate particle size as determined by the manufacturer of the pigment. Considerable work may also be required to wet the surface of the pigment and to displace any air or moisture that may be absorbed on the surface by the liquid. Wetting agents such as soaps or detergents in the water phase of latex paints are often used to help wet and disperse pigments.

After the pigments are dispersed, they must be prevented from coming together again and flocculating, or forming soft lumps of pigment and liquid. The nonpolar binder of a solvent-thinned paint will usually serve to envelope the pigment particles and prevent the electrostatic charges on the surface of the pigments from causing flocculation. In dispersions of water-based paints surfactants in the water phase will neutralize the charges on the pigment surfaces, and protective colloids, such as water-soluble cellulosic polymers, are introduced into the water phase to prevent flocculation after dispersion. In practice, few pigments are dispersed to their ultimate particle size, and paints usually contain many aggregates and flocculants.

Since some pigments are harder to disperse than others, different types of dispersing equipment or

2126330

- 39 -

mills are used. Dispersing pigments in a liquid is often called grinding although there is very little reduction in size of the original pigment particles during the dispersion operation of paint manufacture.

5 The high-speed stone mill consists of a stationary carborundum stone and high-speed rotating stone. Pigment pastes are passed between these stones; the distance between the stones can be varied for more or less shearing action. These mills are suitable for
10 high production rates of paints fairly easy to disperse, e.g., architectural paints, where very fine dispersion is not required.

 Roller mills consist of steel rollers rotating in opposite directions at different speeds. The pigment-
15 liquid paste is passed between the rolls, which can be adjusted to different clearances. Three-roll mills are the most widely used in the paint industry. Roller mills have relatively slow production rates and require skilled operators but are capable of producing fine
20 dispersion.

 Heavy-duty dough mixers, consisting of two roughly S-shaped blades which overlap and rotate in opposite directions, are sometimes used to disperse very heavy pastes.

25 Ball and pebble mills consist of large cylindrical steel tanks which rotate around a horizontal axis. The mill is partly filled with steel or porcelain balls or pebbles and the material to be dispersed. Baffle bars are usually added to the sides of the tank to help lift
30 the balls for better dispersion. Steel balls are more efficient because of their greater density but cannot be used to produce white paints. Ball mills require little attention after they have been charged and are capable of producing good dispersion.

35 The sand mill consists of a cylinder containing

2126330

- 40 -

coarse sand as a grinding medium. The pigment paste to be dispersed is fed into the mill, and rotating impeller disks driven by a vertical shaft impart a circulation pattern to the sand-paste mixture. The difference is velocity between the particles near the surface of the impellers and the rest of the material develops a high shear action to disperse the pigments. A coarse screen allows the pigment slurry to pass through the mill while retaining the sand in the mill. Pigment slurries can be passed through these mills for continuous operation. Production rates of sand mills can be fairly good, and dispersion is quite good. These mills are often used for high-quality industrial finishes.

The high-speed disperser consists of a tank containing a circular impeller driven at high speed by a vertical shaft. Dispersion of the pigment liquid mixture is achieved by high shear action developed near the surface of the impeller. High-speed dispensers are used where very fine dispersion is not required or whenever the pigments will disperse easily in the liquid. The production rate is very high, and this type of equipment is used to manufacture most architectural paints.

The necessary preparation time for the paint can be lessened by making a pre-dispersion or concentrate which may consist of the conjugated polymer dispersed in a liquid medium or in a resin optionally containing an additional pigment. The concentration of said conjugated polymer in said dispersion medium is preferably greater than two times the desired concentration in the paint and more preferably greater than three times such concentration. The preparation methods for said concentrate may be similar to that described herein for the dispersion of pigments when

2126330

- 41 -

the medium is a liquid. When the medium is a thermoplastic resin, a precured thermosetting resin or a combination thereof, methods known in the art for compounding fillers in such resins may be employed.

5 The particle size of the conductive polymer in the dispersion of this invention is critical and the size should be such that the polymer can be dispersed in the paint or concentrate to the desired extent. Whether by grinding, milling, shearing, or dispersing, the
10 particle size of the conductive polymer should preferably be less than about Hegman 5, more preferably less than about Hegman 6, and most preferably less than about Hegman 7.

After the conjugated polymer and the optional
15 pigments are dispersed and stabilized in the liquid or concentrate, said liquid or concentrate is usually transferred to a thin-down tank, equipped with slower agitation, where the paint is adjusted to the desired viscosity and shaded. Materials can be added to the
20 paint in the thin-down tank that are not required in the grinding operation and can be added with slow agitation. The binder of a solvent-thinned paint is usually added during the grinding operation; the binder of a latex paint is usually added in the thin-down
25 tank. Thin-down tanks are usually on a floor below the grinding equipment to take advantage of gravity flow, and the finished paint is usually dropped to a floor below the thin-down tanks for straining and filling.

The paints of this invention are useful for such
30 purposes for which conventional paints are used. For example, these paints are useful as top coats, fillers, primers, surfacers and sealers. Paints used as the final coat on a surface are referred to as finish coats or topcoats. Paint applied before the topcoat is
35 called an undercoat. Undercoats often are classified

2126330

- 42 -

according to use. Fillers are undercoats used to fill holes, pores, or irregularities to provide a uniform surface for the topcoat. Primers are used to aid the adhesion of the topcoat to a surface and to prevent absorption of the topcoat into a porous surface. Primers can also be used to prevent corrosion of metals that are to be painted. Surfacer are highly pigmented undercoaters used to make a surface more uniform and give adhesion to the final coat. Surfacers often are formulated so that they can be sanded smooth before the topcoat is applied. Sealers are clear or pigmented materials applied to a surface to prevent some materials in the surface to be painted, e.g., a dye, from migrating into the topcoat.

The paints of this invention exhibit anti corrosive properties. These paints when applied to a metal substrate prevent or retard corrosion of the metal. The anti corrosive properties of the paint of this invention result from the conjugated backbone copolymer or copolymer component of the paint. The paints of this invention are preferably used in applications where anti corrosive properties are useful.

The paints of this invention are preferably used as primers for coating metals which may be subject to corrosion such as steel, steel alloys, aluminum, aluminum alloys and other non-noble metals. The paints are preferably applied to bare "white" metal, which has been prepared by cleaning, sanding, scraping, sand blasting or other methods known in the art for forming a bare white surface.

The paint may be applied to form coatings using conventional procedure. For example, paints may be applied by brush and rollers, air or airless spray equipment, electrostatic, hot, or steam spraying; use

2126330

- 43 -

of aerosol packaging; dip, flow, and electrodeposition coating; roller coating machines; and powder coating.

Although most architectural paints are applied with a brush or roller, much paint is now being applied
5 by professional painters with compressed air or airless spray equipment. With airless spray equipment the paint is atomized by forcing it through a very small orifice under very high pressure.

With electrostatic spraying the atomized paint is
10 attracted to the conductive object to be painted by an electrostatic potential between the paint and the object. Very little paint is lost with this process, and irregular objects can be coated uniformly.

Hot spray application consists of heating the
15 paint so that it is more fluid and higher-solids paints can be applied. With steam spraying, steam is used to atomize the paint.

Two-component spray equipment consists of two material lines leading to the spray gun so that two
20 materials, e.g., an epoxy and a catalyst, can be mixed in the gun just before application.

Aerosol is a method of packaging paint in a can containing a compressed gas so that the paint can be atomized through a small orifice opened by a push
25 button.

Many different methods are used for industrial application of paint, including most of the spray methods.

Dip application is a simple method where objects
30 to be coated are suspended from a conveyor chain and dipped into a large tank containing the paint. This method is often used for undercoating objects where paint uniformity and appearance are not important.

In flow coating the paint is allowed to flow over
35 the object to be painted, which is usually suspended

2126330

- 44 -

from a conveyor. This process is similar to dip coating but is used where the object, e.g., a bed spring, is too large for a tank.

Electrodeposition consists of depositing a paint
5 on a conductive surface from a water bath containing the paint. The negatively charged paint particles are attracted to the object to be coated, which is the anode when an electric potential is applied. Paint can be applied to very irregular surfaces at very uniform
10 thickness with little loss of paint. The system is normally limited to one coat of limited film thickness, and equipment cost is high, but the conductive paints of this invention may be applied as multiple coats since the substrates remain conductive.

15 Roller coating machines are used to apply paint to one or both sides of flat surfaces, e.g., fiberboard or tin plate. The thickness of the coating can be controlled by the clearance between a doctor blade and the applicator rolls. Decorative effects, such as
20 wood-grain pattern, can be applied with these machines. Flat sheets of wood, fiberboard, or metal and rolls of fabric, paper, or metal can be coated with these machines.

In powder coating paint, a dry powder form is
25 applied on the surface of a heated or electrostatically grounded object to be coated. Following powder application, the object is heated to fuse and cure the coating.

The following examples are presented to more
30 particularly illustrate the invention and are not to be construed as limitations thereon.

- 45 -

EXAMPLES 1 to 6 and COMPARATIVE EXAMPLE 1

Alkyd based paints containing various amounts and forms of poly(aniline) were formulated to a
5 specification which was similar to that given for Alkyd Primer #25 by the Steel Structures Painting Council (SSPC). The paints prepared contained no corrosion preventive additives except for poly(aniline). Formulations differed from paint #25 in that they
10 contained no lead oxide and no iron oxide. Rather, they contained a mixture of titanium dioxide as the pigment and poly(aniline) as the conjugated backbone polymer. After the initial synthesis of poly(aniline) tosylate the poly(aniline) component of the paint was
15 treated with an aqueous wash of pH 1 containing dodecylbenzene sulfonic acid resulting in an electrically conductive poly(aniline). Paint containing neutral (less than 2% tosylate per phenyl-nitrogen repeat unit) poly(aniline) was formulated by
20 treating the electrically conductive poly(aniline) component at with ammonium hydroxide until pH 11 was reached. Paints containing partially doped (30% tosylate per repeat unit) poly(aniline) were formulated by treating the electrically conductive poly(aniline)
25 with sodium carbonate until a pH 4 was reached. After drying, these poly(anilines) were added to a liquid dispersion medium along with other paint ingredients, to form a concentrate or tint base as illustrated in the following Table 1 for the case of pH-1 polyaniline.
30 Concentrates containing partially doped (pH-4) polyaniline and neutral (pH-11) polyaniline were formulated in the same manner.

2126330

- 46 -

TABLE 1

FORMULATION FOR CONCENTRATE OF PANI 1		
MATERIALS	AMOUNT	VOLUME PERCENT
I. Charge the Following to the Pebble Mill:		
5 a) PANI 1 ¹	57.43 kg	10.85
b) DA 15 ²	88.63 kg	33.94
c) PMA ³	53.57 kg	14.66
d) Aromatic Naphtha 100	53.57 kg	16.29
10 II. Grind for Over 50 Hours to Hegman 7+, Then Let Down as Follows:		
a) PMA ³	42.09 kg	11.52
b) Aromatic Naphtha ⁴	42.09 kg	12.77
III. Totals:		
15 a) Total Concentrate	382.75 kg	100.03
b) Total Solid (T.S.):	37.76 %	-
c) Total PANI ¹	15.00 %	-
d) VOC (Volatile Organic Compound):	238.21 kg	-

- 20 1. "PANI 1" is poly(aniline) doped at pH 1.
 2. "DA 15" is a dispersant from Daniel Products containing 65% solids.
 3. "PMA" is propylene glycol methyl ether acetate.
 4. "Aromatic Naphtha 100" is a solvent from Eastman.

25

To form the desired paints, these concentrates were combined with other paint ingredients as illustrated in the following Tables 2 and 3 for an alkyd paint containing poly(aniline) doped to the
 30 desired level by treatment at pH 1, 4 or 11 as described above.

- 47 -

TABLE 2

FORMULATION FOR ALKYD-PANI 1			
	<u>MATERIALS</u>	<u>AMOUNT</u> (kg)	<u>VOLUME</u> <u>PERCENT</u>
	I. Charge the Following to High Speed Dispersion		
5	Alkyd Resin (Reichhold's 366-70M)	71.94	19.83
	Raw Linseed Oil	19.19	5.47
	SD-1 (Rheological Additive)	9.62	1.72
	Nytal* 200 (Magnesium Silicate)	62.82	5.79
	Tint Base - PANI	196.64	51.37
10	Mica 221	24.00	2.22
	CR-822 (Rutile Titanium Dioxide)	38.37	2.53
	II. Grind in High Speed Dispenser to Hegman 5+, Then let Down as Follows:		
	Raw Linseed Oil	24.00	6.85
15	Troysol* AFL (Anti-Float Liquid)	1.95	0.61
	Troymax* Calcium 8% (dryer)	2.40	0.67
	Troymax* Colbalt 12% (dryer)	0.95	0.25
	Troymax* Zirconium 24% (dryer)	0.95	0.20
	Troykyd* Anti-Skin B	0.95	0.33
20	Mineral Spirit	1.91	2.16
	III. Total	459.72	100.00

25

TABLE 3

ALKYD - PANI 1 PAINT FORMULATION ANALYSIS	
Parameter	Value
Total Solids:	66.42%
30 Total Pigment:	33.54%
Pig/T.S.:	50.50%
PANI 1/T.S.:	9.66%
Theoretical Coverage:	17.3m ² /L/25 microns
Weight per Gallon:	1.2 Kg/L
35 VOC (Volatile Organic Compounds):	0.41 Kg/L

* Trade-mark

2126330

- 48 -

The term total pigment in Table 3 refers to the sum of weights of materials with pigment-like physical properties including the polyaniline, the magnesium silicate, the Mica 221, and the titanium dioxide.

- 5 Table 4 below lists the formulations prepared, and estimates the amount of polyaniline in each paint as a function of the percent of total solids (T.S.) in the dry coating. A dried coating of the paint containing polyaniline (pH 1) exhibited a low conductivity
 10 (10^{-6} S/cm). The other paint formulations exhibited no measurable conductivity.

TABLE 4

15	EX. NO.	TYPE of PANI (pH)	TYPE of COATING	PANI ¹ (% of T.S.)	PIG ³ (% of T.S.)	T.S. ² (%)
	Comp. Ex. 1	-	Alkyd	0.0	47.1	87.4
	Ex. 1	PANI 1	Alkyd-PANI 1	3.35	49.4	72.9
	Ex. 2	PANI 1	Alkyd-PANI 1	9.66	50.5	66.4
20	Ex. 3	PANI 4	Alkyd-PANI 4	2.52	49.6	73.6
	Ex. 4	PANI 4	Alkyd-PANI 4	7.01	48.0	64.1
	Ex. 5	PANI 11	Alkyd-PANI 11	2.52	49.6	71.9
	Ex. 6	PANI 11	Alkyd-PANI 11	8.84	56.2	52.7

- 25 1 "PANI" means polyaniline.
 2 "T.S." means total solids.
 3 "PIG" means pigment.

2126330

- 49 -

COMPARATIVE EXAMPLE 2

A series of experiments were carried out to demonstrate the superior corrosion protection provided by the paint of this invention and the electrical conductivity of the dried paint. The paints selected for evaluation were those of Examples 1 to 6 and Comparative Example 1 as well as a commercial alkyd primer.

The paints were applied to bare (white metal) sand-blasted steel panels by spraying. The spraying was carried out in a manner to give a coating of a minimum thickness of about 0.005 cm. The electrical conductivity of the dried coating was evaluated by the four-in-line probe method.

The corrosion resistance of the alkyd paints of Example 1 were tested by exposure of duplicate panels to a salt fog (per the ASTM procedure B-117). The panels were scribed in their lower third with an "X". The performance of the paints which contained polyaniline was compared to that of a formulation of Comparative Example 1 with no polyaniline and a commercially available alkyd primer from Carboline, GP818.

The panels were evaluated at 250 and 500 hours of exposure. Panels were evaluated for blistering (B), overall rust (OR) and scribe rust (SR).

Blistering evaluations were performed in accordance with ASTM D-714. Blister sizes were indicated by numbers (a "2" being the largest and an "8" the smallest), while blister frequency was indicated by few (F), medium (M), medium dense (MD), and dense (D). Overall rusting was evaluated in accordance with ASTM D-610. A value of "10" corresponds to no rust, while lower numbers correspond to increasingly greater amounts of rust. Rust at the

2126330

- 50 -

scribe was evaluated in terms of measuring the amount of creepage from the center of the scribe cut.

The results of exposure for 250 hours are summarized in Table 5, and those for 500 hours exposure in Table 6. From the point of view of overall rust, the best results were provided by the paint which had the heaviest loading of polyaniline in its conductive salt form (pH 1), although the paint coating even in this case was found to be poorly conductive ($<10^{-6}$ S/cm).

TABLE 5
ALKYDS, SALT FOG, 250 HOURS

Exp. No.	Coatings	Panel	Blisters	Scribe Rust	Overall Rust	
15	1	Comp. Ex. 1	AS14	6MD (6D scribe)	<0.15cm	4
	2	Comp. Ex. 1	AS15	3F (6F scribe)	<0.15cm	8
	3	Ex. 1	AS01	6M (3D scribe)	<0.3 cm	7
	4	Ex. 1	AS02	5M (3D scribe)	<0.3 cm	7
	5	Ex. 2	AS07	None (3F scribe)	<0.15cm	7
20	6	Ex. 2	AS08	None (6F scribe)	<0.15cm	8
	7	Ex. 3	AS19	6F (4M scribe)	<0.15cm	7
	8	Ex. 3	AS20	6F (4M scribe)	<0.15cm	7
	9	Ex. 4	AS25	None	<0.15cm	1
	10	Ex. 4	AS26	None	<0.15cm	1
25	11	Ex. 5	AS31	6F (8MD scribe)	<0.15cm	7
	12	Ex. 5	AS32	6F (8MD scribe)	<0.15cm	6
	13	Ex. 6	AS37	None	<0.15cm	1
	14	Ex. 6	AS38	None	<0.15cm	1
30	15	GP818	AS55	7MD (6M scribe)	<0.15cm	2
	16	GP818	AS56	7MD (6M scribe)	<0.15 cm	2

- 51 -

TABLE 6
ALKYDS SALT FOG, 500 HOURS

	<u>Exp. No.</u>	<u>Coatings</u>	<u>Panel</u>	<u>Blisters</u>	<u>Scribe Rust</u>	<u>Overall Rust</u>
5	1	Comp. Ex. 1	AS14	4D	<0.15cm	0
	2	Comp. Ex. 1	AS15	4MD	<0.15cm	5
	3	Ex. 1	AS01	(2D scribe) 4D	<0.15cm	3
	4	Ex. 1	AS02	(2D scribe) 4D	<0.15cm	2
10	5	Ex. 2	AS07	(2D scribe) 6MD	<0.15cm	7
	6	Ex. 2	AS08	(2D scribe) 6MD	<0.15cm	8
	7	Ex. 3	AS19	4D	<0.15cm	4
	8	Ex. 3	AS20	4D	<0.15cm	4
	9	Ex. 4	AS25	(none scribe) 6F	<0.15cm	0
15	10	Ex. 4	AS26	(none scribe) 6F	<0.15cm	0
	11	Ex. 5	AS31	4D	<0.15cm	2
	12	Ex. 5	AS32	4D	<0.15cm	2
	13	Ex. 6	AS37	(none scribe) 6F	<0.15cm	0
	14	Ex. 6	AS38	(none scribe) 6F	<0.15cm	0
20	15	GP818	AS55	4D	<0.15cm	2
	16	GP818	AS56	4D	<0.15cm	2

EXAMPLES 7 and 8 and COMPARATIVE EXAMPLE 3

Vinyl based paints containing various amounts and forms of polyaniline were formulated to a specification which was similar to that given for Vinyl Primer #9 by the Steel Structures Painting Council (SSPC). The paints contained no corrosion preventive additives except for the polyaniline. The formulations differed from paint #9 in that they contained no lead oxide and no iron oxide. Rather they contained a mixture of titanium dioxide as the pigment and polyaniline as the conjugated backbone polymer. Polyaniline equilibrated at pH 1, pH 4, pH 11 were obtained as in Example 1. After drying these polyanilines were ball milled to form a concentrate (tint base) as illustrated in the

2126330

- 52 -

following Table 7 for polyaniline treated at pH 11.
The concentrate for pH 1 is described in Table 1.

TABLE 7

5	FORMULATION FOR CONCENTRATE OF PANI 11		
	<u>MATERIALS</u>	<u>AMOUNT</u>	<u>VOLUME PERCENT</u>
	<u>I. Charge the Following to the Pebble Mill</u>		
	a) PANI 11 ¹	32.70kg	7.01
10	b) DA 15 ²	62.35kg	16.55
	c) PMA ³	94.39kg	25.83
	d) Aromatic Naphtha 100 ⁴	94.39kg	28.64
15	<u>II. Grind for Over 50 Hours of Hegman 7+, Then let Down as Follows:</u>		
	a) PMA ³	38.10 kg	10.42
	b) Aromatic Naphtha 100 ⁴	38.10 kg	11.55
20	<u>III. Totals:</u>		
	a) Total Concentrate	363.02 kg	100.00
	b) Total Solids (T.S.):	20.7 %	-
25	c) Total PANI ¹	9.01 %	-
	d) VOC (Volatile Organic Compounds):	288.04 kg	-

- 30 1. "PANI" is poly(aniline) doped at pH 1, 4 or 11.
 2. "DA 15" is a dispersant from Daniel Products containing 65% solids.
 3. "PMA" is Propylene Glycol Methyl Ether Acetate.
 4. "Aromatic Naphtha 100" is a solvent from Eastman.

35

To form the desired paints, these concentrates were combined with other paint ingredients as illustrated in the following Tables 8 and 9 for a vinyl paint containing polyaniline doped to the desired level
 40 by treatment at pH 1 (4 or 11) as described in Table 10.

- 53 -

TABLE 8

FORMULATION FOR VINYL-PANI 1		
MATERIALS	AMOUNT (kg)	VOLUME PERCENT
I. Change the Following to High Speed Dispersion		
5 Xylol	115.21	35.28
VAGH (Solution Vinyl)	18.46	3.51
VMCH (Solution Vinyl)	18.46	3.61
Methylisobutylketone	115.21	37.62
II. Let Down as Follows and Grind in Pebble Mill to Hegman 6$\frac{1}{2}$+		
10 Dioctyl Phthalate	8.71	2.35
SD-3 (Rheological Additive)	1.72	0.28
Soya Lecithin	0.68	0.18
Troysol (Anti-float Liquid)	1.72	1.45
15 CR-800 (Rutile TiO ₂)	26.13	1.68
Concentrate-PANI 1-	57.20	14.94
III Total	-	99.90

20

TABLE 9

VINYL - PANI PAINT FORMULATION ANALYSIS	
Parameter	Value
Total Solid:	26.48%
25 Total Pigment:	9.55%
Pigment/T.S.:	36.06%
PANI /T.S.:	8.91%
Theoretical Coverage:	5.93 m ² /L/25 micron
Weight per Gallon:	0.96 kg/L
30 VOC (Volatile Organic Compounds):	0.71 kg/L

The term total pigment in Table 9 refers to the sum of weights of materials with pigment-like physical properties including the polyaniline and the titanium dioxide. Table 10 below lists the formulations prepared, and estimates the amount of polyaniline in

2126330

- 54 -

each paint as a function of the percent of total solids (T.S.) in the dry coating. A dried coating of the paint made from polyaniline treated at pH 1 exhibited a conductivity of about 10^{-3} S/cm. The paints made from polyaniline treated at pH 4 and pH 11 exhibited no measureable conductivity.

TABLE 10

Ex. No.	Type of PANI ¹ (pH)	Type of Coating	PANI % of T.S. ²	PIG % of T.S. ²
10 Comp. Ex. 3	-	Vinyl	0.0	33.9
Ex. 7	PANI 1	Vinyl-PANI 1	2.95	32.8
Ex. 8	PANI 1	VINYL - PANI 1	8.91	36.1
Ex. 9	PANI 4	Vinyl-PANI 4	2.97	34.1
15 Ex. 10	PANI 4	Vinyl-PANI 4	8.93	34.6
Ex. 11	PANI 11	Vinyl-PANI 11	2.97	34.1
Ex. 12	PANI 11	Vinyl-PANI 11	8.89	34.5

1. "PANI" means polyaniline.

2. "PANI T.S." means total polyaniline solids.

20 3. "PIG T.S." means total pigment solids.

COMPARATIVE EXAMPLE 4

A series of experiments were carried out to demonstrate the superior corrosion protection provided by the paint of this invention. The paints selected for evaluation were those of Examples 7, 8, 9, 10, 11 and 12 and those of Comparative Example 3 and a commercial vinyl primer.

The paints were applied to bare (white metal) sand-blasted steel panels by spraying. The spraying was carried out in a manner to give a coating of a

- 55 -

minimum thickness of about 0.005 cm. The panels were scribed in their lower third with an "X".

The corrosion resistance of the vinyls of Table 10 were tested by exposure of duplicate panels to a salt fog (per the ASTM procedure B-117). The performance of the paints which contained polyaniline was compared to that of a formulation with no polyaniline and a commercially available vinyl primer from Carboline, Rust Bond 6C. (CRB6C)

The coated steel panels were examined at 250 hours and at 500 hours. Evaluations were made according to ASTM procedures as described in Example 3. The results of exposure for 250 hours are summarized in Table 11 and those for 500 hours exposure in Table 12.

TABLE 11

SALT FOG, VINYLs, 250 HOURS					
Exp No	Coating	Panel	Blisters	Scribe Rust	Overall Rust
1	Comp. Ex. 3	AS73	8F (2M scribe)	<0.15cm	8
2	Comp. Ex. 3	AS74	2M	<0.15cm	9
3	Ex. 7	AS61	8M (8M scribe)	<0.15 cm	7
4	Ex. 7	AS62	8M (2F scribe)	<0.15cm	7
5	Ex. 8	AS67	6M	<0.15cm	8
6	Ex. 8	AS68	6M	<0.15cm	8
7	Ex. 9	AS79	None (2F scribe)	<0.15cm	8
8	Ex. 9	AS80	2F	<0.15cm	8
9	Ex. 10	AS85	6D (2F scribe)	<0.15cm	3
10	Ex. 10	AS86	6D (2F scribe)	<0.15cm	3
11	Ex. 11	AS91	8F (2M scribe)	<0.15cm	8
12	Ex. 11	AS92	8F (2M scribe)	<0.15cm	8
13	Ex. 12	AS97	8F (2M scribe)	<0.15cm	8
14	Ex. 12	AS98	8F (2F scribe)	<0.15cm	8
11	CRB6C	AS117	6M (3D scribe)	<0.15cm	7
12	CRB6C	AS118	5M (3D scribe)	<0.15cm	7

2126330

- 56 -

TABLE 12

SALT FOG, VINYL, 500 HOURS						
Exp. No.	Coatings	Panel	Blisters	Scribe Rust	Overall Rust	
5	1	Comp. Ex. 3	AS73	2M (2MD scribe)	<0.15 cm	6
	2	Comp. Ex. 3	AS74	2M (2MD scribe)	<0.15 cm	6
	3	Ex. 7	AS61	4M(2M scribe)	<0.15 cm	7
	4	Ex. 7	AS62	4MD(4M scribe)	<0.15 cm	5
10	5	Ex. 8	AS67	4MD	<0.15 cm	6
	6	Ex. 8	AS68	4MD	<0.15 cm	7
	7	Ex. 9	AS79	6M(2M scribe)	<0.15 cm	7
	8	Ex. 9	AS80	2F & 8M(2M scribe)	<0.15 cm	7
15	9	Ex. 10	AS85	4D(2M scribe)	<0.15 cm	3
	10	Ex. 10	AS86	4D	<0.15 cm	3
	11	Ex. 11	AS91	7F(2MD scribe)	<0.15 cm	7
	12	Ex. 11	AS92	7F(2MD scribe)	<0.15 cm	7
20	13	Ex. 12	AS97	6D(2M scribe)	<0.15 cm	8
	14	Ex. 12	AS98	6D(2M scribe)	<0.15 cm	8
	15	CRB6C	AS117	6M(8MD scribe)	<0.15 cm	3
	15	CRB67	AS118	6M(8MD scribe)	<0.15 cm	2

From the point of view of overall rust, the best results were provided by the paints which had the heaviest loading of polyaniline in its non-conductive form (pH 11). Although the paint coating containing the highest concentration of pH 1 polyaniline exhibited the interesting behavior of having half the sample corroded and the other half nearly pristine. This paint was conductive (10^{-3} S/cm), and showed evidence for the shorting of corrosion microcells consisting of anode and cathode. The results for these samples (AS67 and AS68) exhibited a macroscopic division of each of the samples into anode and cathode with only the cathodic portion of the panel exhibiting corrosion.

2126330

- 57 -


The resistance between the coating and the substrate steel was found to be $>10^9$ ohms. These observations taken together demonstrated that an anodic protection mechanism was not operative.

- 58 -

WHAT IS CLAIMED IS:

1. . An improved anticorrosion paint of the type comprising one or more polymeric binders dispersed in a liquid medium, said improvement comprising an anti-corrosion effective amount of one, or more than one neutral or electrically conductive conjugated homopolymer or copolymer, wherein said paint on drying forms a coating which has an electrical conductivity of less than about 10^{-9} S/cm.

2. A paint according to claim 1 wherein said conjugated homopolymer or copolymer is a substituted or unsubstituted polyaniline, wherein said polyaniline is of the type derived from polymerizing an aniline of the Formula I:

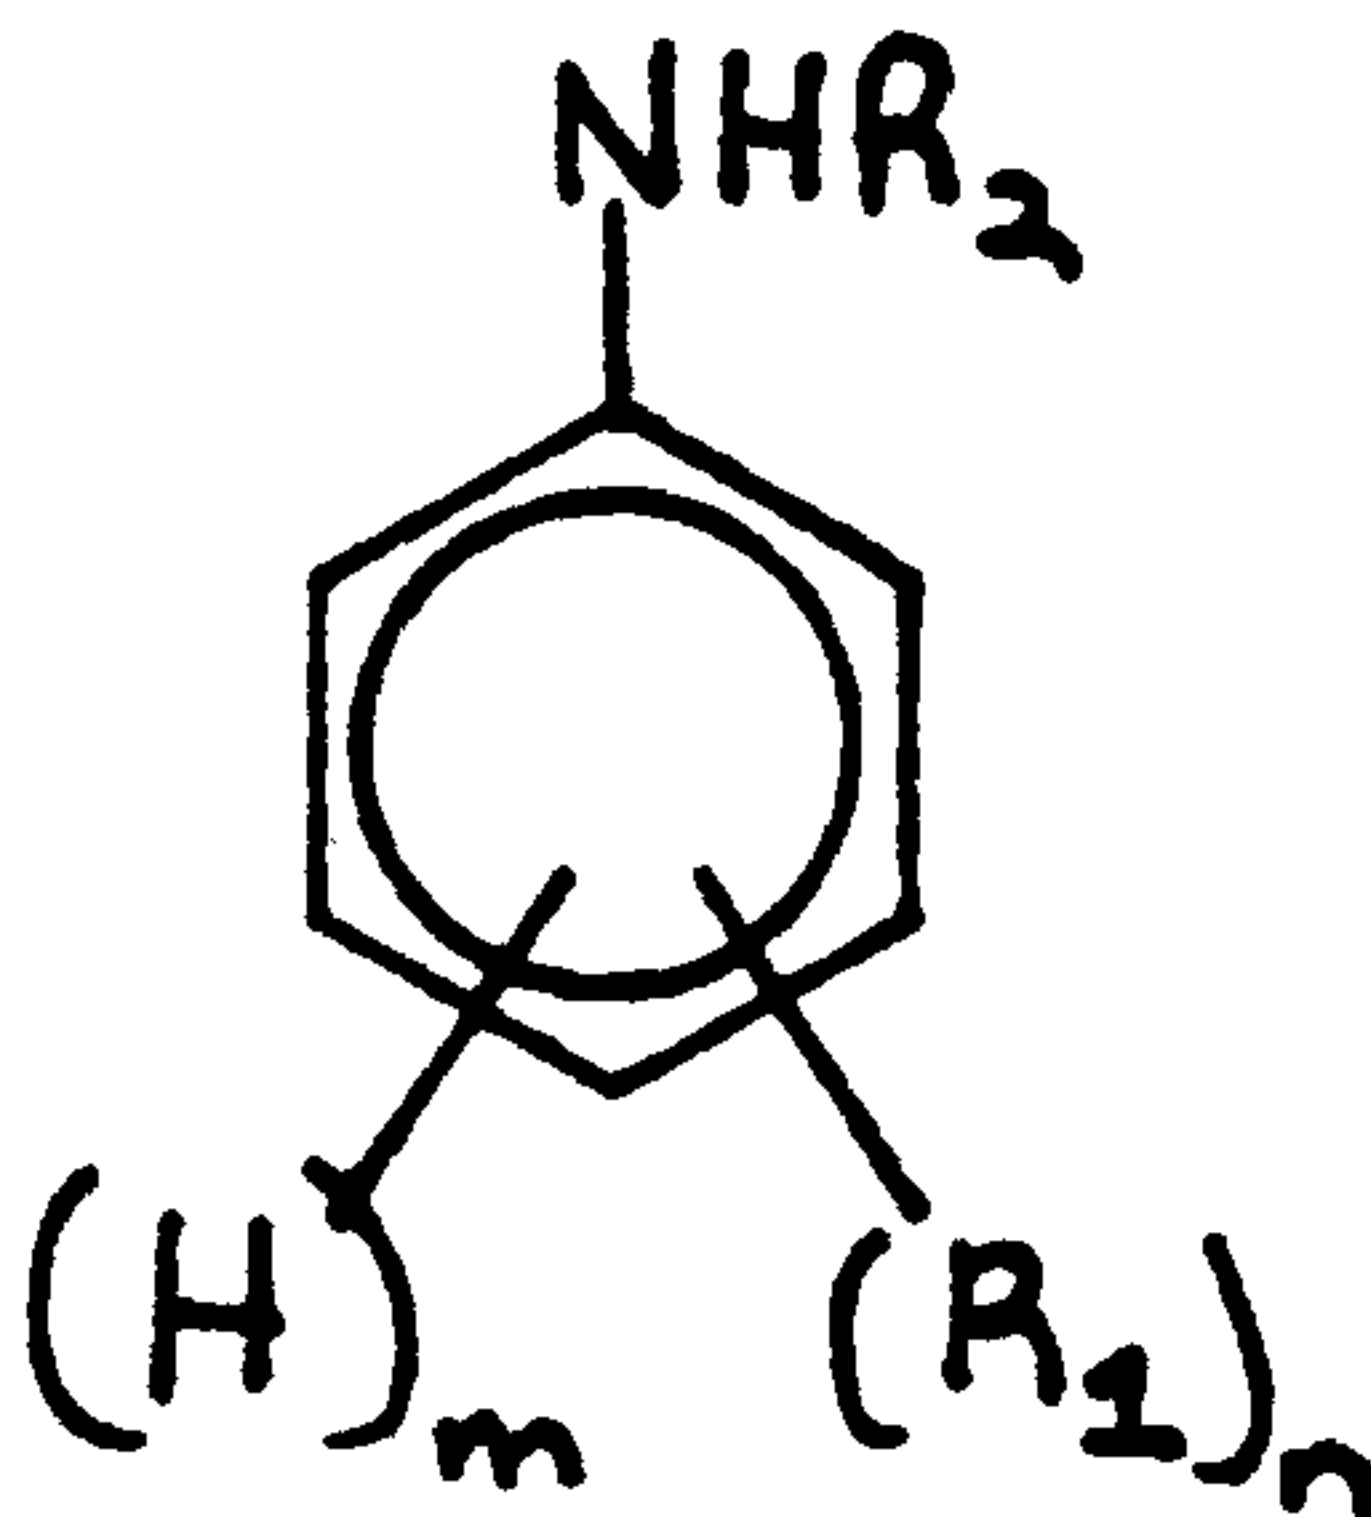Formula I

or is a derivative of polyaniline of the type derived from polymerizing said aniline wherein:

n is an integer from 0 to 5;

m is an integer from 0 to 5, with the proviso that the sum of n and m is 5;

R_1 is phosphinic acid or a salt or ester thereof, phosphonic acid or a salt or ester thereof, sulfonic acid, boric acid or a salt or ester thereof, phosphoric acid, alkylamino, dialkylamino, arylamino, diarylamino, alkylarylamino, amino, hydroxy, sulfinic acid, nitro, carboxylic acid or a salt or ester thereof, halo, cyano, deuterium, or substituted or unsubstituted

2126330

- 59 -

alkyl, alkenyl, alkoxy, cycloalkyl, cycloalkenyl,
 alkanoyl, alkylthio, alkynyl, dialkylamino, arylamino,
 diarylamino, alkylarylamino, aryloxy, hydroxy,
 alkylthioalkyl, alkylaryl, arylalkyl, aryloxy, amino,
 5 alkylthioalkyl, alkylaryl, arylalkyl, alkylsulfinyl,
 alkoxyalkyl, alkylsulfonyl, aryl, arylthio,
 arylsulfinyl, alkoxycarbonyl, alkylsilane, or
 arylsulfonyl, wherein permissible substituents are one
 or more amino, alkylamino, dialkylamino, arylamino,
 10 diarylamino, phosphinic acid salt or ester thereof,
 alkylarylamino, phosphonic acid salt or ester thereof,
 sulfonic acid salt or ester thereof, boric acid salt or
 ester thereof, sulfinic acid salt or ester thereof,
 phosphoric acid salt or ester thereof, carboxylic acid
 15 salt or ester thereof, halo, nitro, hydroxy, cyano, or
 epoxy moieties; or any two R_1 substituents or any one
 R_1 substituent and R_2 substituent taken together may
 form substituted or unsubstituted alkylene, alkynylene
 or alkenylene chain completing a 3, 4, 5, 6, 7, 8, 9 or
 20 10 membered aromatic, heteroalicyclic, heteroaromatic
 or alicyclic carbon ring, which ring may optionally
 include one or more divalent ester, carbonyl, nitrogen,
 sulfur, sulfinyl, sulfonyl or oxygen, wherein
 permissible substituents are one or more amino,
 25 alkylamino, phosphinic acid salt or ester thereof,
 dialkylamino, arylamino, diarylamino, alkylarylamino,
 phosphonic acid salt or ester thereof, sulfonic acid
 salt or ester thereof, boric acid salt or ester
 thereof, sulfinic acid salt or ester thereof,
 30 phosphoric acid salt or ester thereof, carboxylic acid
 salt or ester thereof, halo, nitro, hydroxy, cyano or
 epoxy moieties, or R_1 is an aliphatic moiety having
 repeat units of the formula:

35



2126330

- 60 -




wherein q is a positive whole number; and

R_2 is the same or different at each occurrence and
 5 is R_1 substituents or hydrogen.

3. A paint according to claim 2 wherein said
 homopolymer or copolymer is comprised of the Formula
 IV:

Formula IV

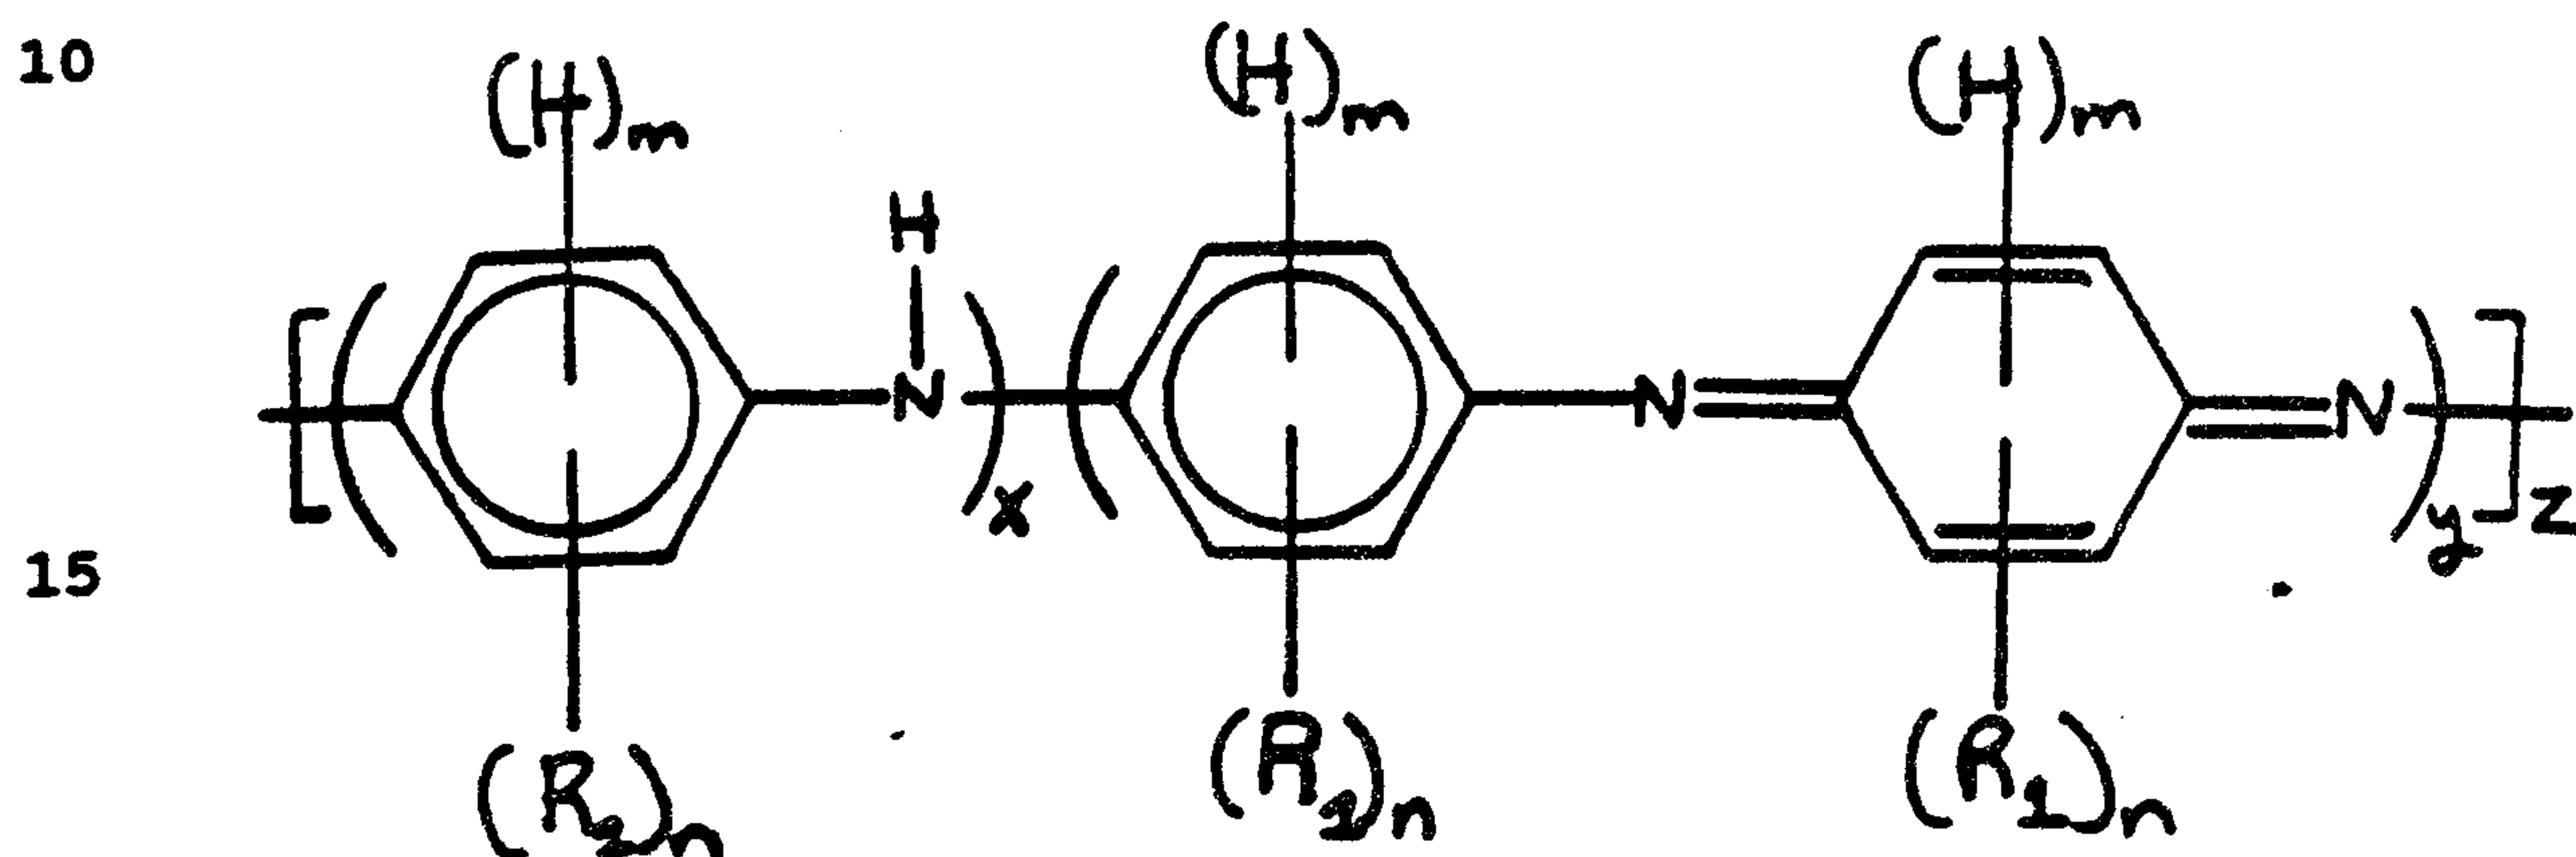

20 wherein:

x and y are the same or different at each
 occurrence and are integers equal to or greater than 0,
 with the proviso that the sum of x and y are greater
 than 0;

25 z is an integer equal to or greater than about 1;

n is an integer from 0 to 3;

m is an integer from 1 to 4, with the proviso that
 the sum of n and m is 4;

R_1 is the same or different at each occurrence and
 30 is alkyl, alkenyl, alkoxy, cycloalkyl, cycloalkenyl,
 alkanoyl, amino, alkylamino, dialkylamino, arylamino,
 diarylamino, alkylarylamino, alkylthio, aryloxy,
 alkylthioalkyl, alkylaryl, arylalkyl, alkylsulfinyl,
 alkoxyalkyl, alkylsulfonyl, aryl, arylthio,
 35 arylsulfinyl, alkoxycarbonyl, phosphinic acid or a salt

- 61 -

or ester thereof, phosphonic acid or a salt or ester thereof, alkylsilyl, boric acid or a salt or ester thereof, arylsulfonyl, carboxylic acid or a salt or ester thereof, halo, hydroxy, nitro, cyano, sulfonic acid or a salt or ester thereof, phosphoric acid or a salt or ester thereof or aryloxy, alkyl or alkoxy substituted with one or more sulfonic acid, carboxylic acid or a salt or ester thereof, phosphoric acid or a salt or ester thereof, boric acid or a salt or ester thereof, sulfinic acid or a salt or ester thereof, halo, nitro, cyano, epoxy, hydroxy, phosphinic acid or a salt or ester thereof, or phosphonic acid or a salt or ester thereof or; or any two R_1 groups or any one R_1 group and R_2 group together may form a substituted or unsubstituted alkylene or alkenylene chain completing a 3, 4, 5, 6, 7, 8, 9 or 10 membered heteroaromatic, heteroalicyclic, aromatic or alicyclic carbon ring, which chain may optionally include one or more divalent nitrogen, ester, carbonyl, sulfur, sulfinyl, sulfonyl or oxygen group, wherein permissible substituents are one or more sulfonic acid or salt or ester thereof, carboxylic acid or salt or ester thereof, phosphoric acid or salt or ester thereof, boric acid or salt or ester thereof, sulfinic acid or salt or ester thereof, halo, nitro, cyano, epoxy, hydroxy, phosphinic acid or salt or thereof or, phosphonic acid or salt or ester thereof.

4. A paint according to claim 3 wherein:

R_2 is hydrogen;

R_1 is the same or different at each occurrence and is alkyl or alkoxy having from 1 to about 12 carbon atoms or a protonic acid function or a salt thereof;

x is an integer equal to or greater than 2;

y is equal to or greater than 0; and

z is an integer equal to or greater than about 5.

- 62 -

5. A paint according to claim 3 or 4 wherein m is 4 and n is 0.

6. A paint according to claim 1 wherein the amount of said conjugated polymer is greater than about 3% by weight of the dried film formed from the paint.

7. A paint according to claim 6 wherein said amount is from about 3% by weight to less than about 20% by weight of said film.

8. A paint according to claim 2 wherein said conjugated polymer is neutral and said paint forms a dried coating having an electrical conductivity of less than about 10^{-9} S/cm.

9. The paint of claim 2 wherein on drying said polymers are electrically conductive and said paint forms a dried coating having an electrical conductivity of less than about 10^{-2} S/cm.


10. A paint according to claim 9 wherein said conjugated homopolymer or copolymer is doped by a dopant at a doping level equal to or greater than about 3 mole %.

11. A paint according to claim 9 wherein said polyaniline is doped by an organic or inorganic acid dopant having a pKa equal to or less than that of said polyaniline.

12. A paint according to claim 11 wherein said dopant is an acid or acid derivative of the formula:



or

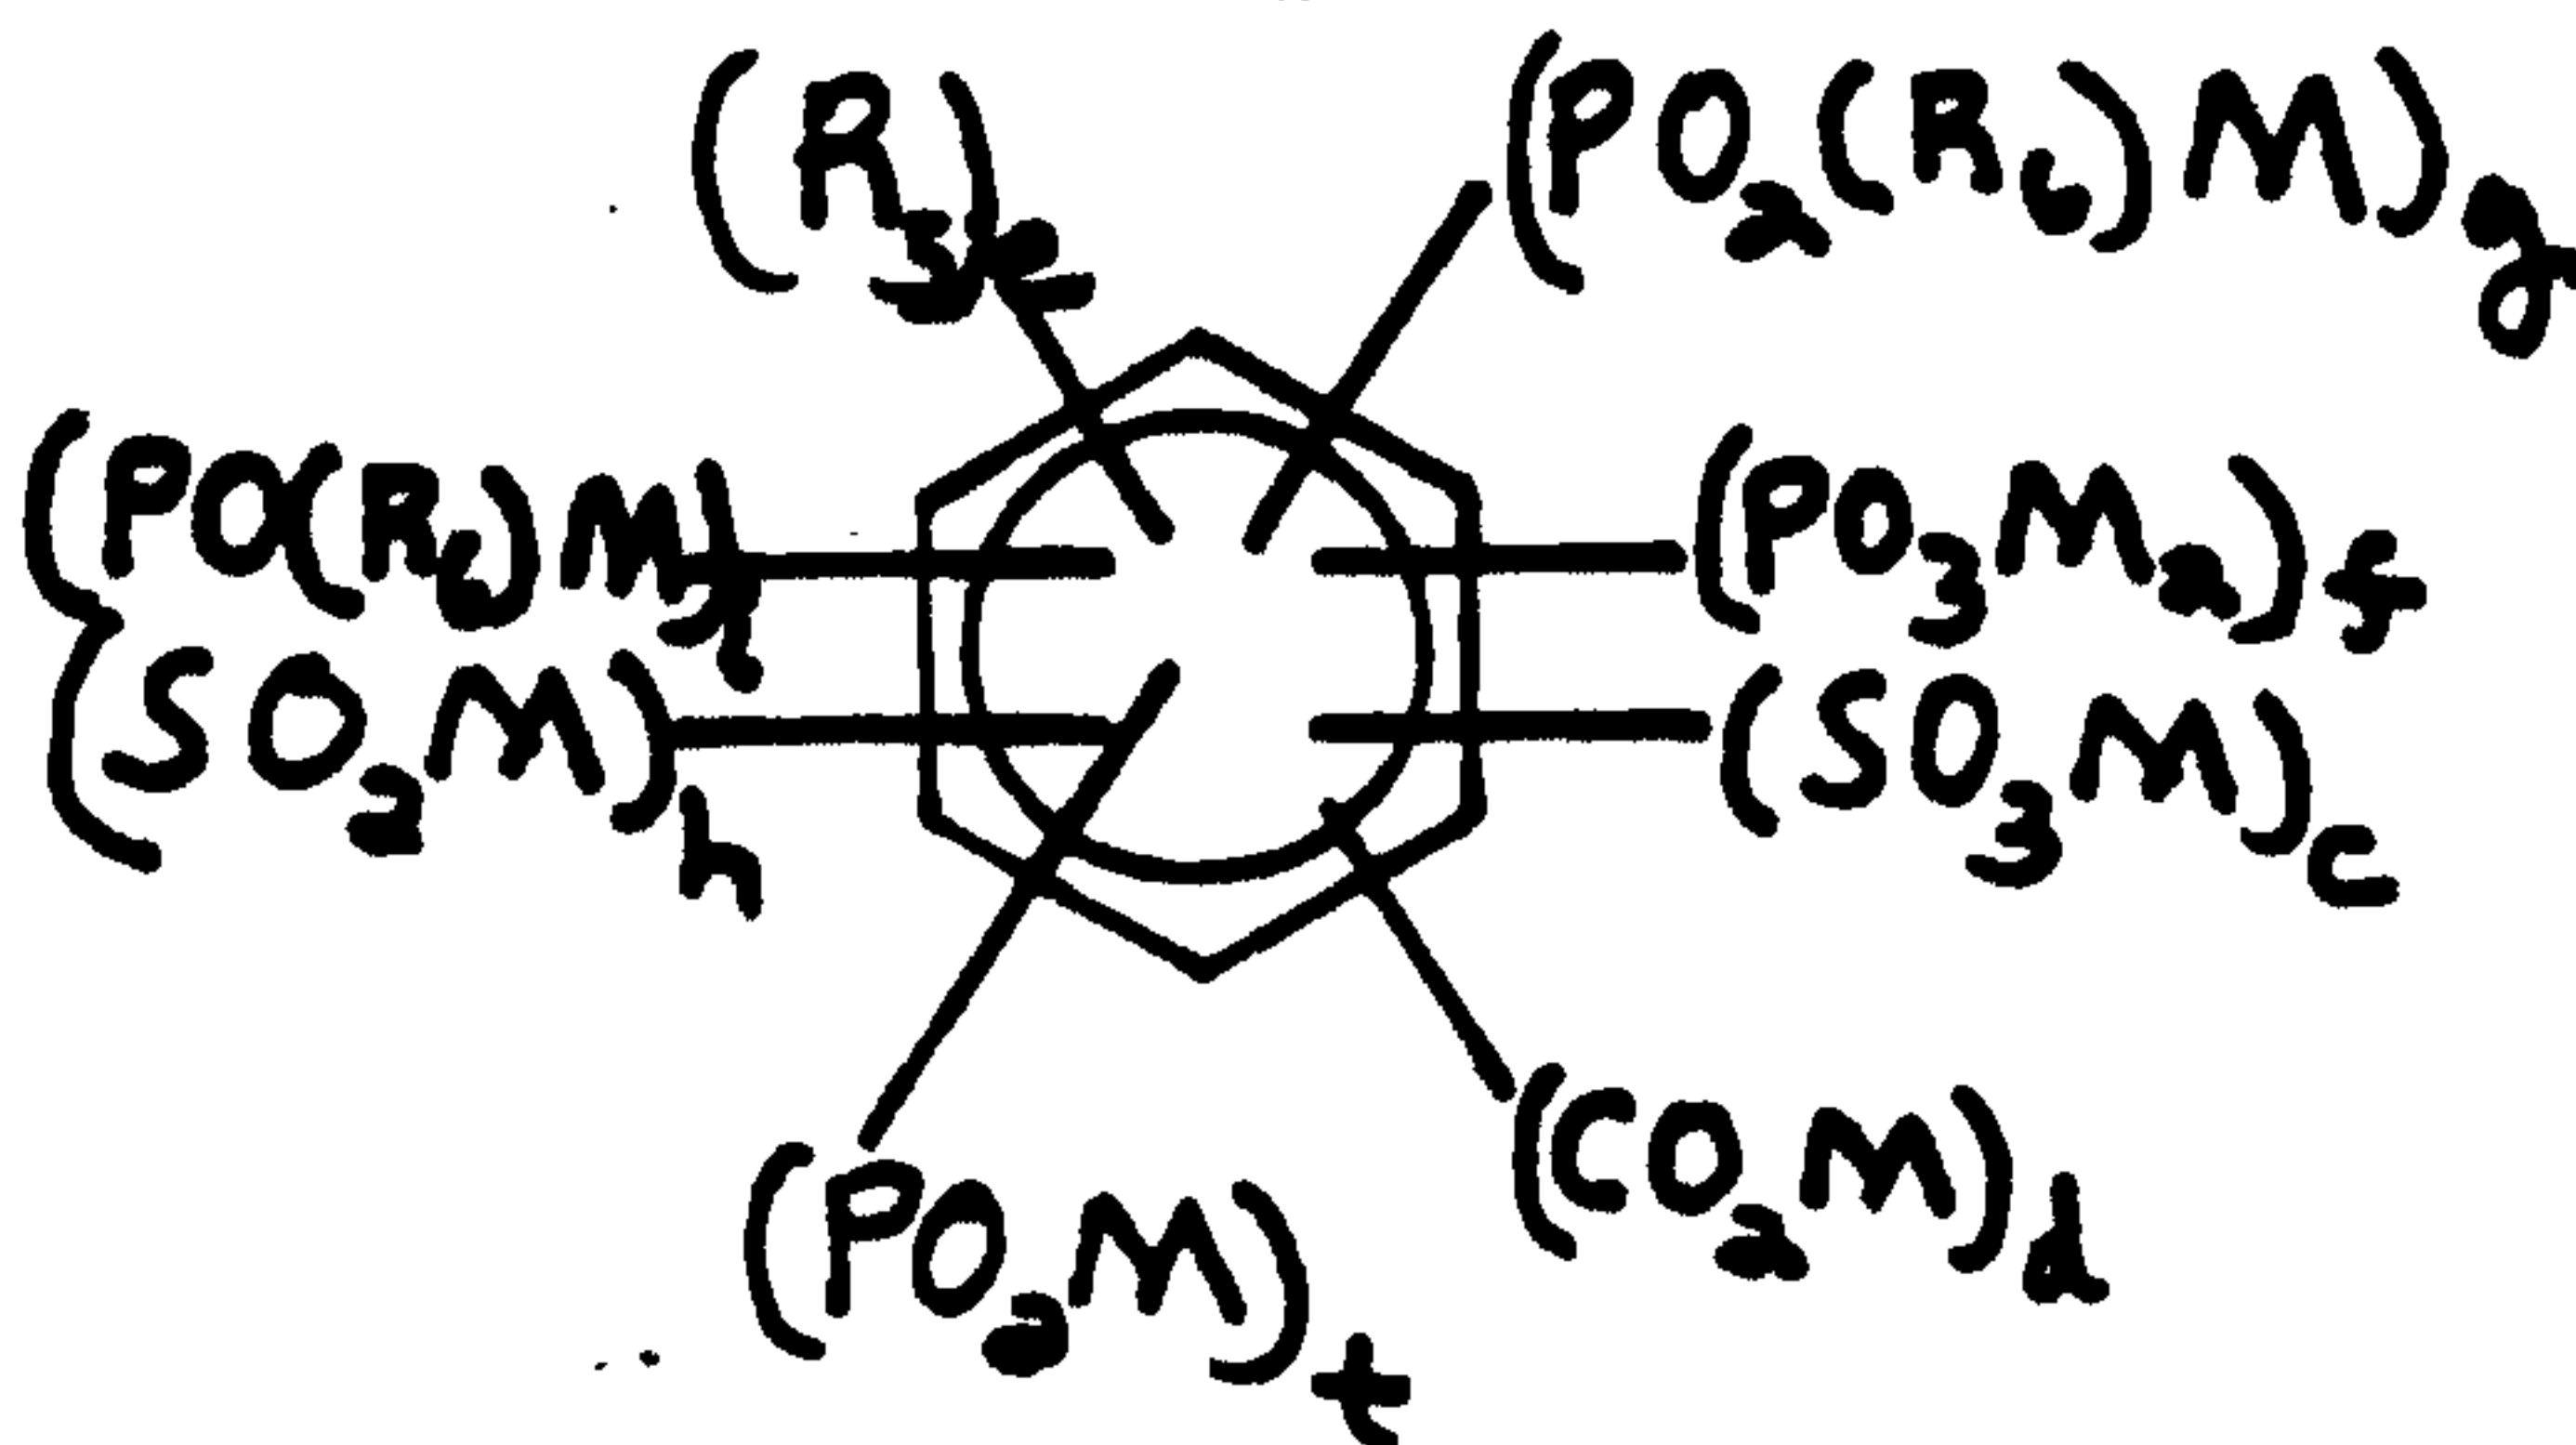

- 63 -

wherein:

M is H⁺, or a metal or non-metal cation, with the proviso that at least one of M is H⁺ or a moiety which can be thermally or chemically transformed into a proton under use conditions;

t is 0, 1, 2, 3 or 4;

i is 0, 1, 2, 3 or 4;

h is 0, 1, 2, 3 or 4;

c is 0, 1, 2, 3 or 4;

10 d is 0, 1, 2, 3 or 4;

f is 0, 1, 2, 3 or 4;

g is 0, 1, 2, 3 or 4 with the proviso that at least one of t, i, h, c, d, f or g is other than 0;

e is 0, 1, 2, 3 or 4; and


15 R₄ substituted or unsubstituted is alkylamino, dialkylamino, arylamino, diarylamino, alkylsulfinyl, alkylsulfonyl, alkylarylamino, alkoxyalkyl, alkoxy or alkyl wherein permissible substituents include, perhaloalkyl, phenyl, alkoxy, halo, cyano, amino, 20 haloalkyl, hydroxy, sulfonic acid or a salt or ester thereof, phosphoric acid or a salt or ester thereof, boric acid or a salt or ester thereof, sulfinic acid or a salt or ester thereof, phosphinic acid or a salt or ester thereof, phosphonic acid or a salt or ester thereof, 25 thereof, carboxylic acid or a salt or ester thereof, nitro;

R₅ is the same or different at each occurrence and is selected from the group consisting of substituted or unsubstituted R₄ substituents, aryl, amino, hydroxy, or 30 any two R₅ substituents together may form an unsubstituted or substituted alkenylene chain completing a fused-ring system which chain wherein permissible substituents are one or more halo, phosphoric acid or a salt or ester thereof, hydroxy, 35 boric acid or a salt or ester thereof, nitro, cyano,

2126330

- 64 -

amino, phosphinic acid or a salt or ester thereof,
 alkylamino, dialkylamino, phosphinate salt, arylamino,
 diarylamino, alkylarylamino, sulfinic acid or a salt or
 ester thereof, phosphonic acid or a salt or ester
 5 thereof, sulfonic acid or a salt or ester thereof or
 carboxylic acid or a salt or ester thereof or R_5 is a
 moiety of the formula:

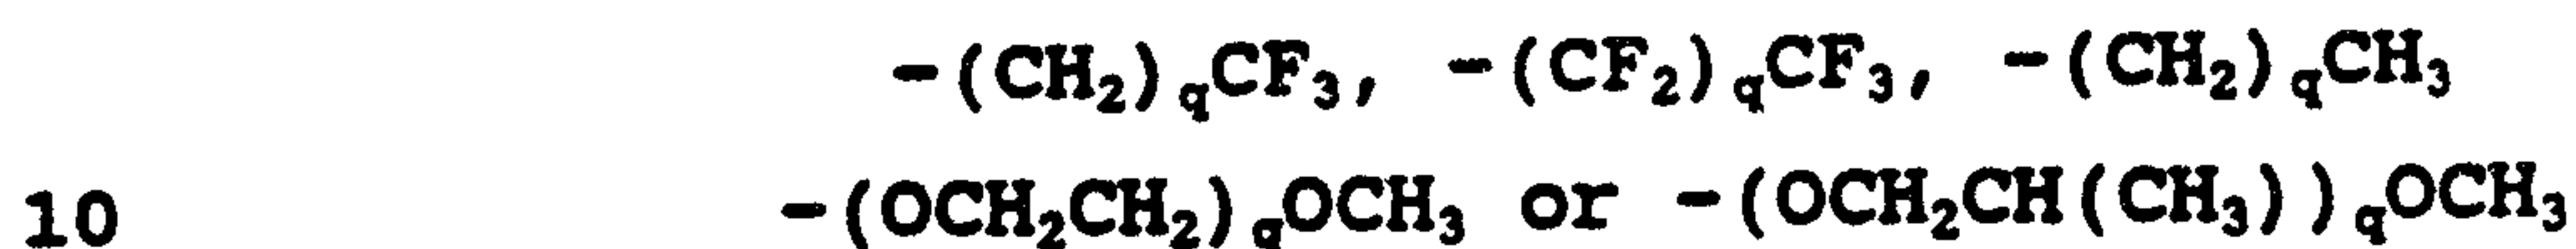

wherein:

q is a positive whole number from 1 to about 10;


and

15 R_6 is hydrogen substituted or unsubstituted alkyl,
 aralkyl, aryl, aryloxy, alkylaryl, arylalkyl,
 arylalkoxy, alkoxyaryl, alkoxyalkyl or alkoxy wherein
 permissible substituents are halo, hydroxy or amino.

13. A paint according to claim 12 wherein said
 20 dopants are acids and/or acid derivatives of the
 formula:



or

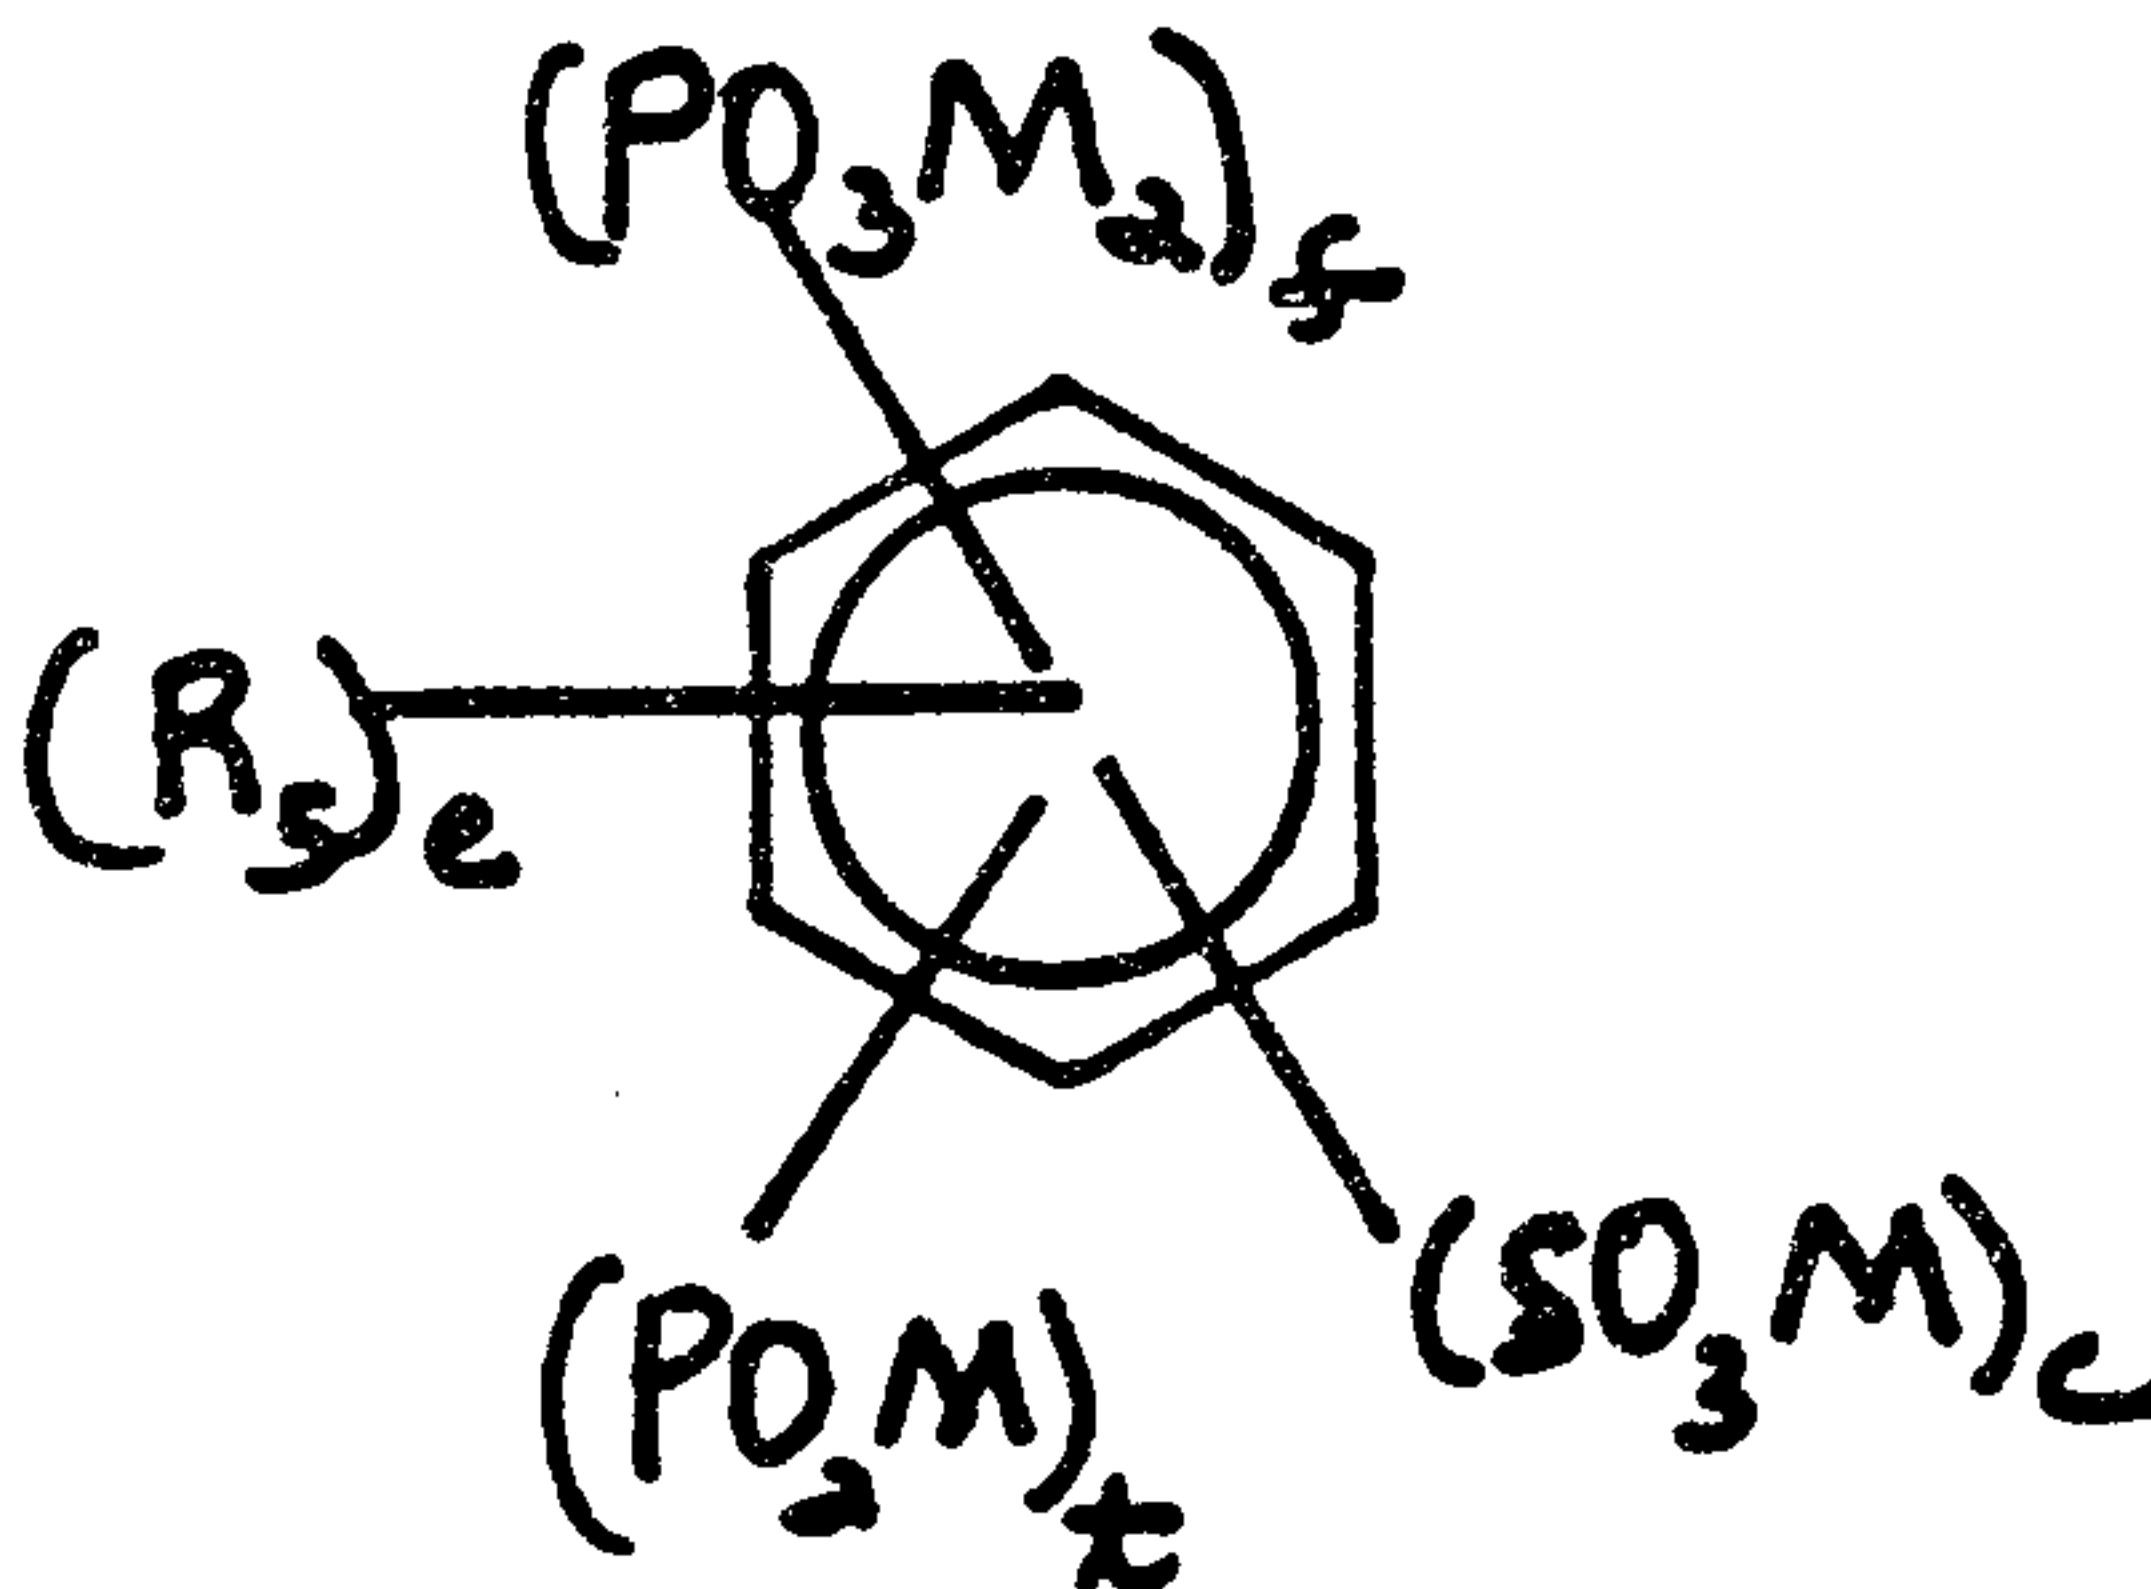

35

- 65 -

wherein:

c, t and f are the same or different and are 0, 1 or 2 with the proviso that at least one of c, t, and f is not 0;

5 e is 0, 1 or 2;


R₄ is alkyl, alkoxyalkyl or alkyl or alkoxyalkyl substituted with one or more halo, hydroxy or amino;

R₅ is the same or different at each occurrence and is alkyl, phenyl, naphthyl, amino, alkylamino,
10 dialkylamino, arylamino, diarylamino, alkylarylamino, or alkyl substituted with one or more fluoro, sulfonic acid or a salt or ester thereof, alkoxy, hydroxy, nitro, cyano, phosphinic acid or a salt or ester thereof, amino or carboxylic acid or a salt or ester
15 thereof, or phenyl substituted with one or more alkyl, alkoxy, fluoroalkyl, sulfonic acid or a salt or ester thereof, phosphinic acid or a salt or ester thereof, hydroxy, nitro, cyano, or carboxylic acid or a salt or ester thereof or any two R₅ substituents together may
20 form an alkylene or alkenylene chain completing a naphthalene, anthracene or phenanthrene fused system which may be substituted with one or more alkyl, alkoxy, fluoro, phosphinic acid, fluoroalkyl, sulfonic acid, carboxylic acid or a salt or ester thereof
25 hydroxy, nitro, amino or cyano groups; and

M is H⁺, or a metal or non-metal cation, with the proviso that at least one of M is H⁺ or is a moiety which can be thermally transformed into a proton under process conditions.

30 14. A paint according to claim 13 wherein said dopant is a sulfonic acid, a sulfonic acid derivative, or a combination thereof of the formula:

- 66 -

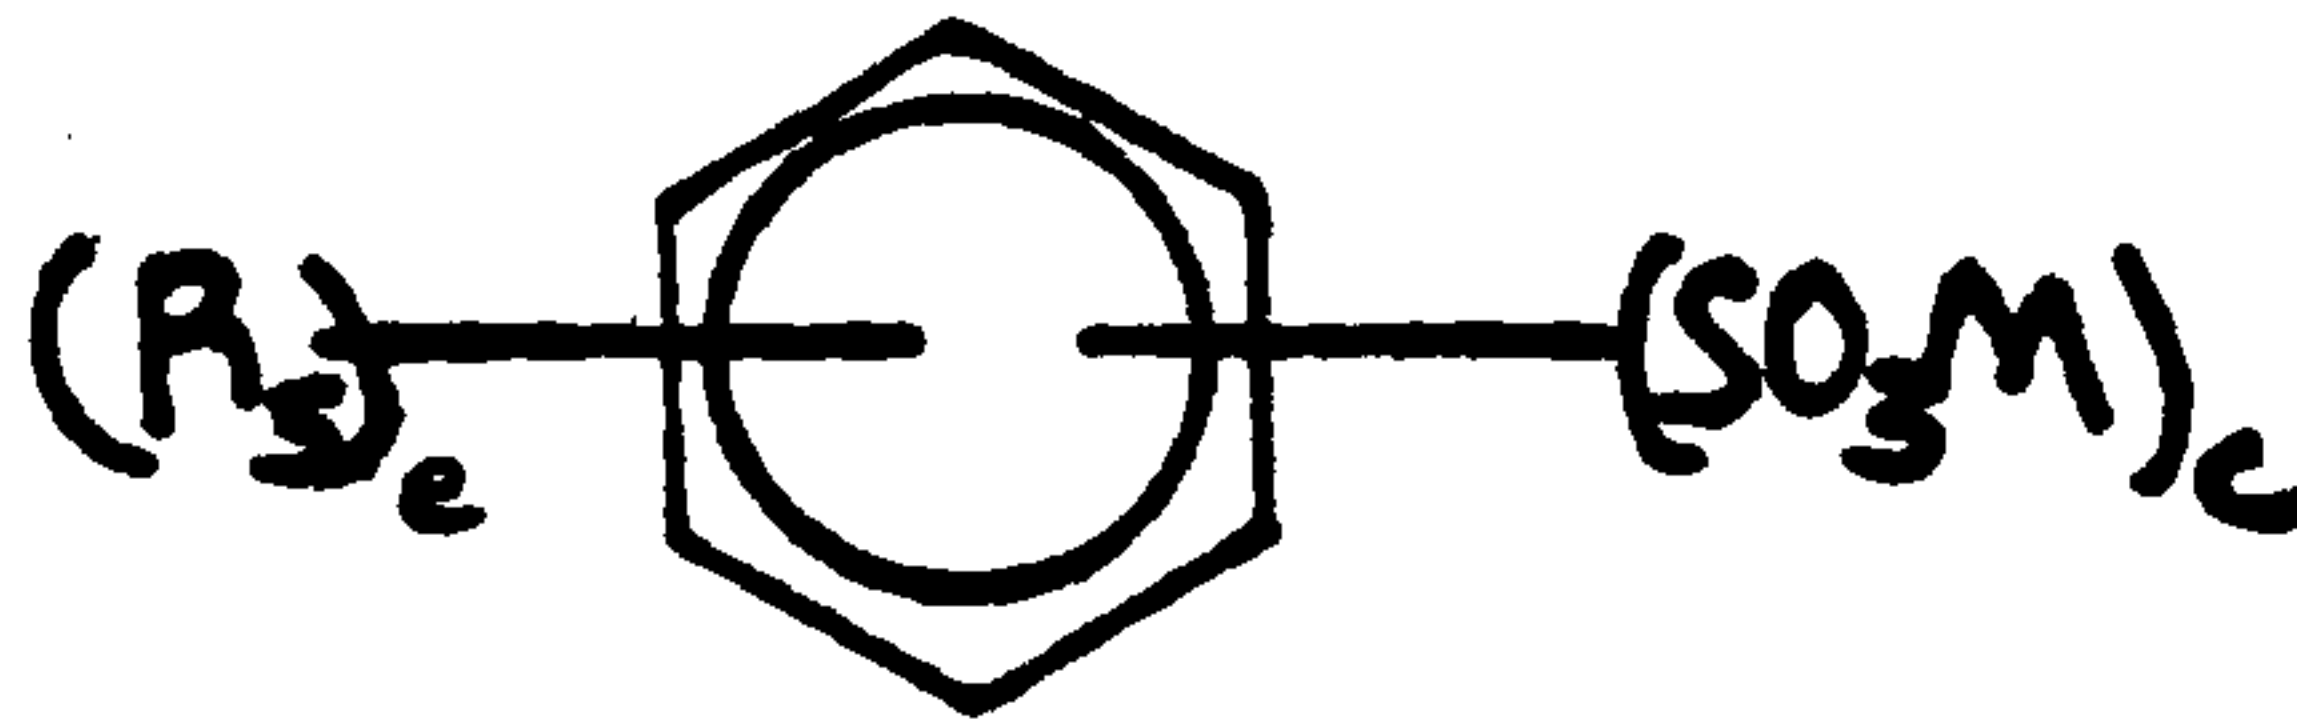

10

wherein;

c is 1, 2 or 3;

e is 0, 1 or 2;

15 R_s is hydroxy, alkyl or alkyl substituted with one or more fluoro, or any two R_s groups together may form an alkenylene chain completing a naphthalene fused system which may be substituted with one or more sulfonic acid, hydroxy, amino, sulfonic acid salt, alkyl or alkyl substituted by one or more fluoro
20 substituents; and

M is proton, or a metal or non-metal cation, with the proviso that at least one of M is a proton.

15. A paint according to claim 1 wherein said polymeric binder is selected from the group consisting
25 of alkyds, vinyls, vinylidene chlorides, epoxies, fluoroepoxies, unsaturated polyesters, thermosetting acrylics, phenolics, and polyurethanes.