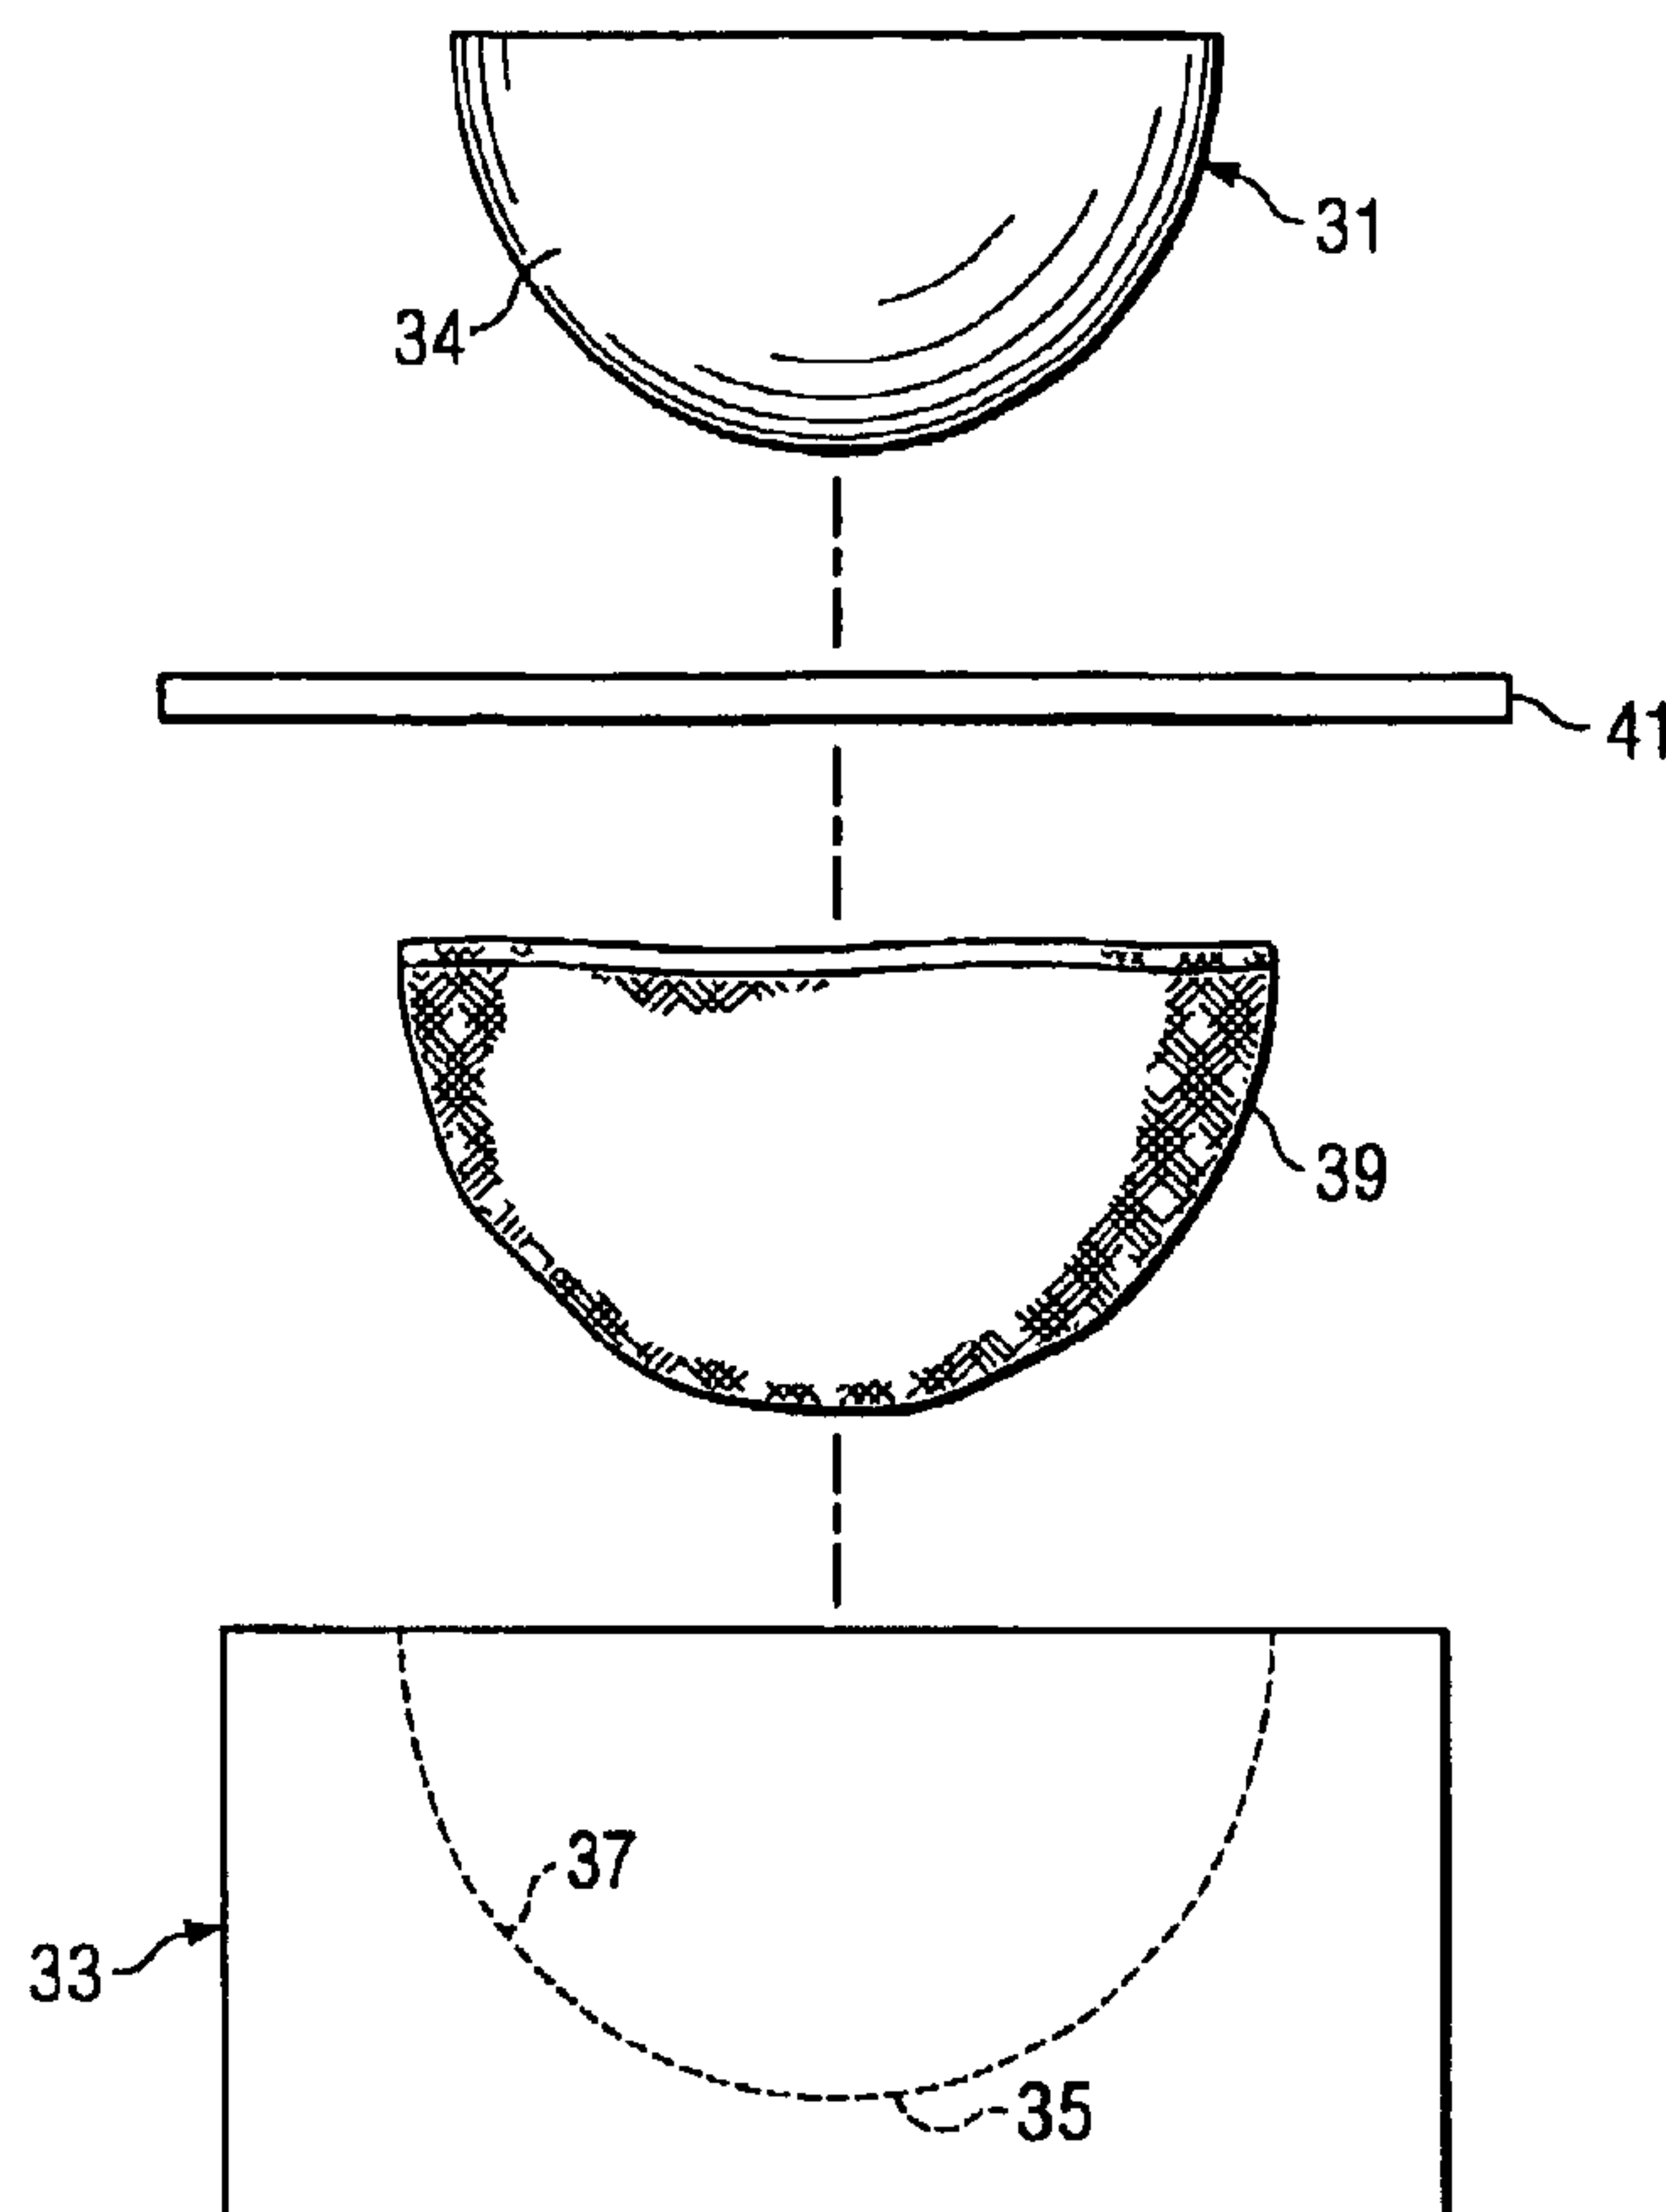




(86) Date de dépôt PCT/PCT Filing Date: 2005/05/23
(87) Date publication PCT/PCT Publication Date: 2006/03/09
(45) Date de délivrance/Issue Date: 2010/10/26
(85) Entrée phase nationale/National Entry: 2007/02/13
(86) N° demande PCT/PCT Application No.: US 2005/017916
(87) N° publication PCT/PCT Publication No.: 2006/025890
(30) Priorité/Priority: 2004/09/01 (US60/606,317)

(51) Cl.Int./Int.Cl. *B29C 43/02* (2006.01),
B64C 1/12 (2006.01), *B64C 3/26* (2006.01),
C08J 5/04 (2006.01)
(72) Inventeurs/Inventors:
BERGERSON, ANTHONY P., US;
HOYLE, JASON L., US
(73) Propriétaire/Owner:
BELL HELICOPTER TEXTRON INC., US
(74) Agent: MACRAE & CO.

(54) Titre : PIECES MOULEES PAR COMPRESSION COMPRENANT UNE COUCHE CONDUCTRICE INTEGREE ET
LEUR PROCEDE DE FABRICATION
(54) Title: COMPRESSION-MOLDED PARTS HAVING AN EMBEDDED CONDUCTIVE LAYER AND METHOD FOR
MAKING SAME



(57) Abrégé/Abstract:

A compression-molded part has a conductive layer embedded in the part during molding of the part. The conductive layer is generally adjacent an outer surface of the part and is preferably formed from a mesh, a foil, a pulled screen, or multiple layers of



(57) Abrégé(suite)/Abstract(continued):

conductive elements. The part is preferably optimized for use on the exterior of an aircraft for lightning-strike or EMI protection or for use as an antenna. Methods for forming the panels of the invention include placing the conductive layer against a mold surface of a compression mold, then forming the compression-molded part with the conductive layer embedded in the part.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 March 2006 (09.03.2006)**PCT**(10) International Publication Number
WO 2006/025890 A2(51) International Patent Classification: **Not classified**(21) International Application Number:
PCT/US2005/017916

(22) International Filing Date: 23 May 2005 (23.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/606,317 1 September 2004 (01.09.2004) US(71) Applicant (for all designated States except US): **BELL HELICOPTER TEXTRON INC.** [US/US]; P.O. Box 482, Forth Worth, Texas 76101 (US).

(72) Inventors; and

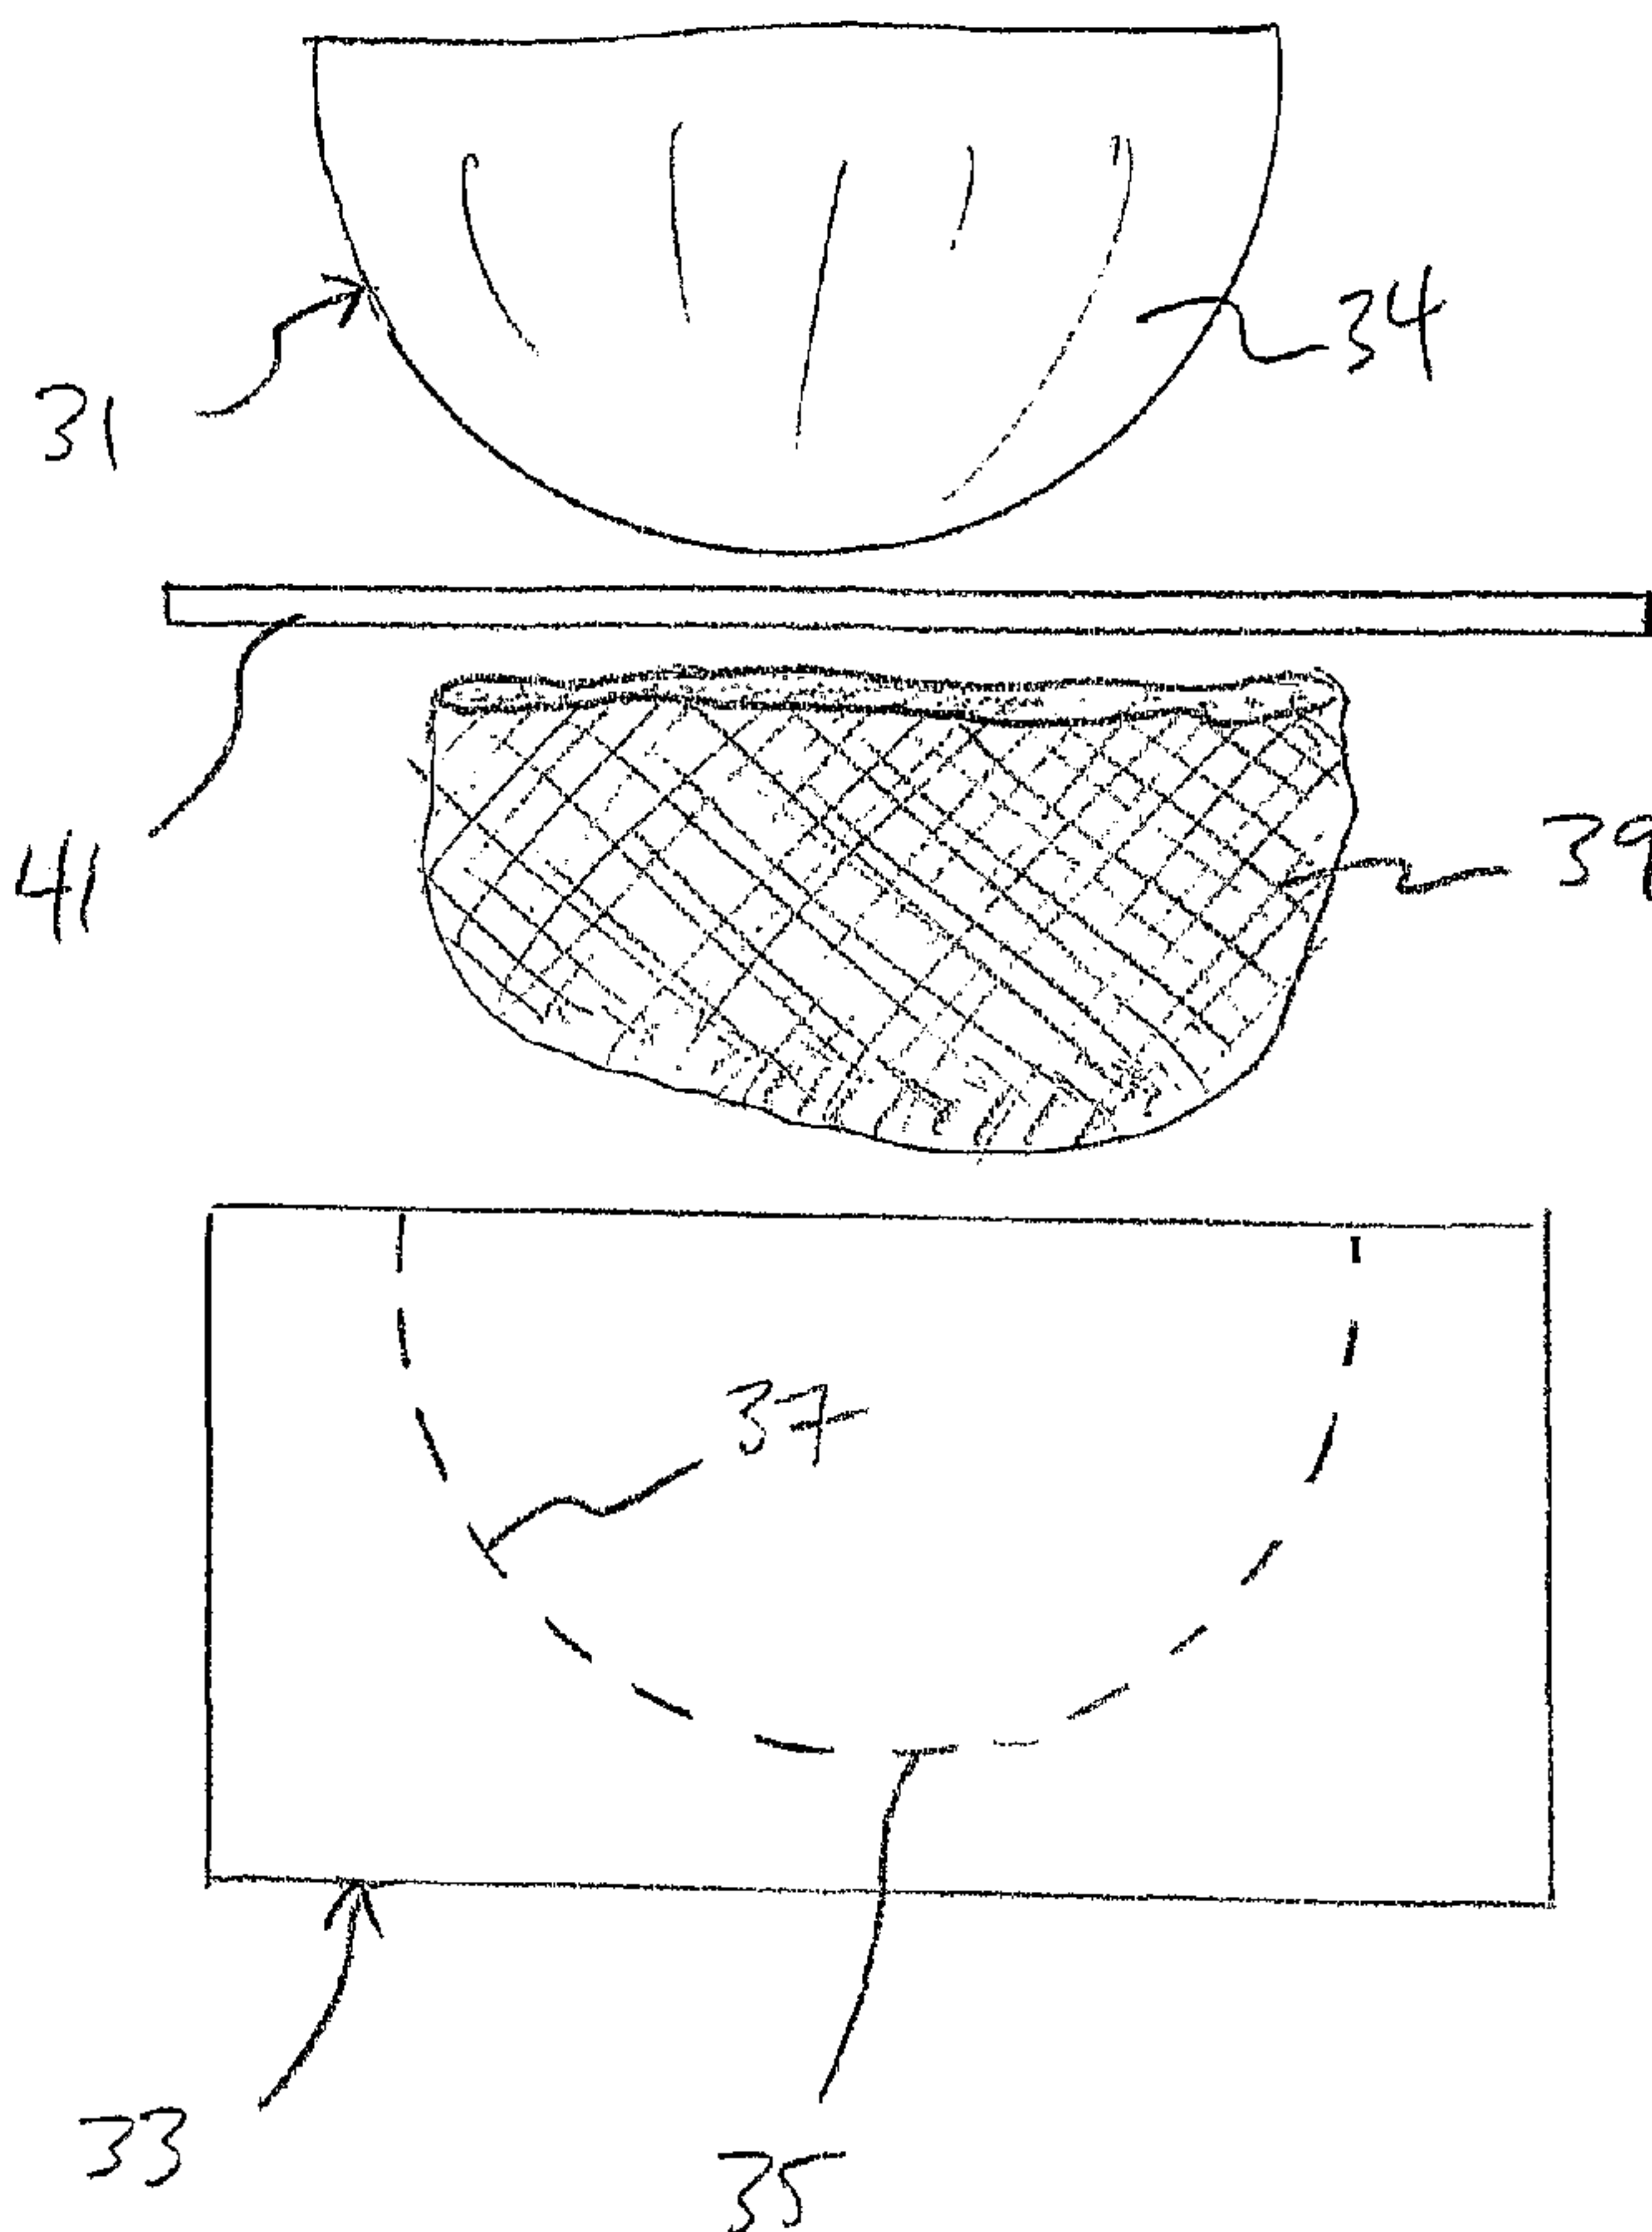
(75) Inventors/Applicants (for US only): **BERGERSON, Anthony, P.** [US/US]; 1403 Hamilton Drive, Cedar Hill, Texas 75104 (US). **HOYLE, Jason, L.** [US/US]; 601 South Partridge Drive, Mansfield, Texas 76063 (US).(74) Agents: **WALTON, James et al.**; LAW OFFICES OF JAMES E. WALTON, P.L.L.C., 1169 N. Burleson Blvd., Suite 107-328, Burleson, Texas 76028 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: COMPRESSION-MOLDED PARTS HAVING AN EMBEDDED CONDUCTIVE LAYER AND METHOD FOR MAKING SAME



(57) Abstract: A compression-molded part has a conductive layer embedded in the part during molding of the part. The conductive layer is generally adjacent an outer surface of the part and is preferably formed from a mesh, a foil, a pulled screen, or multiple layers of conductive elements. The part is preferably optimized for use on the exterior of an aircraft for lightning-strike or EMI protection or for use as an antenna. Methods for forming the panels of the invention include placing the conductive layer against a mold surface of a compression mold, then forming the compression-molded part with the conductive layer embedded in the part.

WO 2006/025890 A2

WO 2006/025890 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(48) Date of publication of this corrected version:

27 April 2006

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

(15) Information about Correction:

see PCT Gazette No. 17/2006 of 27 April 2006

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMPRESSION-MOLDED PARTS HAVING AN EMBEDDED CONDUCTIVE LAYER AND METHOD FOR MAKING SAME

Technical Field

5 The present invention relates generally to the field of molded parts and relates particularly to compression-molded parts having an embedded conductive layer.

Description of the Prior Art

10 Compression-molded parts are fabricated using a matched die set consisting of male and female dies. The molding material, which may be a powder, pellets, sheet, a putty-like mass, or a liquid, is introduced into the female die in a partially
15 cured condition and may be preheated prior to being placed in the die. The mold is then closed with the male die member, pressure is applied to force the material into contact with all mold areas, and heat and pressure are maintained until the molding material has cured. The process employs thermosetting resins, and advanced
20 composite thermoplastics may also be compression molded with unidirectional tapes, woven fabrics, randomly orientated fiber mat, or chopped strand. The advantage of compression molding is its ability to mold large, fairly intricate parts with very little labor cost.

25 Certain compression-molded external fairings and panels on aircraft require lightning strike protection. Prior art methods of providing lightning protection to compression-molded parts include: (1) secondary bonding of a copper mesh to the part via a structural adhesive layer; and (2) painting the compression-molded part with copper-filled paint. A key disadvantage of the secondary bonding process is the added weight of the adhesive. In addition, there is an increase in per-unit cost due
30 to the inherent post-molding processing, the need for additional tooling, and any required rework or repair of surface imperfections. The copper-paint method has a high weight penalty and may provide inconsistent protection due to variations in application thickness. In addition, the copper paint can be easily damaged during routine maintenance and can be inadvertently removed during repair or repaint situations.

Summary of the Invention

There is a need for compression-molded parts having an embedded conductive layer. Furthermore, there is a need for a method of making compression-molded parts having an embedded conductive layer.

5 Therefore, it is an object of the present invention to provide compression-molded parts having an embedded conductive layer.

It is a further object of the present invention to provide a method of making compression-molded parts having an embedded conductive layer.

10 A compression-molded part has a conductive layer embedded in the part during molding of the part. The conductive layer is generally adjacent an outer surface of the part and is preferably formed from a mesh, a foil, a pulled screen, or multiple layers of conductive elements. The part is preferably optimized for use on the exterior of an aircraft for lightning-strike or EMI protection or for use as an antenna.

15 Methods for forming the panels of the invention include placing the conductive layer against a mold surface of a compression mold, then forming the compression-molded part with the conductive layer embedded in the part.

20 The present invention provides for several advantages, including: (1) providing a lightweight part having an embedded conductive layer, the layer providing lightning-strike or EMI protection capability or for use as an antenna; (2) providing a method for forming the parts of the invention; and (3) providing methods for inhibiting movement of the conductive layer during forming of the parts of the invention.

Brief Description of the Drawings

25 For a more complete understanding of the present invention, including its features and advantages, reference is now made to the detailed description of the invention taken in conjunction with the accompanying drawings in which like numerals identify like parts, and in which:

Figure 1 is a perspective view of a compression-molded aircraft part according to the invention;

Figure 2 is a cross-sectional side view of a portion of the molded aircraft part of Figure 1 along the II-II line;

Figure 3 is a side view of an aircraft having molded parts according to the invention;

5 Figure 4 is an exploded side view of the components used in the method according to the invention for forming molded parts according to the invention;

Figure 5 is a cross-sectional view of the components of Figure 4 assembled;

10 Figure 6 is an exploded side view of the components used in an alternate method according to the invention for forming molded parts according to the invention; and

FIG. 7 is a cross-sectional view of a female die for use in a second alternate method according to the invention for forming molded parts according to the invention.

Description of the Preferred Embodiment

15 The present invention represents the discovery that molded parts capable of providing lightning-strike protection may be formed by compression molding parts having an embedded conductive layer. The present invention may also be used to provide a conductive surface as required for electro-static discharge applications, for antennas, or for protection from EMI (electromagnetic interference, also called RFI, or radio frequency interference).

20 Figure 1 shows a panel 11, which may be a panel forming a portion of the outer skin of an aircraft, having a conductive mesh 13 embedded in an outer portion of a member 15. Member 15 is compression molded from a curable molding material, such as a thermoset plastic, to form a preferably rigid material. Member 15 may be compression molded from composites, such as those containing glass or
25 carbon fibers, including unidirectional tapes, woven fabrics, randomly orientated fiber mat, or chopped strand. The preferred embodiment is formed from sheets containing chopped fibers or from bulk material, which may be chopped fibers

covered with resin. Member 15 is shown as a curved part, though member 15 may alternatively be formed as a planar or cup-shaped part.

Mesh 13 comprises multiple conductive elements 17, and these may be formed from any material having conductivity sufficient for use as an antenna or to conduct the current caused by a lightning strike. Conductive elements 17 formed from copper are particularly suited for use in mesh 13, though conductive elements 17 formed from aluminum or other metals may have mechanical, thermal, or electro-chemical properties that may be advantageous in certain applications. Elements 17 may form a woven mesh, a foil, or a pulled screen, or one or more layers of individual conductive elements 17 may be used. Mesh 13 is embedded in member 15 generally adjacent outer surface 19, though mesh 13 may be located a small distance away from surface 19 as long as mesh 13 remains visible through surface 19. For example, it may be desirable for resin to cover mesh 13 to prevent damage or corrosion, though the lightning-strike effectiveness is reduced if fibers of the molding material cover mesh 13. Where desirable, an additional mesh 13 may be embedded in member 15 generally adjacent inner surface 21. Ends 22 of conductive elements 17 preferably extend to, or may protrude from, the edges of member 15, allowing mesh 13 to be conductively connected to mesh 13 of additional panels 11 or to metal structures for dissipation of electrical energy in mesh 13. Mesh 13 may alternatively be conductivity connected to additional panels 11 other structures through metal fasteners or inserts extending through panel 11 and in conductive contact with mesh 13.

Figure 2 is a cross-sectional view of panel 11 taken along the line II-II in Figure 1. Member 15 has a cross-sectional thickness selected for the particular application, and this thickness does not determine the effectiveness of mesh 13 due to the positioning of mesh 13 at or near surface 19. Conductive elements 17 are shown as adjacent, or tangent to, outer surface 19, though elements 17 may be located a small distance away from outer surface 19, as described above.

Figure 3 shows an aircraft, helicopter 23, having exterior panels according to the present invention in locations typical of where parts formed like panel 11 may be used. For example, doors 24, 25 may be formed according to the present invention as compression-molded parts having an embedded conductive layer, as may access

panel 27 and tail fairing 29. Though not shown, other applications also include the fore and aft fairings on weapons pylons on military aircraft. Parts formed according to the present invention may be used on any appropriate outer surface, as long as the mechanical (e.g., aerodynamic, structural) loads and thermal conditions do not preclude their use.

If panel 11 is struck by a bolt of lightning or other electrical discharge, the electrical charge is conducted from the strike location by conductive elements 17, ends 22 (Figure 1) of which are preferably conductively connected at the outer edges of panel 11 to adjacent panels 11 or to metal structures of the aircraft. As shown in Figure 2, conductive elements 17 have a cross-sectional thickness, and this thickness will be selected, based on the material used to form elements 17 and on the number of elements 17 embedded in panel 11, to ensure sufficient capability to conduct the high current produced in a lightning strike. The same considerations would be used to select the appropriate mesh 13 for use as an antenna.

The present invention also provides for a method for forming compression-molded parts with an embedded conductive layer. Figure 4 shows a mold comprising male die 31 and a matched female die 33. Male die 31 has an outer mold surface 34. Female die 33 has a mold cavity 35 shaped for receiving male die 31, and cavity 35 has an inner mold surface 37. Though shown as spherical, mold cavity 35 may be formed to have any appropriate shape required for the finished part. A conductive mesh 39, which is constructed like mesh 13 of Figure 1, may be provided as a preform, as shown, having the general shape of mold cavity 35. Alternatively, mesh 39 may be provided in any appropriate form, such as multiple pieces, which is described below. In the figure, a sheet 41 of partially-cured, resin-coated fibers is provided, though bulk material may alternatively be used.

To form the part, mesh 39 is inserted into mold cavity 35 and pressed against inner surface 37 to conform mesh 39 to the shape and contours of inner surface 37. A sheet 41 of molding material is then placed in mold cavity 35 adjacent mesh 39, and male die 31 is inserted into female die 33. Insertion of male die 31 compresses sheet 41 against mesh 39 and conforms sheet 41 to outer surface 34 and to inner surface 37. This configuration is illustrated in Figure 5, with male die 31 shown as fully pressed into female die 33 and compressing sheet 41 and mesh 39 in the space

between outer surface 34 and inner surface 37. Resin within sheet 41 flows around the conductive elements of mesh 39. Pressure forcing dies 31, 33 together may be maintained, and the mold is heated to cure the resin in sheet 41. After curing, male die 31 is withdrawn from mold cavity 35, and the finished part is then removed from cavity 35.

Figure 6 shows an alternate method according to the invention for forming the compression-molded parts of the invention. A mold comprises a female die 43 and a matched male die (not shown). Female die 43 comprises a mold cavity 45 having an inner surface 47 shaped for receiving the male die. In the method shown, conductive mesh 49 is shown as being formed of multiple pieces, rather than being a preform, that are inserted into mold cavity 45 and pressed against inner surface 47. The edges of the pieces of mesh 49 are overlapped to ensure a conductive path exists between the pieces of mesh 49.

In addition, Figure 6 shows a method of preventing or limiting movement of mesh 49 within mold cavity 45 prior to curing of the molding material. To assist in preventing mesh 49 from moving from the desired position on inner surface 47 as the male die is pressed into female die 43, a nonconductive layer, such as fiberglass mat 51, is placed against the inside of mesh 49. Fiberglass mat 51 may be formed as a preform, as shown, or may be inserted as multiple pieces. The male die is then used to compress the molding material in mold cavity 45, and resin within the molding material flows into fiberglass mat 51 and mesh 49. The mold may then be heated to cure the resin, and the finished part is removed from mold cavity 45 after curing.

Figure 7 illustrates an additional method of preventing movement of the conductive mesh within a mold. A female die 53 is shown, die 53 having a mold cavity 55. Inner surface 57 of mold cavity 55 has stippling 59, or a similar raised-surface finish, for preventing or limiting the sliding of the conductive mesh along inner surface 57 as the male die is inserted. Stippling 59 may be used with or without the fiberglass mat of the method shown in Figure 6 and described above. The use of stippling or other non-smooth surface finish in the mold may be precluded if the outer surface of the finished part is required to be smooth, such as may be required on aerodynamic surfaces.

Though the methods of the invention are shown with the conductive layer being located adjacent the mold surface of the female die, the conductive layer may alternatively be located adjacent the mold surface of the male die. For example, this method may be used when forming bent or concave panels for the exterior of an aircraft.

The present invention provides for several advantages, including: (1) providing a lightweight part having an embedded conductive layer, the layer providing lightning-strike or EMI protection capability or for use as an antenna; (2) providing a method for forming the parts of the invention; and (3) providing methods for inhibiting movement of the conductive layer during forming of the parts of the invention.

While this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications and combinations of the illustrative embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to the description.

WHAT IS CLAIMED IS:

1. A surface panel for a structure, the panel comprising:
a compression-molded member composed of chopped fibers; and
a conductive layer embedded in the member during molding of the member;
wherein the conductive layer remains exposed to an outer surface of the member;
and
wherein the conductive layer has a conductivity sufficient for conducting a current caused by a lightning strike.
2. The surface panel according to claim 1, wherein the compression molded member is at least partially formed from a thermoset plastic.
3. The surface panel according to claim 1, wherein the conductive layer is formed from a metallic material.
4. The surface panel according to claim 1, wherein the conductive layer is at least partially formed from copper.
5. The surface panel according to claim 1, wherein the conductive layer is at least partially formed from aluminum.
6. The surface panel according to claim 1, wherein the conductive layer is formed from a mesh.
7. The surface panel according to claim 1, wherein the conductive layer is formed from foil.
8. The surface panel according to claim 1, wherein the conductive layer is formed from a pulled screen.
9. The surface panel according to claim 1, wherein the conductive layer is formed from multiple layers of conductive elements.

10. The surface panel according to claim 1, wherein the compression molded member is at least partially formed from a fiber-reinforced plastic.
11. The surface panel according to claim 1, wherein the conductive layer is optimized for use as an antenna.
12. The surface panel according to claim 1, wherein the conductive layer is configured for being conductively connected to a conductive structure.
13. An aircraft, comprising:
 - a compression-molded panel covering at least a portion of the exterior of the aircraft; and
 - a conductive layer embedded in the panel during molding of the panel;
 - wherein the conductive layer remains exposed to an outer surface of the member;
 - wherein the compression-molded member is composed of chopped fibers; and
 - wherein the conductive layer has a conductivity sufficient for conducting a current caused by a lightning strike.
14. The aircraft according to claim 13, wherein the compression molded member is at least partially formed from a thermoset plastic.
15. The aircraft according to claim 13, wherein the conductive layer is formed from a metallic material.
16. The aircraft according to claim 13, wherein the conductive layer is formed from a mesh.
17. The aircraft according to claim 13, wherein the conductive layer is formed from multiple layers of conductive elements.
18. The aircraft according to claim 13, wherein the compression molded member is at least partially formed from a fiber-reinforced plastic.

19. The aircraft according to claim 13, wherein the conductive layer is optimized for use as an antenna.

20. The aircraft according to claim 13, further comprising:

a second compression-molded panel covering at least a portion of the exterior of the aircraft, the second panel having a conductive layer embedded in the second panel during molding of the second panel;

wherein the conductive layers of the panels are conductively connected for allowing electrical energy to flow between the conductive layers of the panels.

21. The aircraft according to claim 13, wherein the conductive layer of the panel is conductively connected to a metal structure of the aircraft for allowing electrical energy to flow from the conductive layer of the panel into the metal structure.

22. A method of forming a compression-molded panel having an embedded conductive layer, the method comprising:

(a) locating a conductive layer adjacent a mold surface of a portion of a compression mold;

(b) locating an uncured molding material composed of chopped fibers adjacent the conductive layer and closing the mold;

(c) pressing the portions of the mold together for causing the molding material to flow within a mold cavity, at least a portion of the molding material flowing into the conductive layer; and

(d) curing the molding material within the mold to form a panel, the conductive layer being embedded in the panel and exposed to an outer surface of the panel.

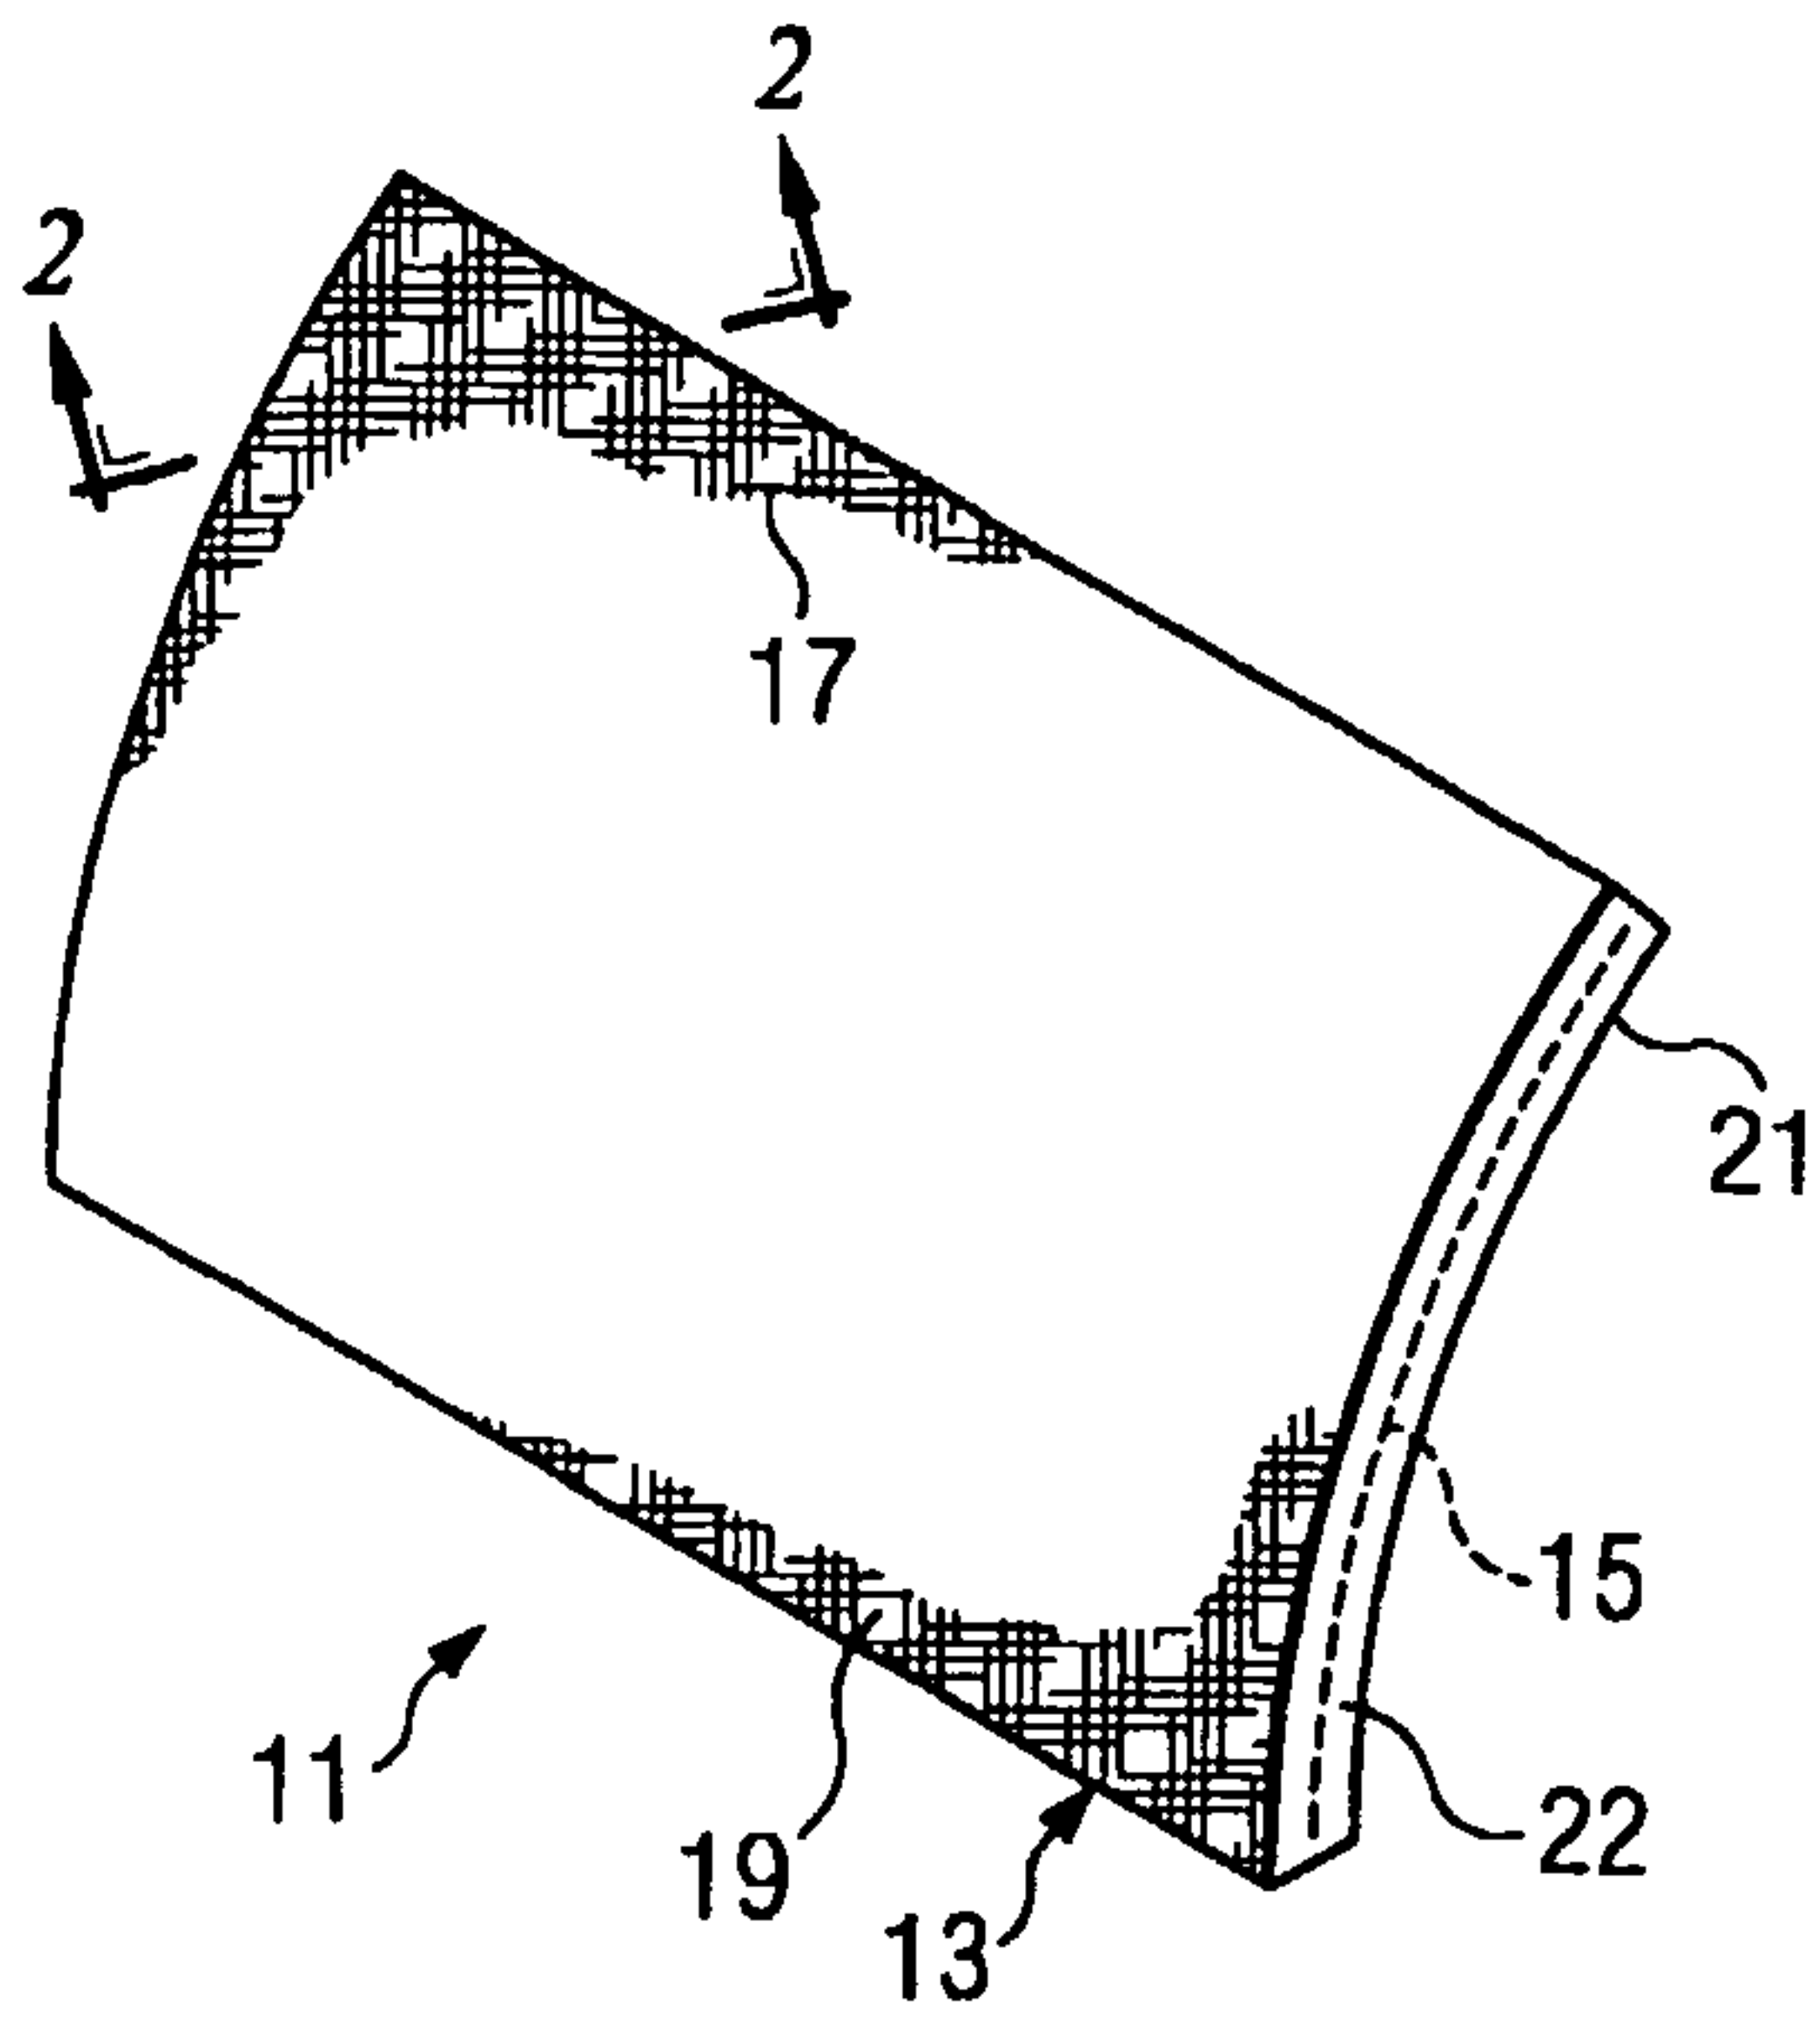
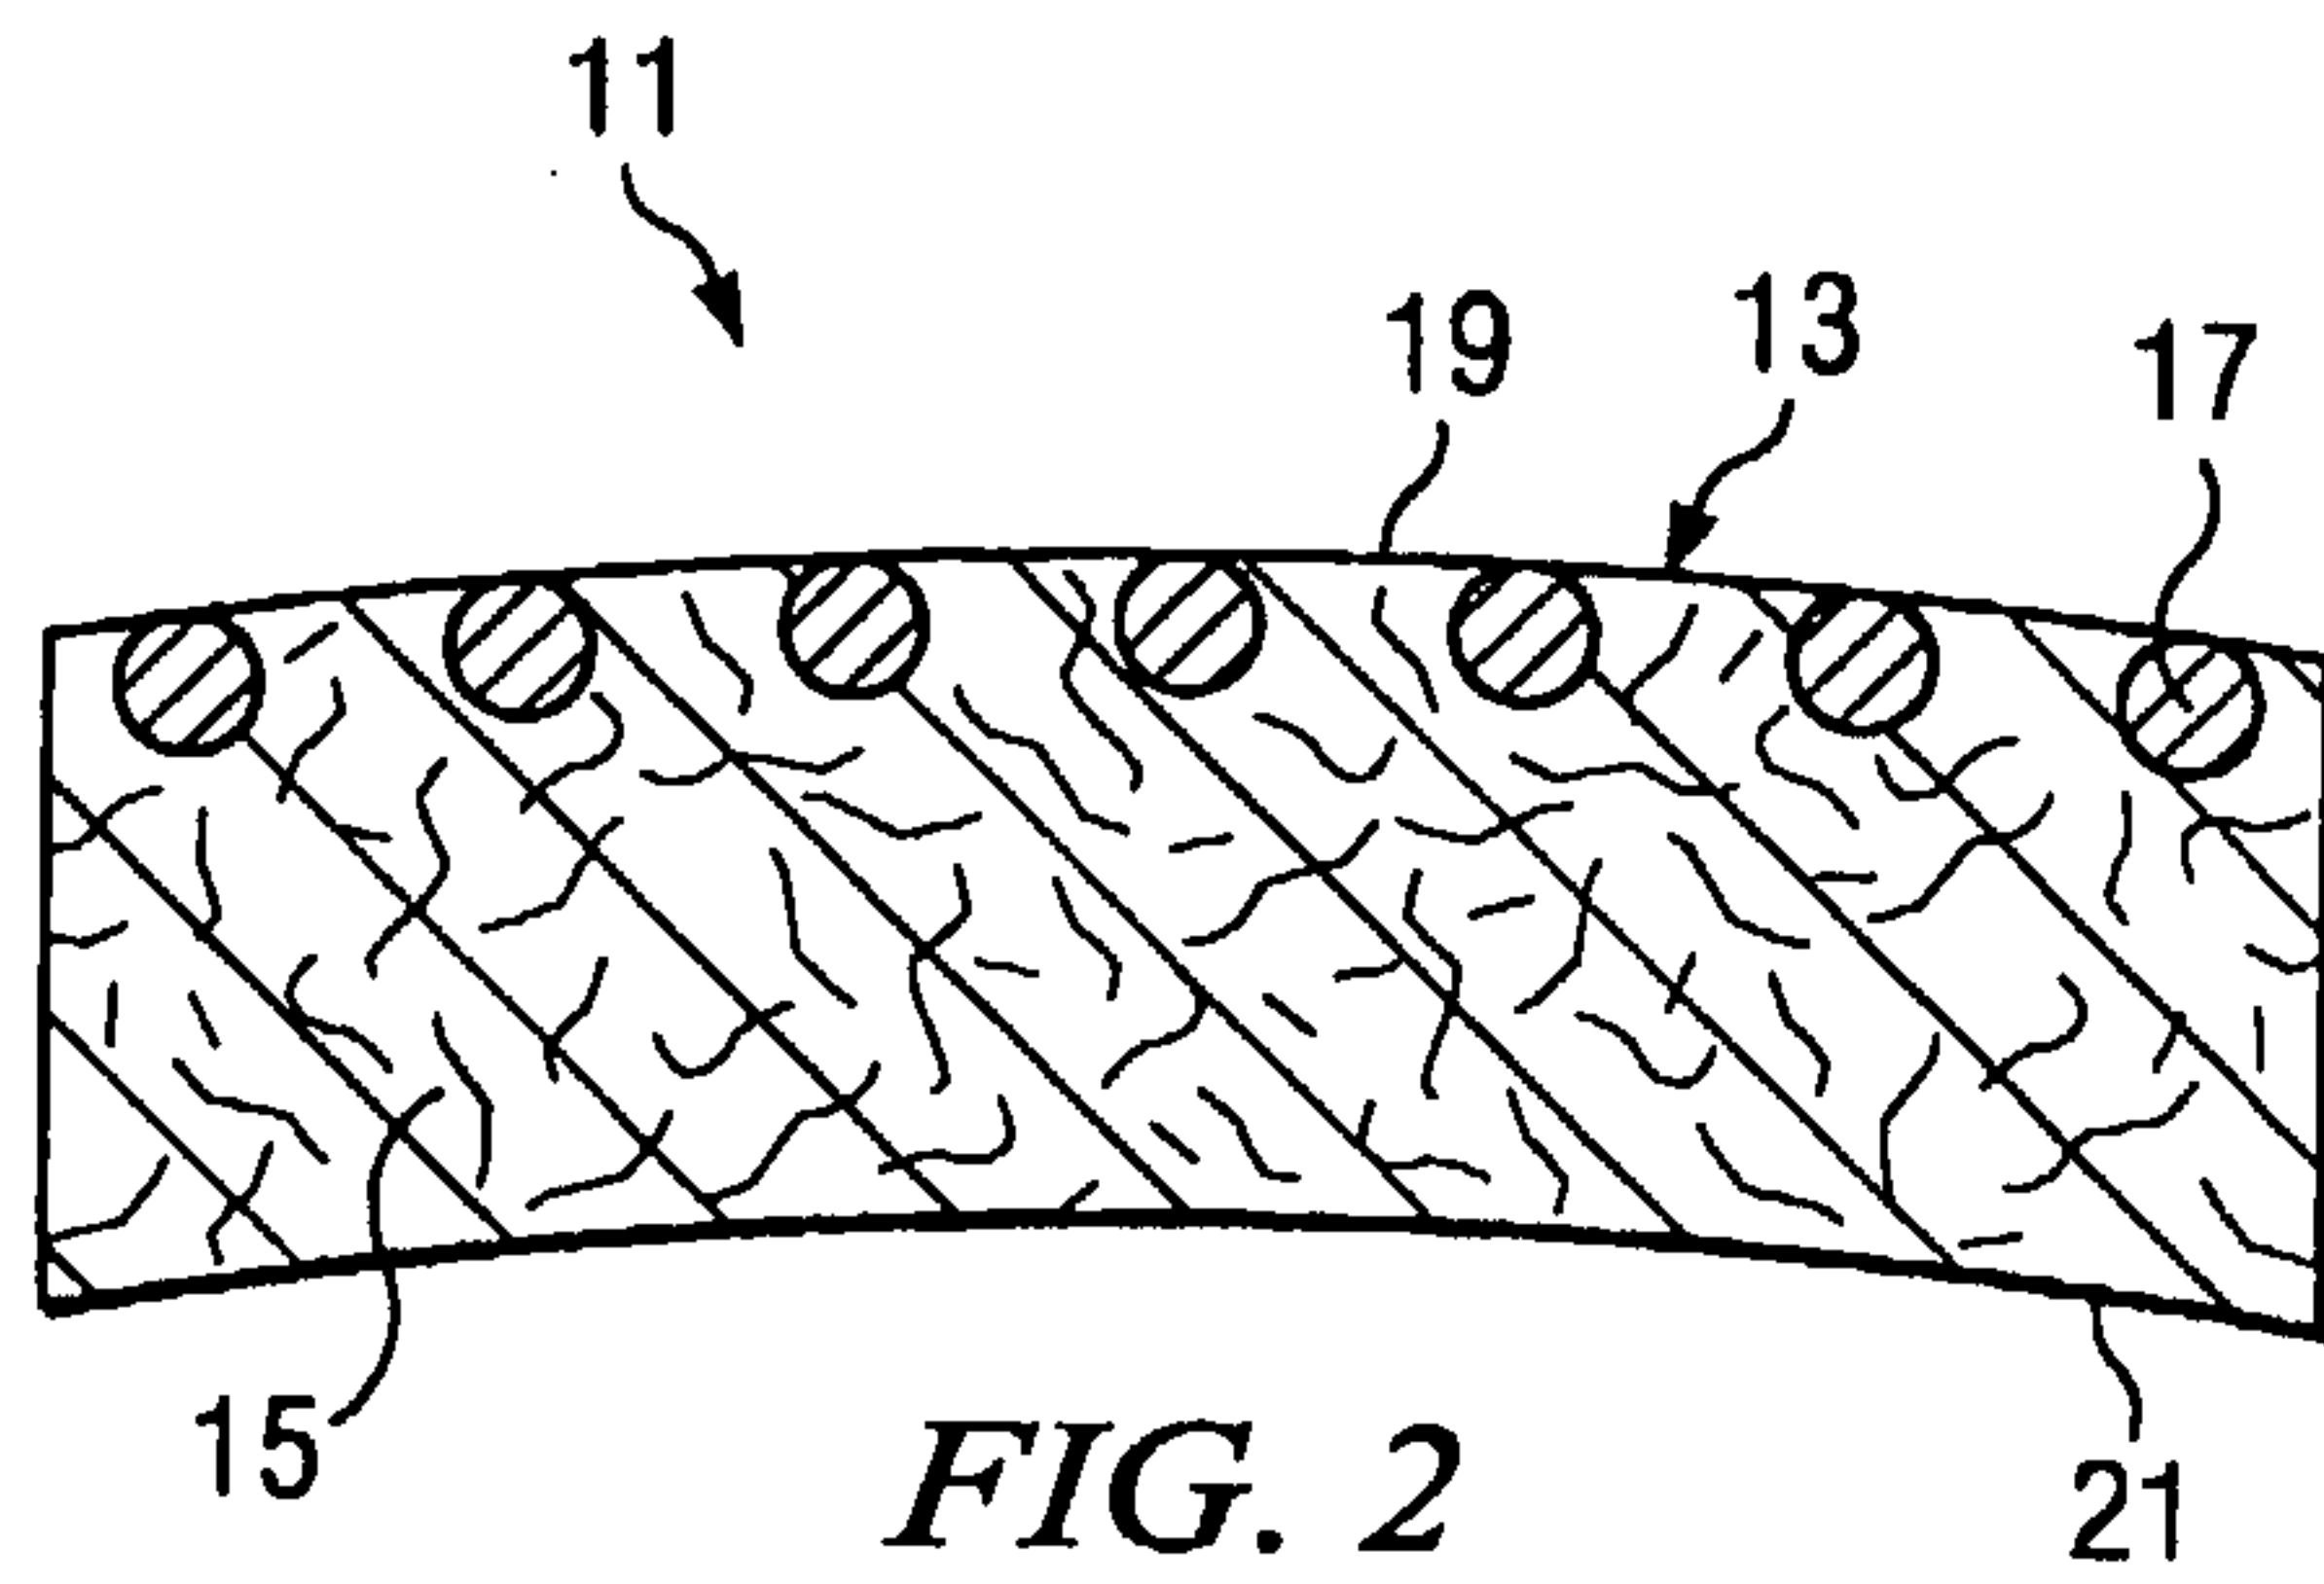
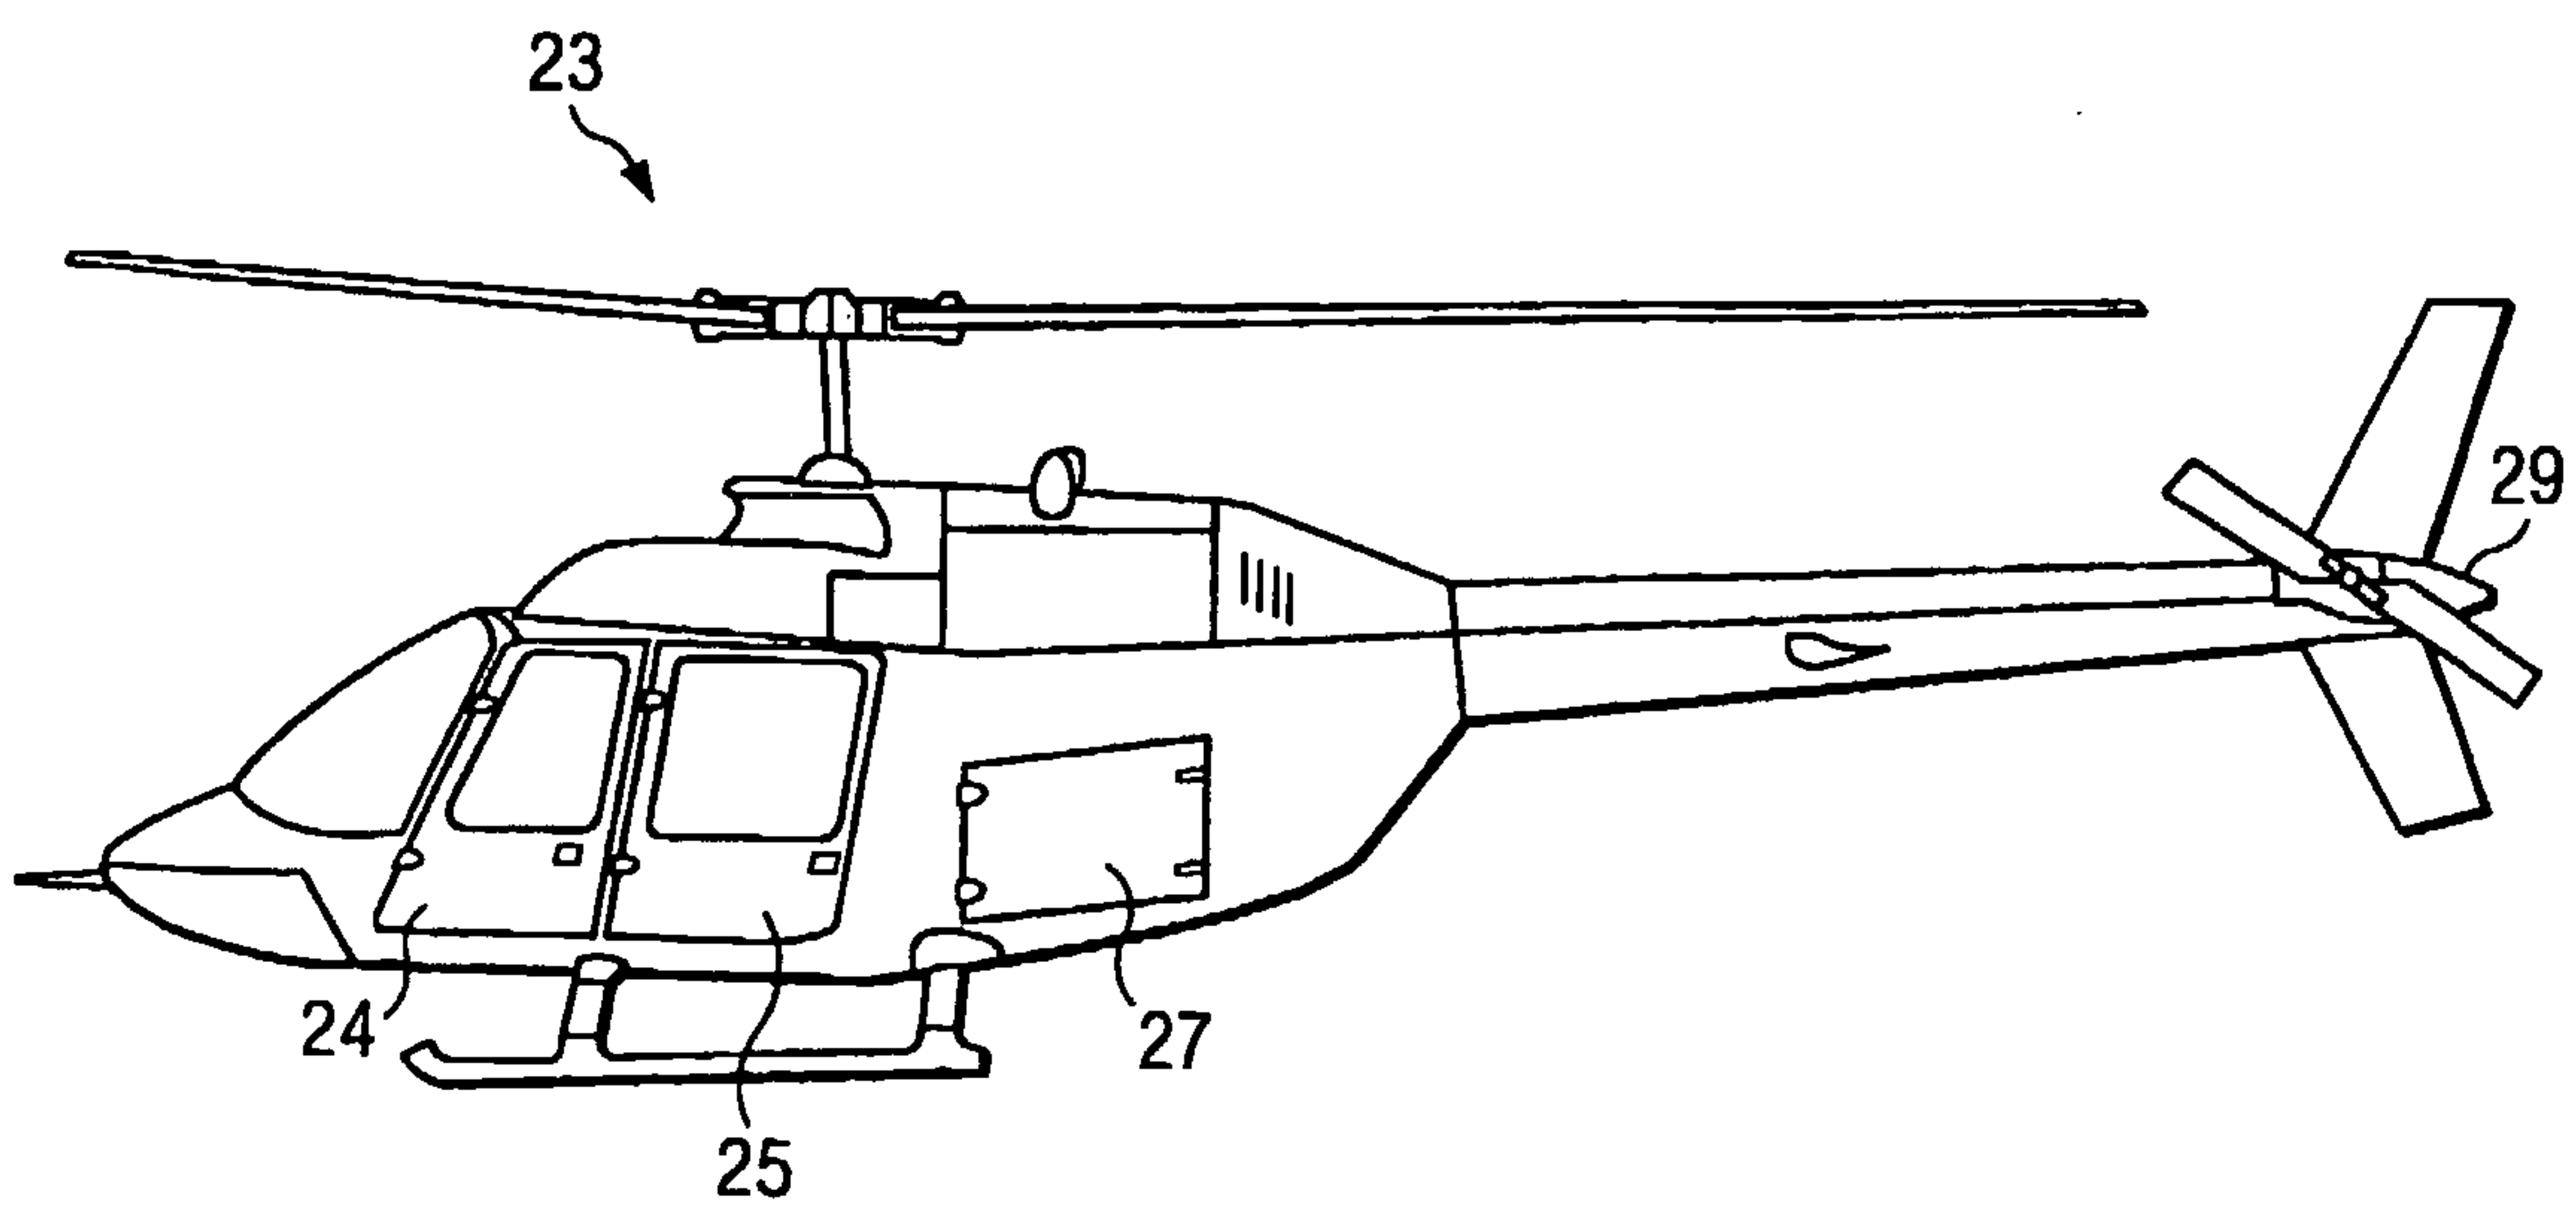
23. The method according to claim 22, further comprising:

prior to step (a), forming the conductive layer as a preform having a shape generally approximating the shape of the mold surface.

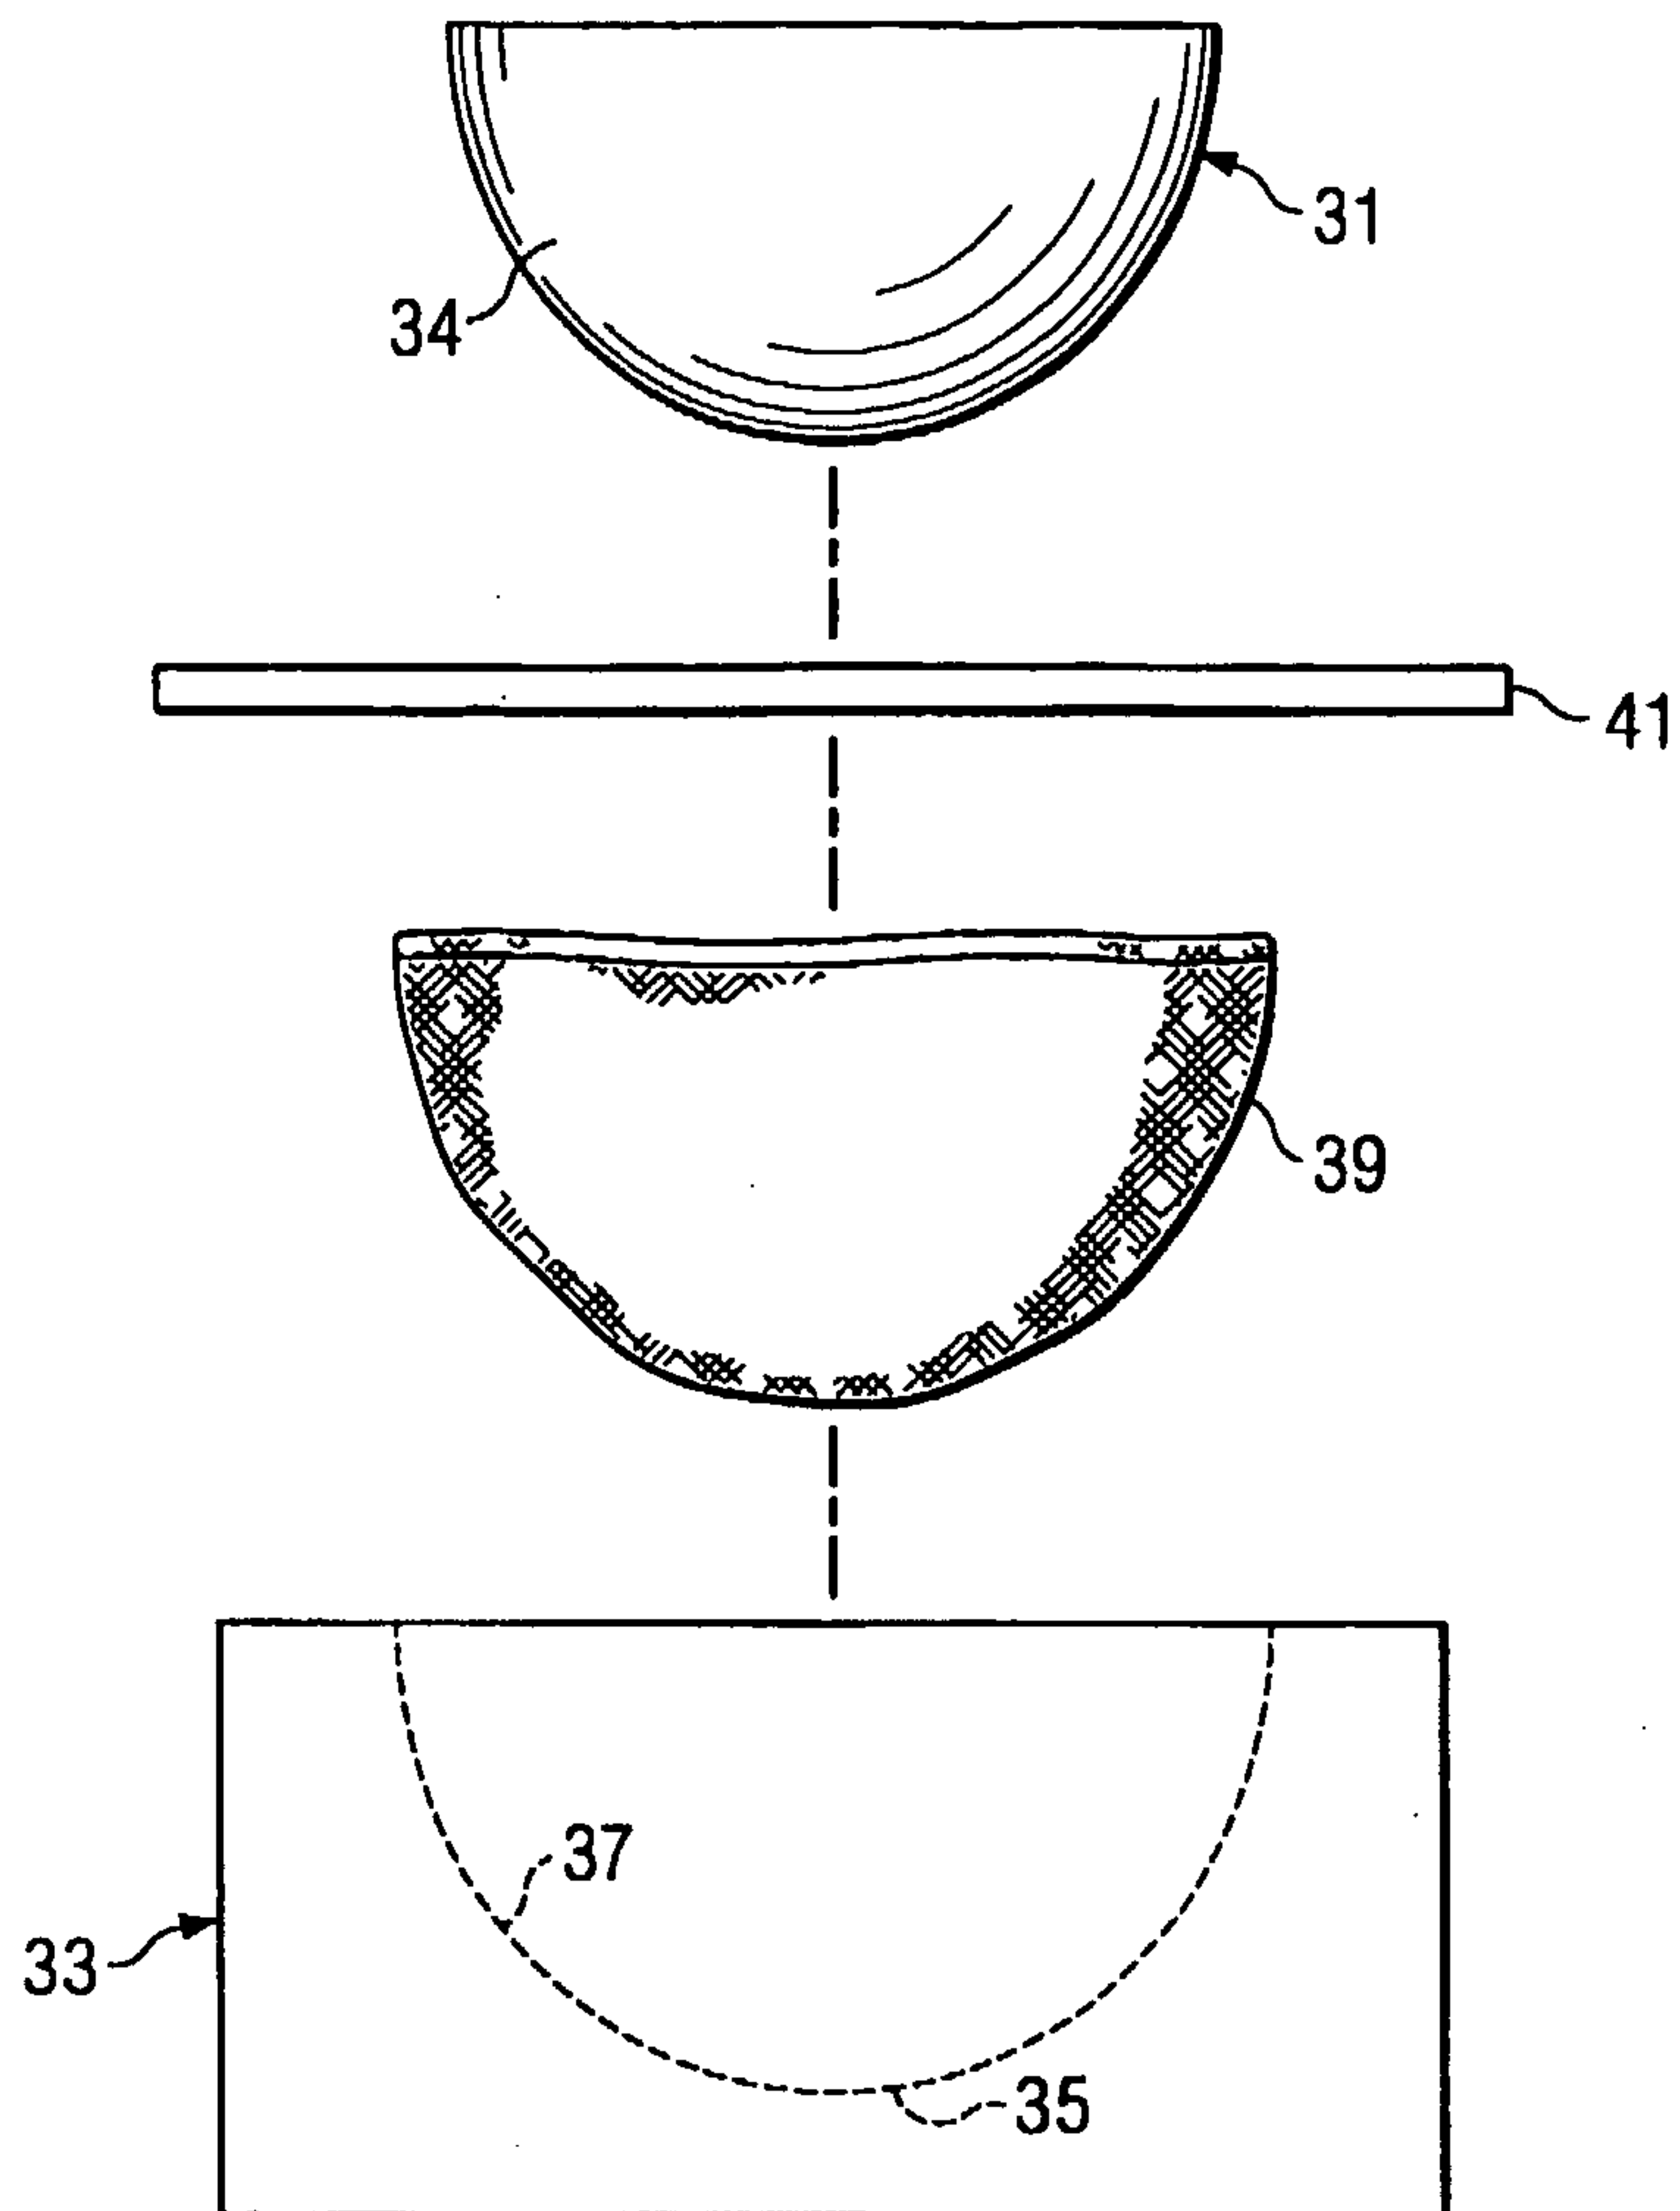
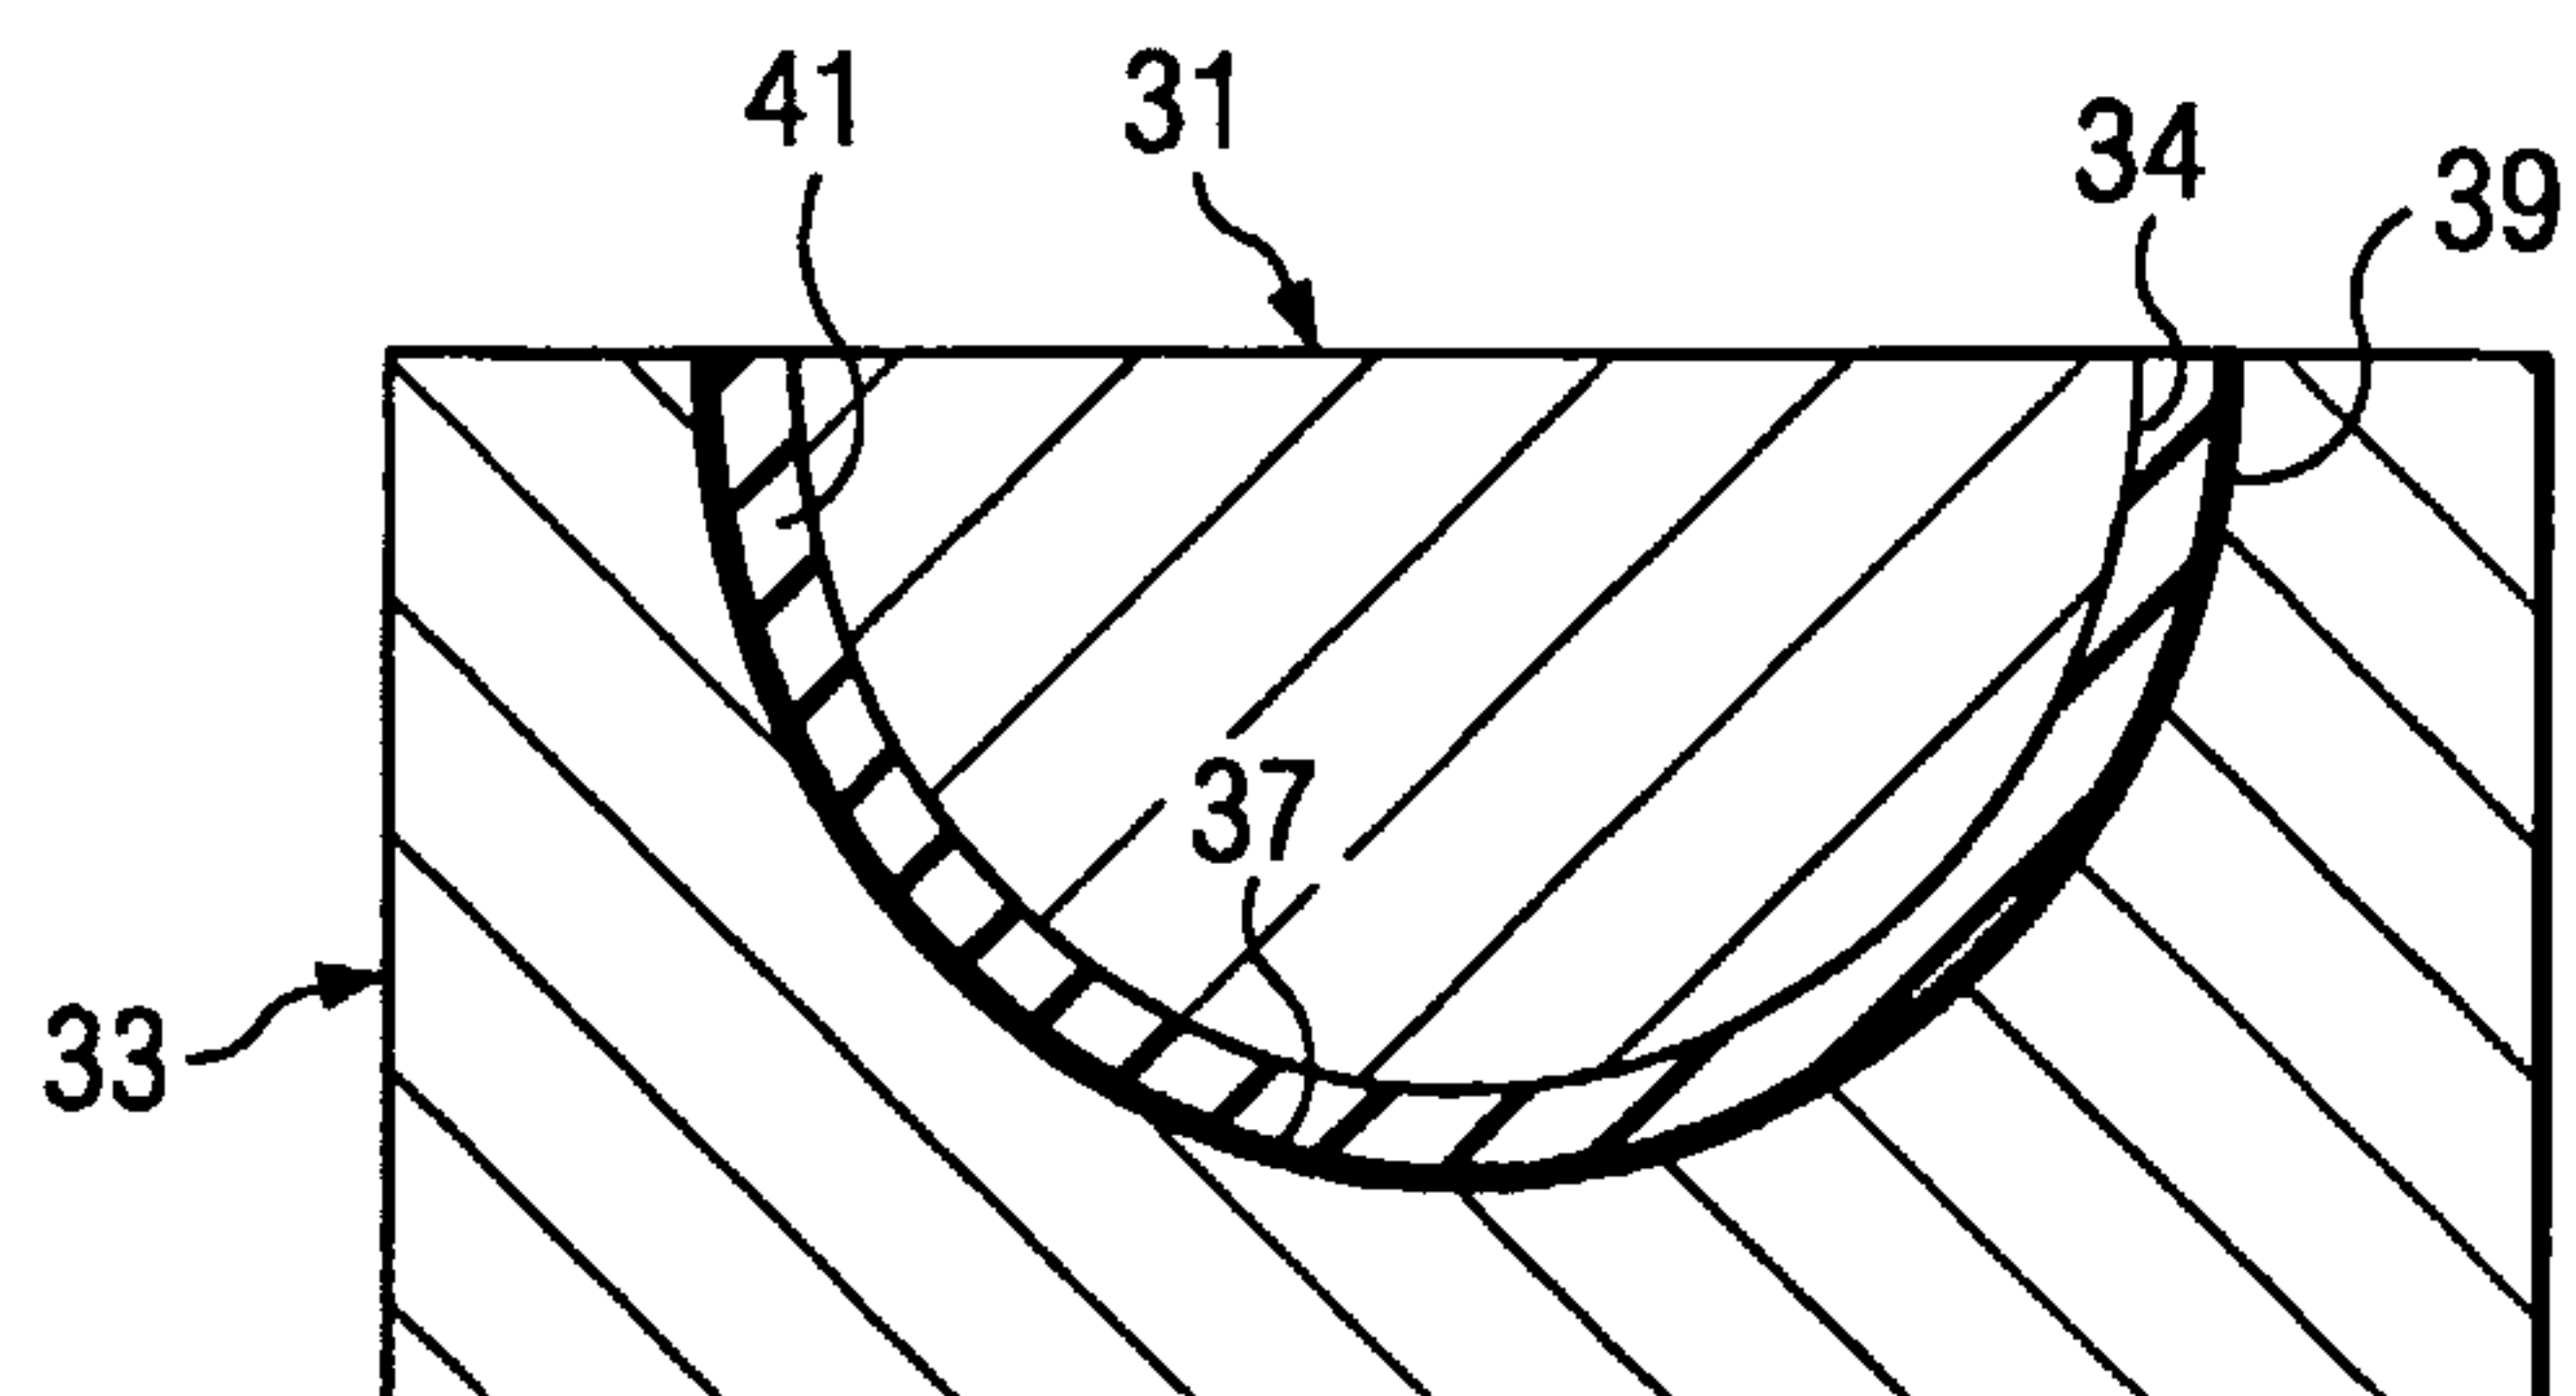
24. The method according to claim 22, wherein the conductive layer is formed of multiple overlapping portions.

25. The method according to claim 22, further comprising:
after step (a) and prior to step (b), locating a nonconductive layer adjacent the conductive layer, such that the nonconductive layer is interposed between the molding material and the conductive layer; and
wherein step (c) further comprises at least a portion of the molding material flowing into the nonconductive layer.
26. The method according to claim 22, further comprising:
prior to step (a), providing a surface treatment on the mold surface for inhibiting movement of the conductive layer relative to the mold surface during steps (b) through (d).

1/3

**FIG. 1****FIG. 2****FIG. 3**

2/3

*FIG. 4**FIG. 5*

3/3

