



(51) International Patent Classification:

H01B 13/00 (2006.01)

(21) International Application Number:

PCT/US2020/033174

(22) International Filing Date:

15 May 2020 (15.05.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/849,372 17 May 2019 (17.05.2019) US

62/864,571 21 June 2019 (21.06.2019) US

(71) Applicant: **GEORGIA TECH RESEARCH CORPORATION** [US/US]; Office of Technology Licensing, 926 Dalney Street NW, Atlanta, Georgia 30318 (US).


(72) Inventors; and

(71) Applicants: **KIM, Mingu** [US/US]; c/o Georgia Tech Research Corporation, 926 Dalney Street NW, Atlanta, Georgia 30318 (US). **BRAND, Oliver** [DE/US]; c/o Georgia Tech Research Corporation, 926 Dalney Street NW, Atlanta, Georgia 30318 (US). **BROWN, Devin** [US/US]; c/o Georgia Tech Research Corporation, 926 Dalney Street NW, Atlanta, Georgia 30318 (US).

(74) Agent: **BOCKHOP, Bryan**; Bockhop Intellectual Property Law, LLC, 2375 Mossy Branch Drive, Snellville, Georgia 30078 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) Title: MULTISCALE ALL-SOFT ELECTRONIC DEVICES AND CIRCUITS BASED ON LIQUID METAL

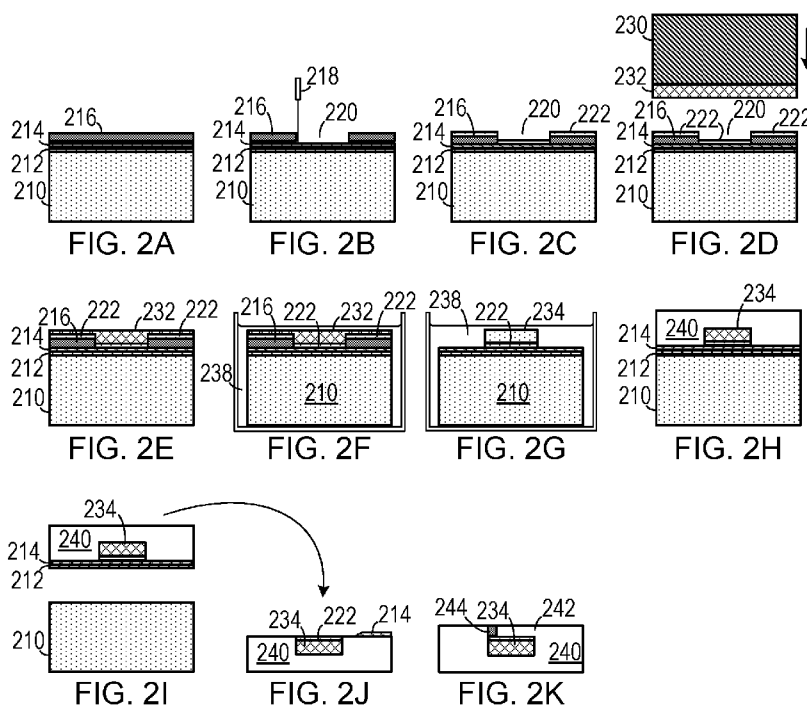

(57) Abstract: In a method making a flexible electrical conductor, a mask layer (216) is applied to a substrate (210). A portion of the mask layer (216) is removed to expose the substrate (210) in an exposed shape (220) corresponding to the conductor. A liquid phase conductor (232) is applied to the portion of the substrate (210). The mask layer (216) is dissolved with a solvent (238) to leave a shaped liquid phase conductor (234) corresponding to the exposed shape on the substrate (210). A primary elastomer layer (240) is applied onto the substrate (210) and the shaped liquid phase conductor (234). The primary elastomer layer (240) and the shaped liquid phase conductor (234) are removed from the substrate (210). A secondary elastomer layer (242) is applied to the shaped liquid phase conductor (234) and the primary elastomer layer (240) to seal the shaped liquid phase conductor (234) therein.



KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

MULTISCALE ALL-SOFT ELECTRONIC DEVICES AND CIRCUITS BASED ON LIQUID METAL

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] This application claims the benefit of US Provisional Patent Application Serial No. 62/849,372, filed 05/17/2019; this application also claims the benefit of US Provisional Patent Application Serial No. 62/864,571, filed 06/21/2019, the entirety of each of which is hereby incorporated herein by reference.

STATEMENT OF GOVERNMENT SUPPORT

[0002] This invention was made with government support under 1542174, awarded by the National Science Foundation. The government has certain rights in the invention.

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention

[0004] The present invention relates to electronic circuits and, more specifically, to electronic circuits with stretchable passive elements and circuits.

[0005] 2. Description of the Related Art

[0006] Progress in soft functional material synthesis and manufacturing technology has enabled bioinspired and skin-like soft electronics for applications ranging from entertainment to healthcare. Unlike conventional solid-state electronics, soft electronics can be lightweight, stretchable, and reconfigurable, with biocompatible characteristics for skin-mountable and wearable sensing electronics. Flexible and stretchable characteristics can be achieved by using either 2D or 3D compliant wave-like, solid metal patterns or elastic conductors based on conductive nanomaterials embedded in a polymer matrix.

[0007] An alternative approach to realize all-soft microsystems is the use of intrinsically soft conductors, such as gallium-based liquid metal such as eutectic gallium–

indium alloy (EGaIn), which is a liquid phase conductor at room temperature. The use of EGaIn in flexible electronics can be desirable due to its nontoxicity, mechanical stability (virtually unlimited stretchability), thermal conductivity and electrical conductivity. The low melting temperature and negligible vapor pressure of EGaIn facilitate room-temperature and ambient pressure manufacturing processing. Moreover, thanks to the formation of a thin oxide layer on the EGaIn surface under atmospheric oxygen level, EGaIn structures maintain their mechanical shapes, allowing formation of EGaIn patterns on soft elastomeric substrates.

[0008] For interfacing with individual cells, the ability to pattern submicrometer metallic structures embedded in soft substrates is of significant interest. Considering the size of a single biological cell, such as platelets with a diameter of 2–3 μm , mechano-transducers should be manufactured with submicron scale features and soft, biomimetic properties. Existing fabrication technologies, including the transfer printing of compliant solid metal patterns, nanoprinting, direct printing of nanomaterials, and EGaIn patterning, are currently not suitable to fabricate such soft and stretchable electronic devices with submicron-scale resolution.

[0009] Certain existing EGaIn circuit production methods place EGaIn in a channel defined by an elastomer. The channel can be shaped in the form of passive electronic components. Unfortunately, existing processes have difficulty making wires that have a width greater than 500 μm . Such widths can be useful in power distribution networks, ground planes and other circuit elements.

[0010] Therefore, there is a need for flexible circuit elements and a method for making such elements employing soft conductors.

SUMMARY OF THE INVENTION

[0011] The disadvantages of the prior art are overcome by the present invention which, in one aspect, is a method of making a flexible electrical element configured to conduct electricity while at a normal operating temperature, in which a stamp is generated so as to have a shaped surface corresponding to the flexible electrical element. A liquid phase conductor is applied to the shaped surface. The liquid phase conductor includes a material

that remains liquid while at the normal operating temperature of the flexible electrical element. The stamp is stamped onto a receptive surface of a primary elastomer layer. The receptive surface has an aspect that causes the liquid phase conductor from the shaped surface to remain on the receptive surface of the primary elastomer layer when the stamp is removed therefrom. A secondary elastomer layer is applied to the elastomer substrate so as to seal the liquid phase conductor onto the elastomer substrate.

[0012] In another aspect, the invention is a method making a flexible electrical conductor configured to conduct electricity while at a normal operating temperature, in which a mask layer is applied to a substrate. A portion of the mask layer is removed so as to expose a portion of the substrate in an exposed shape corresponding to the flexible electrical conductor. A liquid phase conductor is applied to the portion of the substrate. The mask layer is dissolved with a solvent so as to leave a shaped liquid phase conductor corresponding to the exposed shape on the substrate. A primary elastomer layer is applied onto the substrate and the shaped liquid phase conductor. The primary elastomer layer and the shaped liquid phase conductor are removed from the substrate. A secondary elastomer layer is applied to the shaped liquid phase conductor and the primary elastomer layer so as to seal the shaped liquid phase conductor therein.

[0013] In yet another aspect, the invention is an electronic element that includes an elastomer member defining a channel. The channel has a length and a width that are at least 500 μm . A liquid phase conductor fills the channel.

[0014] These and other aspects of the invention will become apparent from the following description of the preferred embodiments taken in conjunction with the following drawings. As would be obvious to one skilled in the art, many variations and modifications of the invention may be effected without departing from the spirit and scope of the novel concepts of the disclosure.

BRIEF DESCRIPTION OF THE FIGURES OF THE DRAWINGS

[0015] **FIGS. 1A-1H** include a series of schematic diagrams demonstrating a first embodiment of a method of making flexible electronic elements.

[0016] **FIGS. 2A-2K** include a series of schematic diagrams demonstrating a second embodiment of a method of making flexible electronic elements.

[0017] **FIG. 3** is a schematic diagram of a flexible resistor.

[0018] **FIGS. 4A-4C** are schematic diagrams of a flexible resistor, a flexible inductor and a flexible capacitor, respectively, made according to one representative embodiment of the invention.

[0019] **FIG. 5** is a schematic diagram of a flexible electrode array made according to one representative embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0020] A preferred embodiment of the invention is now described in detail. Referring to the drawings, like numbers indicate like parts throughout the views. Unless otherwise specifically indicated in the disclosure that follows, the drawings are not necessarily drawn to scale. The present disclosure should in no way be limited to the exemplary implementations and techniques illustrated in the drawings and described below. As used in the description herein and throughout the claims, the following terms take the meanings explicitly associated herein, unless the context clearly dictates otherwise: the meaning of “a,” “an,” and “the” includes plural reference, the meaning of “in” includes “in” and “on.”

[0021] Parylene is a common name for a variety of chemical vapor deposited poly(p-xylylene) polymers.

[0022] As shown in FIGS. 1A-1H, in one embodiment of a method of making a flexible electrical element that is configured to conduct electricity while at a normal operating temperature, material is removed from a substrate **111** using a common lithography method, such as by using an e-beam lithography device **112** so as to form a stamp **110**, as shown in FIG. 1A. The stamp **110** is shaped so as to have a surface corresponding to the desired shape of the flexible electrical element. The stamp **110**, if made from a flexible elastomer (such as polydimethylsiloxane (PDMS)), can define a

narrow channel **114** (e.g., narrower than about 500 μm) that follows the path of a desired narrow wire.

[0023] As shown in FIG. 1B, a donor layer **120** (which can also include PDMS) is coated with a liquid phase conductor **122** (such as EGaIn or other eutectic alloy), which remains in a liquid form while at the normal operating temperature (e.g., room temperature) of the flexible electrical element. If EGaIn is used, a roughly 1-3 nm layer **124** of gallium oxide will form on its top surface. The shaped outer surface of the stamp **110** can be coated with a chemical modifier **116** (such as with toluene) to attract the liquid phase conductor **122** thereto.

[0024] As shown in FIG. 1C, the stamp **110** is pressed against the liquid phase conductor **122**, which causes the liquid phase conductor **122** to enter the channel **114** and adhere to the chemically modified surface **116** of the stamp. (It should be noted that such a narrow channel is not used in some applications, such as ones that generate flexible elements having widths of at least about 500 μm .) This stamping action can be repeated several times for more complete adhesion of the liquid phase conductor **122** to the stamp **110**. As shown in FIGS. 1D-1E, the stamp is then stamped against a receptive surface if a primary elastomer layer **130** (e.g., a layer of polydimethylsiloxane). The receptive surface has a treatment **132**, or other aspect, that causes the liquid phase conductor **122** from the shaped surface to remain on the receptive surface. In one embodiment, the treatment **132** includes a paper texturing which can be achieved by applying micro cellulose fiber to the receptive surface.

[0025] When the stamp **110** is removed, as shown in FIG. 1F, shaped portions **128** of the liquid phase conductor having a shape corresponding to that of the shaped surface of the stamp **110** are left on the surface of the primary elastomer layer **130**. If channel **114** in an elastomer stamp **110** is used to form a liquid phase conductor wire **126**, as shown in FIG. 1G, then a secondary elastomer layer **142** (such as a polydimethylsiloxane layer) is placed against the stamp **110** to encapsulate the wire **126**. A flexible via **144** can be used to connect the liquid phase conductor wire **126** to external elements. As shown in FIG. 1H, the shaped portions **128** are encapsulated with a secondary elastomer layer **146** (such as a polydimethylsiloxane layer) to seal the shaped portions **128** to the primary elastomer layer substrate **130**, thereby making a flexible circuit element having the desired shape.

[0026] In another embodiment, as shown in FIGS. 2A-2K, a mask layer **216** (such as a poly(methyl methacrylate) layer) is applied to a substrate, which can include a rigid layer **210** (such as silicon or SiO₂ layer), onto which is applied a sacrificial layer **212** (such as poly(acrylic acid) (PAA)) and a separation layer **214** (such as parylene C), as shown in FIG. 2A. As shown in FIG. 2B, a portion corresponding to the shape of a desired flexible electrical conductor is removed from the mask layer **216** so as to generate an opening **220** in the desired shape of the conductor that exposes the sacrificial layer **212**. This can be done using a conventional circuit lithography method, such as e-beam lithography **218**. As shown in FIG. 2C, an adhesion layer **222** (such as a thin film of Ti/Au at 5 nm to 30 nm in thickness, in one embodiment) having an affinity for the liquid phase conductor is applied to all exposed surfaces. As shown in FIG. 2D, a liquid phase conductor layer **232** (such as EGaIn) is applied to a stamp **230** (such as a PDMS layer), which is pressed against the adhesion layer **222**. When the stamp is removed, as shown in FIG. 2E, the liquid phase conductor layer **232** adheres to the adhesion layer **222**. By using a suitable solvent **238** (such as acetone when the mask layer comprises PMMA), as shown in FIG. 2F, the remaining mask layer **216** is removed, leaving the liquid phase conductor layer **232** in the desired shape, as shown in FIG. 2G. As shown in FIG. 2H, a primary soft elastomer layer **240** (such as PDMS) is applied to the liquid phase conductor layer **232** and the exposed portions of the separation layer **214**. As shown in FIG. 2I, the soft elastomer layer **240**, the remaining liquid phase conductor layer **232**, the separation layer **214** and the sacrificial layer **212** are removed from the rigid layer **210**. As shown in FIG. 2J, the separation layer **214** is then etched away so as to expose the primary soft elastomer layer **240** and liquid phase conductor layer **232** (and the trace amount of the remaining adhesion layer **222**). As shown in FIG. 2K, the secondary soft elastomer layer **242** (such as PDMS) is applied so as to encapsulate the liquid phase conductor layer **232**. A via **244** can also be applied to couple the component to other components. Micro-scale elements (e.g., light emitting diodes, microchips, etc.) can also be embedded in the elastomer layers to add functionality.

[0027] As shown in FIG. 3, a liquid phase conductor **326** can be shaped so as to act as a passive electronic component **300** that is encapsulated in a soft elastomer block **310** and that can be electrically coupled to other components with vias **344**. While this figure shows only a single component, many different components can be integrated into a single soft elastomer block **310**. As shown in FIGS. 4A-4C, such components can include, for example, a resistor **410**, an inductor **412** and a capacitor **414**. A complex flexible

microelectrode array **500** is shown in FIG. 5, in which a first plurality of flexible wires **520** is spaced apart from a second plurality of flexible wires **522**, both of which are encapsulated in a soft elastomer material **510**.

[0028] The following paragraphs describe methods employed in a first experimental embodiment:

[0029] Subtractive Reverse Stamping Technique Based on Soft Lithography: For PDMS mold preparation, a microfabricated photoresist master on a silicon wafer with critical dimension of 2 μm was fabricated. To create the PDMS mold, liquid PDMS (10:1 ratio of PDMS prepolymer and curing agent, Sylgard 184, Dow Corning) was either drop casted or spin coated on the fabricated silicon master molds and cured at 60 °C for 8 hours. A 500 μL droplet of toluene (Toluene, ACS grade, VWR International) was drop-coated on a glass substrate and subsequently dried at room temperature and under atmospheric pressure for 5–10 minutes. Then, the PDMS mold was placed on the glass substrate for chemical surface modification. In the micro-transfer molding process, EGaIn (gallium–indium eutectic, >99.99% trace metal basis, Sigma-Aldrich) was dispensed and spread using a PDMS roller on a donor PDMS substrate. Afterward, the PDMS mold was gently pressed onto the EGaIn thin film and separated from it. Unwanted liquid metal residue on the outside of the channel was transferred to a sacrificial PDMS layer, and this transfer process was repeated several times (≈ 15 times) until all residue is removed. The EGaIn-filled PDMS mold was then bonded to an additional PDMS layer using either drop casting or spin coating.

[0030] Additive Stamping Technique Based on Soft Lithography: For the PDMS stamp preparation, an acrylic master with critical dimension of 500 μm was fabricated using a CO₂ laser cutter, and liquid PDMS (10:1 ratio of PDMS prepolymer and curing agent, Sylgard 184, Dow Corning) was drop casted on the fabricated molds and cured at 60 °C for 8 hours. For paper-textured PDMS preparation, a small piece of standard printing paper (Office Depot #348-037) was taped on a flat substrate, and liquid PDMS (10:1 ratio of PDMS prepolymer and curing agent, Sylgard 184, Dow Corning) was either drop casted or spin coated on the paper substrate. After curing at 60 °C for 8 hours, the polymerized PDMS was gently peeled off from the paper substrate. With this process, the micro cellulose fiber structures can be effectively transferred to the PDMS surface. EGaIn

(gallium–indium eutectic, >99.99% trace metal basis, Sigma-Aldrich) was dispensed and spread using a PDMS roller on a donor PDMS substrate. The PDMS stamp was gently pressed onto the EGaIn film, and then the EGaIn film was stamped to the paper-textured PDMS substrate. The patterned EGaIn films on the paper-textured PDMS were then sealed by an additional PDMS layer using either drop casting or spin coating, and commercial copper tape was used for electrical contacts. All PDMS samples were polymerized at 60 °C for 8 hours.

[0031] Another experimental embodiment includes a hybrid lithography process is introduced that combines electron-beam lithography (EBL) for nano/microstructure fabrication with soft lithography for EGaIn transfer. This hybrid lithography process is applied to a biphasic structure, including a metallic adhesion layer coated with EGaIn. The hybrid fabrication approach enables high-resolution and high-density all-soft electronic devices, including passive electronic components, resistive strain sensor arrays, and microelectrode arrays. In particular, EGaIn thin-film patterning with feature sizes as small as 180 nm and 1 μm line spacing were demonstrated. The intrinsically soft EGaIn structures, patterned by the developed hybrid lithography technique, offer a combination of resolution, electrical conductivity, and electronic/wiring density. Thanks to the intrinsically soft EGaIn properties, the fabricated soft devices can endure mechanical deformation up to 30%, while maintaining electrical functionality.

[0032] In an experimental embodiment, the fabrication process typically includes three fundamental steps: nano/microstructure fabrication using EBL (or any other lithography technique able to pattern submicrometer features), EGaIn transfer using a stamping process, and soft material encapsulation and final release from the silicon (Si) carrier wafer. The process starts by spin-coating a water-soluble sacrificial material (poly(acrylic acid), PAA) on a silicon wafer at 2000 rpm for 30 seconds and baking the film at 100 °C for 60 seconds. On top of the PAA sacrificial layer, a 600-nm-thick parylene-C barrier film is deposited by chemical vapor deposition (CVD) in order to protect the underlying PAA during the subsequent EGaIn patterning as well as while releasing the fabricated soft electronic devices from the Si wafer after the soft material encapsulation. EBL is then used to pattern a spin-coated poly(methylmethacrylate) (PMMA) layer with a thickness between 300 nm and 1 μm. After exposure in the EBL tool (Elionix ELS G-100), the PMMA film is developed using a mixture of methyl isobutyl ketone (MIBK) and isopropanol with 1:1

ratio. Alternatively, other lithography processes with submicron resolution can be considered for this step. In the next step, a stamping process is used to transfer an EGaIn thin film onto the patterned PMMA structures. To improve the adhesion and uniformity of the stamped EGaIn on the parylene-C-coated substrate, a biphasic structure was adopted. To this end, a thin metallic adhesion layer (such as Ti/Au, 5 nm/30 nm in thickness) is first deposited using electron-beam evaporation on the patterned PMMA nano/microstructures. The purpose of this metallic adhesion layer is to enhance the adhesion and wetting characteristics during the EGaIn stamping process while maintaining EGaIn's electrical and mechanical properties. Then, a non-structured PDMS stamp is wet with EGaIn and gently pressed 2–3 times onto the Au-coated nano/microstructures, transferring a thin EGaIn film which forms an alloy with the underlying Au adhesion layer. A PMMA lift-off process with acetone is then used to pattern the stamped EGaIn on Au.

[0033] To highlight the impact of the Au adhesion layer on the EGaIn wettability, the EGaIn stamping process was carried out on patterned PMMA structures without and with the use of the Au adhesion layer. Without the adhesion layer, the stamped EGaIn is not uniformly spread onto the patterned PMMA structure, resulting in non-uniform and rough EGaIn surfaces with EGaIn droplets as well as non-covered areas after PMMA lift-off. In contrast, by utilizing the Au adhesion layer during the EGaIn stamping process, the stamped EGaIn uniformly spreads across the Au film and fills concave nano/micropatterns up to the designed PMMA thickness. The EGaIn stamped on the Au adhesion layer demonstrated strong adhesion and uniform wetting and, therefore, could be successfully patterned using the PMMA lift-off process without any structural deformation.

[0034] Next, the remaining EGaIn structures are covered with a soft elastomer (e.g., poly(dimethyl siloxane), PDMS), and the fabricated devices are released from the Si carrier wafer by dissolving the sacrificial PAA layer in water for at least six hours. Finally, the parylene-C barrier layer is etched using an oxygen plasma in a reactive-ion etching (RIE) system, and the back side of the soft electronic device is sealed with a soft elastomer. It should be noted that optical lithography with a positive-tone photoresist can be utilized as well for the microstructure fabrication. Moreover, other lithography techniques able to pattern submicron-scale sacrificial structures, such as direct laser writing⁵⁴ or 3D nanoprinting, can be potentially utilized for cost-effective fabrication.

[0035] The following paragraphs describe methods employed in a second experimental embodiment:

[0036] Nano/microstructure fabrication process: A water-soluble sacrificial layer, poly (acrylic acid) (PAA, Polyscience, Inc.), was spun on a Si wafer at 2000 rpm for 30 s and baked at 100 °C for 60 s, resulting in $\approx 2 \mu\text{m}$ film thickness. On top of the PAA sacrificial layer, a parylene-C film with 600 nm thickness was deposited by chemical vapor deposition (CVD, SCS Labcoter PDS 2010). For nano/microstructure definition, electron-beam lithography (EBL, Elionix ELS G-100) was utilized to pattern spin-coated poly(methylmethacrylate) (PMMA, Micro-Chem Corp.) films with thicknesses ranging from 300nm to 1 μm . In the EBL process, the samples with different PMMA thicknesses were all exposed using a 1-nA current with a proximity effect correction ($\beta = 30$ and $\eta = 0.6$). The applied dose was adjusted from 400 $\mu\text{C cm}^{-2}$ to 630 $\mu\text{C cm}^{-2}$ because of the different PMMA thicknesses. For example, a dose of 510 $\mu\text{C cm}^{-2}$ was selected for the 1- μm -thick PMMA film. Then, a thin metallic adhesion layer, either Ti/Au or Ti/Cu, was deposited onto the PMMA nano/micropatterns using an electron-beam evaporator with a target thickness of 5 nm/30 nm.

[0037] PDMS stamp preparation and EGaIn stamping process: For PDMS stamp fabrication, a general replica molding process was used using an acrylic master fabricated using a CO₂ laser cutter (Hermes LS500XL). Liquid PDMS (10:1 ratio of PDMS pre-polymer and curing agent, Sylgard 184, Dow Corning) was drop-casted on the acrylic master and cured at 60 °C for 8 h. PDMS stamps with various shapes (e.g. circle or rectangle) and sizes (e.g. 5mm $\times$ 5mm to 30mm $\times$ 30 mm) were designed and fabricated to stamp EGaIn onto the Au- or Cu-coated nano/microstructures. EGaIn (gallium-indium eutectic, >99.99 trace metal basis, Sigma-Aldrich) was dispensed on a donor PDMS substrate using a syringe and spread and flattened by a PDMS roller. In the next step, the fabricated PDMS stamp was wet with EGaIn by pressing it on the EGaIn-coated donor PDMS substrate and gently stamped 2–3 times onto the Au- or Cu-coated nano/micropatterns to transfer the EGaIn thin film. The stamped EGaIn on Au or Cu was finally patterned using a PMMA lift-off process with acetone.

[0038] Soft material encapsulation and release process: The patterned EGaIn structures were encapsulated with liquid PDMS (10:1 ratio of PDMS pre-polymer and curing agent,

Sylgard 184, Dow Corning) either by spin coating or drop casting. The fabricated soft electronic devices were then released by submerging the samples into water for >6 h. After the PAA sacrificial layer etching was completed, the fabricated soft devices were floating on the water surface and could gently be transferred to a glass substrate to etch the parylene-C layer. The parylene-C layer was etched using an oxygen plasma in a reactive-ion etching system (RIE, Vision 320 RIE) for >7min or until the parylene-C film was completely removed. Under the etching conditions of 200 mTorr pressure and 200W power, the tested parylene-C etch rate using oxygen plasma was $\approx 100 \text{ nm min}^{-1}$. After etching the parylene-C layer, the soft electronic devices were encapsulated again with PDMS for backside sealing.

[0039] Although specific advantages have been enumerated above, various embodiments may include some, none, or all of the enumerated advantages. Other technical advantages may become readily apparent to one of ordinary skill in the art after review of the following figures and description. It is understood that, although exemplary embodiments are illustrated in the figures and described below, the principles of the present disclosure may be implemented using any number of techniques, whether currently known or not. Modifications, additions, or omissions may be made to the systems, apparatuses, and methods described herein without departing from the scope of the invention. The components of the systems and apparatuses may be integrated or separated. The operations of the systems and apparatuses disclosed herein may be performed by more, fewer, or other components and the methods described may include more, fewer, or other steps. Additionally, steps may be performed in any suitable order. As used in this document, “each” refers to each member of a set or each member of a subset of a set. It is intended that the claims and claim elements recited below do not invoke 35 U.S.C. §112(f) unless the words “means for” or “step for” are explicitly used in the particular claim. The above described embodiments, while including the preferred embodiment and the best mode of the invention known to the inventor at the time of filing, are given as illustrative examples only. It will be readily appreciated that many deviations may be made from the specific embodiments disclosed in this specification without departing from the spirit and scope of the invention. Accordingly, the scope of the invention is to be determined by the claims below rather than being limited to the specifically described embodiments above.

CLAIMS


What is claimed is:

1. A method of making a flexible electrical element configured to conduct electricity while at a normal operating temperature, comprising the steps of:
 - (a) generating a stamp so as to have a shaped surface corresponding to the flexible electrical element;
 - (b) applying a liquid phase conductor to the shaped surface, the liquid phase conductor comprising a material that remains liquid while at the normal operating temperature of the flexible electrical element;
 - (c) stamping the stamp onto a receptive surface of a primary elastomer layer, wherein the receptive surface has an aspect that causes the liquid phase conductor from the shaped surface to remain on the receptive surface of the primary elastomer layer when the stamp is removed therefrom; and
 - (d) applying a secondary elastomer layer to the elastomer substrate so as to seal the liquid phase conductor onto the elastomer substrate.
2. The method of Claim 1, further comprising the step of chemically modifying the shaped surface of the stamp to attract the liquid phase conductor thereto.
3. The method of Claim 2, wherein the chemically modifying step comprises applying toluene to the shaped surface.
4. The method of Claim 1, wherein the applying a liquid phase conductor step comprises the steps of:
 - (a) applying the liquid phase conductor to an upper surface of a donor layer; and
 - (b) preliminarily stamping the stamp onto the liquid phase conductor on the upper surface of the donor layer so as to transfer a portion of the liquid phase conductor on the upper surface of the donor layer to the shaped surface.
5. The method of Claim 1, wherein the stamp comprises polydimethylsiloxane.

6. The method of Claim 1, wherein the primary elastomer layer and the secondary elastomer layer comprise polydimethylsiloxane.
7. The method of Claim 1, further comprising the step of applying a texture to the receptive surface of the primary elastomer layer prior to the stamping step.
8. The method of Claim 7, wherein the step of applying a texture to the receptive surface comprises applying micro cellulose fiber to the receptive surface so as to generate a paper texture on the receptive surface.
9. The method of Claim 1, wherein the liquid phase conductor comprises a eutectic alloy.
10. The method of Claim 9, wherein the eutectic alloy comprises a eutectic gallium-indium alloy.
11. The method of Claim 1, further comprising the step of placing a flexible via so that the flexible via is in contact with the liquid phase conductor and extends to an outer surface of at least one of the primary elastomer layer and the secondary elastomer layer so as to provide an external electrical contact to liquid phase conductor.
12. A method making a flexible electrical conductor configured to conduct electricity while at a normal operating temperature, comprising the steps of:
 - (a) applying a mask layer to a substrate;
 - (b) removing a portion of the mask layer so as to expose a portion of the substrate in an exposed shape corresponding to the flexible electrical conductor;
 - (c) applying a liquid phase conductor to the portion of the substrate;
 - (d) dissolving the mask layer with a solvent so as to leave a shaped liquid phase conductor corresponding to the exposed shape on the substrate;
 - (e) applying a primary elastomer layer onto the substrate and the shaped liquid phase conductor;

- (f) removing the primary elastomer layer and the shaped liquid phase conductor from the substrate; and
 - (g) applying a secondary elastomer layer to the shaped liquid phase conductor and the primary elastomer layer so as to seal the shaped liquid phase conductor therein.
- 13. The method of Claim 12, wherein the step of removing a portion of the mask layer comprises subjecting the portion of the mask layer to e-beam lithography.
- 14. The method of Claim 12, wherein the substrate is generated by employing the steps of:
 - (a) applying a sacrificial layer to a rigid layer; and
 - (b) applying a separation layer to the sacrificial layer.
- 15. The method of Claim 14, wherein the rigid layer comprises a selected one of silicon or SiO₂, wherein the sacrificial layer comprises poly(acrylic acid) and wherein the separation layer comprises parylene C.
- 16. The method of Claim 15, wherein a portion of the separation layer adheres to the primary elastomer layer and the shaped liquid phase conductor as a result of the step of removing the primary elastomer layer and the shaped liquid phase conductor from the substrate and further comprising the step of etching the portion of the separation layer so as to expose the elastomer layer and the shaped liquid phase prior to the step of applying a secondary elastomer layer to the shaped liquid phase conductor and the primary elastomer layer.
- 17. The method of Claim 15, further comprising the step of applying an adhesion layer to the separation layer and the portion of the substrate prior to the step of applying a liquid phase conductor in which the adhesion layer has an affinity for the liquid phase conductor.
- 18. The method of Claim 17, wherein the adhesion layer comprises at least one of titanium and gold.

19. The method of Claim 17, wherein the step of applying a liquid phase conductor comprises the steps of:
 - (a) applying the liquid phase conductor to a surface of a stamp;
 - (b) pressing the surface of the stamp against the adhesion layer; and
 - (c) removing the surface of the stamp from the adhesion layer.
20. The method of Claim 12, wherein the mask layer comprises poly(methyl methacrylate) and wherein the solvent comprises acetone.
21. The method of Claim 12, wherein at least one of the primary elastomer layer and the secondary elastomer layer comprises polydimethylsiloxane.
22. An electronic element, comprising:
 - (a) an elastomer member defining a channel, in which the channel has a length and a width that are at least 500 μm ; and
 - (b) a liquid phase conductor filling the channel.
23. The electronic element of Claim 22, wherein the elastomer member comprises polydimethylsiloxane.
24. The electronic element of Claim 22, wherein the liquid phase conductor comprises a eutectic alloy.
25. The electronic element of Claim 24, wherein the eutectic alloy comprises a eutectic gallium-indium alloy.

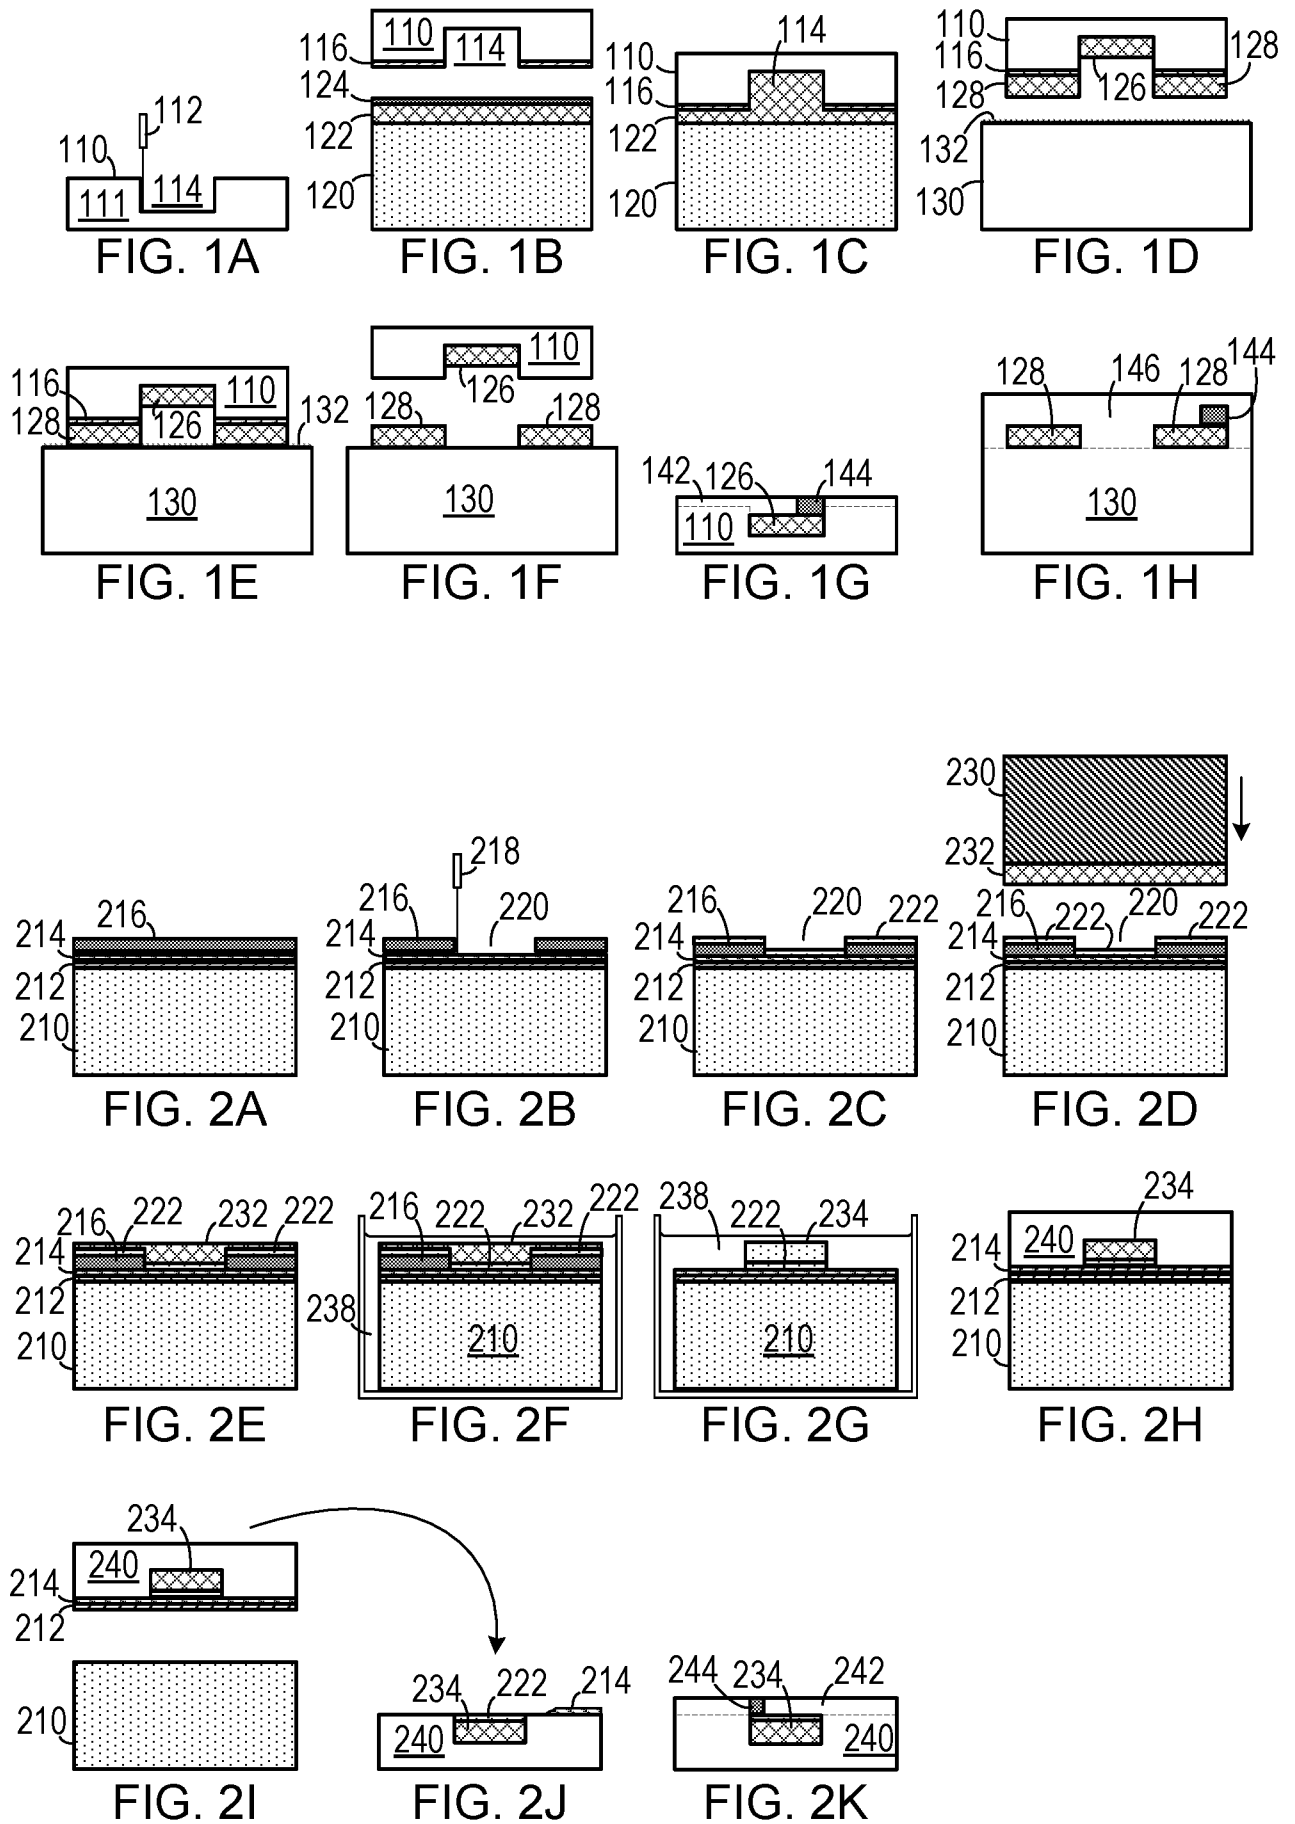

2/3

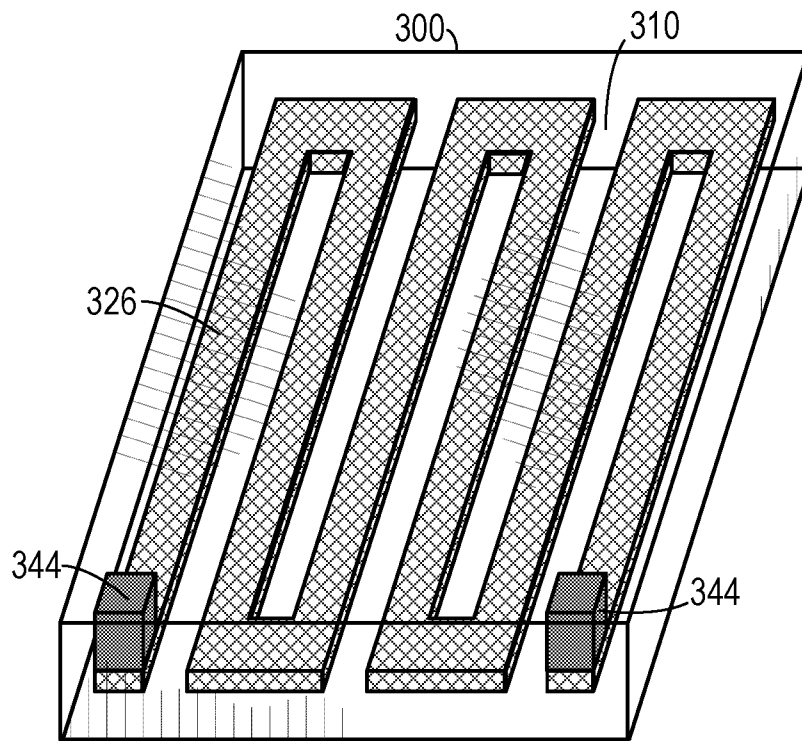


FIG. 3




FIG. 4A




FIG. 4B




FIG. 4C

3/3

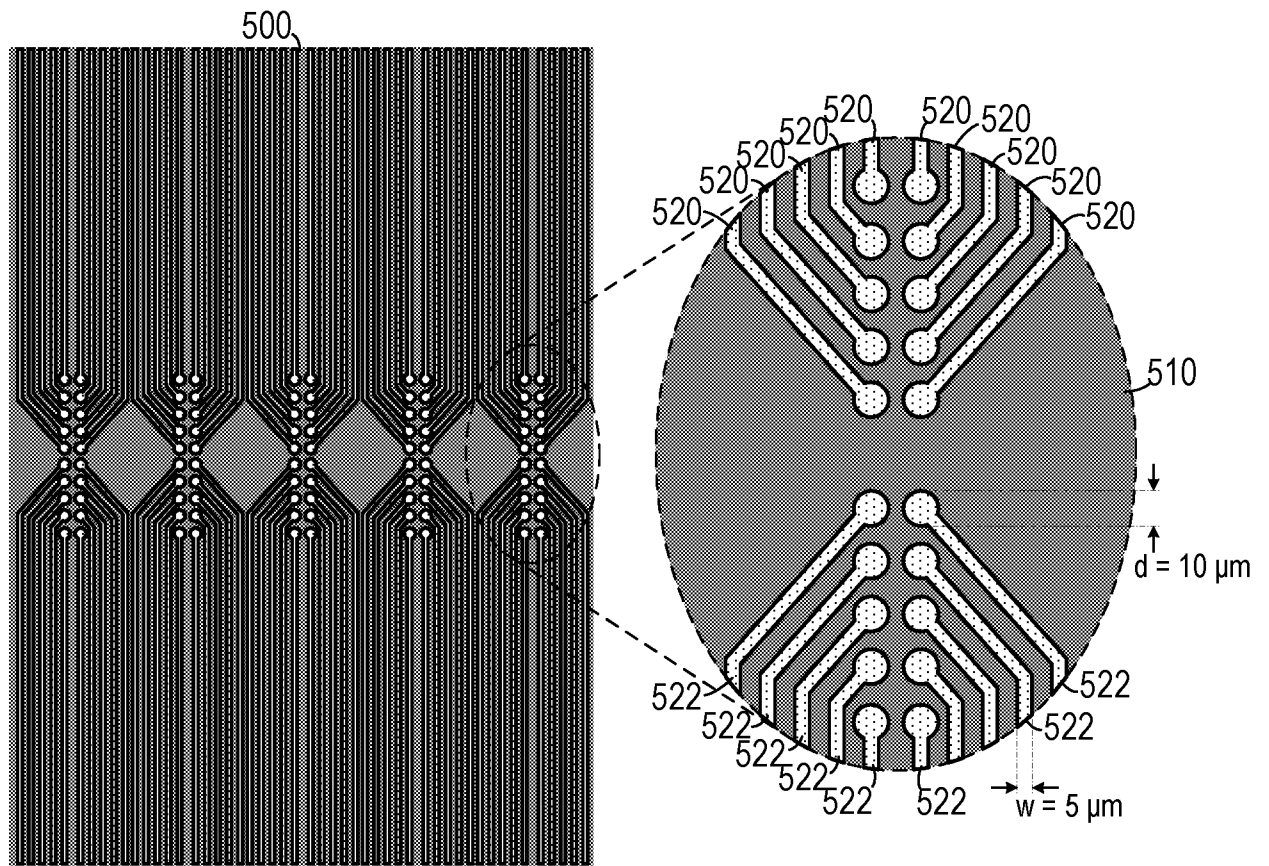


FIG. 5