(Model.)

## J. HERRMANN.

BRACKET.

No. 292,011.

Patented Jan. 15, 1884.


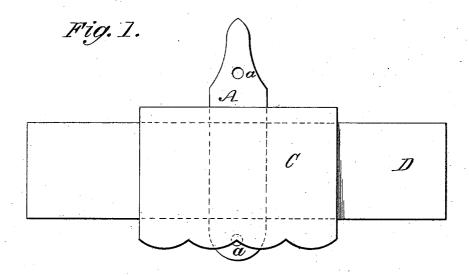


Fig. 2.



WITNESSES:

b. Sedguick

INVENTOR:

BY Munn to

ATTORNEYS.

## UNITED STATES PATENT OFFICE.

JONAS HERRMANN, OF COLUMBUS, OHIO.

## BRACKET.

SPECIFICATION forming part of Letters Patent No. 292,011, dated January 15, 1884.

Application filed July 26, 1883. (Model.)

To all whom it may concern:

Be it known that I, Jonas Herrmann, of Columbus, in the county of Franklin and State of Ohio, have invented a new and Improved Bracket, of which the following is a full, clear, and exact description.

The object of this invention is to provide a novel bracket adapted for holding a cross-bar out from the wall.

Reference is to be had to the accompanying drawings, forming a part of this specification, in which similar letters of reference indicate corresponding parts in both the figures.

Figure 1 is a front elevation of my new and is improved bracket, showing the cross-bar in place; and Fig. 2 is a side elevation of the bracket with the cross-bar removed.

A represents the supporting-board of the bracket. This is adapted to be secured to the 20 wall or other permanent object by screws, bolts, or nails passing through the holes a a, and has the bracket-arm B formed upon or secured at right angles to it.

To the outer end of the bracket-arm B is 25 hinged, by the hinge-plates bb and screws b'b',

the leaf C, which is recessed, as shown at c, to leave a space between the leaf and the outer end of the arm B, for the passage of the crossbar D or one end thereof.

The cross-piece D may be held by a single 30 bracket, to increase the hanging or holding capacity of the bracket as a whole; or two brackets may be used for holding the cross-piece D, one being placed at or near each end of the piece D. In this manner the cross-piece D is 35 very securely held, and it may be very easily removed, which renders the bracket very convenient for many purposes.

Having thus described my invention, I claim as new and desire to secure by Letters Patent— 40

The combination of the board A, the bracket arm B, secured at right angles thereto, the hinged plates b b at the outer end of said arm, the screws b' b', the leaf C, recessed at c, and the cross-bar D, all arranged substantially as 45 shown and described.

JONAS HERRMANN.

Witnesses:

WM. T. ROBBINS, SEBASTIAN HERRMANN.