



(51) International Patent Classification:

C09K 8/12 (2006.01) *C09K 8/03* (2006.01)
C09K 8/035 (2006.01)

(21) International Application Number:

PCT/US2016/061274

(22) International Filing Date:

10 November 2016 (10.11.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Pkwy E., Houston, TX 77032 (US).

(72) Inventors: **PANG, Xueyu**; 20215 Niagara Falls Drive, Tomball, TX 77375 (US). **HUNDT, Gregory**; 21 Long Hearth Place, Spring, TX 77382 (US). **LEWIS, Samuel**; 3 Dahlia Trail Place, Spring, TX 77382 (US). **SODHI, Thomas, Singh**; 410 Magnolia Bend, New Caney, TX 77357 (US). **SINGH, John, P.**; 3603 Scenic Valley Drive, Kingwood, TX 77345 (US). **TAN, Brendon**; 2510 Bevis Street, Houston, TX 77008 (US).

(74) Agent: **HILTON, Robert, C.** et al.; McGuireWoods LLP, 1750 Tysons Blvd., Suite 1800, Tysons Corner, VA 22102 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: STORABLE LIQUID SUSPENSION OF HOLLOW PARTICLES

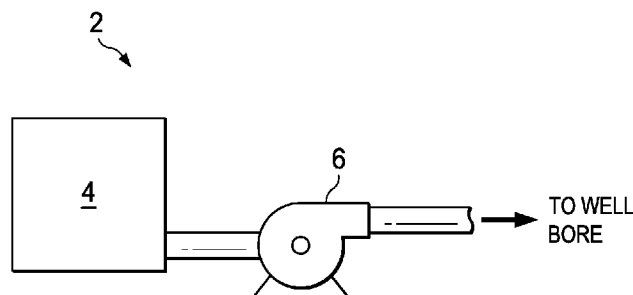


FIG. 1

(57) Abstract: Provided are compositions and methods of using a liquid suspension of hollow particles comprising a plurality of hollow particles, water, a suspending aid, and a stabilizer selected from the group consisting of a non-ionic surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof. The liquid suspension is homogenous. An example method includes statically storing the liquid suspension in a container for at least one week; wherein the liquid suspension maintains a difference in density from the top of the container to the bottom of the container of less than one pound per gallon while stored. The method further includes adding the liquid suspension to a treatment fluid; wherein the liquid suspension reduces the density of the treatment fluid; and introducing the treatment fluid into a wellbore penetrating a subterranean formation.



STORABLE LIQUID SUSPENSION OF HOLLOW PARTICLES

TECHNICAL FIELD

The present disclosure relates to the use and production of storable liquid suspensions of hollow particles, and more particularly to producing and storing liquid homogenous suspensions of hollow particles and then introducing the liquid homogenous suspensions to a treatment fluid after storage of the liquid homogenous suspensions.

BACKGROUND

Hollow particles may be used to lower the density of wellbore treatment fluids such as drilling fluids, cement slurries, completion fluids, and the like. Hollow particles may be used to reduce the density of treatment fluids, typically without a substantial effect on other fluid properties, for example, compressive strength of cement slurries after set. Further, the use of hollow particles may preclude the need for water extension or foaming of the treatment fluid. As such, hollow particles are a useful component for producing lightweight treatment fluids having desired densities.

In some instances the hollow particles may be dry blended with other treatment fluid solids for storage and/or transport before hydration and introduction of the treatment fluid in the wellbore. Dry blending the hollow particles with other treatment fluid solids may induce various problems when the treatment fluid is to be prepared and used. For example, the hollow particles are lightweight and may segregate from the heavier treatment fluid solids in the dry blend. If this happens, the dry blend will not be homogenous and may produce a treatment fluid of lesser quality. Moreover, dry blending of the hollow particles before hydration may preclude broad control of treatment fluid density while pumping as the hollow particles have already been added to the dry blend and cannot be removed. Further, the hollow particles may take longer to wet compared to other treatment fluid solids and as such may limit the pump rate of the treatment fluid. Finally, hollow particles may be subject to pneumatic transfer loss. The hollow particles may be one of the more expensive components in the treatment fluid, and any loss may lead to increased operational costs.

In order to resolve the aforementioned issues with dry blending hollow particles, liquid suspensions of hollow particles may be prepared. The liquid suspension of hollow particles may be added to the treatment fluid before the treatment fluid is used. However, it can be difficult to maintain a stable liquid suspension of hollow particles over time. Hollow particles may float to the top of a liquid suspension and ruin homogeneity. Further, the hollow particles may pack together tightly over time, squeezing the water out of the inter-

particle space between the hollow particles. The hollow particles may then form a hardened crust at the surface of the liquid suspension. The hardened crust may make resuspension of the hollow particles difficult and time intensive. In larger containers such as those used for field storage, sufficient agitation for resuspension may be impossible without the use of heavy equipment.

BRIEF DESCRIPTION OF THE DRAWINGS

Illustrative examples of the present disclosure are described in detail below with reference to the attached drawing figures, which are incorporated by reference herein, and wherein:

FIG. 1 illustrates a schematic of a system for the preparation and delivery of a treatment fluid to a wellbore in accordance with the disclosed examples;

FIG. 2A illustrates a schematic of a system of surface equipment that may be used in the placement of a treatment fluid in a wellbore in accordance with the disclosed examples;

FIG. 2B illustrates a schematic of a system used for the placement of a treatment fluid into a wellbore annulus in accordance with the disclosed examples;

FIG. 3A illustrates a comparison photo of a specific formulation of a liquid suspension of hollow particles after aging 1 month in accordance with the disclosed examples;

FIG. 3B illustrates a comparison photo of the specific formulation illustrated in FIG. 3A after aging 2 months in accordance with the disclosed examples;

FIG. 4A illustrates a comparison photo of another specific formulation of a liquid suspension of hollow particles after aging 1 month in accordance with the disclosed examples;

FIG. 4B illustrates a comparison photo of the specific formulation illustrated in FIG. 4A after aging 2 months in accordance with the disclosed examples;

FIG. 5A illustrates a comparison photo of another specific formulation of a liquid suspension of hollow particles after aging 1 month in accordance with the disclosed examples;

FIG. 5B illustrates a comparison photo of the specific formulation illustrated in FIG. 5A after aging 2 months in accordance with the disclosed examples;

FIG. 6A illustrates a comparison photo of another specific formulation of a liquid suspension of hollow particles after aging 1 month in accordance with the disclosed examples;

FIG. 6B illustrates a comparison photo of the specific formulation illustrated in FIG. 6A after aging 2 months in accordance with the disclosed examples;

FIG. 7 is a graph of rheology test results of different formulations of liquid suspensions of hollow particles in accordance with the disclosed examples;

5 FIG. 8 is a graph of rheology test results of a formulation of a liquid suspension of hollow particles in accordance with the disclosed examples; and

FIG. 9 is a graph of rheology test results of another formulation of a liquid suspension of hollow particles in accordance with the disclosed examples.

10 The illustrated figures are only exemplary and are not intended to assert or imply any limitation with regard to the environment, architecture, design, or process in which different examples may be implemented.

DETAILED DESCRIPTION

15 The present disclosure relates to the use and production of storable liquid suspensions of hollow particles, and more particularly to producing and storing liquid homogenous suspensions of hollow particles and then introducing the liquid homogenous suspensions to a treatment fluid after storage of the liquid homogenous suspensions.

20 Unless otherwise indicated, all numbers expressing quantities of ingredients, properties such as molecular weight, reaction conditions, and so forth used in the present specification and associated claims are to be understood as being modified in all instances by the term “about.” Accordingly, unless indicated to the contrary, the numerical parameters set forth in the following specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the examples of the present invention. At the very least, and not as an attempt to limit the application of the doctrine of
25 equivalents to the scope of the claim, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques. It should be noted that when “about” is at the beginning of a numerical list, “about” modifies each number of the numerical list. Further, in some numerical listings of ranges some lower limits listed may be greater than some upper limits listed. One skilled in
30 the art will recognize that the selected subset will require the selection of an upper limit in excess of the selected lower limit.

Examples of the compositions and methods described herein comprise the production and use of a storable liquid suspension of hollow particles. The storable liquid suspension comprises an aqueous fluid, hollow particles, a suspending aid, and a stabilizer. As used

herein, "storable" and all variations thereof refers to the static storage of the liquid suspension in a homogenous state. As used herein, "static" means without agitation such as stirring or mixing of the liquid suspension while stored in the container, but does not include moving the container, for example, to transport it; or removing the liquid suspension from the container, for example, by pouring or draining the container. As used herein, "homogenous" refers to a suspension having a range of density from the top of the container to the bottom of the container of less than one pound per gallon (hereafter "ppg"). In some examples, the liquid suspension may be stored for four months or longer. When desired for use, the liquid suspension may be added to a treatment fluid to adjust the density of the treatment fluid. The treatment fluid may then be introduced into a wellbore to perform a wellbore operation.

Examples of the liquid suspensions described herein comprise hollow particles. As used herein, the term "hollow particles" refers to hollow, rigid, substantially spherical particles having a specific gravity of less than 1. As used herein, the term "substantially spherical" refers to a generally spherical shape that may include defects like indentations, protrusions, holes, and the like. General examples of hollow particles include, but are not limited to, hollow glass beads, hollow ceramic beads, and a combination thereof. Specific examples of hollow particles may include, but are not limited to, glass spheres, glass microspheres, ceramic spheres, cenospheres, or combinations thereof. The hollow particles may comprise materials including, but not limited to, glass, soda lime, borosilicates, fly ash, ceramic, or combinations thereof. With the benefit of this disclosure one of ordinary skill in the art will be able to select a hollow bead for a given application.

In some examples, the hollow particles may have an average particle size distribution (D50) in the range of about 5 μm to about 110 μm . In some examples, the hollow particles may have an average particle size distribution (D10) in the range of about 5 μm to about 20 μm . In some examples, the hollow particles may have an average particle size distribution (D90) in the range of about 40 μm to about 75 μm . The average particle size of the hollow particles may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the average particle size distribution (D50) of the hollow particles may be about 5 μm , about 10 μm , about 20 μm , about 30 μm , about 40 μm , about 50 μm , about 60 μm , about 70 μm , about 80 μm , about 90 μm , about 100 μm , or about 110 μm . However, particle

sizes outside these defined ranges also may be suitable for particular applications. Particle sizes may be measured using various methods, including using a laser light scattering particle size analyzer. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a particle size for the hollow particles for a given application.

5 In some examples, the concentration of the hollow particles in the liquid suspension may be in the range of about 25% to about 75% by volume of the liquid suspension. The concentration of the hollow particles may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that
10 the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the hollow particles in the liquid suspension may be about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, or about 75% by volume of the liquid
15 suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a concentration of hollow particles for a given application.

The liquid suspension may comprise an aqueous fluid. The aqueous fluid may generally be from any source including the subterranean formation. In various examples, the
20 aqueous fluid may comprise fresh water, acidified water, salt water, seawater, brine, or an aqueous salt solution. In some embodiments, the aqueous fluid may comprise a monovalent brine or a divalent brine. Suitable monovalent brines include, but are not limited to, sodium chloride brines, sodium bromide brines, potassium chloride brines, potassium bromide brines, and the like. Suitable divalent brines include, but are not limited to, magnesium chloride
25 brines, calcium chloride brines, and the like.

The liquid suspension may comprise a suspending aid. General examples of suspending aids include, but are not limited to, polymers and clays. Specific examples of polymers include, but are not limited to, diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, and combinations thereof. Specific
30 examples of clays include bentonite, attapulgite, sepiolite, vermiculite, illite, muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, laponite and combinations thereof. In a preferred specific example, the suspending aid comprises diutan gum. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a suspending aid for a given application.

In some examples, the concentration of the suspending aid in the liquid suspension may be in the range of about 0.1% to about 30% by volume of the liquid suspension. The concentration of the suspending aid may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed
5 may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the suspending aid in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about 5%, about 10%, about 15%,
10 about 20%, about 25%, or about 30% by volume of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a concentration of the suspending aid for a given application.

The liquid suspension may comprise a stabilizer. Generally, the stabilizers may be
15 divided into two categories, non-ionic surfactants and particle-packing stabilizers. Examples of non-ionic surfactants include, but are not limited to, polyethylene oxide, polypropylene oxide, polyethyleneglycol alkyl ethers, polypropylene alkyl ethers, glucoside alkyl ethers, polyethyleneglycol alkylphenyl ethers, glycerol alkyl esters, sorbitan alkyl esters, polyethylene glycol/polypropylene glycol block copolymers, the like, derivatives thereof, or
20 mixtures thereof.

In some examples, the concentration of the non-ionic surfactant in the liquid suspension may be in the range of about 0.1% to about 30% by weight of the liquid suspension. The concentration of the non-ionic surfactant may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the
25 lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the non-ionic surfactant in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about
30 5%, about 10%, about 15%, about 20%, about 25%, or about 30% by weight of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a concentration of the non-ionic surfactant for a given application.

Particle-packing stabilizers must be water-insoluble. The particle-packing stabilizers may be provided to the liquid suspension as a suspension of particles, an emulsion of particles, or as particulate matter to be dispersed in the liquid suspension. The average particle size of the particles in the particle-packing stabilizer is in the range of about 100 nm to about 10 microns. The average particle size of the particles in the particle-packing stabilizer may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the average particle size of the particles in the particle-packing stabilizer may be about 100 nm, about 250 nm, about 500 nm, about 750 nm, about 1 micron, about 2.5 microns, about 5 microns, about 7.5 microns, or about 10 microns. However, particle sizes outside these defined ranges also may be suitable for particular applications. Particle sizes may be measured by various methods including using a laser light scattering particle size analyzer. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a particle size for the hollow particles for a given application.

Without limitation by theory, particle-packing stabilizers may be used to separate the hollow bead particles and prevent or reduce the close packing of hollow bead particles by insertion of the particle-packing stabilizer into the inter-particle spaces between the hollow bead particles such that sufficient separation between the hollow bead particles is maintained. Examples of particle-packing stabilizers include latex, oleaginous fluids, particulate porous silica, or combinations thereof.

As discussed above, an example of a particle-packing stabilizer is latex. Latex is the stable dispersion of rubber microparticles in an aqueous medium and may be natural or synthetic. As will be understood by those of ordinary skill in the art, the latex may comprise any of a variety of rubber materials available in latex form. For example, natural rubber (cis-1,4-polyisoprene) in most of its modified types can be utilized. Synthetic polymers of various types can also be used including styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber, ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane rubber, polyacrylic rubber, polysulfide rubber, blends thereof,

derivatives thereof, or combinations thereof. The rubber materials may be commercially available in latex form, i.e., aqueous dispersions or emulsions which are utilized directly.

In some examples, the concentration of the latex in the liquid suspension may be in the range of about 0.1% to about 75% by volume of the liquid suspension. The concentration of the latex may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the latex in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about 5%, about 10%, about 15%, about 20%, about 25%, or about 30% by volume of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a type and concentration of latex for a given application.

As discussed above, an example of a particle-packing stabilizer is an oleaginous fluid. General examples of oleaginous fluids include, but are not limited to, petroleum oils, natural oils, synthetically-derived oils, or combinations thereof. More particularly, specific examples of oleaginous fluids include, but are not limited to, diesel oil, kerosene oil, mineral oil, synthetic oil, such as polyolefins (e.g., alpha-olefins and/or internal olefins), polydiorganosiloxanes, esters, diesters of carbonic acid, paraffins, or combinations thereof.

In some examples, the concentration of the oleaginous fluid in the liquid suspension may be in the range of about 0.1% to about 30% by volume of the liquid suspension. The concentration of the oleaginous fluid may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the oleaginous fluid in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about 5%, about 10%, about 15%, about 20%, about 25%, or about 30% by volume of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a type and concentration of oleaginous fluid for a given application.

As discussed above, an example of a particle-packing stabilizer is a particulate porous silica. Particulate porous silica may be obtained commercially or prepared by precipitation. For example, sulfuric acid and a sodium silicate solution may be added to water in a reaction vessel with high agitation. The mixture of acid, sodium silicate and water must be mixed at a high rate to prevent the formation of low pH areas where gelation may occur. Since silica dissolves to form silicate at a pH value above about 9, smaller particles are continuously dissolved during the precipitation process and therefore, uniform particle sizes are obtained. As the silica precipitation progresses, the small particles aggregate through siloxane bridges to form three dimensional networks that resist the high capillary pressure that develops during drying. After drying, the precipitated particulate silica is porous and remains dry and free flowing after absorbing liquids.

In some examples, the concentration of the particulate porous silica in the liquid suspension may be in the range of about 0.1% to about 30% by volume of the liquid suspension. The concentration of the particulate porous silica may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the particulate porous silica in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about 5%, about 10%, about 15%, about 20%, about 25%, or about 30% by volume of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to prepare or obtain particulate porous silica and also select a concentration of particulate porous silica for a given application.

In some optional examples, a defoaming agent may be added to the liquid suspension. Where present, the defoaming agent should act to prevent foaming during mixing of the liquid suspension. Examples of the defoaming agent include, but are not limited to, polyols, silicon defoamers, alkyl polyacrylates, ethylene oxide/propylene oxide compounds, acetylenic diols, and any combination thereof.

In the optional examples comprising a defoaming agent, the concentration of the defoaming agent in the liquid suspension may be in the range of about 0.1% to about 10% by volume of the liquid suspension. The concentration of the defoaming agent may range from any lower limit to any upper limit and encompass any subset between the upper and lower

limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the defoaming agent in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about 2%, about 3%, about 4%, about 5%, about 7%, or about 10% by volume of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a concentration of defoaming agent for a given application.

In some optional examples, a dispersant may be added to the liquid suspension. Where present, the dispersant should act to assist in controlling the rheology of the liquid suspension. Examples of the dispersant include, but are not limited to, naphthalene sulfonic acid condensate with formaldehyde; acetone, formaldehyde, and sulfite condensate; melamine sulfonate condensed with formaldehyde; or any combination thereof.

In the optional examples comprising a dispersant, the concentration of the dispersant in the liquid suspension may be in the range of about 0.1% to about 5% by volume of the liquid suspension. The concentration of the dispersant may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the concentration of the dispersant in the liquid suspension may be about 0.1%, about 0.5%, about 1%, about 2%, about 3%, about 4%, or about 5% by volume of the liquid suspension. However, concentrations outside these defined ranges also may be suitable for particular applications. With the benefit of this disclosure, one of ordinary skill in the art will be able to select a concentration of dispersant for a given application.

Generally, the examples of the liquid suspension should have a density suitable for a particular application. By way of example, the liquid suspension may have a density of about 5 ppg to about 10 ppg. The density of the liquid suspension may range from any lower limit to any upper limit and encompass any subset between the upper and lower limits. Some of the lower limits listed may be greater than some of the listed upper limits. One skilled in the art will recognize that the selected subset may require the selection of an upper limit in excess of

the selected lower limit. Therefore, it is to be understood that every range of values is encompassed within the broader range of values. For example, the density of the liquid suspension may be about 5 ppg, about 6 ppg, about 7 ppg, about 8 ppg, or about 10 ppg. However, concentrations outside these defined ranges also may be suitable for particular applications. Those of ordinary skill in the art, with the benefit of this disclosure, will recognize the appropriate density for a particular application.

As previously mentioned, the liquid suspension may be stored until desired for use. In some examples, the liquid suspension is stored in a static state and remains homogenous while stored. The storable liquid suspension is characterized in that it may be statically stored in a homogenous, flowable fluid state for a time of four months or longer at room temperature. For example, the liquid suspension may be statically stored in a homogenous, flowable fluid state for a period of time from about 1 week, about 2 weeks, about 3 weeks, about 4 weeks, about 2 months, about 3 months, about 4 months, or longer. A fluid is considered to be in a flowable fluid state where the fluid has a viscosity of less than 2000 cP.

When desired for use, the liquid suspension may be added to a treatment fluid to adjust the density of the treatment fluid. The treatment fluid may be introduced into a wellbore to perform a wellbore operation. The liquid suspension may be added to a variety of treatment fluids used in wellbore operations. Examples of treatment fluids include, but are not limited to, water-based drilling fluids, cement slurries, completion fluids, displacement fluids, conformance fluids, and the like. The concentration of the liquid suspension in the treatment fluid is dependent upon the amount of liquid suspension required to produce a desired change in density of the treatment fluid.

Referring now to FIG. 1, preparation of a treatment fluid comprising the liquid suspension of hollow particles in accordance with the examples disclosed herein will now be described. FIG. 1 illustrates a system 2 for preparation of a treatment fluid comprising the liquid suspension of hollow particles. The liquid suspension of hollow particles may be added to a treatment fluid and mixed in mixing equipment 4. Mixing equipment 4 may be any mixer sufficient for mixing the liquid suspension of hollow particles with the treatment fluid or the components of the treatment fluid in order to provide a treatment fluid with the desired density. Examples of mixing equipment 4 may include, but are not limited to, a jet mixer, recirculating mixer, a batch mixer, and the like. In some examples, mixing equipment 4 may be a jet mixer and may continuously mix the treatment fluid as it is pumped to the wellbore. The liquid suspension of hollow particles may be added to mixing equipment 4 first or, alternatively, the treatment fluid may be added to mixing equipment 4 first. In some

examples, the treatment fluid may be formulated in mixing equipment 4 such that the components of the treatment fluid, including the liquid suspension of hollow particles, may be added to the mixing equipment 4 in any order and mixed to provide the desired treatment fluid. A sufficient amount of the liquid suspension of hollow particles should be added to mixing equipment 4 to provide a treatment fluid with the desired density. In examples, the liquid suspension of hollow particles may be added directly to mixing equipment 4 without agitation. The liquid suspension of hollow particles may be added to mixing equipment 4 by flowing the liquid suspension of hollow particles out of its storage container. In alternative examples, the liquid suspension may be agitated prior to flowing the liquid suspension into mixing equipment 4.

After the liquid suspension of hollow particles has been added to the treatment fluid and mixed in mixing equipment 4 to provide a treatment fluid with a desired density, the treatment fluid may be pumped to the wellbore via pumping equipment 6. In some examples, the mixing equipment 4 and the pumping equipment 6 may be disposed on one or more cement trucks as will be apparent to those of ordinary skill in the art. Examples of pumping equipment 6 include, but are not limited to, floating piston pumps, positive displacement pumps, centrifugal pumps, peristaltic pumps, and diaphragm pumps.

With reference to FIGS. 2A and 2B, an example technique for placing a treatment fluid comprising the liquid suspension of hollow particles is described. Specifically, the placement of a cement composition of a specific desired density is described. FIG. 2A illustrates surface equipment 10 that may be used in placement of a cement composition in accordance with certain examples disclosed herein. It should be noted that while FIG. 2A generally depicts a land-based operation, those skilled in the art will readily recognize that the principles described herein are equally applicable to subsea operations that employ floating or sea-based platforms and rigs without departing from the scope of the disclosure. As illustrated by FIG. 2A, the surface equipment 10 may include a cementing unit 12, which may include one or more cement trucks. The cementing unit 12 may include mixing equipment 4 and pumping equipment 6 as will be apparent to those of ordinary skill in the art. The cementing unit 12 may pump a cement composition 14 through feed pipe 16 and to a cementing head 18, which conveys the cement composition 14 downhole into a wellbore.

Turning now to FIG. 2B, the cement composition 14 may be placed into a subterranean formation 20 in accordance with certain examples. As illustrated, a wellbore 22 may be drilled into the subterranean formation 20. While wellbore 22 is shown extending vertically into the subterranean formation 20, the principles described herein are also

applicable to wellbores that extend at an angle through the subterranean formation 20, such as horizontal and slanted wellbores. As illustrated, the wellbore 22 comprises walls 24. A surface casing 26 has been inserted into the wellbore 22. The surface casing 26 may be cemented to the walls 24 of the wellbore 22 by cement sheath 28. In the illustrated embodiment, casing 30 is disposed in the wellbore 22. In some examples, one or more additional conduits (e.g., intermediate casing, production casing, liners, tubing, coiled tubing, jointed tubing, stick pipe, etc.) may also be disposed in the wellbore 22. As illustrated, there is a wellbore annulus 32 formed between the casing 30 and the walls 24 of the wellbore 22 and/or the surface casing 26. One or more centralizers 34 may be attached to the casing 30, for example, to centralize the casing 30 in the wellbore 22 prior to and during the cementing operation.

With continued reference to FIG. 2B, the cement composition 14 may be pumped down the interior of the casing 30. The cement composition 14 may be allowed to flow down the interior of the casing 30 through the casing shoe 42 at the bottom of the casing 30 and up around the casing 30 into the wellbore annulus 32. The cement composition 14 may be allowed to set in the wellbore annulus 32, for example, to form a cement sheath that supports and positions the casing 30 in the wellbore 22. While not illustrated, other techniques may also be utilized for introduction of the cement composition 14. By way of example, reverse circulation techniques may be used that include introducing the cement composition 14 into the subterranean formation 20 by way of the wellbore annulus 32 instead of through the casing 30.

As it is introduced, the cement composition 14 may displace other fluids 36, such as drilling fluids and/or spacer fluids that may be present in the interior of the casing 30 and/or the wellbore annulus 32. In some examples, these displaced other fluids 36 may also be treatment fluids comprising the disclosed liquid suspension of hollow particles. At least a portion of the displaced other fluids 36 may exit the wellbore annulus 32 via a flow line 38 and be deposited, for example, in one or more retention pits 40 (e.g., a mud pit), as shown on FIG. 2A. Referring again to FIG. 2B, a bottom plug 44 may be introduced into the wellbore 22 ahead of the cement composition 14, for example, to separate the cement composition 14 from the other fluids 36 that may be inside the casing 30 prior to cementing. After the bottom plug 44 reaches a landing collar 46, a diaphragm, or other suitable device may rupture to allow the cement composition 14 through the bottom plug 44. In FIG. 2B, the bottom plug 44 is illustrated as positioned on the landing collar 46. In the illustrated example, a top plug 48 may be introduced into the wellbore 22 behind the cement composition 14. The top plug 48

may separate the cement composition 14 from a displacement fluid 50 and also push the cement composition 14 through the bottom plug 44. When positioned as desired, the cement composition 14 may then be allowed to set. In some examples, the displacement fluid 50 may comprise the disclosed liquid suspension of hollow particles to provide the displacement fluid 50 with a desired density.

It is also to be recognized that the disclosed treatment fluids may also directly or indirectly affect the various downhole equipment and tools that may come into contact with the treatment fluids during operation. Such equipment and tools may include, but are not limited to, wellbore casing, wellbore liner, completion string, insert strings, drill string, coiled tubing, slickline, wireline, drill pipe, drill collars, mud motors, downhole motors and/or pumps, surface-mounted motors and/or pumps, centralizers, turbolizers, scratchers, floats (e.g., shoes, collars, valves, etc.), logging tools and related telemetry equipment, actuators (e.g., electromechanical devices, hydromechanical devices, etc.), sliding sleeves, production sleeves, plugs, screens, filters, flow control devices (e.g., inflow control devices, autonomous inflow control devices, outflow control devices, etc.), couplings (e.g., electro-hydraulic wet connect, dry connect, inductive coupler, etc.), control lines (e.g., electrical, fiber optic, hydraulic, etc.), surveillance lines, drill bits and reamers, sensors or distributed sensors, downhole heat exchangers, valves and corresponding actuation devices, tool seals, packers, cement plugs, bridge plugs, and other wellbore isolation devices, or components, and the like. Any of these components may be included in the systems generally described above and depicted in FIGs. 1–2B.

EXAMPLES

The present disclosure can be better understood by reference to the following examples which are offered by way of illustration. The present disclosure is not limited to the examples given herein.

EXAMPLE 1

Five different formulations of liquid suspensions comprising hollow particles were prepared. All five formulations comprised hollow glass beads with a D50 particle size of 26 μm . Formulation 1 was a control and consisted of only the glass beads and water. Formulation 2 consisted of the glass beads, water, and bentonite as a particle-packing stabilizer. Soda ash was used to exfoliate the bentonite. Formulation 3 was the same as Formulation 2 except a poloxamer non-ionic surfactant was added as an additional stabilizer.

Additionally, a defoaming agent was added to Formulation 3. Formulations 4 and 5 used the same non-ionic surfactant stabilizer and defoaming agent as Formulation 3; however, Formulations 4 and 5 used different concentrations of diutan gum as the particle-packing stabilizer instead of bentonite.

5 Rheological parameters were derived by fitting the generalized Herschel-Bulkley model (hereafter “GHB”) to test data obtained from a FANN[®] 35 viscometer with a FANN[®] yield stress adapter. FANN is a registered trademark of Halliburton Energy Services of Houston, Texas. The GHB model was applied to the down ramp of the rheogram, i.e. after the samples had experienced a shear history. Gel time was determined as the time it takes for
 10 the liquid suspensions of hollow particles to form a soft gel and stop flowing when the container was tilted. A visual check was performed in the lab by intermittently tilting the container to check the flow of the samples. The formula compositions and rheological data are illustrated in Table 1 below.

15 **Table 1: Volume compositions of Formulations 1-5 and corresponding gel times and rheological data**

Composition	Formulation 1	Formulation 2	Formulation 3	Formulation 4	Formulation 5
Glass Beads	55.5	55.5	55.5	55.5	55.5
Non-Ionic Surfactant Stabilizer	-	-	0.2	0.2	0.2
Defoamer	-	-	0.75	0.75	0.75
Water	44.5	44.25	43.3	43.51	43.5
Soda Ash	-	0.07	0.07	-	-
Clay Suspending Aid	-	0.18	0.18	-	-
Polymer Suspending Aid	-	-	-	0.04	0.05

Yield Point, lbf/100 ft ²	11.0	5.6	-	26.9	36
Viscosity, cP	145.8	154.6	-	560.2	960.5
Gel Time 70° F	1 hrs.	6 hrs.	1 day	3 wks.	3 wks.
Gel Time 120° F	-	0.5 hrs.	1 hrs.	3 days	3 days

EXAMPLE 2

20 Four new formulations of liquid suspensions comprising hollow particles were prepared that all used the composition of Formulation 4 as a base, but additionally comprised latex.

The formula compositions and rheological data are illustrated in Table 2 below.

Table 2: Volume compositions of Formulations 6-9 and corresponding gel times and rheological data

Composition	Formulation 4	Formulation 6	Formulation 7	Formulation 8	Formulation 9
Glass Beads	55.5	55.5	55.5	55.5	55.5
Non-Ionic Surfactant Stabilizer	0.2	0.2	0.2	0.2	0.2
Defoamer	0.75	0.75	0.75	0.75	0.75
Water	43.51	38.51	33.51	28.51	23.51
Latex Stabilizer	0	5	10	15	20
Polymer Suspending Aid	0.04	0.04	0.04	0.04	0.04

Yield Point, lbf/100 ft ²	26.9	13.6	10.4	12.7	12.6
Viscosity, cP	560.2	503.4	598.2	649.4	891.0
Gel Time 70° F	3 wks.	1 mos.	1.5 mos.	1.5 mos.	3 mos.
Gel Time 120° F	3 days	9 days	10 days	10 days	19 days

FIG. 3A illustrates a comparison photo of Formulation 6 after aging 1 month, and FIG. 3B illustrates a comparison photo of Formulation 6 after aging 2 months. FIG. 4A illustrates a comparison photo of Formulation 7 after aging 1 month, and FIG. 4B illustrates a comparison photo of Formulation 7 after aging 2 months. FIG. 5A illustrates a comparison photo of Formulation 8 after aging 1 month, and FIG. 5B illustrates a comparison photo of Formulation 8 after aging 2 months. FIG. 6A illustrates a comparison photo of Formulation 9 after aging 1 month, and FIG. 6B illustrates a comparison photo of Formulation 9 after aging 2 months. As illustrated, Formulation 9 was still flowable at 3 months. FIG. 7 is a graph of the rheology test results of the different liquid suspension compositions for Formulations 4 and 6-9.

EXAMPLE 3

A new formulation was prepared that was similar to Formulation 6 but used half as much of the non-ionic stabilizer. This sample was tested over different periods of time using the methods described above as well as a new method of rheological testing using a Marsh funnel. At 2.5 weeks the sample was remixed and a friction reducer was added at a concentration of 0.3% by volume.

The formula composition and rheological data is illustrated in Table 3 below.

Table 3: Volume compositions of Formulation 10 and corresponding rheological data

Composition	Formulation 10
Glass Beads	55.5
Non-Ionic Surfactant Stabilizer	0.1
Defoamer	0.75
Water	38.21
Latex Stabilizer	5
Polymer Suspending Aid	0.04
Friction Reducer (added when the sample was aged 2.5 wks)	0.3

Age		0	12 days	2.5 wks (remixed only)	2.5 wks. w/ Friction Reducer and remixed	5.5 Wks.	9.5 Wks.
Fann 35 Viscometer	Yield Point, lbf/100 ft ²	14.1	32.7	27.5	16.2	17.6	15.9
	Viscosity, cP	487.2	485.4	637.3	469.4	486.2	525.5
Marsh Funnel	Funnel Time, hh:mm:ss	00:21:33	-	01:03:00	00:24:30	-	-
	Viscosity, cP	854.6	-	2531.9	973.9	-	-

FIG. 8 is a graph of the rheology test results for Formulation 10 for different time periods.

5

EXAMPLE 4

A Formulation 11 was prepared which used a higher concentration of non-ionic surfactant and also comprised a friction reducer. The Formulation 11 composition is illustrated in Table 4 below.

Table 4: Volume compositions of Formulation 11

Composition	Formulation 11
Glass Beads	55.5
Non-Ionic Surfactant Stabilizer	0.3
Defoamer	0.75
Water	33.11
Latex Stabilizer	10
Polymer Suspending Aid	0.04
Friction Reducer	0.3

FIG. 9 is a graph of the rheology test results for Formulation 11 for different time periods.

Provided are compositions for a storable liquid suspension of hollow particles in accordance with the description provided herein. An example composition comprises a plurality of hollow particles, water, a suspending aid, and a stabilizer selected from the group consisting of a non-ionic surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof; wherein the liquid suspension is homogenous. The plurality of hollow particles may be selected from the group consisting of glass spheres, glass microspheres, ceramic spheres, cenospheres, and combinations thereof. The plurality of hollow particles may comprise materials selected from the group consisting of glass, soda lime, borosilicates, fly ash, ceramic, and combinations thereof. The average particle size (D50) of the plurality of hollow particles may be in a range from about 5 μm to about 110 μm . The concentration of the plurality of hollow particles in the liquid suspension may range from about 25% to about 75% by volume of the liquid suspension. The suspending aid may be selected from the group consisting of diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, bentonite, attapulgite, sepiolite, vermiculite, illite, muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, and combinations thereof. The stabilizer may comprise the non-ionic surfactant and the non-ionic surfactant may be selected from the group consisting of polyethylene oxide, polypropylene oxide, polyethyleneglycol alkyl ethers, polypropylene alkyl ethers, glucoside alkyl ethers, polyethyleneglycol alkylphenyl ethers, glycerol alkyl esters, sorbitan alkyl esters, polyethylene glycol/polypropylene glycol block copolymers, derivatives thereof, and mixtures thereof. The stabilizer may comprise the latex and the latex may comprise a rubber selected from the group consisting of cis-1,4-polyisoprene rubber, styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber, ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane rubber, polyacrylic rubber, polysulfide rubber, blends thereof, derivatives thereof, and combinations thereof. The stabilizer may comprise the oleaginous fluid and the oleaginous fluid may be selected from the group consisting of petroleum oils, natural oils, synthetically-derived oils, diesel oil, kerosene oil, mineral oil, synthetic oil, polyolefins, polydiorganosiloxanes, esters, diesters of carbonic acid, paraffins, and combinations thereof. The composition may further comprise a defoaming agent, a dispersant, or a combination thereof.

Provided are methods for treating a subterranean formation in accordance with the description provided herein and as illustrated by FIGs. 1-2B. An example method comprises providing a liquid suspension of hollow particles comprising: a plurality of hollow particles, water, a suspending aid, and a stabilizer selected from the group consisting of a non-ionic surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof. The method further comprises statically storing the liquid suspension in a container for at least one week; wherein the liquid suspension maintains a difference in density from the top of the container to the bottom of the container of less than one pound per gallon while stored. The method further comprises adding the liquid suspension to a treatment fluid; wherein the liquid suspension reduces the density of the treatment fluid; and introducing the treatment fluid into a wellbore penetrating a subterranean formation. The liquid suspension may not be agitated prior to adding the liquid suspension to the treatment fluid. The liquid suspension may be statically stored for at least one month. The treatment fluid may comprise a water-based drilling fluid, a cement slurry, a completion fluid, a displacement fluid, or a conformance fluid. The plurality of hollow particles may be selected from the group consisting of glass spheres, glass microspheres, ceramic spheres, cenospheres, and combinations thereof. The plurality of hollow particles may comprise materials selected from the group consisting of glass, soda lime, borosilicates, fly ash, ceramic, and combinations thereof. The average particle size (D50) of the plurality of hollow particles may be in a range from about 5 μm to about 110 μm . The concentration of the plurality of hollow particles in the liquid suspension may range from about 25% to about 75% by volume of the liquid suspension. The suspending aid may be selected from the group consisting of diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, bentonite, attapulgite, sepiolite, vermiculite, illite, muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, and combinations thereof. The stabilizer may comprise the non-ionic surfactant and the non-ionic surfactant may be selected from the group consisting of polyethylene oxide, polypropylene oxide, polyethyleneglycol alkyl ethers, polypropylene alkyl ethers, glucoside alkyl ethers, polyethyleneglycol alkylphenyl ethers, glycerol alkyl esters, sorbitan alkyl esters, polyethylene glycol/polypropylene glycol block copolymers, derivatives thereof, and mixtures thereof. The stabilizer may comprise the latex and the latex may comprise a rubber selected from the group consisting of cis-1,4-polyisoprene rubber, styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber, ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene

rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane rubber, polyacrylic rubber, polysulfide rubber, blends thereof, derivatives thereof, and combinations thereof. The stabilizer may comprise the oleaginous fluid and the oleaginous fluid may be selected from the group consisting of petroleum oils, natural oils, synthetically-
5 derived oils, diesel oil, kerosene oil, mineral oil, synthetic oil, polyolefins, polydiorganosiloxanes, esters, diesters of carbonic acid, paraffins, and combinations thereof. The liquid suspension may further comprise a defoaming agent, a dispersant, or a combination thereof.

Provided are systems for treating a subterranean formation in accordance with the
10 description provided herein and as illustrated by FIGs. 1-2B. An example system comprises a liquid suspension of hollow particles comprising: a plurality of hollow particles, water, a suspending aid, and a stabilizer selected from the group consisting of a non-ionic surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof; wherein the liquid suspension is capable of being statically stored in a container for at least one week; wherein
15 the liquid suspension maintains a difference in density from the top of the container to the bottom of the container of less than one pound per gallon while stored. The system further comprises a container capable of storing the liquid suspension of hollow particles for at least one week. The system further comprises a treatment fluid. The system further comprises mixing equipment capable of mixing the treatment fluid and the liquid suspension of hollow
20 particles. The system further comprises pumping equipment capable of pumping the treatment fluid into a wellbore penetrating a subterranean formation. The treatment fluid may comprise a water-based drilling fluid, a cement slurry, a completion fluid, a displacement fluid, or a conformance fluid. The plurality of hollow particles may be selected from the group consisting of glass spheres, glass microspheres, ceramic spheres, cenospheres, and
25 combinations thereof. The plurality of hollow particles may comprise materials selected from the group consisting of glass, soda lime, borosilicates, fly ash, ceramic, and combinations thereof. The average particle size (D50) of the plurality of hollow particles may be in a range from about 5 μm to about 110 μm . The concentration of the plurality of hollow particles in the liquid suspension may range from about 25% to about 75% by volume of the liquid
30 suspension. The suspending aid may be selected from the group consisting of diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, bentonite, attapulgite, sepiolite, vermiculite, illite, muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, and combinations thereof. The stabilizer may comprise the non-ionic surfactant and the non-ionic surfactant may be selected

from the group consisting of polyethylene oxide, polypropylene oxide, polyethyleneglycol alkyl ethers, polypropylene alkyl ethers, glucoside alkyl ethers, polyethyleneglycol alkylphenyl ethers, glycerol alkyl esters, sorbitan alkyl esters, polyethylene glycol/polypropylene glycol block copolymers, derivatives thereof, and mixtures thereof. The stabilizer may comprise the latex and the latex may comprise a rubber selected from the group consisting of cis-1,4-polyisoprene rubber, styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber, ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane rubber, polyacrylic rubber, polysulfide rubber, blends thereof, derivatives thereof, and combinations thereof. The stabilizer may comprise the oleaginous fluid and the oleaginous fluid may be selected from the group consisting of petroleum oils, natural oils, synthetically-derived oils, diesel oil, kerosene oil, mineral oil, synthetic oil, polyolefins, polydiorganosiloxanes, esters, diesters of carbonic acid, paraffins, and combinations thereof. The liquid suspension may further comprise a defoaming agent, a dispersant, or a combination thereof.

One or more illustrative examples incorporating the examples disclosed herein are presented. Not all features of a physical implementation are described or shown in this application for the sake of clarity. Therefore, the disclosed systems and methods are well adapted to attain the ends and advantages mentioned, as well as those that are inherent therein. The particular examples disclosed above are illustrative only, as the teachings of the present disclosure may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown other than as described in the claims below. It is therefore evident that the particular illustrative examples disclosed above may be altered, combined, or modified, and all such variations are considered within the scope of the present disclosure. The systems and methods illustratively disclosed herein may suitably be practiced in the absence of any element that is not specifically disclosed herein and/or any optional element disclosed herein.

Although the present disclosure and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the disclosure as defined by the following claims.

WHAT IS CLAIMED IS:

1. A composition for a storable liquid suspension of hollow particles comprising:
a plurality of hollow particles,
5 water,
a suspending aid, and
a stabilizer selected from the group consisting of a non-ionic surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof; wherein the liquid suspension is homogenous.

2. The composition of claim 1, wherein the plurality of hollow particles are selected from the group consisting of glass spheres, glass microspheres, ceramic spheres, cenospheres, and combinations thereof.

3. The composition of claim 1, wherein the plurality of hollow particles comprise materials selected from the group consisting of glass, soda lime, borosilicates, fly ash, ceramic, and combinations thereof,

4. The composition of claim 1, wherein the average particle size (D50) of the plurality of hollow particles is in a range from about 5 μm to about 110 μm .

5. The composition of claim 1, wherein the concentration of the plurality of hollow particles in the liquid suspension ranges from about 25% to about 75% by volume of the liquid suspension.

6. The composition of claim 1, wherein the suspending aid is selected from the group consisting of diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, bentonite, attapulgate, sepiolite, vermiculite, illite, muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, and combinations thereof.

7. The composition of claim 1, wherein the stabilizer comprises the non-ionic surfactant and the non-ionic surfactant is selected from the group consisting of polyethylene oxide, polypropylene oxide, polyethyleneglycol alkyl ethers, polypropylene alkyl ethers,

glucoside alkyl ethers, polyethyleneglycol alkylphenyl ethers, glycerol alkyl esters, sorbitan alkyl esters, polyethylene glycol/polypropylene glycol block copolymers, derivatives thereof, and mixtures thereof.

5 8. The composition of claim 1, wherein the stabilizer comprises the latex and the latex comprises a rubber selected from the group consisting of cis-1,4-polyisoprene rubber, styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber, ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene
10 rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane rubber, polyacrylic rubber, polysulfide rubber, blends thereof, derivatives thereof, and combinations thereof.

 9. The composition of claim 1, wherein the stabilizer comprises the oleaginous
15 fluid and the oleaginous fluid is selected from the group consisting of petroleum oils, natural oils, synthetically-derived oils, diesel oil, kerosene oil, mineral oil, synthetic oil, polyolefins, polydiorganosiloxanes, esters, diesters of carbonic acid, paraffins, and combinations thereof.

 10. The composition of claim 1 further comprising a defoaming agent, a
20 dispersant, or a combination thereof.

 11. A method of using a liquid suspension of hollow particles:
 providing a liquid suspension of hollow particles comprising:
 a plurality of hollow particles,
25 water,
 a suspending aid, and
 a stabilizer selected from the group consisting of a non-ionic surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof;
 statically storing the liquid suspension in a container for at least one week;
30 wherein the liquid suspension maintains a difference in density from the top of the container to the bottom of the container of less than one pound per gallon while stored;
 adding the liquid suspension to a treatment fluid; wherein the liquid suspension reduces the density of the treatment fluid; and

introducing the treatment fluid into a wellbore penetrating a subterranean formation.

12. The method of claim 11, wherein the liquid suspension is not agitated prior to
5 adding the liquid suspension to the treatment fluid.

13. The method of claim 11, wherein the liquid suspension is statically stored for at least one month.

10 14. The method of claim 11, wherein the treatment fluid comprises a water-based drilling fluid, a cement slurry, a completion fluid, a displacement fluid, or a conformance fluid.

15 15. The method of claim 11, wherein the plurality of hollow particles are selected from the group consisting of glass spheres, glass microspheres, ceramic spheres, cenospheres, and combinations thereof.

20 16. The method of claim 11, wherein the suspending aid is selected from the group consisting of diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, bentonite, attapulgite, sepiolite, vermiculite, illite, muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, and combinations thereof.

25 17. The method of claim 11, wherein the stabilizer comprises the latex and the latex comprises a rubber selected from the group consisting of cis-1,4-polyisoprene rubber, styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber, ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane
30 rubber, polyacrylic rubber, polysulfide rubber, blends thereof, derivatives thereof, and combinations thereof.

18. A system for treating a subterranean formation comprising:
a liquid suspension of hollow particles comprising:

a plurality of hollow particles,

water,

a suspending aid, and

a stabilizer selected from the group consisting of a non-ionic

5 surfactant, a latex, an oleaginous fluid, porous silica, and combinations thereof; wherein the liquid suspension is capable of being statically stored in a container for at least one week; wherein the liquid suspension maintains a difference in density from the top of the container to the bottom of the container of less than one pound per gallon while stored;

10 a container capable of storing the liquid suspension of hollow particles for at least one week;

a treatment fluid;

mixing equipment capable of mixing the treatment fluid and the liquid suspension of hollow particles;

15 pumping equipment capable of pumping the treatment fluid into a wellbore penetrating a subterranean formation.

19. The system of claim 18, wherein the suspending aid is selected from the group consisting of diutan gums, scleroglucan, guar gums, carragenans, xanthan gums, welan, celluloses, hydroxyethyl celluloses, bentonite, attapulgite, sepiolite, vermiculite, illite,
20 muscovite, biotite, kaolinite, cookeite, halloysite, flint clay, montmorillonite, hectorite, and combinations thereof.

20. The system of claim 18, wherein the stabilizer comprises the latex and the latex comprises a rubber selected from the group consisting of cis-1,4-polyisoprene rubber, styrene-butadiene rubber, cis-1,4-polybutadiene rubber, high styrene resin, butyl rubber,
25 ethylene-propylene rubbers, neoprene rubber, nitrile rubber, cis-/trans- 1,4-polyisoprene rubber, silicone rubber, chlorosulfonated polyethylene rubber, crosslinked polyethylene rubber, epichlorohydrin rubber, fluorocarbon rubber, fluorosilicone rubber, polyurethane rubber, polyacrylic rubber, polysulfide rubber, blends thereof, derivatives thereof, and
30 combinations thereof.

1/8

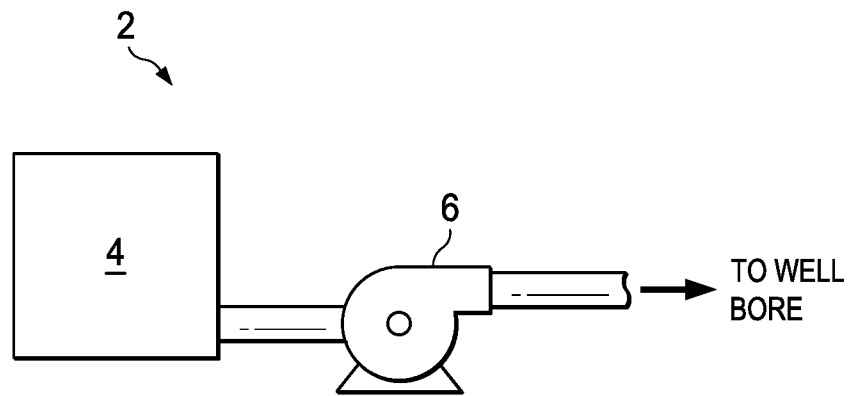


FIG. 1

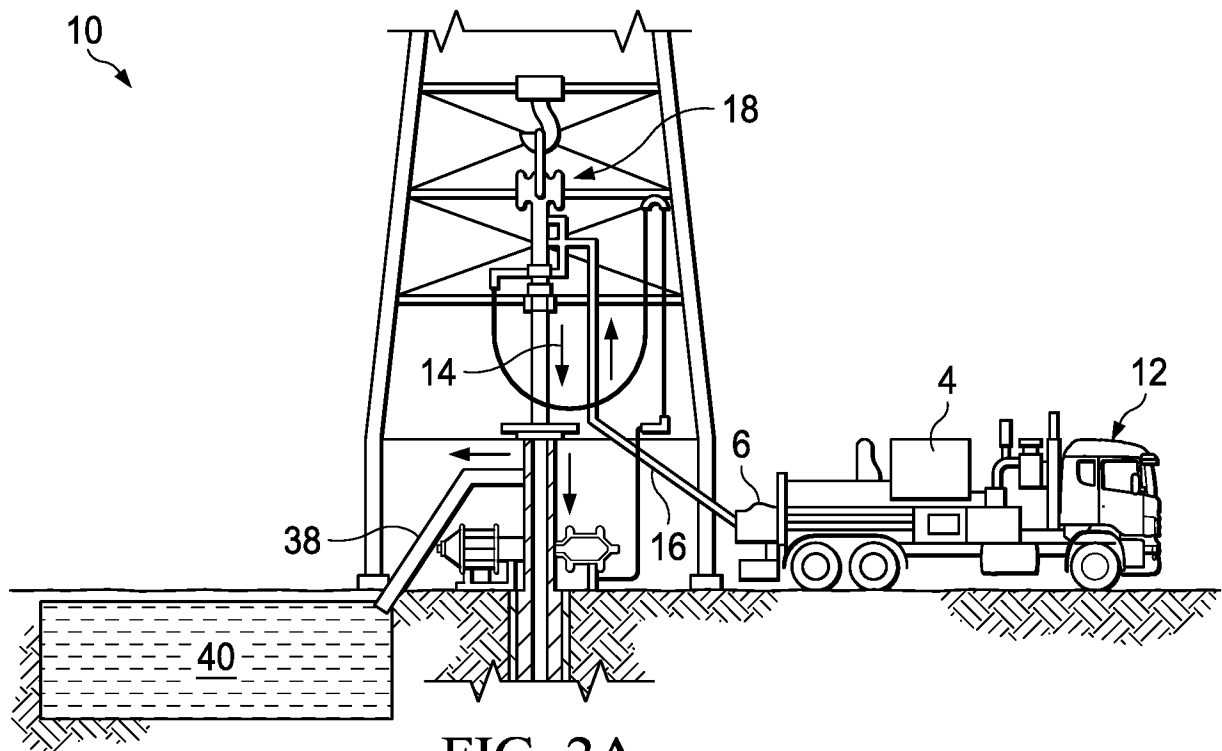


FIG. 2A

2/8

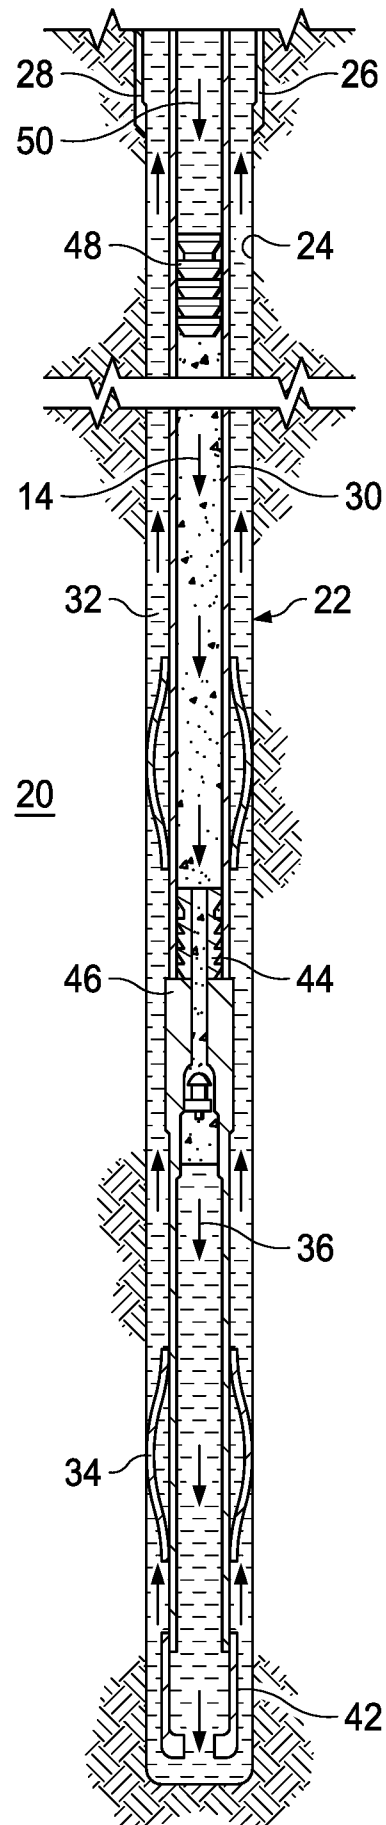


FIG. 2B

3/8

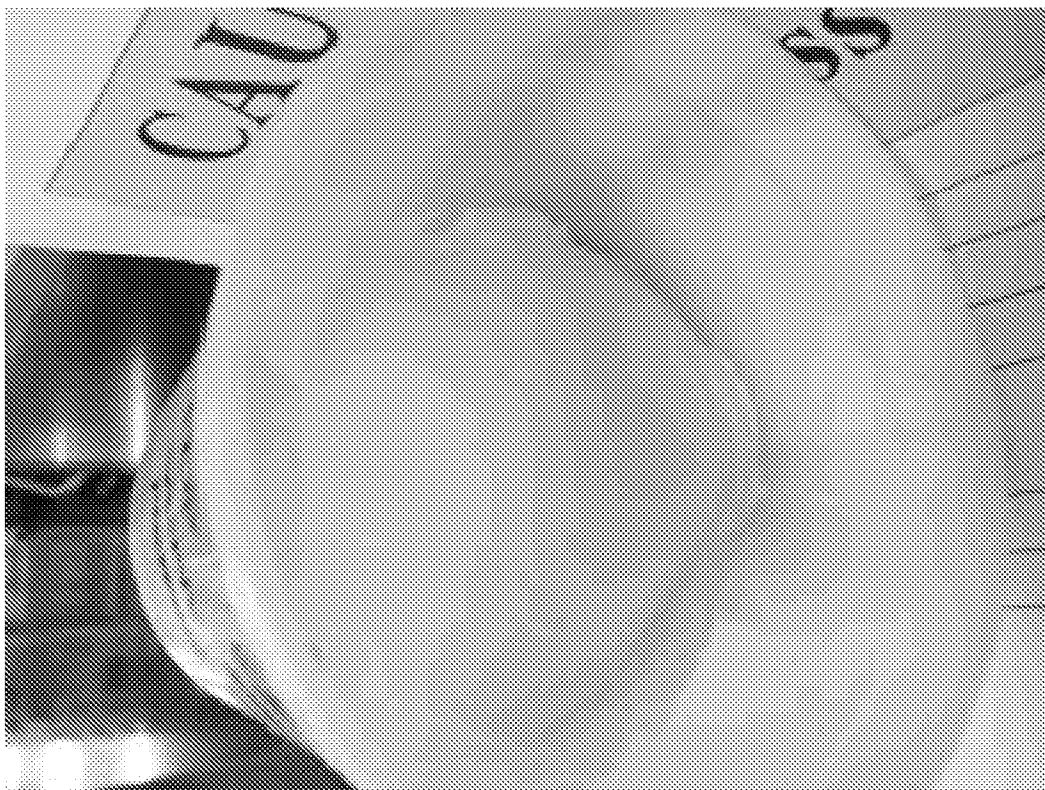


FIG. 3A



FIG. 3B

4/8



FIG. 4A



FIG. 4B

5/8

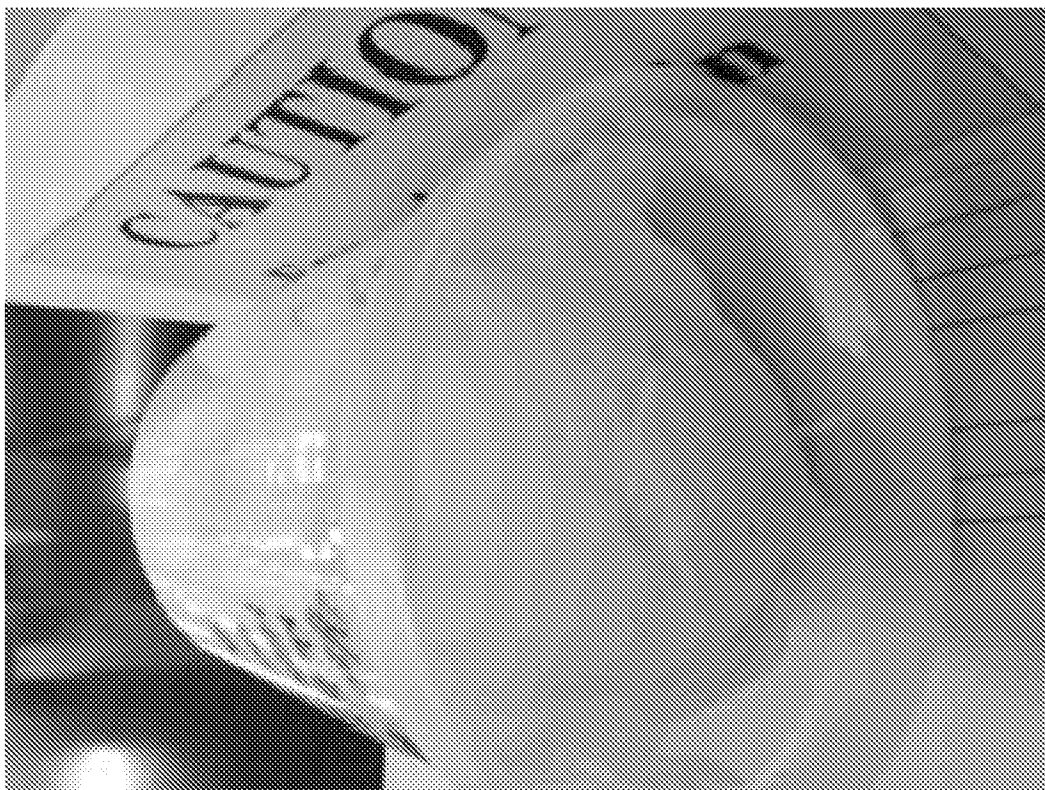


FIG. 5A



FIG. 5B

6/8



FIG. 6A



FIG. 6B

7/8

FIG. 7

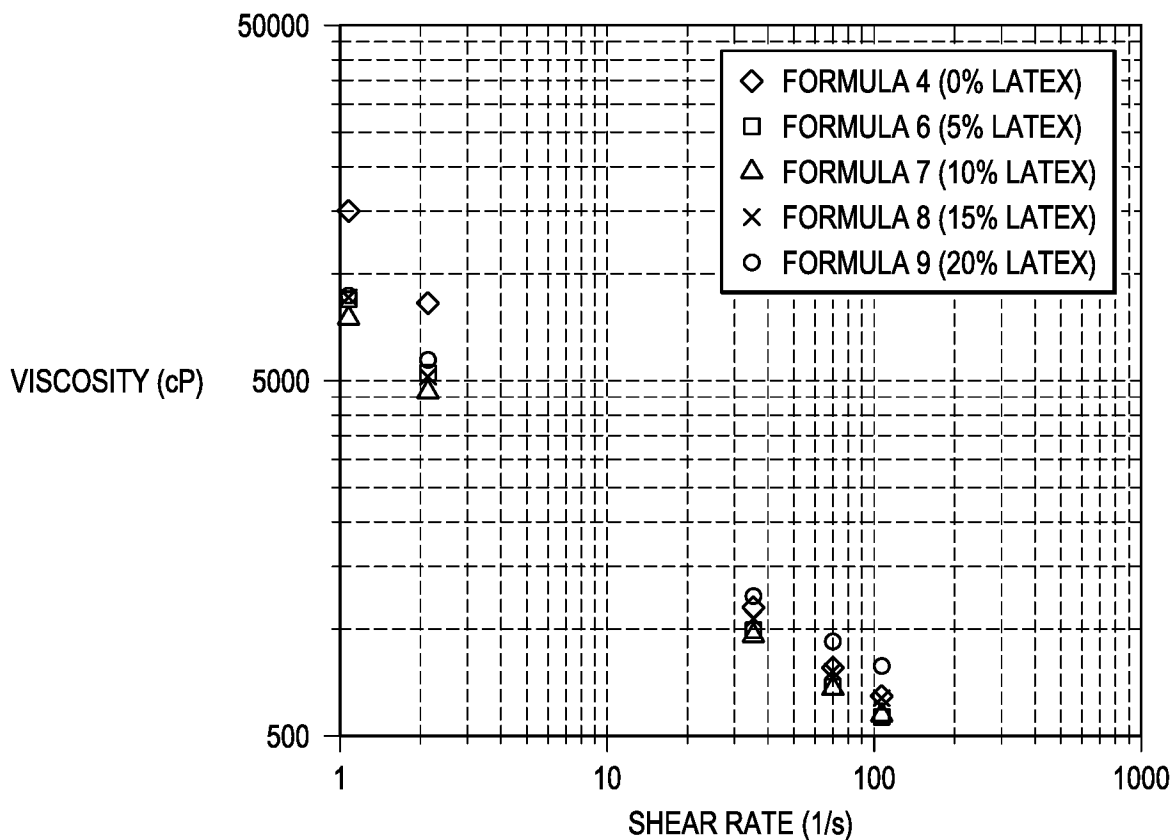


FIG. 8


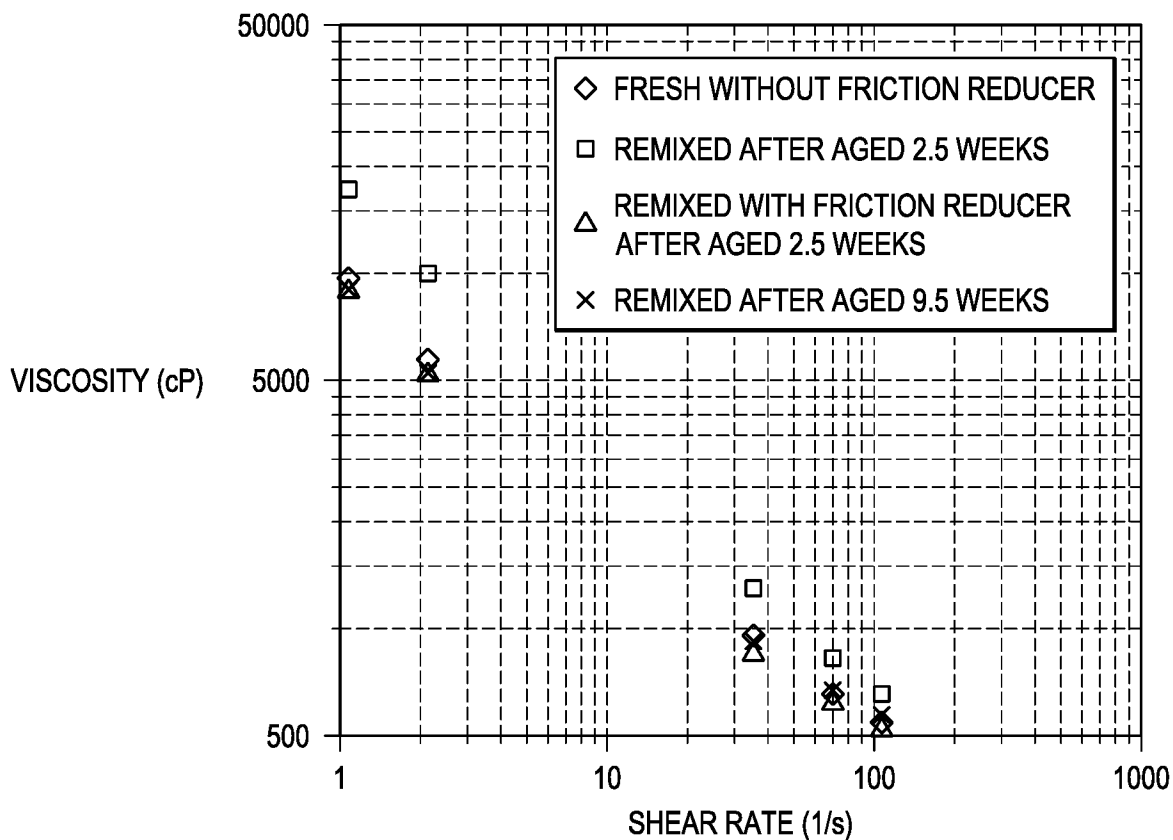


FIG. 9

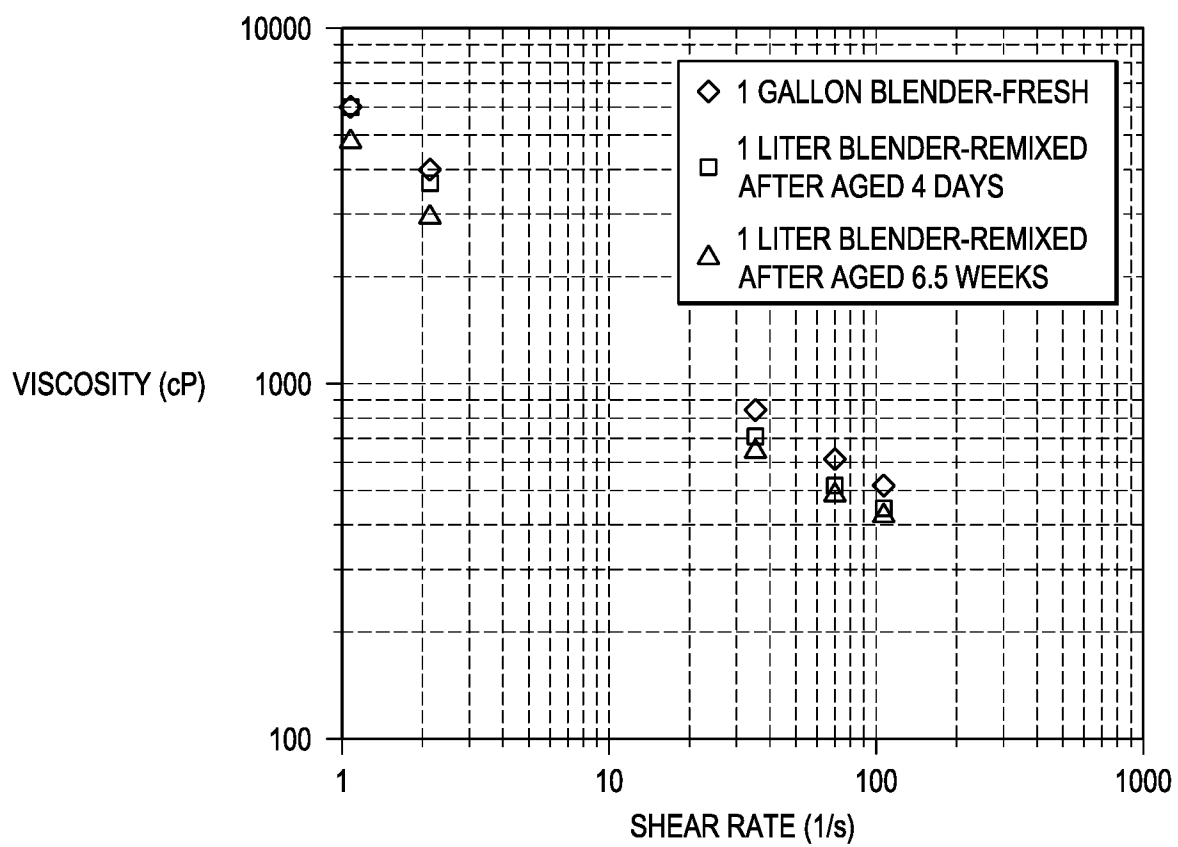

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/061274**A. CLASSIFICATION OF SUBJECT MATTER****C09K 8/12(2006.01)i, C09K 8/035(2006.01)i, C09K 8/03(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
C09K 8/12; E21B 37/00; E21B 33/13; C09K 8/05; E21B 33/16; C04B 24/00; C09K 8/035Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: hollow particle, suspending agent, stabilizer, wellbore, storable**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008-0105428 A1 (SANTRA, ASHOK K. et al.) 08 May 2008 See paragraphs [0015], [0023]-[0025], [0028], [0031]-[0039], [0044]-[0046]; and claim 15.	1-20
A	US 2003-0177955 A1 (VIJN, JAN PIETER et al.) 25 September 2003 See paragraph [0015]; and claims 1, 3, 5-6, 16, 20-21.	1-20
A	US 4530402 A (SMITH, ROBERT C. et al.) 23 July 1985 See abstract; and claims 1-2, 4-8.	1-20
A	US 2004-0238170 A1 (FANGUY, JR., CHARLES JOSEPH et al.) 02 December 2004 See claims 1, 4, 8-12, 16.	1-20
A	WO 2012-085516 A2 (HALLIBURTON ENERGY SERVICES, INC.) 28 June 2012 See paragraphs [0003], [0008]; and claims 1-2, 7.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 July 2017 (31.07.2017)

Date of mailing of the international search report

31 July 2017 (31.07.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM, Sun Hee

Telephone No. +82-42-481-5405



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/061274

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0105428 A1	08/05/2008	EP 2077978 A1 US 2008-0105167 A1 US 7789149 B2 US 7833344 B2 WO 2008-053222 A1	15/07/2009 08/05/2008 07/09/2010 16/11/2010 08/05/2008
US 2003-0177955 A1	25/09/2003	CA 2407365 A1 EP 1348831 A1 EP 1348831 B1 NO 20025316 A NO 331465 B1 US 2003-0177954 A1 US 2005-0011412 A1 US 6644405 B2 US 6814798 B2	21/09/2003 01/10/2003 14/04/2010 22/09/2003 09/01/2012 25/09/2003 20/01/2005 11/11/2003 09/11/2004
US 4530402 A	23/07/1985	None	
US 2004-0238170 A1	02/12/2004	CA 2468224 A1 CA 2468224 C GB 2402145 A GB 2402145 B GB 2416176 A GB 2416176 B NO 20042263 A US 2006-0111246 A1 US 7007754 B2	30/11/2004 22/03/2011 01/12/2004 21/12/2005 18/01/2006 29/11/2006 30/11/2004 25/05/2006 07/03/2006
WO 2012-085516 A2	28/06/2012	AU 2011-346890 A1 AU 2011-346890 B2 CA 2818630 A1 CA 2818630 C CN 103270130 A CN 103270130 B CO 6751254 A2 DK 2655540 T3 EA 201390891 A1 EP 2655540 A2 EP 2655540 B1 MX 2013007391 A US 2012-0165231 A1 US 2013-0130945 A1 US 8476201 B2 US 8569213 B2 WO 2012-085516 A3	02/05/2013 07/08/2014 28/06/2012 13/09/2016 28/08/2013 10/08/2016 16/09/2013 28/11/2016 30/12/2013 30/10/2013 14/09/2016 02/12/2013 28/06/2012 23/05/2013 02/07/2013 29/10/2013 25/04/2013