



HU000035938T2

(19) **HU**(11) Lajstromszám: **E 035 938**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 12 875785**(51) Int. Cl.: **B41J 2/175** (2006.01)(22) A bejelentés napja: **2012. 04. 30.**

(86) A nemzetközi (PCT) bejelentési szám:

PCT/US 12/035889

(96) Az európai bejelentés bejelentési száma:

EP 20120875785

(87) A nemzetközi közzétételi szám:

WO 13165373

(97) Az európai bejelentés közzétételi adatai:

EP 2844487 A1 **2013. 11. 07.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2844487 B1 **2017. 08. 16.**

(72) Feltaláló(k):

CAMPBELL-BROWN, Iain, Leixlip Co Kildare (IE)
WALSH, Mark, Leixlip Co Kildare (IE)
OLIVER, John, Leixlip Co Kildare (IE)
WARD, Jefferson P., Vancouver, Washington 98683 (US)
SHIPMAN, Amy, Vancouver, Washington 98683 (US)

(73) Jogosult(ak):

Hewlett-Packard Development Company, L.P.,
Houston, TX 77070 (US)

(74) Képviselő:

SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54)

Rugalmas hordozó integrált áramkörrel

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 2 844 487 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

16.08.2017 Bulletin 2017/33

(51) Int Cl.:

B41J 2/175 (2006.01)

(86) International application number:

PCT/US2012/035889

(21) Application number: **12875785.3**

(22) Date of filing: **30.04.2012**

(87) International publication number:

WO 2013/165373 (07.11.2013 Gazette 2013/45)

(54) **FLEXIBLE SUBSTRATE WITH INTEGRATED CIRCUIT**

FLEXIBLES SUBSTRAT MIT INTEGRIERTER SCHALTUNG

SUBSTRAT FLEXIBLE À CIRCUIT INTÉGRÉ

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:

11.03.2015 Bulletin 2015/11

(60) Divisional application:

16167992.3 / 3 085 538

(73) Proprietor: **Hewlett-Packard Development
Company, L.P.**

Houston, TX 77070 (US)

(72) Inventors:

- **CAMPBELL-BROWN, Iain**
Leixlip
Co Kildare (IE)

• **WALSH, Mark**

Leixlip

Co Kildare (IE)

• **OLIVER, John**

Leixlip

Co Kildare (IE)

• **WARD, Jefferson P.**

Vancouver, Washington 98683 (US)

• **SHIPMAN, Amy**

Vancouver, Washington 98683 (US)

(74) Representative: **Samson & Partner Patentanwälte
mbB**

Widenmayerstraße 6

80538 München (DE)

(56) References cited:

WO-A1-96/05061

US-A- 5 610 635

US-A1- 2004 189 758

US-A1- 2006 125 893

US-B2- 6 375 298

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 844 487 B1

Description

BACKGROUND

[0001] Examples of fluid cartridges are ink cartridges provided with integrated fluid dispensing dies. The fluid dispensing dies are provided with nozzles and actuators. The actuators can be signaled for fluid dispensing through a control circuit in a host device. When the cartridge is installed in the printer, the electrical connector pad array is connected to corresponding connector pads of the printer, so that a printer controller can signal the die circuit and the actuators, and fluid can be dispensed on a medium in accordance with input digital image data. The electrical connector pad array and the fluid dispensing die are attached to a flexible circuit. In industry, such flexible circuit can also be referred to as tab flex, or tab head assembly. The flexible circuit oftentimes consists of a flexible film, a window for the fluid dispensing die, the fluid dispensing die, electrical connector pads, and conductor lines connecting the connector pads to the actuators. It can be challenging to integrate further functionalities with the flexible circuit in a cost efficient manner.

[0002] US 5 610 635 A describes a printer ink cartridge which includes a cartridge body containing ink, a plurality of ink orifices, a plurality of electrical conductors, a control and driver circuit and a memory storage element. The memory storage element is connected to the control and driver circuit. Connectors are connected with the memory.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] For the purpose of illustration, certain examples constructed in accordance with the teachings of this disclosure will now be described with reference to the accompanying drawings, in which:

Fig. 1 illustrates a diagram of an example of a flexible circuit;

Fig. 2 illustrates a diagram of an example of a cross sectional side view of a fluid cartridge;

Fig. 3 illustrates a diagram of a front view of the example of the fluid cartridge of Fig. 2;

Fig. 4 illustrates a diagram of top view of another example of a flexible circuit;

Fig. 5 illustrates a diagram of an example of a cross sectional side view of the flexible circuit of Fig. 4;

Fig. 6 illustrates a diagram of a portion of the example of the flexible circuit of Fig. 4;

Fig. 7 illustrates a block diagram of an example of a secure microcontroller;

Fig. 8 illustrates a flow chart of an example of a method of manufacturing a flexible circuit;

Fig. 9 illustrates a flow chart of another example of a method of manufacturing a flexible circuit; and

Fig. 10 illustrates a flow chart of a part of a further

example of a method of manufacturing a flexible circuit.

DETAILED DESCRIPTION

[0004] In the following detailed description, reference is made to the accompanying drawings. The examples in the description and drawings should be considered illustrative and are not to be considered as limiting to the specific example or element described. Multiple examples may be derived from the following description and/or drawings through modification, combination or variation of certain elements. Furthermore, it may be understood that examples or elements that are not literally described may be derived from the description and drawings by a person of ordinary skill in the art.

[0005] Fig. 1 illustrates a diagram of an example of a flexible circuit 1. For example the flexible circuit 1 is arranged to be applied to a fluid cartridge 80 (Fig. 2, 3). For example, the flexible substrate 2 consists of a single integrated substrate, for example a single flexible film. For example, the flexible substrate 2 is cut out of a single continuous flexible film. The flexible circuit 1 further includes a first integrated circuit 3 attached to the flexible substrate 2. For example, the first integrated circuit 3 includes a memory 4 and a processing unit 5. The flexible circuit 1 includes an electrical connector pad array 6 arranged to receive signals from a host device, such as for example a printer or other fluid dispensing device. For example, other devices such as web servers or mobile communication devices can communicate with the first integrated circuit 3 through the printer or directly.

[0006] The example electrical connector pad array 6 is arranged in a constant pattern. For example, the electrical connector pad array 6 includes a number of connector pads regularly deposited on the flexible substrate 2 along parallel lines, as illustrated in Fig. 1. For example the electrical connector pad array 6 is equal or similar to a conventional electrical connector pad array 6, for example as known from existing fluid cartridge connector pad arrays. The electrical connector pad array 6 includes first electrical connector pads 7 connected to the first integrated circuit 3 and second electrical connector pads 8 for connection to a fluid dispensing die 9. For example, the first electrical connector pads 7 are connected to first conductor lines 10 that are connected to the first integrated circuit 3. For example, the second electrical connector pads 8 are connected to second conductor lines 11 for connection to the fluid dispensing die 9. For example, bond pads connect the first and second conductor lines 10, 11 to the first integrated circuit 3 and the fluid dispensing die 9, respectively. In an example, the bond pads are conductive joints that can be connected to respective leads through gang bonding or other bonding techniques. For example, separate joints are formed on the bond pads or connector pads 7, 8, or the bond pads or connector pads 7, 8 act as joints.

[0007] For example, the fluid dispensing die 9 includes

at least one of actuators, nozzles, slots and a second integrated circuit. The second electrical connector pads 8 are connected to at least one of these actuators, nozzles, slots, and second integrated circuit through the second conductor lines 11.

[0008] In an example, the flexible circuit 1 of Fig. 1 allows for gang bonding of the features on the flexible substrate 2. For example, the electrical connector pads 7, 8 and the conductor lines 10, 11 are connected by gang bonding. For example, the first integrated circuit 3 and the fluid dispensing die 9 are connected to the corresponding conductor lines 10, 11, respectively, by gang bonding. For example, the integrate circuit 3 can be gang bonded to the flexible substrate 2 with the same gang bonding tool, on the same gang bond table, and in the same gang bonding process step as the electrical connector pad array 6 and die 9, to allow for manufacturing with relatively cost efficient tools and processes.

[0009] Fig. 2 and 3 illustrate a diagram of a cross sectional side view and a front view, respectively, of a fluid cartridge 80. Fig. 2 represents a cross sectional side view of Fig. 3. The dimensions in Figs. 2 and 3 are strongly exaggerated for reasons illustration. The fluid cartridge 80 of Figs. 2 and 3 includes a housing 23 and the flexible circuit 1 attached to the housing 23. In Figs. 2 and 3 the flexible circuit 1 is mounted to the cartridge 80 but it should be understood that in an example the flexible circuit 1 is a product in itself, for example an intermediary product, separate from the fluid cartridge 80. The housing 23 includes a fluid reservoir 12. For example, the housing 23 includes a single cast mold and a lid or shell for tapping or closing the reservoir 12. The flexible circuit 1 includes the flexible substrate 2 and connected to it the first integrated circuit 3 and the fluid dispensing die 9. For example, the fluid cartridge 80 (Fig. 2, 3) is an ink cartridge with integrated printhead. For example, the fluid dispensing die 9 is a printhead die. For example, the actuators are at least one of thermal and piezo resistors for jetting ink.

[0010] The illustrated example of Figs. 2 and 3 includes a single chamber reservoir 12. In another example, the fluid cartridge 80 includes multiple reservoir chambers for different fluids, for example different colors of ink, separated by inner walls. For example at least one capillary medium 15 and at least one standpipe 16 are provided in the reservoir 12, for example one capillary medium 15 and standpipe 16 per chamber, for providing the fluid to the fluid dispensing die 9. In the illustrated example, the fluid cartridge 80 includes a bed 22 or frame that can be pre-molded in the housing 23, for receiving and connecting the fluid dispensing die 9 to the housing 23. In an example, the fluid dispensing die 9 is connected with the flexible substrate 2 before being attached to the housing 23.

[0011] The fluid dispensing die 9 includes nozzles 13 and actuators 14. For example, the actuators 14 include thermal or piezo resistors for ejecting fluid from chambers. A second integrated circuit 17 is provided that is

connected to, for example included in, the fluid dispensing die 9. In an example the second integrated circuit 17 includes a second memory 18. In an example, the second integrated circuit 17 includes at least one transistor 20, for example to facilitate triggering of the actuators 14. For example, the fluid dispensing die 9 includes conductor circuits 21 for connecting the different circuits. For example, the conductor circuits 21 connect the actuators 14 to the second integrated circuit 17 and to the electrical connector pad array 6, for example to facilitate triggering of the actuators 14 by a host device controller. In the illustrated example, the second integrated circuit 17 is arranged at a distance from the first integrated circuit 3. For example, the second integrated circuit 17 is arranged in or near the fluid dispensing die 9, near a bottom 25 of the fluid cartridge 80, and the first integrated circuit 3 is arranged near the electrical connector pad array 6, for example at a front 26 of the fluid cartridge 80. For example the second integrated circuit 17 is integrated with the fluid dispensing die 9. For example, the second integrated circuit 17 is fabricated in JetMos Integrated Circuit fabrication processes, wherein also the die 9 including the transistors 20 and the memory 18 can be fabricated. For example, the memory 18 includes at least one of a Read Only Memory (ROM), a series of links, and an Erasable Programmable Read-Only Memory (EPROM), for example having a limited memory of approximately 200 bits or less, or of approximately 400 bits or less, or of approximately 2048 bits or less, or more.

[0012] For example, a cartridge ID 28 is stored on the memory 18 of the second integrated circuit 17. For example, the cartridge ID 28 includes a part of a unique serial number pertaining to the cartridge 80. For example, the cartridge ID 28 includes a code that corresponds to a further ID such as the serial number. For example the cartridge ID 28 includes a hash, an encrypted code or an obfuscated version of a further ID such as the serial number. For example, the cartridge ID 28 stored on the second integrated circuit 17 is secured using an industry standard security coding method. For example, the host device controller is configured to decode or otherwise process the cartridge ID 28 for verification.

[0013] For example, an authentication code 29 is stored on the memory 4 of the first integrated circuit 3. For example, the authentication code 29 corresponds to said cartridge ID 28 stored on the second integrated circuit 17, so that the ID stored on the second integrated circuit 17 and the authentication code 29 stored on the first integrated circuit 3 can be matched, for example by a host device controller. In one example, the cartridge ID 28 and the authentication code 29 are equal and can be directly matched. In another example, one or both of the cartridge ID 28 and the authentication code 29 needs to be processed before being able to match the cartridge ID 28 and the authentication code 29. For example, the authentication code 29 is secured, for example encrypted. For example the authentication code 29 is a secret key. For example, the authentication code 29 includes a

hash, an encrypted code or an obfuscated version of the cartridge ID 28 or of a further ID such as the serial number, so as to allow for said matching. For example, the host device controller is configured to decode or otherwise process the authentication code 29 for matching with the cartridge ID 28. Instead of, or in addition to the authentication code, the first integrated circuit 3 can contain a further secret key for authentication.

[0014] In an example, the second integrated circuit 9 includes a hash of the cartridge ID 28. For example, the first integrated circuit 3 includes a hash of the authentication code 29. For example, a cryptographically signature is applied over one or both of the hashes with an asymmetric algorithm, for example using a private key. For example the private key is arranged according to at least one these techniques: RSA (Rivest, Shamir, Adleman), ECDSA (Elliptic Curve Digital Signature Algorithm) and DSA (Digital Signature Algorithm). For example, the signature is stored in a tamper resistant memory, for example on the memory of the first integrated circuit 3. For example a host device can validate an authenticity of the cartridge 80 by reading the digital signature, the cartridge ID 28 and the authentication code 29, and validate them using a public key which is already known to the host device.

[0015] As can be seen from Figs. 2 and 3, in an example the first and second electrical connector pads 7, 8 form part of a single regularly patterned connector pad array 6. For example, the first and the second electrical connector pads 7, 8 are arranged long straight, parallel lines 27, for example in rows or columns. In an example that is not shown the lines 27 have an inclined orientation with respect to longitudinal edges of the flexible substrate 2. First and second electrical connector pads 7, 8 can be arranged along the same line 27. In the illustrated example, the electrical connector pad array 6 includes two parallel lines 27 of electrical connector pads 7, 8, each line including both first and second electrical connector pads 7, 8. One example of the flexible circuit 1 includes at least four first electrical connector pads 7 that are regularly arranged in the electrical connector pad array 6 that are connected to the first integrated circuit 3, for example including a ground connection, a power supply connection (Vcc), a data connection, and a clock circuit connection.

[0016] For example, the first integrated circuit 3 and the second integrated circuit 17 share at least one combination connector pad A, B. In this disclosure the combination connector pad A, B can be defined as a combination of both a first and a second electrical connector pad 7, 8. The combination connector pads A, B are electrically connected to the first and second conductor lines 10, 11. For example at least one combination connector pad A, B is configured to function as a ground for the first and second integrated circuit 3, 17, when connected to a host device. For example at least one combination connector pad A, B is configured to function as a power supply (Vcc) for the first and second integrated circuit 3, 17,

when connected to the host device.

[0017] For example, having a constant pattern of electrical connector pads 7, 8 can allow for relatively cost efficient manufacturing of the flexible circuit 1, as well as the corresponding host device connectors. In an example, applying the first integrated circuit 3 to the flexible circuit 1 requires no modification, or only little modification, to existing flexible circuit fabrication.

[0018] Figs. 4 and 5 illustrate a further example of a flexible circuit 1. The example flexible circuit 1 includes the fluid dispensing die 9. The example flexible circuit 1 includes the flexible substrate 2 and the first integrated circuit 3. The flexible substrate 2 includes a tape or film and flexible conductor lines 10, 11. For example, the flexible substrate 2 is made of strong polymer thin film material such as polyimide. The thin conductor lines 10, 11 are for example imaged by photolithography. In an example, the single flexible substrate 2 comprises at least one first window 30 and at least one second window 31. For example the first integrated circuit 3 is connected to the flexible substrate 2 near edges of the first window 30. For example, the fluid dispensing die 9 is connected to the flexible substrate 2 near edges of the second window 31 via bond pads and/or further joints. For example, the fluid dispensing die 9 and/or the first integrated circuit 3 are gang bonded or wire bonded to the flexible substrate 2 via bond pads. For example, the integrated circuit 3 is gang bonded to the first conductor lines 10, via first bond pads, and the fluid dispensing die 9 is gang bonded to the second conductor lines 11, via second bond pads. For example, the first integrated circuit 3 and the fluid dispensing die 9 are connected to the same side of the flexible substrate 2. For example the first integrated circuit 3 and the fluid dispensing die 9 are gang bonded on the same gang bond table, in one process step. In another example, the fluid dispensing die 9 and the first integrated circuit 3 are bonded in separate process steps wherein for example the flexible substrate 2 is re-positioned or moved to another tool between these process steps.

[0019] For example, an encapsulation layer 32 encapsulates the first integrated circuit 3. For example, an encapsulation layer 33 encapsulates the electrical connector pad array 6. The illustrated example encapsulation layer 33 of the electrical connector pad array 6 also covers the first integrated circuit 3. The example encapsulation layer 33 illustrated defines one continuous encapsulation layer 33 for the connector pad array 6 and the first integrated circuit 3. In another example, multiple encapsulation islands 32 could be applied for encapsulating the first integrated circuit 3 and the electrical connector pad array 6 separately. For example, the encapsulation layers 32, 33 are made of the same material and applied to the same side of the flexible substrate 2. For example, the encapsulation layers 32, 33 are provided in the same manufacturing process step. For example, the encapsulation layer 32, 33 is configured to protect the respective encapsulated circuit 6, 3 from ink or other fluids. In an

example, the encapsulation layer 32, 33 includes epoxy.

[0020] The example electrical connector pad array 6 of Fig. 4 illustrates first and second electrical connector pads 7, 8 along two pairs of parallel lines 27A, 27B. For example, the layout of the electrical connector pad array 6 is similar or equal to a conventional electrical connector pad array of a conventional flexible circuit of a fluid cartridge. For example, each line 27A, 27B has an inclination α , β with respect to sidewall of the flexible substrate 2, for example to facilitate the arrangement of conductor lines 10, 11 towards the first integrated circuit 3 and the fluid dispensing die 9. As can be seen from Fig. 4 lines 27A of a left pair of connector pad sub-arrays have a first inclination α and lines 27B of a right pair of connector pad sub-arrays have second inclination β . For examples, the inclinations α , β are equal but in opposite directions.

[0021] For example, the first integrated circuit 3 is arranged between the electrical connector pad array 6 and a side edge of the single flexible substrate 2. For example, this facilitates locating the first integrated circuit 3 on the front face 26 of the fluid cartridge 80 (Fig. 2). For example, this facilitates readily encapsulating the electrical connector pad array 6 and the first integrated circuit 3. For example, the electrical connector pad array 6 is symmetrical having an axis of symmetry S through the middle of the electrical connector pad array 6, for example between the pairs of the connector pad sub-arrays. For example, the axis of symmetry S is arranged next to a center line C of the flexible substrate 2. The center line C extends through the center of the flexible substrate 2, parallel to the longitudinal side edges of the flexible substrate 2. In an example, a width W of the flexible substrate 2 is larger than a conventional width of a conventional type flexible circuit 1 of a similar fluid cartridge 80, for example the size of one flexible film's sprocket wider. For example the distance D between the axis of symmetry S of the electrical connector pad array 6 and the center line C of the flexible substrate 2 is approximately half of a sprocket pitch of the flexible film, or a multitude of half of a sprocket pitch of the flexible film. For example, the distance D between the center line C and the axis of symmetry S is approximately one, one-and-a-half, two, two-and-a-half, three, etc. times the sprockets' pitch.

[0022] Fig. 6 illustrates a top view of a diagram of an example of the first integrated circuit 3. For example the first integrated circuit 3 is a secure microcontroller. In the shown example the first integrated circuit 3 includes a main integrated circuit 40. Furthermore, at least four bond pads 41 are provided that connect the main integrated circuit 40 to the conductor lines 10. The bond pads 41 facilitate bonding of the integrated circuit 40 to the first conductor lines 10. For example, the first integrated circuit 3, the bond pads 41 and the first conductor lines 10 are gang bonded together. For example, at the gang bonding stage joints are formed between the conductor lines 10 and the bond pads 41. For example, the main integrated circuit 40 and the bond pads 41 are arranged on a relatively rigid substrate 42. For example, an encapsulation layer 32 encapsulates at least the main integrated circuit 40 and the bond pads 41. In an example, at least one or at least two of the bond pads 41 are connected to combination electrical connector pads A, B (Fig. 2).

[0023] In an example, the first integrated circuit 3 includes a secure microcontroller 50. Fig. 7 illustrates a diagram of an example of a secure microcontroller 50. For example, the secure microcontroller 50 includes memory elements connected to an internal bus 51 such as at least one of a RAM 52, an EEPROM 53, a User ROM 54, and a ST ROM (Boot Software) 55. For example, the secure microcontroller 50 includes an EDES accelerator 56 connected to the internal bus 51. For example a ST ROM Firewall 57 is provided between the ST ROM 55 and the internal bus 51. For example, the secure microcontroller 50 includes processing modules that communicate with the internal bus 51, such as at least one of a Cyclic Redundancy Check (CRC) module 60, a Clock Generator Module 61, two times 8-bit timers 62, a Security Monitoring and Control circuit 63, a True Random Number Generator 64, an 8/16-bit Central Processing Unit Core 65 and an Asynchronous Receiver Transmitter (IART) 66 for high speed serial data support. For example, further circuits on the secure microcontroller 50 include a Clock Circuit 70 (CLK), a reset circuit 71, a power supply or Vcc circuit 72, a ground circuit 73, and an Input/Output circuit 74. In an example the Vcc circuit 72 and the ground circuit 73 are connected to the combination electrical connector pads A, B through conductor lines 10, wherein the combination electrical connector pads A, B are also connected to the second integrated circuit 17. For example, other circuits such as the Clock Circuit 70 or the Input/Output circuit 74 can be unique to the secure microcontroller 50 and are not shared with the fluid dispensing die 9.

[0024] For example, instead of or in addition to the secure micro controller, the first integrated circuit 3 includes another secure memory.

[0025] For example the secure microcontroller. 50 is configured to facilitate secure authentication. For example, in addition to the authentication code 29, the secure microcontroller 50 stores further data for example including at least one of an ink level, reward-related data, coupon or voucher related data, website addresses, image data, a set of instructions for the printer, etc. The secure microcontroller 50 can be co-gang bonded to the flexible substrate 2 together with the fluid dispensing die 9.

[0026] Fig. 8 illustrates an example of a method of manufacturing a flexible circuit 1 for a fluid dispensing cartridge 80. The example method includes providing the constant array 6 of the first and second electrical connector pads 7, 8 on a flexible substrate 2 (block 100). For example, the method includes connecting the first integrated circuit 3 to the flexible substrate 2 (block 110). For example the first integrated circuit 3 is bonded to the flexible substrate 2, for example gang bonded, for example via first bond pads 41 provided on the substrate 2. The

first bond pads 41 connect to the first conductor lines 10. The example method includes connecting the first integrated circuit 3 (or the first bond pads 41) to the first electrical connector pads 7 of the array 6 (block 120). For example, the first integrated circuit 3 includes a secure microcontroller 50 configured to facilitate secure authentication of a fluid cartridge 80. The example method includes connecting the fluid dispensing die 9 to the flexible substrate 2 (block 130), at a distance from the first integrated circuit 3. For example the fluid dispensing die 9 is bonded to the flexible substrate 2, for example gang bonded, for example via bond pads 41 provided on the substrate 2, and for example in one step together with the integrated circuit 3. The second bond pads are connected to the second conductor lines 11. For example, the method includes connecting the second electrical connector pads 8 to the fluid dispensing die 9 (block 140), for example to a second integrated circuit 17 thereof. For example, the method includes attaching the resulting flexible circuit 1 to the fluid cartridge 80 (block 150) so that the fluid dispensing die 9 is fluidically connected to fluid reservoir 12 and the electrical connector pad array 6 extends on the front face 26.

[0027] Fig. 9 illustrates another example of a method of manufacturing a flexible circuit 1 for a fluid dispensing cartridge 80. For example, the method includes providing the flexible substrate 2, the flexible substrate 2 comprising

at least the first window 30 for the first integrated circuit 3 and the second window 31 for the fluid dispensing die 9 and pre-arranged conductor lines 10, 11 (block 200). In an example, the flexible substrate 2 is pre-manufactured by a third party. For example, the dimensions and locations of the circuits of the flexible circuit 1 are predetermined and determine the dimensions and configuration of the flexible substrate 2. For example, the conductor lines 10, 11 are pre-arranged for connecting the die 9 and the first integrated circuit 3 to the respective electrical connector pads 7, 8.

[0028] For example, the example method of Fig. 9 includes positioning the die 9 and the first integrated circuit 3 with respect to the corresponding windows 30, 31 (block 210), and for example connecting the die 9 and the first integrated circuit 3 to the flexible substrate 2 (block 220). For example, one or a combination of wire and gang bonding is used to connect the die 9 and the first integrated circuit 3 to the flexible substrate 2. For example, the method includes gang bonding the first integrated circuit 3, the die 9 and the first and second electrical connector pads 7, 8 to the corresponding conductor lines 10, 11 (block 230). For example, one gang bonding tool is used to gang bond the respective connector pads 7, 8 and bond pads 41 to the conductor lines 10, 11. The gang bonding process allows for making multiple electrical contacts in one process step. For example, the electrical connector pads 7, 8 and the first integrated circuit 3 are encapsulated using the same encapsulation material, for example using the same tool, and for example in the

same process step (block 240), for example without moving the flexible substrate 2 with respect to the bond table. In another example, the die 9 and the first integrated circuit 3 are bonded in separate process steps, for example the flexible substrate 2 is repositioned after one of the die 9 or first integrated circuit 3 is bonded. For example different bonding tools or tables are used for bonding the die 9 and the first integrated circuit 3.

[0029] Fig. 10 illustrates another example of a method of manufacturing a flexible circuit 1 for a fluid dispensing cartridge 80. For example, the method includes writing a cartridge ID 28 on the second integrated circuit 17 (block 250). For example, the method includes writing an authentication code 29 corresponding to the cartridge ID 28 on the first integrated circuit 3 (block 260). For example, the method includes writing different cartridge ID 28s and different corresponding authentication codes 29 per flexible circuit 1 or per fluid cartridge 80 (block 270), so that each fluid cartridge 80 has a unique ID 28 and authentication code 29. For example, the latter step provides for a secured and unique authentication code 29 per fluid cartridge 80.

[0030] For example, some of the features disclosed in this specification provide for the ability to securely authenticate a flexible circuit 1 or fluid cartridge 80, while allowing for an integrated and cost efficient manufacturing thereof. For example, the integrated circuit 3 is configured to facilitate secure authentication. In different example, different host devices are able to authenticate the flexible circuit 1 or fluid cartridge 80, for example a printer, smart phone, a web server, any computing device, etc. In an example the host device interfaces with the flexible circuit 1 through the printer. In an example, the first integrated circuit 3 is configured to store further data such as fluid related codes, color adjustment information, voucher related codes, advertisements, coupons, etc. For example, the host device can access, modify or process such further data only after the secure authentication has been established through the first integrated circuit 3. For example, the first integrated circuit 3 is configured to provide, or provide access to, above mentioned further data only after the authentication is established. In an example, the fluid dispensing die 9 needs little or no adaptations with respect to existing integrated printheads. In another example, the flexible substrate 2 and electrical connector pad array 6 need little or no adaptations with respect to existing electrical connector pad arrays of integrated printhead fluid cartridges. For example, the integrated circuit 3 is gang bonded to conductor lines 10 at the same time as the fluid dispensing die 9, at a distance from the fluid dispensing die 9, and to the same flexible substrate 2.

[0031] For example, the flexibility of the flexible circuit 1 refers to the flexible substrate 2 while some of the circuits on the flexible substrate 2 may in itself be relatively rigid. In fact, in an example the flexible circuit 1 can be relatively rigid due to the circuits on the flexible substrate 2. For example, in addition to or instead of gang bonding,

wire bonding or other suitable welding methods can be used, for example including the use of heating processes, electrical energy or chemical components.

[0032] In one example, the fluid cartridge 80 is adapted to be connected to a host device. In another example, the fluid cartridge 80 is part of a handheld fluid dispensing device. In yet another example, the fluid dispensing device or host device is a printer or titration device or another type of high precision fluid dispensing device.

[0033] The above description is not intended to be exhaustive or to limit this disclosure to the examples disclosed. Other variations to the disclosed examples can be understood and effected by those of ordinary skill in the art from a study of the drawings, the disclosure, and the claims. The indefinite article "a" or "an" does not exclude a plurality, while a reference to a certain number of elements does not exclude the possibility of having more or less elements. A single unit may fulfil the functions of several items recited in the disclosure, and vice versa several items may fulfil the function of one unit. Multiple alternatives, equivalents, variations and combinations may be made without departing from the scope of this disclosure.

Claims

1. A flexible circuit for a fluid cartridge, comprising a flexible substrate (2) including first conductor lines (10) and second conductor lines (11), a first integrated circuit (3) connected to the flexible substrate (2), and an electrical connector pad array (6) arranged on the flexible substrate (2), the electrical connector pad array (6) to provide for connection to a host controller, and comprising first electrical connector pads (7) and second electrical connector pads (8), the first conductor lines (10) each having a first end connected to one of the first electrical connector pads (7) and a second end connected to the first integrated circuit (3), and **characterized in that** the second conductor lines (11) each having a first end connected to one of the second electrical connector pads (8) and a second end for connection to a fluid dispensing die (9).
2. The flexible circuit of claim 1 wherein the first integrated circuit (3) is a secure microcontroller.
3. The flexible circuit of claim 1 wherein at least a portion of the first and the second electrical connector pads (7, 8) are arranged on one straight line.
4. The flexible circuit of claim 1 wherein the first integrated circuit (3) is arranged between the electrical connector pad array (6) and a side edge of the single flexible substrate (2), and an axis of symmetry (S) of the electrical connector

pad array is arranged parallel to and at a distance from a longitudinal center line (C) of the flexible substrate (2).

5. The flexible circuit of claim 1 wherein the electrical connector pad array (6) comprises at least one electrical connector pad (7) to be connected only to the first integrated circuit (3), at least one electrical connector pad (8) to be connected only to the fluid dispensing die (9), and at least one electrical connector pad (A, B) that is connected to both the first integrated circuit (3) and the fluid dispensing die (9).
6. The flexible circuit of claim 1 comprising bond pads (41) for connecting the first integrated circuit (3) to a conductor line (10) connected to the electrical connector pads (7), and an encapsulation layer (32) covering the first integrated circuit (3), the bond pads (41) and the electrical connector pad array (6).
7. The flexible circuit of claim 1 wherein the single flexible substrate (2) comprises at least one first window (30), at least one second window (31), the first integrated circuit (3) is aligned with the first window (30) and connected to the flexible substrate (2) near edges of the first window (30), and the fluid dispensing die (9) is to be aligned with the second window (31) and connected to the flexible substrate (2) near edges of the second window (31).
8. A fluid dispensing cartridge, comprising a fluid reservoir (12), a fluid dispensing die (9), the flexible circuit of claim 1, and a second integrated circuit (17), distanced from the first integrated circuit (3), connected to the fluid dispensing die (9), and connected to at least one of the second electrical connector pads (8) of the electrical connector pad array (6), the second integrated circuit (17) configured to signal actuators (14) of the fluid dispensing die (9).
9. A method of manufacturing a flexible circuit for a fluid dispensing cartridge (80), comprising providing an array (6) of a first and second electrical connector pads (7, 8) on a flexible substrate (2), connecting a first integrated circuit (3) to the flexible substrate (2), connecting a fluid dispensing die (9) to the flexible substrate (2), and **characterized by** connecting first ends of first conductor lines (10) of the flexible substrate (2) to the first integrated circuit and connecting second ends of the first conductor lines (10) to the first electrical connector pads (7) and connecting first ends of second conductor lines (11) of the flexible substrate (2) to the fluid dispensing

die (9) and connecting second ends of the second conductor lines (11) to the second electrical connector pads (8).

10. The method of claim 9, the flexible substrate (2) comprising
 at least one window (31) for a fluid dispensing die (9),
 at least one window (30) for the first integrated circuit (3), and
 conductor lines (10, 11) for connecting the die (9) and first integrated circuit (3) to the first and second electrical connector pads (7, 8), respectively, the method comprising
 positioning the die (9) and the first integrated circuit (3) with respect to the corresponding windows (30, 31), and
 gang bonding the first integrated circuit (3) and the die (9) to the corresponding conductor lines (10, 11). 5
11. The method of claim 9 comprising encapsulating the electrical connector pads (7, 8) and the first integrated circuit (3) with the same material using the same encapsulation tool. 10
12. The method of claim 9 wherein the first electrical connector pads (7) and the second electrical connector pads (8) are intermixed within the array (6). 15
13. The method of claim 9 comprising
 writing a cartridge ID (28) on a second integrated circuit (17) connected to the fluid dispensing die (9),
 writing an authentication code (29) corresponding to the cartridge ID (28) on the first integrated circuit (3). 20
14. The fluid dispensing cartridge of claim 8, comprising a flexible substrate (2),
 a first integrated circuit (3) connected to the flexible substrate (2),
 a fluid dispensing die (9) connected to the flexible substrate (2), and
 an electrical connector pad array (6) arranged on the flexible substrate (2), for connection to a host controller, comprising first electrical connector pads (7) connected to the first integrated circuit (3) by first conductor lines (10) each having one end connected to one of the first
 electrical connector pads (7) and another end connected to the first integrated circuit (3) and second electrical connector pads (8) connected to the fluid dispensing die (9) by second conductor lines (11) each having one end connected to one of the second electrical connector pads (8) and
 another end connected to the fluid dispensing die (9). 25
15. The fluid dispensing cartridge of claim 14, wherein the flexible substrate (2) has a longitudinal centerline (C),
 the electrical connector pad array (6) has an axis of 30

symmetry (S) offset from the longitudinal centerline (C) in a first direction, and
 the first integrated circuit (3) is positioned laterally of the electrical connector pad array (6) and offset from the longitudinal centerline (C) in a second direction opposite the first direction.

16. The fluid dispensing cartridge of claim 8, the flexible circuit (1) comprising a flexible substrate (2) having at least one window (31) for the fluid dispensing die (9), and at least one window (30) for the first integrated circuit (3). 35
17. The fluid dispensing cartridge of claim 16, wherein the fluid dispensing die (9) and the first integrated circuit (3) are provided on a same side of the flexible substrate (2). 40
18. The fluid dispensing cartridge of claim 8, wherein the electrical connector pad array (6) is to provide connection to a host device. 45
19. The fluid dispensing cartridge of claim 18, comprising
 a cartridge ID (28) stored on the second integrated circuit (17), and
 an authentication code (29), that corresponds to the cartridge ID (28), stored on the first integrated circuit (3), the cartridge ID (28) and the authentication code (29) to be matched by the host device. 50

Patentansprüche

1. Flexibler Schaltkreis für eine Fluidkartusche, Folgendes umfassend
 ein flexibles Substrat (2), einschließlich erster Leiterbahnen (10) und zweiter Leiterbahnen (11),
 einen ersten integrierten Schaltkreis (3), verbunden mit dem flexiblen Substrat (2), und
 eine elektrische Verbinderpadanordnung (6), angeordnet an dem flexiblen Substrat (2), wobei die elektrische Verbinderpadanordnung (6) vorgesehen ist, eine Verbindung zu einem Hostcontroller bereitzustellen, und erste elektrische Verbinderpads (7) und zweite elektrische Verbinderpads (8) umfassend,
 wobei die ersten Leiterbahnen (10) jeweils ein erstes Ende, das mit einem der ersten elektrischen Verbinderpads (7) verbunden ist, und ein zweites Ende, das mit dem ersten integrierten Schaltkreis (3) verbunden ist, aufweisen, und **dadurch gekennzeichnet, dass**
 die zweiten Leiterbahnen (11) jeweils ein erstes Ende, das mit einem der zweiten elektrischen Verbinderpads (8) verbunden ist, und ein zweites Ende, das zum Verbinden mit einer Fluidausgabedüse (9) vorgesehen ist, aufweisen. 55

2. Flexibler Schaltkreis nach Anspruch 1, wobei der erste integrierte Schaltkreis (3) ein sicherer Mikrocontroller ist.
3. Flexibler Schaltkreis nach Anspruch 1, wobei wenigstens ein Abschnitt der ersten und der zweiten elektrischen Verbinderpads (7, 8) in einer geraden Linie angeordnet ist. 5
4. Flexibler Schaltkreis nach Anspruch 1, wobei der erste integrierte Schaltkreis (3) zwischen der elektrischen Verbinderpadanordnung (6) und einer Seitenkante des einzigen flexiblen Substrats (2) angeordnet ist, und eine Symmetrieachse (S) der elektrischen Verbinderpadanordnung parallel zu und mit einem Abstand von einer Längsmittellinie (C) des flexiblen Substrats (2) angeordnet ist. 10
5. Flexibler Schaltkreis nach Anspruch 1, wobei die elektrische Verbinderpadanordnung (6) Folgendes umfasst: wenigstens ein elektrisches Verbinderpad (7), das nur mit dem ersten integrierten Schaltkreis (3) zu verbinden ist, wenigstens ein elektrisches Verbinderpad (8), das nur mit der Fluidausgabedüse (9) zu verbinden ist, und wenigstens ein elektrisches Verbinderpad (A, B), das sowohl mit dem ersten integrierten Schaltkreis (3) als auch mit der Fluidausgabedüse (9) zu verbinden ist. 20
6. Flexibler Schaltkreis nach Anspruch 1, Folgendes umfassend: 25
- Haftungspads (41) zum Verbinden des ersten integrierten Schaltkreises (3) mit einer Leiterbahn (10), die mit den elektrischen Verbinderpads (7) verbunden ist, und eine Verkapselungsschicht (32), die den ersten integrierten Schaltkreis (3), die Haftungspads (41) und die elektrische Verbinderpadanordnung (6) abdeckt. 30
7. Flexibler Schaltkreis nach Anspruch 1, wobei das einzige flexible Substrat (2) wenigstens ein erstes Fenster (30) umfasst, wenigstens ein zweites Fenster (31), der erste integrierte Schaltkreis (3) an dem ersten Fenster (30) ausgerichtet ist und in der Nähe der Kanten des ersten Fensters (30) mit dem flexiblen Substrat (2) verbunden ist, und die Fluidausgabedüse (9) an dem zweiten Fenster (31) auszurichten ist und in der Nähe der Kanten des zweiten Fensters (31) mit dem flexiblen Substrat (2) zu verbinden ist. 35
8. Fluidausgabekartusche, Folgendes umfassend: 40
- Haftungspads (41) zum Verbinden des ersten integrierten Schaltkreises (3) mit einer Leiterbahn (10), die mit den elektrischen Verbinderpads (7) verbunden ist, und eine Verkapselungsschicht (32), die den ersten integrierten Schaltkreis (3), die Haftungspads (41) und die elektrische Verbinderpadanordnung (6) abdeckt. 45
9. Verfahren zum Fertigen eines flexiblen Schaltkreises für eine Fluidausgabekartusche (80), Folgendes umfassend: 50
- Bereitstellen einer Anordnung (6) aus einem ersten und einem zweiten elektrischen Verbinderpad (7, 8) auf einem flexiblen Substrat (2), Verbinden eines ersten integrierten Schaltkreises (3) mit dem flexiblen Substrat (2), Verbinden einer Fluidausgabedüse (9) mit dem flexiblen Substrat (2) und **gekennzeichnet durch** Verbinden von ersten Enden erster Leiterbahnen (10) des flexiblen Substrats (2) mit dem ersten integrierten Schaltkreis und Verbinden von zweiten Enden der ersten Leiterbahnen (10) mit den ersten elektrischen Verbinderpads (7) und Verbinden von ersten Enden zweiter Leiterbahnen (11) des flexiblen Substrats (2) mit der Fluidausgabedüse (9) und Verbinden zweiter Enden der zweiten Leiterbahnen (11) mit den zweiten elektrischen Verbinderpads (8). 55
10. Verfahren nach Anspruch 9, wobei das flexible Substrat (2) Folgendes umfasst: 60
- wenigstens ein Fenster (31) für eine Fluidausgabedüse (9), wenigstens ein Fenster (30) für den ersten integrierten Schaltkreis (3) und Leiterbahnen (10, 11) zum Verbinden der Düse (9) und des integrierten Schaltkreises (3) mit den ersten beziehungsweise den zweiten elektrischen Verbinderpads (7, 8), wobei das Verfahren Folgendes umfasst: 65
- Positionieren der Düse (9) und des ersten integrierten Schaltkreises (3) mit Bezug auf die jeweiligen Fenster (30, 31) und gemeinsames Verkleben des ersten integrierten Schaltkreises (3) und der Düse (9) mit den jeweiligen Leiterbahnen (10, 11). 70
11. Verfahren nach Anspruch 9, umfassend das Verkapseln der elektrischen Verbinderpads (7, 8) und des

ersten integrierten Schaltkreises (3) mit demselben Material unter Einsatz desselben Verkapselungswerkzeugs.

12. Verfahren nach Anspruch 9, wobei die ersten elektrischen Verbinderpads (7) und die zweiten elektrischen Verbinderpads (8) innerhalb der Anordnung (6) gemischt sind.

13. Verfahren nach Anspruch 9, Folgendes umfassend:

Schreiben einer Kartuschen-ID (28) auf einen zweiten integrierten Schaltkreis (17), der mit der Fluidausgabedüse (9) verbunden ist,
Schreiben eines Authentifizierungs-Codes (29), der Kartuschen-ID (28) entsprechend, auf den ersten integrierten Schaltkreis (3).

14. Fluidausgabekartusche nach Anspruch 8, Folgendes umfassend:

ein flexibles Substrat (2),
einen ersten integrierten Schaltkreis (3), verbunden mit dem flexiblen Substrat (2),
eine Fluidausgabedüse (9), verbunden mit dem flexiblen Substrat (2), und
eine elektrische Verbinderpadanordnung (6), angeordnet an dem flexiblen Substrat (2) zum Verbinden mit einem Hostcontroller, umfassend erste elektrische Verbinderpads (7), verbunden mit dem ersten integrierten Schaltkreis (3) durch erste Leiterbahnen (10), wobei jede davon ein mit einem der ersten elektrischen Verbinderpads (7) verbundenes Ende und ein weiteres mit dem ersten integrierten Schaltkreis (3) verbundenes Ende aufweist, und zweite elektrische Verbinderpads (8), verbunden mit der Fluidausgabedüse (9) über zweite Leiterbahnen (11), wobei jede davon ein mit einem der zweiten elektrischen Verbinderpads (8) verbundenes Ende und ein weiteres mit der Fluidausgabedüse (9) verbundenes Ende aufweist.

15. Fluidausgabekartusche nach Anspruch 14, wobei das flexible Substrat (2) eine Längsmittellinie (C) aufweist,
die elektrische Verbinderpadanordnung (6) eine Symmetrieachse (S) aufweist, die in einer ersten Richtung von der Längsmittellinie (C) versetzt ist, und
der erste integrierte Schaltkreis (3) seitlich von der elektrischen Verbinderpadanordnung (6) angeordnet ist und in einer zweiten Richtung, die der ersten Richtung entgegengesetzt ist, von der Längsmittellinie (C) versetzt ist.

16. Fluidausgabekartusche nach Anspruch 8, wobei der flexible Schaltkreis (1), der ein flexibles Substrat (2)

umfasst, wenigstens ein Fenster (31) für die Fluidausgabedüse (9) und wenigstens ein Fenster (30) für den ersten integrierten Schaltkreis (3) aufweist.

17. Fluidausgabekartusche nach Anspruch 16, wobei die Fluidausgabedüse (9) und der erste integrierte Schaltkreis (3) auf einer selben Seite des flexiblen Substrats (2) bereitgestellt sind.

18. Fluidausgabekartusche nach Anspruch 8, wobei die elektrische Verbinderpadanordnung (6) vorgesehen ist, eine Verbindung zu einer Hostvorrichtung bereitzustellen.

19. Fluidausgabekartusche nach Anspruch 18, Folgendes umfassend:

eine Kartuschen-ID (28), gespeichert auf dem zweiten integrierten Schaltkreis (17), und einen Authentifizierungs-Code (29), welcher der auf dem ersten integrierten Schaltkreis (3) gespeicherten Kartuschen-ID (28) entspricht, wobei die Kartuschen-ID (28) und der Authentifizierungs-Code (29) von der Hostvorrichtung abzugleichen sind.

Revendications

1. Circuit flexible pour une cartouche de fluide, comprenant
un substrat flexible (2) comportant des premières lignes conductrices (10) et des secondes lignes conductrices (11),
un premier circuit intégré (3) connecté au substrat flexible (2), et
un réseau de plots de connexion électrique (6) disposé sur le substrat flexible (2), le réseau de plots de connexion électrique (6) pour assurer la connexion à un contrôleur hôte, et comprenant des premiers plots de connexion électrique (7) et des seconds plots de connexion électrique (8),
les premières lignes conductrices (10) ayant chacune une première extrémité connectée à l'un des premiers plots de connexion électrique (7) et une seconde extrémité connectée au premier circuit intégré (3), et
en ce que
les secondes lignes conductrices (11) ayant chacune une première extrémité connectée à l'un des seconds plots de connexion électrique (8) et une seconde extrémité pour la connexion à une matrice de distribution de fluide (9).
2. Circuit flexible selon la revendication 1 dans lequel le premier circuit intégré (3) est un microcontrôleur sécurisé.

3. Circuit flexible selon la revendication 1 dans lequel au moins une partie des premiers et des seconds plots de connexion électrique (7, 8) sont disposés sur une ligne droite.
4. Circuit flexible selon la revendication 1 dans lequel le premier circuit intégré (3) est disposé entre le réseau de plots de connexion électrique (6) et un bord latéral du substrat flexible unique (2), et un axe de symétrie (S) du réseau de plots de connexion électrique est disposé parallèlement et à distance d'une ligne centrale longitudinale (C) du substrat flexible (2).
5. Circuit flexible selon la revendication 1 dans lequel le réseau de plots de connexion électrique (6) comprend au moins un plot de connexion électrique (7) à connecter uniquement au premier circuit intégré (3), au moins un plot de connexion électrique (8) à connecter uniquement à la matrice de distribution de fluide (9), et au moins un plot de connexion électrique (A, B) qui est connecté à la fois au premier circuit intégré (3) et à la matrice de distribution de fluide (9).
6. Circuit flexible selon la revendication 1 comprenant des plots de liaison (41) pour connecter le premier circuit intégré (3) à une ligne conductrice (10) connectée aux plots de connexion électrique (7), et une couche d'encapsulation (32) recouvrant le premier circuit intégré (3), les plots de liaison (41) et le réseau de plots de connexion électrique (6).
7. Circuit flexible selon la revendication 1 dans lequel le substrat flexible unique (2) comprend au moins une première fenêtre (30), au moins une seconde fenêtre (31), le premier circuit intégré (3) est aligné avec la première fenêtre (30) et connecté au substrat flexible (2) à proximité des bords de la première fenêtre (30), et la matrice de distribution de fluide (9) doit être alignée avec la seconde fenêtre (31) et connectée au substrat flexible (2) à proximité des bords de la seconde fenêtre (31).
8. Cartouche de distribution de fluide, comprenant un réservoir de fluide (12), une matrice de distribution de fluide (9), le circuit flexible selon la revendication 1, et un second circuit intégré (17), éloigné du premier circuit intégré (3), connecté à la matrice de distribution de fluide (9), et connecté à au moins l'un des seconds plots de connexion électrique (8) du réseau de plots de connexion électrique (6), le second circuit intégré (17) conçu pour signaler des actionneurs (14) de la matrice de distribution de fluide (9).
9. Procédé de fabrication d'un circuit flexible pour une cartouche de distribution de fluide (80), comprenant la disposition d'un réseau (6) de premiers et seconds plots de connexion électrique (7, 8) sur un substrat flexible (2), la connexion d'un premier circuit intégré (3) au substrat flexible (2), la connexion d'une matrice de distribution de fluide (9) au substrat flexible (2), et **caractérisé par** la connexion des premières extrémités des premières lignes conductrices (10) du substrat flexible (2) au premier circuit intégré et la connexion des secondes extrémités des premières lignes conductrices (10) aux premiers plots de connexion électrique (7) et la connexion des premières extrémités des secondes lignes conductrices (11) du substrat flexible (2) à la matrice de distribution de fluide (9) et la connexion des secondes extrémités des secondes lignes conductrices (11) aux seconds plots de connexion électrique (8).
10. Procédé selon la revendication 9, le substrat flexible (2) comprenant au moins une fenêtre (31) pour une matrice de distribution de fluide (9), au moins une fenêtre (30) pour le premier circuit intégré (3), et des lignes conductrices (10, 11) pour connecter la matrice (9) et le premier circuit intégré (3) aux premiers et seconds plots de connexion électrique (7, 8), respectivement, le procédé comprenant le positionnement de la matrice (9) et du premier circuit intégré (3) par rapport aux fenêtres correspondantes (30, 31), et la liaison multiple du premier circuit intégré (3) et de la matrice (9) aux lignes conductrices correspondantes (10, 11).
11. Procédé selon la revendication 9 comprenant l'encapsulation des plots de connexion électrique (7, 8) et du premier circuit intégré (3) avec le même matériau en utilisant le même outil d'encapsulation.
12. Procédé selon la revendication 9 dans lequel les premiers plots de connexion électrique (7) et les seconds plots de connexion électrique (8) sont mélangés dans le réseau (6).
13. Procédé selon la revendication 9 comprenant l'écriture d'un identifiant de cartouche (28) sur un second circuit intégré (17) connecté à la matrice de distribution de fluide (9), l'écriture d'un code d'authentification (29) correspondant à l'identifiant de cartouche (28) sur le premier circuit intégré (3).
14. Cartouche de distribution de fluide selon la revendication 8, comprenant

un substrat flexible (2),
 un premier circuit intégré (3) connecté au substrat flexible (2),
 une matrice de distribution de fluide (9) connectée au substrat flexible (2), et
 un réseau de plots de connexion électrique (6) disposé sur le substrat flexible (2), pour la connexion à un contrôleur hôte, comprenant des premiers plots de connexion électrique (7) connectés au premier circuit intégré (3) par des premières lignes conductrices (10) ayant chacune une extrémité connectée à l'un des premiers plots de connexion électrique (7) et une autre extrémité connectée au premier circuit intégré (3) et des seconds plots de connexion électrique (8) connectés à la matrice de distribution de fluide (9) par des secondes lignes conductrices (11) ayant chacune une extrémité connectée à l'un des seconds plots de connexion électrique (8) et une autre extrémité connectée à la matrice de distribution de fluide (9).

code d'authentification (29) devant être mis en correspondance par le dispositif hôte.

15. Cartouche de distribution de fluide selon la revendication 14, dans laquelle le substrat flexible (2) a une ligne centrale longitudinale (C),
 le réseau de plots de connexion électrique (6) a un axe de symétrie (S) décalé par rapport à la ligne centrale longitudinale (C) dans une première direction, et
 le premier circuit intégré (3) est positionné latéralement par rapport au réseau de plots de connexion électrique (6) et décalé par rapport à la ligne centrale longitudinale (C) dans une seconde direction opposée à la première direction.
16. Cartouche de distribution de fluide selon la revendication 8, le circuit flexible (1) comprenant un substrat flexible (2) ayant au moins une fenêtre (31) pour la matrice de distribution de fluide (9), et au moins une fenêtre (30) pour le premier circuit intégré (3).
17. Cartouche de distribution de fluide selon la revendication 16, dans laquelle la matrice de distribution de fluide (9) et le premier circuit intégré (3) sont disposés sur un même côté du substrat flexible (2).
18. Cartouche de distribution de fluide selon la revendication 8, dans laquelle le réseau de plots de connexion électrique (6) doit assurer la connexion à un dispositif hôte.
19. Cartouche de distribution de fluide selon la revendication 18, comprenant un identifiant de cartouche (28) stocké sur le second circuit intégré (17), et un code d'authentification (29), qui correspond à l'identifiant de cartouche (28), stocké sur le premier circuit intégré (3), l'identifiant de cartouche (28) et le

Fig. 1

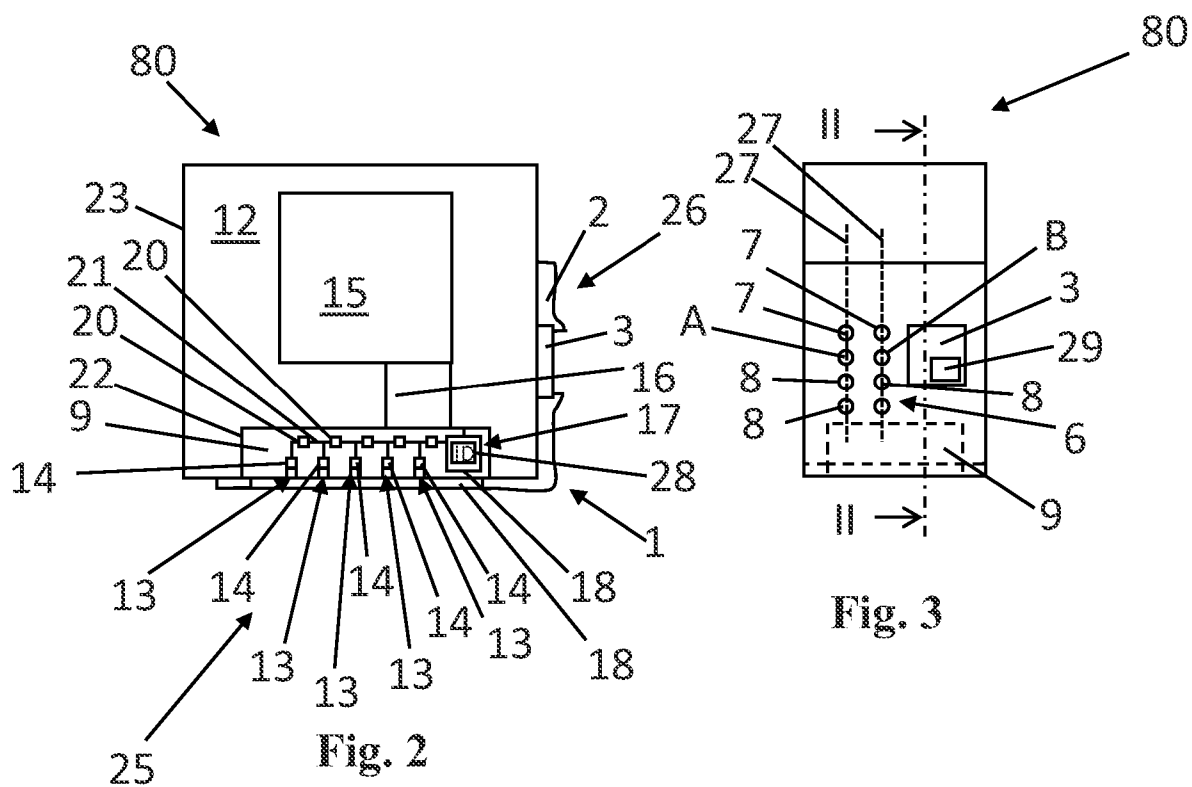
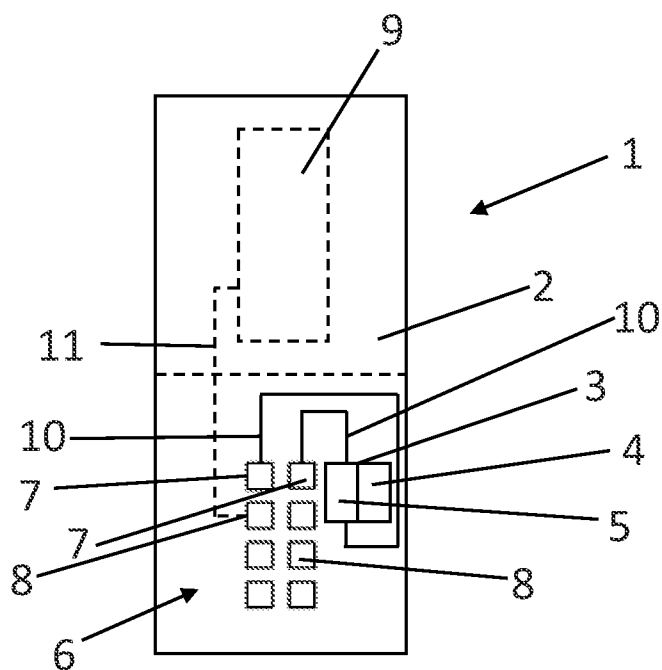
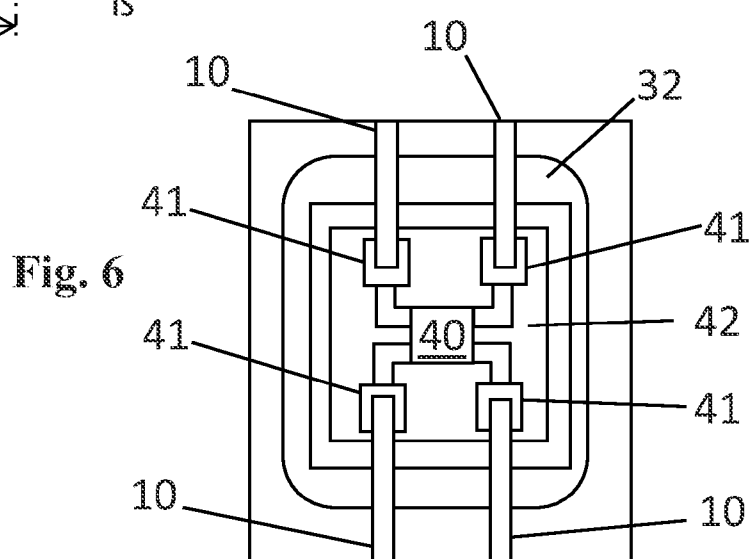
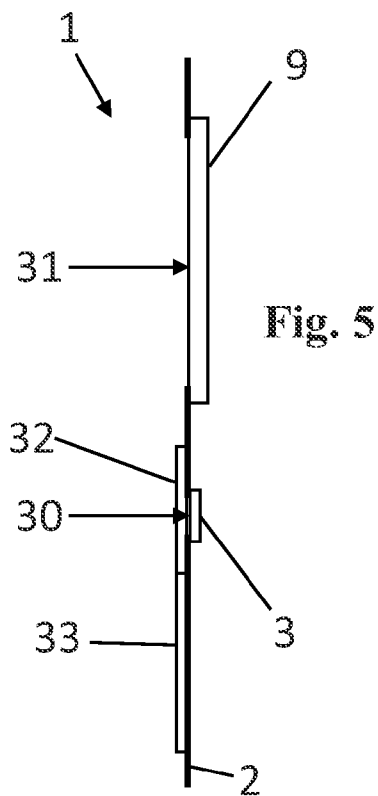
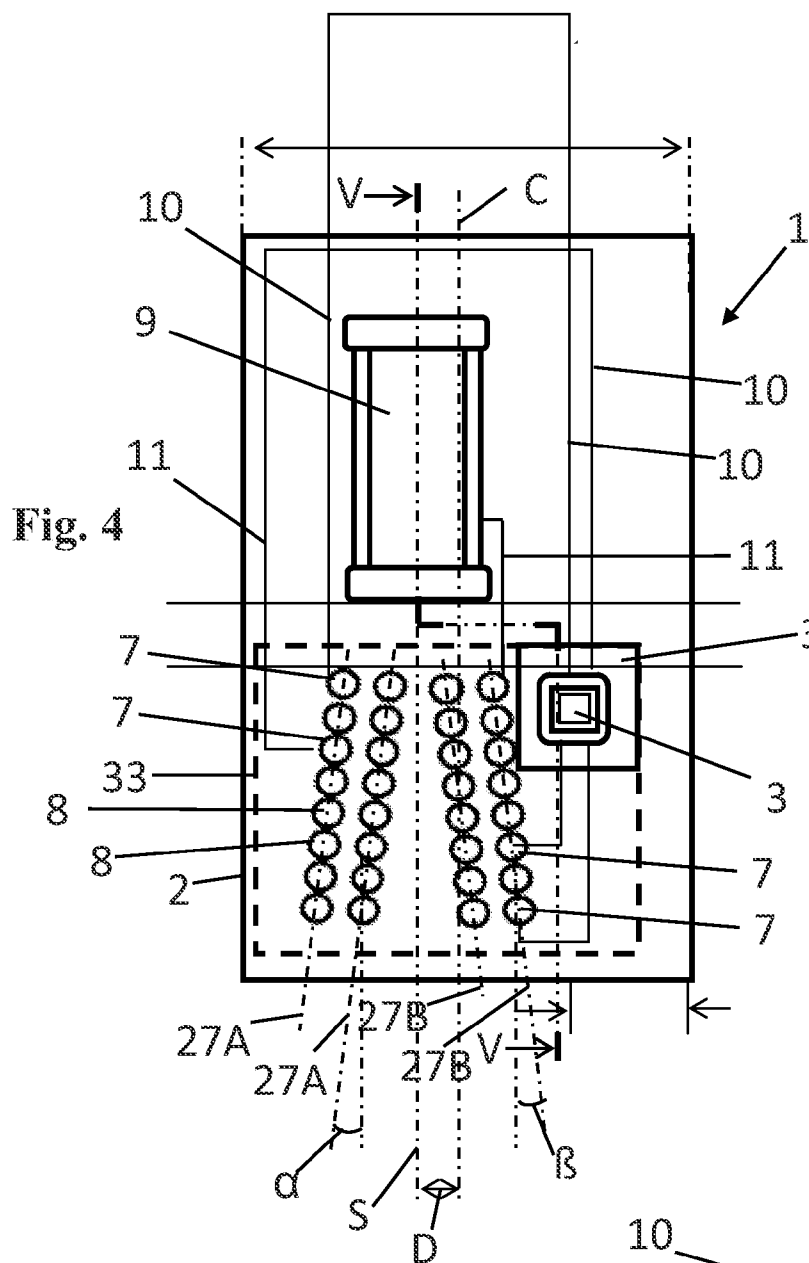


Fig. 2

Fig. 3



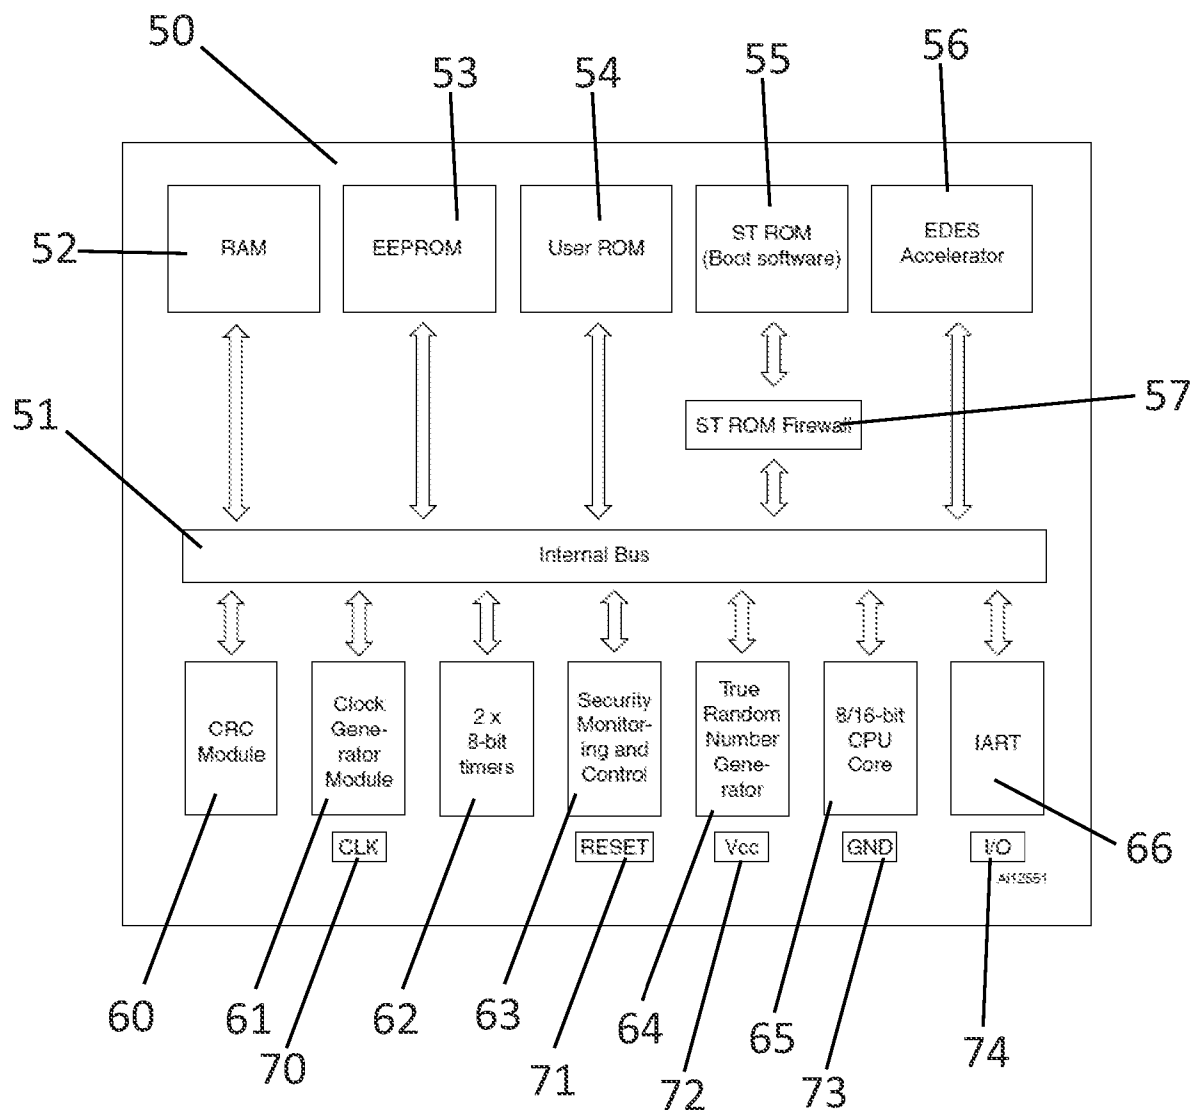


Fig. 7

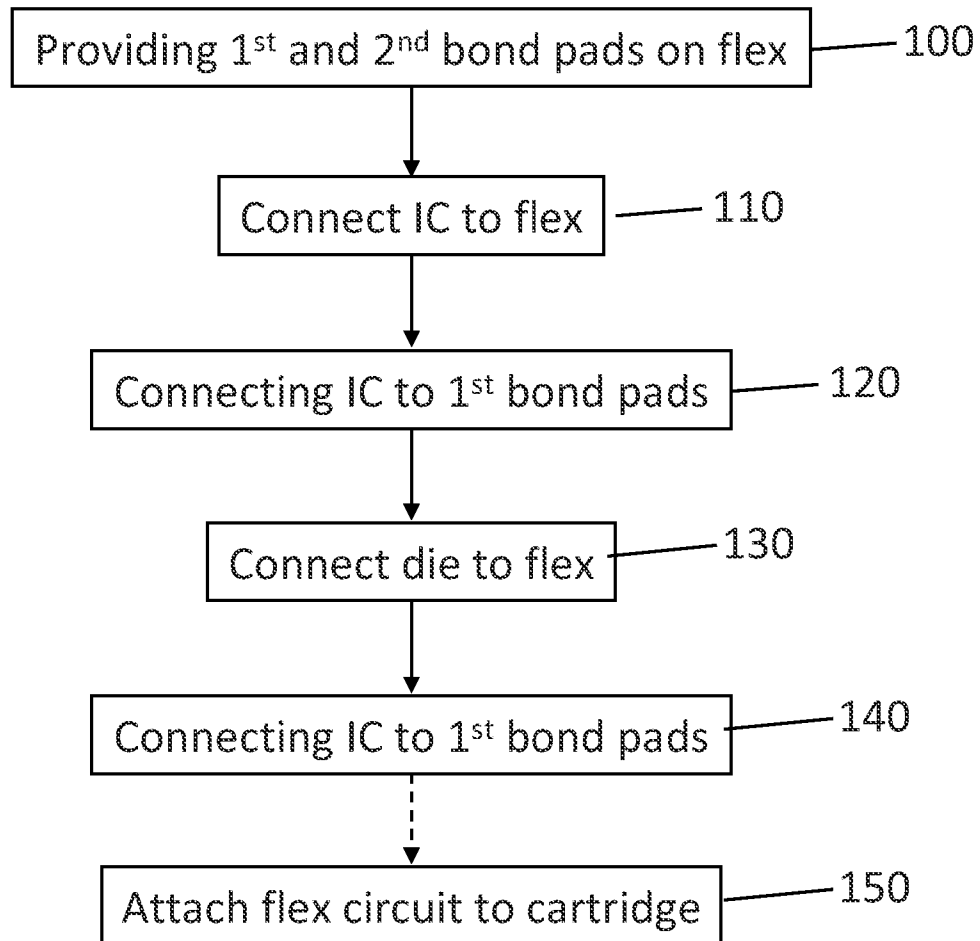


Fig. 8

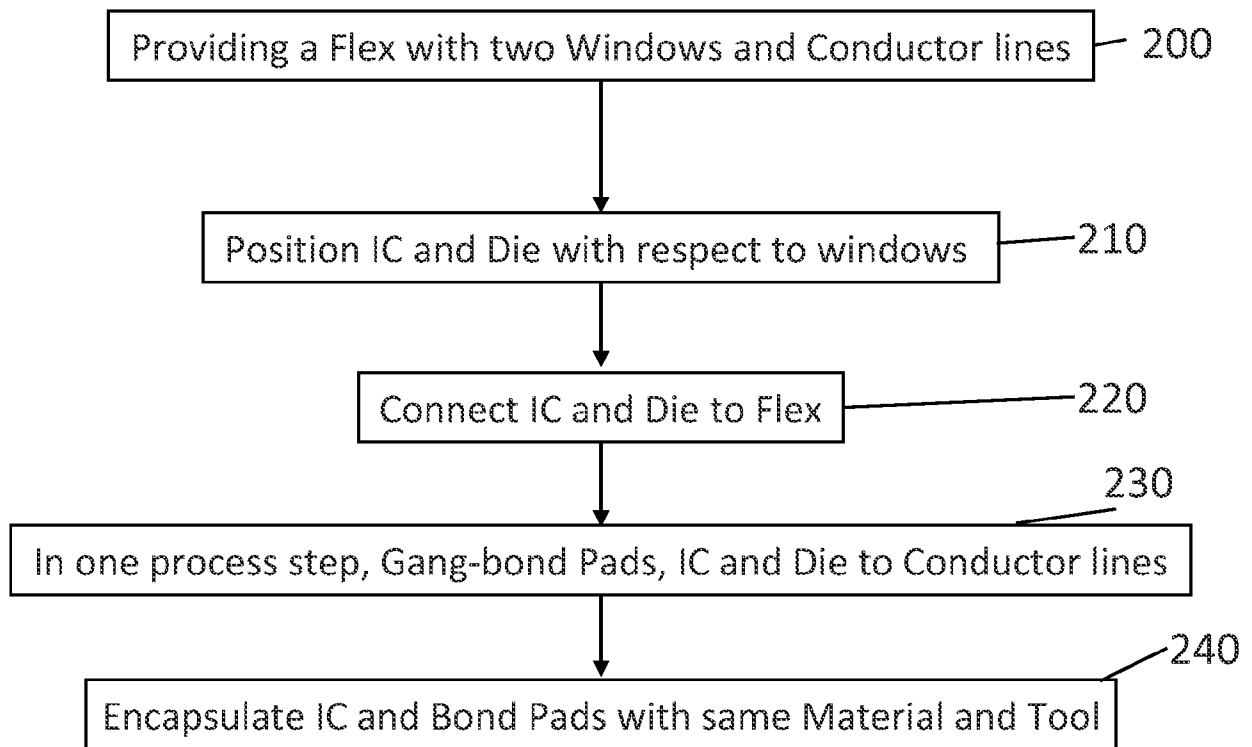


Fig. 9

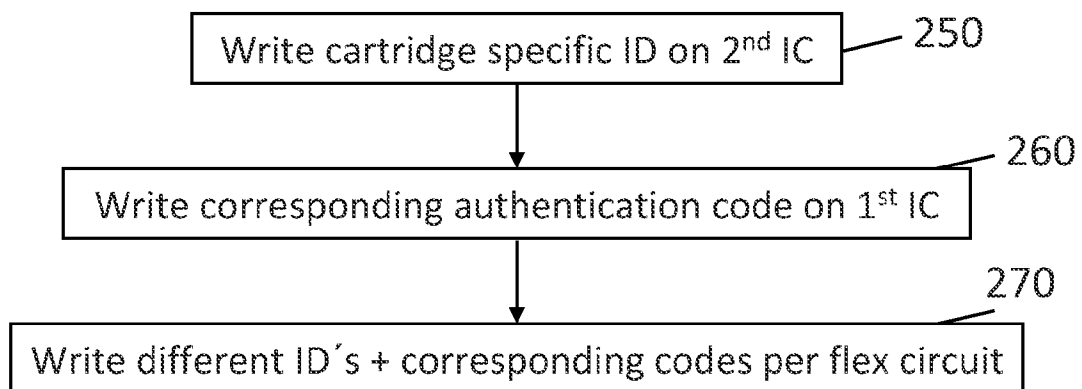


Fig. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5610635 A [0002]

RUGALMAS HORDOZÓ INTEGRÁLT ÁRAMKÖRREL

Szabadalmi igénypontok

1. Rugalmas áramkör folyadékatronhoz, amely a következőket tartalmazza:
rugalmas hordozó (2) amely első vezető vonalakat (10) és második vezető vonalakat (11) tartalmaz,
első integrált áramkör (3), amely csatlakozik a rugalmas hordozóhoz (2), és
elektromos csatlakozó padtömb (6) a rugalmas hordozón (2) elrendezve, az elektromos csatlakozó padtömb (6) biztosítja a csatlakozást egy gazdagép-vezérlőhöz, és első elektromos csatlakozó padokat (7) és második elektromos csatlakozó padokat (8) tartalmaz,
az első vezető vonalak (10) mindegyikének van egy első vége, amely csatlakozik az első elektromos csatlakozó padok (7) egyikéhez és egy másik vége, amely csatlakozik az első integrált áramkörhöz (3), és
a második vezető vonalak (11) mindegyikének van egy első vége, amely csatlakozik a második elektromos csatlakozó padok (8) egyikéhez és egy második vége a folyadékadagoló kockához (9) való csatlakozásra.
2. Az 1. igénypont szerinti rugalmas áramkör, ahol az első integrált áramkör (3) egy biztonságos mikrovezérlő.
3. Az 1. igénypont szerinti rugalmas áramkör, ahol legalább az első és a második elektromos csatlakozó padok (7, 8) egy egyenes vonalon vannak elrendezve.
4. Az 1. igénypont szerinti rugalmas áramkör, ahol
az első integrált áramkör (3) az elektromos csatlakozó padtömb (6) és az önálló rugalmas hordozó (2) egyik oldalsó éle között van elrendezve, és
az elektromos csatlakozó padtömb szimmetriatengelye (S) pedig a rugalmas hordozó (2) hosszanti középvonalával (C) párhuzamosan bizonyos távolságra van elrendezve.



SZTNH-100064193

5. Az 1. igénypont szerinti rugalmas áramkör, ahol az elektromos csatlakozó padtömb (6) tartalmaz legalább egy olyan elektromos csatlakozó padot (7), amelyet csak az első integrált áramkörhöz (3) kell csatlakoztatni, legalább egy olyan elektromos csatlakozó padot (8), amelyet csak a folyadékadagoló kockához (9), valamint legalább egy olyan elektromos csatlakozó padot (A, B), amelyet mind az első integrált áramkörhöz (3), mind pedig a folyadékadagoló kockához (9) csatlakozik,
6. Az 1. igénypont szerinti rugalmas áramkör, amely a következőket tartalmazza:
 - kötőpadok (41) az első integrált áramkörnek (3) olyan vezető vonalhoz (10) való csatlakozásához, amely csatlakozik az elektromos csatlakozó padokhoz (7), és
 - tokozási réteg (32), amely lefedi az első integrált áramkört (3), a kötőpadokat (41) és az elektromos csatlakozó padtömböt (6).
7. Az 1. igénypont szerinti rugalmas áramkör, ahol
 - az önálló hordozó (2) tartalmaz legalább egy első ablakot (30), legalább egy második ablakot (31),
 - az első integrált áramkör (3) igazodik az első ablakhoz (30) és csatlakozik a rugalmas hordozóhoz (2) az első ablak (30) szélei mellett, és
 - a folyadékadagoló kockát (9) a második ablakhoz (31) kell igazítani és a rugalmas hordozóhoz (2) kell csatlakoztatni a második ablak (31) szélei közelében.
8. Folyadékadagoló patron, amely a következőket tartalmazza:
 - folyadéktartály (12),
 - folyadékadagoló kocka (9),
 - az 1. igénypont szerinti rugalmas áramkör, és
 - második integrált áramkör (17), amely bizonyos távolságra van az első integrált áramkörtől (3), csatlakozik a folyadékadagoló kockához (9), valamint csatlakozik az elektromos csatlakozó padtömbnek (6) legalább egy második elektromos csatlakozó padjához (8), a második integrált áramkör (17) a folyadékadagoló kocka (9) jelműködtetőihez (14) van kialakítva.
9. Eljárás folyadékadagoló patronhoz (80) való rugalmas áramkör gyártására, amely a következőket tartalmazza:

első és második elektromos csatlakozó padok (7, 8) padjának (6) biztosítása rugalmas hordozón (2),

első integrált áramkör (3) csatlakoztatása a rugalmas hordozóhoz (2),

folyadékadagoló kocka (9) csatlakoztatása a rugalmas hordozóhoz (2), azzal jellemezve, hogy a rugalmas hordozó (2) első vezető vonalainak (10) első végei az első integrált áramkörhöz csatlakoznak, az első vezető vonalak (10) második végei pedig az első elektromos csatlakozó padokhoz (7) csatlakoznak, a rugalmas hordozó (2) második vezető vonalainak (11) első végei pedig a folyadékadagoló kockához (9) csatlakoznak, a második vezető vonalak (11) második végei pedig a második elektromos csatlakozó padokhoz (8) csatlakoznak.

10. A 9. igénypont szerinti eljárás, a rugalmas hordozó (2) a következőket tartalmazza:

legalább egy ablak (31) egy folyadékadagoló kockához (9),

legalább egy ablak (30) az első integrált áramkörhöz (3), valamint vezető vonalak (10, 11) a kockának (9) és az első integrált áramkörnek (3) az első és második elektromos csatlakozó padokhoz (7, 8) külön-külön való csatlakoztatásához, az eljárás a következőket tartalmazza:

a kocka (9) és az első integrált áramkör (3) elhelyezése a megfelelő ablakok (30, 31) vonatkozásában, és

az első integrált áramkör (3) és a kocka (9) csoportos kötése a megfelelő vezető vonalakhoz (10, 11).

11. A 9. igénypont szerinti eljárás, amely tartalmazza az elektromos csatlakozó padok (7, 8) és az első integrált áramkörnek (3) ugyanazzal az anyaggal, azonos tokozó eszköz segítségével való tokozását.

12. A 9. igénypont szerinti eljárás, ahol az első elektromos csatlakozó padok (7) és a második elektromos csatlakozó padok (8) össze vannak keverve a tömbön (6) belül.

13. A 9. igénypont szerinti eljárás, amely a következőket tartalmazza:

patron ID (28) írása egy második integrált áramkörön (17), amely csatlakozik a folyadékadagoló kockához (9),

a patron ID-nek (28) megfelelő azonosítónak hitelesítési kód (29) írása az első integrált áramkörre (3).

14. A 8. igénypont szerinti folyadékadagoló patron, amely a következőket tartalmazza:
 rugalmas hordozó (2),
 első integrált áramkör (3), amely csatlakozik a rugalmas hordozóhoz (2),
 folyadékadagoló kocka (9), amely csatlakozik a rugalmas hordozóhoz (2), és
 elektromos csatlakozó padtömb (6), amely a rugalmas hordozón (2) van elhelyezve egy gazdavezérlőhöz való csatlakozáshoz, amely tartalmaz első csatlakozó padokat (7), amelyek az első integrált áramkörhöz (3) csatlakoznak első vezető vonalak (10) által, amelyek mindegyikének van egy vége, amelyik az egyik első elektromos csatlakozó padhoz (7) csatlakozik és egy másik vége, amelyik az első integrált áramkörhöz (3) csatlakozik, valamint második elektromos csatlakozó padokat (8), amelyek a folyadékadagoló kockához (9) csatlakoznak második vezető vonalak (11) általános, amelyek mindegyikének van egy vége, amelyik az egyik második elektromos csatlakozó padhoz (8) csatlakozik és egy másik vége, amelyik a folyadékadagoló kockához (9) csatlakozik.
15. A 14. igénypont szerinti folyadékadagoló patron, ahol:
 a rugalmas hordozónak (2) van egy hosszanti középvonala (C),
 az elektromos csatlakozó padtömbnek (6) van egy szimmetriatengely (S) eltolása a hosszanti középvonaltól (C) egy első irányban, és
 az első integrált áramkör (3) az elektromos csatlakozó padtömbtől (6) oldalt és a hosszanti középvonaltól (C) eltolva van elhelyezve egy második irányban az első iránnyal szemben.
16. A 8. igénypont szerinti folyadékadagoló patron, a rugalmas áramkör (1) tartalmaz egy rugalmas hordozót (2), amelynek van legalább egy ablaka (31) a folyadékadagoló kocka (9) számára, valamint legalább egy ablaka (30) az első integrált áramkör (3) számára.
17. A 16. igénypont szerinti folyadékadagoló patron, ahol a folyadékadagoló kocka (9) és az első integrált áramkör (3) a rugalmas hordozónak (2) ugyanazon az oldalán vannak biztosítva.
18. A 8. igénypont szerinti folyadékadagoló patron, ahol az elektromos csatlakozó padtömb (6) egy gazdaeszközhöz való kapcsolat biztosítására van.
19. A 18. igénypont szerinti folyadékadagoló patron, amely a következőket tartalmazza:

patron ID (28), amely a második integrált áramkörön (17) van tárolva, és

hitelesítési kód (29), amely megfelelő a patron ID-nek (28), amely az első integrált áramkörön (3) van tárolva, a patron ID-t (28) és a hitelesítési kódot (29) a gazdaeszköznek egyeztetnie kell.