



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
10.12.2008 Bulletin 2008/50

(51) Int Cl.:
F25B 49/02 ^(2006.01) **F25B 25/00** ^(2006.01)

(21) Application number: **07425351.9**

(22) Date of filing: **04.06.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

- **Beghi, Alessandro**
35126 Padova (IT)
- **Bodo, Christian**
35030 Rubano (IT)
- **Scodellaro, Alessandro**
33033 Codroipo (IT)
- **Albieri, Michele**
33078 San Vito al Tagliamento (IT)

(71) Applicant: **RHOSS S.p.A.**
45031 Arqua' Polesine (IT)

(74) Representative: **Jorio, Paolo et al**
STUDIO TORTA
Via Viotti 9
10121 Torino (IT)

(72) Inventors:
• **Zen, Alessandro**
45100 Rovigo (IT)
• **Cecchinato, Luca**
35131 Padova (IT)

(54) **Control device for a refrigerating machine**

(57) Control device (19) for a refrigerating machine (3) equipped with a compressor (12), this control device (19) having a temperature sensor (20) to provide a first signal (SDLV) representing the delivery temperature (TDLV) of a service fluid (5) in output from the refriger-

ating machine (3), a filter (22) to dampen the dynamics of the first signal (SDLV) and to provide a corresponding damped second signal (SCTRL), and a control unit (21) to control the switching on and off of the compressor (12) as a function of the second signal (SCTRL).

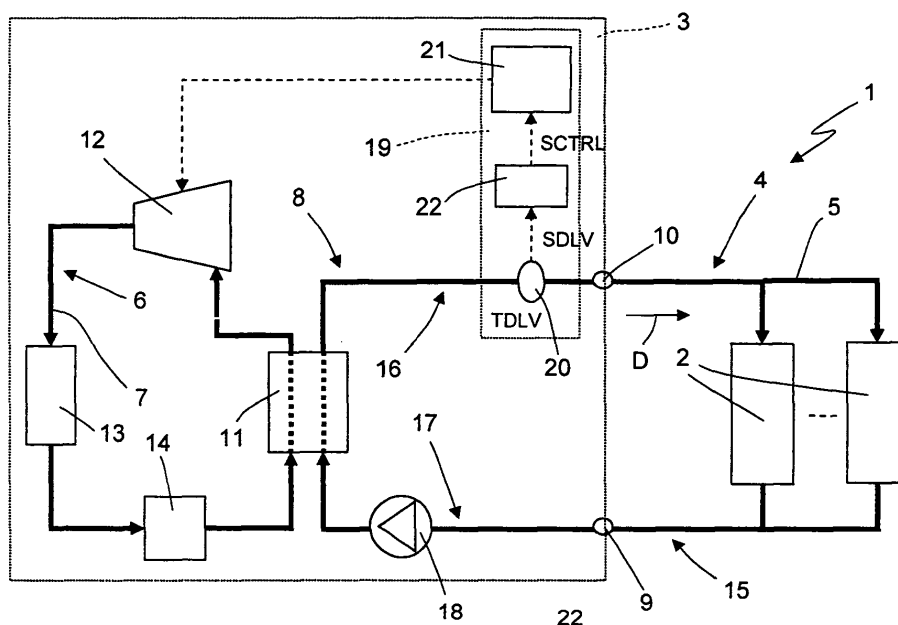


Fig. 1

Description

[0001] The present invention concerns a control device for a refrigerating machine.

[0002] In particular, the present invention finds useful, but not exclusive, application in the regulation of the delivery temperature of a service fluid in output from a water chiller for centralized air-conditioning systems, to which the following description shall make explicit reference without, however, any loss of generality.

[0003] As is known, a centralized air-conditioning system for the control of the ambient temperature in a building comprises a plurality of fan coils, opportunely distributed inside the building and connected with each other via a hydraulic circuit, and a centralized refrigerating machine suited to cool a service fluid, in particular a coolant liquid substantially composed of water, and to convey this service fluid to the various fan coils via said hydraulic circuit.

[0004] This refrigerating machine, normally indicated by the term "chiller", comprises an internal circuit in which a working fluid consisting of a refrigerant circulates, an output circuit that connects to the hydraulic circuit of the air-conditioning system in correspondence to the unit's inlet and outlet to form, together with said hydraulic circuit, a so-called hydronic circuit, a heat exchanger through which the internal circuit and the output circuit pass for heat exchange between the working fluid and the service fluid, and one or more compressors for implementing a refrigeration cycle on the working fluid through compression of the working fluid itself.

[0005] Electronic control devices are also known of for controlling the switching on and off of the compressors on the basis of a direct comparison between a measurement of the temperature of the service fluid in output from the refrigerating machine, or rather the delivery temperature of the service fluid, and a pair of temperature thresholds such that the delivery temperature converges to a predetermined set point value.

[0006] Moreover, the refrigerating machine is typically equipped with a storage tank applied on the delivery branch of the hydronic circuit at a short distance from the heat exchanger to produce thermal inertia in the hydronic circuit that slows down the dynamics of the air-conditioning system in terms of speed of temperature variation in the service fluid so as to avoid phenomena that could induce instability in the system, such as undesired oscillations phenomena in the regulator valves of the fan coils for example. The delivery temperature, on the basis of which the switching on and off of the compressors is controlled, is typically taken downstream of the storage tank.

[0007] The storage tank is usually housed inside the metal casing that encloses the various mechanical components of the refrigerating machine, and so the size and cost of the refrigerating machine heavily depend on its presence. Therefore, for reasons of cost and overall dimensions, it is often attempted to reduce or even eliminate the storage tank, consequently making a refrigerating machine potentially capable of inducing the above-mentioned drawbacks.

[0008] The object of the present invention is to create a control device for a refrigerating machine and a refrigerating machine that allows the drawbacks caused by the absence of the storage tank to be overcome and that, at the same time, are simple and economic to manufacture.

[0009] According to the present invention, a control device for a refrigerating machine and a refrigerating machine in accordance with the attached claims are provided.

[0010] The present invention shall now be described with reference to the attached drawings, which illustrate a non-limitative example of embodiment, in which:

- Figure 1 shows a block diagram of an air-conditioning system comprising a refrigerating machine equipped with a control device in accordance with the present invention; and
- Figure 2 shows a table of values with which to configure certain parameters of the control device in Figure 1.

[0011] In Figure 1, reference numeral 1 generally designates a block diagram showing the principles of an air-conditioning system comprising a plurality of fan coils 2 opportunely distributed inside a building (not shown) for which it is wished to control the ambient temperature, and a refrigerating machine 3 suited to cool a service fluid 5, in particular a coolant liquid substantially composed of water, and make it circulate through a hydraulic circuit 4 that connects the fan coils 2 to the refrigerating machine 3 itself.

[0012] The refrigerating machine 3 comprises an internal circuit 6, in which a working fluid 7 consisting of a refrigerant circulates, and an output circuit 8, which connects to the hydraulic circuit 4 of the system 1 in correspondence to an inlet 9 and an outlet 10 of the refrigerating machine 3. A series of devices are arranged along the internal circuit 6 to implement a refrigeration cycle on the working fluid 7, and in particular, a first heat exchanger 11 through which the internal circuit 6 and the output circuit 8 pass and which functions as an evaporator to make the working fluid 7 evaporate at low pressure, absorbing heat from the service fluid 5; a compressor 12, preferably of the scroll type, to carry out adiabatic compression on the working fluid 7 in the vapour state; a second heat exchanger 13 functioning as a condenser, that is to make the working fluid 7 condense so as to release the previously absorbed heat to the outside, and an expansion valve 14 to cool the working fluid 7 and make it partially evaporate so that it is ready for another cycle.

[0013] The hydraulic circuit 4 of the system 1 and the output circuit 8 of the refrigerating machine 3 form a so-called hydronic circuit 15, comprising a delivery branch 16, along which the service fluid 5 circulates in a direction D from the

heat exchanger 11 to the fan coils 2, and a return branch 17, along which the service fluid 5 returns to the heat exchanger 11. Circulation of the service fluid 5 in direction D is guaranteed by a pump 18 placed along the return branch 17.

[0014] In addition, the refrigerating machine 3 comprises a control device 19 to control the switching on and off of the compressor 12 based on the delivery temperature TDLV of the service fluid 5. More in detail, the control device 19 comprises a temperature sensor 20 placed along the delivery branch 16 at the outlet 10 of the refrigerating machine 3 to provide a first signal SDLV representing the delivery temperature TDLV and an electronic control unit 21 suited to switch the compressor 12 on and off on the basis of a comparison between a measurement of the delivery temperature TDLV, provided via the SDLV signal, and a pair of temperature thresholds such that the delivery temperature TDLV converges to a delivery temperature set point between the two temperature thresholds.

[0015] In accordance with the present invention, the control device 19 comprises a filter 22 connected in input with the sensor 20 to receive the signal SDLV and in output with the electronic control unit 21 to supply a corresponding signal SCTRL obtained by damping the dynamics of the SDLV signal according to a model that reconstructs the dynamic behaviour of a common storage tank. The SCTRL signal represents a delivery temperature with dampened dynamics, in the time domain, on the basis of which control of the compressor 12 is performed. In other words, a delivery temperature measurement is extracted from the SCTRL signal and compared with the above-mentioned temperature thresholds to switch the compressor 12 on or off.

[0016] More precisely, the filter 22 is modelled as a first order system with delay, of which the transfer function to the Laplace transform domain is given by:

$$F(s) = \frac{e^{-sT}}{1 + s \cdot P}, \quad (1)$$

where T defines a delay between the input signal SDLV and the output signal SCTRL, and P represents a pole of the transfer function.

[0017] Therefore, by opportunely sizing the parameters T and P of function (1), it is possible to define a virtual storage tank that simulates the presence of a storage tank of the desired characteristics.

[0018] Indeed, two different phenomena occur, to differing extents, inside a storage tank: stratification, which consists in a division of the service fluid into layers according to the temperature, and mixing, which consists in the fact that part of the incoming service fluid is typically colder than that inside and absorbs part of the heat of the latter, converging to a temperature that can be defined as one of equilibrium. Consequently, the delay T represents the delay due to the stratification and parameter P is proportional to a mixing coefficient, which defines the volume percentage of the service fluid 5 in the tank that is affected by the mixing phenomena, at the density of the service fluid 5 in the hydronic circuit 15 expressed in kg/m³ and at a storage volume expressed in m³ that it is wished to simulate, and is inversely proportional to the mass flow of the service fluid expressed in kg/s.

[0019] Figure 2 shows a table in which a series of values are listed that the parameters T and P must assume in order to simulate a corresponding series of tank volume values expressed in L/kW, i.e. expressed in litres with reference to the nominal power of the compressor 12. These values have been determined through experimental tests, applying a method known as the area method, which allows a system to be identified via its response to an input signal, such as a unitary step for example. The best compromise between damping the dynamics of the system 1 and the regulating speed of the delivery temperature TDLV is obtained by sizing the filter 22 for intermediate tank volumes, between 4 and 6 L/kW for example, and preferably for a tank volume value equal to 5 L/kW, to which there is a corresponding delay T substantially equal to 32.6 s and a parameter P substantially equal to 70.8 s.

[0020] It is worthwhile to note that the diagram of the principle of the refrigerating machine 3 shown in Figure 1 can also generically describe a machine suited to heat the service fluid 5 for the purpose of heating the environments in which the fan coils 2 are placed, for example a refrigerating machine 3 of the type operating as a heat pump. In this type of refrigerating machine 3, the compressor 12 is configured so as to perform the refrigeration cycle in the opposite sense to that previously described, such that the heat exchanger 11 functions as a condenser to transfer heat from the working fluid 7 to the service fluid 5 and the heat exchanger 13 functions as an evaporator. Furthermore, the sizing of the filter 22 is virtually independent of the fact of cooling or heating the service fluid 5. Thus, the control device 19 provided with the filter 22 is also applicable to a refrigerating machine suited to heat the service fluid 5.

[0021] The main advantage of the above-described control device 19 for a refrigerating machine 3 is to allow the elimination of the storage tank on the delivery branch 16 of the hydronic circuit 15, whilst still guaranteeing the necessary stability of the air-conditioning system 1 thanks to the presence of the filter 22, which defines a virtual storage tank.

Claims

1. Control device for a refrigerating machine (3) comprising a compressor (12), the control device (19) comprising temperature sensor means (20) to provide a first signal (SDLV) representing the delivery temperature (TDLV) of a service fluid (5) in output from the refrigerating machine (3) and a control unit (21) suited to switch the compressor (12) on and off according to the first signal (SDLV), and being **characterized in that** it comprises signal damping means (22) to dampen the dynamics of the first signal (SDLV) and to supply a corresponding dampened second signal (SCTRL) suitable for being fed in input to the control unit (21) to control the said switching on and off of the compressor (12).

2. Device according to claim 2, in which the said damping means include a first order filter (22) with delay to simulate an accumulation of said service fluid (5).

3. Device according to claim 2, in which said filter (22) has a Laplace transform domain transfer function given by:

$$F(s) = \frac{e^{-sT}}{1 + s \cdot P} ,$$

wherein T defines a delay between said first signal (SDLV) in input to the filter and said second signal (SCTRL) in output from the filter (22) and P is an accumulation parameter proportional to a storage volume of service fluid (5) that it is wished to simulate and to a mixing coefficient of the service fluid (5) in said storage volume.

4. Device according to claim 3, in which said filter (22) is sized for a value of said storage volume to simulate in the range from 4 to 6 L/kW.

5. Device according to claim 4 or 5, in which said delay (T) between said first signal (SDLV) and said second signal (SCTRL) is equal to 32.6 s and said accumulation parameter (P) is equal to 70.8 s.

6. Refrigerating machine (3) comprising a compressor (12) and a control device (19) for switching the compressor (12) on and off according to a measurement of the delivery temperature (TDLV) of a service fluid (5) in output from the refrigerating machine (3), and **characterized in that** the control device (19) is of the type asserted in one of the claims 1 to 5.

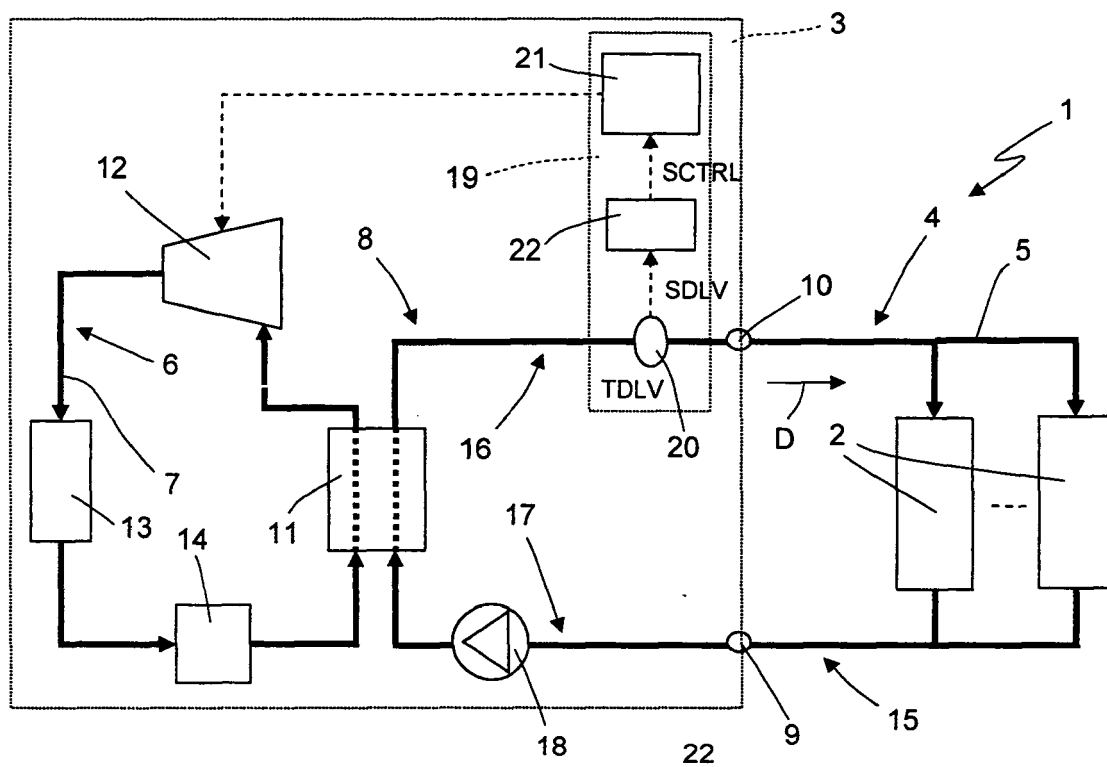


Fig. 1

L/kW	T	B
1	7.69	13.99
2	13.71	28.41
3	19.73	42.82
4	26.61	56.38
5	32.62	70.79
6	38.64	85.21
7	44.66	99.63
8	50.67	114.05
9	56.67	128.47
10	62.64	142.89

Fig. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 42 5351

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/235669 A1 (CHO SUNG-HO [KR]) 27 October 2005 (2005-10-27) * paragraphs 16,22,42; figures 1-7 *	1	INV. F25B49/02
X	US 4 292 813 A (PADDOCK STEPHEN W) 6 October 1981 (1981-10-06) * column 2, line 10 - column 2, line 41; figures 1-7 *	1	ADD. F25B25/00
X	WO 2006/012720 A (MULTIBRAS ELETRODOMESTICOS SA [BR]; PIMENTEL FABIO RIBEIRO [BR]; MEZAV) 9 February 2006 (2006-02-09) * page 5, line 17 - page 6, line 35; figures 1-3 *	1	
A	US 5 088 298 A (FUJII KAZUO [JP]) 18 February 1992 (1992-02-18) * column 7, line 30 - column 8, line 21; figure 6 *	2	
			TECHNICAL FIELDS SEARCHED (IPC)
			F25B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 13 November 2007	Examiner Szilagyi, Barnabas
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 42 5351

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-11-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005235669 A1	27-10-2005	CN 1690632 A KR 20050103097 A	02-11-2005 27-10-2005
US 4292813 A	06-10-1981	CA 1153447 A1 JP 1022923 B JP 1539277 C JP 55124816 A	06-09-1983 28-04-1989 16-01-1990 26-09-1980
WO 2006012720 A	09-02-2006	NONE	
US 5088298 A	18-02-1992	JP 2696398 B2 JP 3025023 A	14-01-1998 01-02-1991