

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number
WO 02/074007 A1

(51) International Patent Classification⁷: **H04R 1/28**

(21) International Application Number: PCT/FI02/00104

(22) International Filing Date: 11 February 2002 (11.02.2002)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20010313 19 February 2001 (19.02.2001) FI

(71) Applicant (for all designated States except US): **GEN-ELEC OY** [FI/FI]; Olvitie 5, FIN-74100 Iisalmi (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MARTIKAINEN, Ilpo** [FI/FI]; Immolantie 563, FIN-73110 Mäntylähti (FI).


(74) Agent: **SEPPO LAINE OY**; Itämerenkatu 3 B, FIN-00180 Helsinki (FI).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BASS-REFLEX LOUDSPEAKER SYSTEM AND METHOD OF MANUFACTURING THE SAME

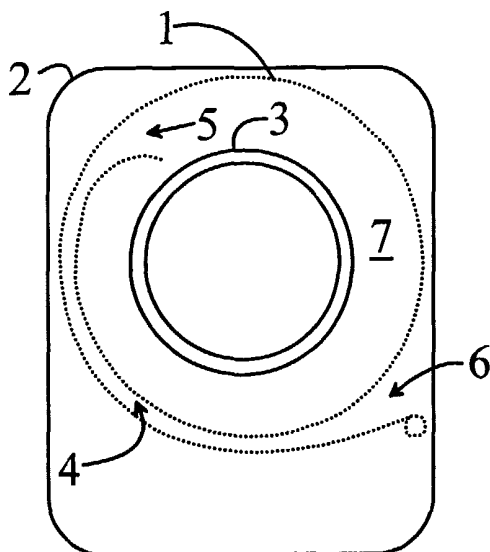

(57) Abstract: The present invention relates to a bass-reflex loudspeaker construction and a method of manufacturing the same. The loudspeaker construction comprises a loudspeaker chamber (7) delimited by a loudspeaker enclosure structure (1,2,8), a reflex duct (4) communicating with the loudspeaker chamber (7) so as to connect the loudspeaker chamber to the exterior environment of the loudspeaker enclosure, and at least one loudspeaker unit (3) mounted on the loudspeaker enclosure structure (1,2,8) so as to form a portion of the delimiting walls of the loudspeaker chamber (7). According to the invention, the loudspeaker enclosure structure comprises a curved spiral structure (1) closed from its both sides by gable elements (2, 8) so as to form the loudspeaker chamber (7), and the reflex duct (4) is adapted at least partially running on the outer periphery of the spiral structure.

WO 02/074007 A1

Bass-reflex loudspeaker system and method of manufacturing the same

The present invention relates to a bass-reflex loudspeaker construction according to the preamble of claim 1.

The invention also relates to a method according to the preamble of claim 9 for manufacturing a bass-reflex loudspeaker structure.

The invention is in particular suited for use in bass-range loudspeakers.

Among the requirements set for loudspeaker enclosures in the reproduction of low-frequency sounds, the most important factors are related to the capability of the enclosure to take internal pressure variations with deformations as small as possible (requiring stiffness) and the freedom of the enclosure from structural resonances. Generally, the enclosure is made from planar panels that are supported and stiffened from within the enclosure. As curved surfaces are structurally much stiffer than planar surfaces, also spherical, cylindrical and other equivalent shapes have been employed in the structures of loudspeaker enclosures.

One basic loudspeaker enclosure construction for reproduction of low-frequency sounds is the bass-reflex enclosure. Herein, the enclosure opening made for the loudspeaker unit is complemented with another opening that frequently has a duct connected thereto. Then, the air contained in the duct forms an acoustic impedance (a mass), while the air contained in the enclosure forms an acoustic capacitance (a spring), and the resonant frequency of this combination is dimensioned to cooperate with the loudspeaker unit. At the lowest frequencies, the combination exhibits a resonance, whereby the resonant circuit acts as a load to the loudspeaker unit. Then the excursion of the loudspeaker unit is small and the major portion of the radiation takes place via the reflex opening. When the goal is to reproduce sound in the very low-frequency range, the resonant frequency of the overall system must be lowered by way of either increasing the volume of the enclosure or the acoustic mass

of air contained in the reflex duct. In many cases, a large size of the enclosure becomes a disadvantage that must be avoided, whereby the length of the reflex duct must be made long. Since the radiation occurring at the resonant frequency takes place via the reflex duct, the desired acoustical power output affects the flow velocity of air in the duct. If the flow velocity in the duct increases above a given limit value, the flow becomes turbulent thus evoking sound distortion and compression. Hence, the minimum cross section of the duct is determined by the desired acoustical power output. When a higher acoustical power is desired, the duct cross section area must be increased but the duct becomes longer consequently. A long duct cannot be fitted straight into an enclosure and a conventional approach has been to fold the duct in different angles, but abrupt bends cause turbulence even at small air flow velocities. The dimensioning of a bass-reflex loudspeaker and electrotechnical solutions to the problems thereof have been described widely in the literature of the art and, e.g., in European patent EP 0 322 686.

It is an object of the present invention to overcome the problems of the prior art and to provide an entirely novel type of bass-reflex loudspeaker construction and a method for manufacturing the same.

The goal of the invention is achieved by way of forming at least the reflex duct portion of the loudspeaker enclosure from a curved element having a spiraling shape in its sectional plane and gable elements placed about its both sides. According to the invention, the reflex duct is composed so that outer shell of the curved portion forms at least a portion of the reflex duct wall, while the spiralingly "wrapped" extension of the duct outer shell forms the other wall of the reflex duct. In other words, the envelope of the loudspeaker enclosure and the reflex duct is in practice formed from a single banded structure that is bent into a spiral shape so that the reflex duct is created by the gap remaining between the coiled turns of the spiral. In an embodiment which is very typical to the invention, the reflex duct is formed by a channel whose width is equal to the width of the curved element and whose sides are delimited by the gable elements.

More specifically, the bass-reflex loudspeaker construction according to the invention is characterized by what is stated in the characterizing part of claim 1.

Furthermore, the method according to the invention is characterized by what is stated in the characterizing part of claim 9.

The invention offers significant benefits.

The structure becomes very stiff thus being free from disturbing resonances over the operational frequency range. The length of the reflex duct is maximized by locating it to the outer periphery of the enclosure, yet avoiding discontinuities even in a long reflex duct. Hence, the loudspeaker construction can be made very compact inasmuch the reflex duct portion can be located optimally. The construction is further optimized thereby that the reflex duct serves as a portion of the load-bearing members of the loudspeaker construction. Turbulence is minimized due to the spiral, smoothly formed reflex duct, whereby also sound distortion and compression are reduced. Furthermore, a plurality of variations according to the invention can avail of very advantageous solutions in the sense of manufacturing technology, since the loudspeaker construction typically consists of only three major components in addition to the loudspeaker unit, or even less when using certain manufacturing technologies.

In the following, the invention will be examined in greater detail with the help of exemplary embodiments by making reference to the appended drawings, in which

FIG. 1 shows a front view of a first embodiment of a bass-reflex loudspeaker construction according to the invention;

FIG. 2 shows the loudspeaker construction of FIG. 1 viewed from the right side;

FIG. 3 shows a front view of a second embodiment of a bass-reflex loudspeaker construction according to the invention; and

FIG. 4 shows the loudspeaker construction of FIG. 3 in a viewed from the right side.

In the embodiment shown in FIG. 1, a loudspeaker unit 3 is mounted on a front wall 2. Behind the front wall 2 is shown by a dashed line the curved portion 1 of the loudspeaker enclosure that is implemented as a spiral structure. To the interior of the spiral structure 1 is formed a loudspeaker chamber 7 wherefrom to the exterior of the loudspeaker is routed a reflex duct 4 that has a reflex duct inlet end 5 placed in the loudspeaker chamber 7 and a reflex duct outlet end 6 opening to the exterior. Due to flow technical reasons, the cross sections of both the inlet end 5 and the outlet end 6 are made larger than the cross section of the center portion of the reflex duct 4. The loudspeaker construction is designed for maximum stiffness with the exception of the active loudspeaker unit 3 that acts as the acoustical generator of the system. The loudspeaker unit 3 itself serves as a delimiting portion of the loudspeaker chamber 7.

As shown in FIG. 2, the loudspeaker chamber 7 is delimited by its spiral portion 1, its front wall panel 2, its rear wall panel 8, which enclose the spiraling duct from its both sides, and by the loudspeaker unit 3. In FIGS. 1 and 2 the reflex duct outlet opening 6 is drawn so as to exit to the right side, but according to the invention the reflex duct outlet opening can be made to exit in any direction. Further, while in the diagrams the reflex duct 4 is drawn spiraling in a counterclockwise direction when viewed from the side of the front wall panel 2, obviously the opposite direction (that is, clockwise) is also possible.

In the benefit of certain manufacturing technologies, the front wall panel 2 and the rear wall panel 8 are located parallel to each other and perpendicular to the longitudinal axis of the curved spiral portion 1, but this detail is obviously irrelevant to the function of the present invention. Loudspeaker constructions often aim to provide a spectacular look, it is thus possible, e.g., to enclose the curved spiral portion 1 with gable elements that may be inclined in any angle in regard to each other. Neither need the gable elements 2 and 8 be planar with the provision that the loudspeaker chamber 7 and the reflex duct 4 are manufactured into a nonleaking

entity. Also the operating position of the loudspeaker unit may be chosen freely, e.g., so that the loudspeaker construction can be placed in a horizontal position resting on the gable element 8 or on suitable legs mounted to the gable element 2.

The embodiment shown in FIGS. 3 and 4 is otherwise entirely equivalent with that of FIGS. 1 and 2 with the exception that herein the loudspeaker unit 3 is located on the curved spiral portion 1. Since the joint between the loudspeaker unit 3 and the curved wall portion 1 must naturally be air-tight, this mounting technique needs a seal member not shown in the diagrams between the loudspeaker unit 3 and the curved portion 1.

Using a known formula, the length of the reflex duct can be dimensioned on the basis of the volume of chamber 7 and the dimensions of the reflex duct:

$$f_r = c(S / lV)^{1/2} / 2\pi$$

wherein

f_r = resonant frequency

c = speed of sound

S = cross-sectional area of reflex duct

l = length of reflex duct

V = volume of loudspeaker chamber.

As an example of loudspeaker dimensioning on the basis of the above formula, the following dimensions are obtained for a loudspeaker enclosure such as those shown in FIGS. 1-4:

Resonant frequency f_r	29 Hz
Diameter of curved portion 1	340 mm
Width of curved portion	250 mm

Height of front (and rear) wall panel	470 mm
Height of reflex duct 4	15 mm
Length of reflex duct	580 mm
Volume of chamber 7	22 l

Due to the spiral construction, the present invention is characterized in that the reflex duct 4 has a monotonously curved shape whose width is equal to the width of the curved portion 1. However, without departing from the scope and spirit of the invention, the width of the duct 4 may be reduced if so required, e.g., in the vicinity of the wall plates 2 and 8. While in the exemplary embodiments illustrated in the figures, the reflex duct 4 has a length substantially equal to half the perimeter of a circle, it is possible to allow the reflex duct length to vary within wide limits as dictated by the other design parameters (formula, diameter of loudspeaker unit, cutoff frequency of the loudspeaker unit and the like). Accordingly the reflex duct 4 may run even longer than a full circle about the outer perimeter of the curved portion 1 and its extension. In this special case, the reflex duct is not entirely placed along the outer perimeter of the curved portion 1.

Instead of having a cylindrically coiled wall, the curved portion 1 may also be conical.

When using casting, deep drawing or a similar technique, the curved portion may be formed from two mutually jointed parts, whereby the above-described division of the manufactured parts into a curved spiral part and its gable elements is not applicable. It may be further contemplated that the loudspeaker enclosure is designed to have a spherical shape, whereby it lacks any actual gable elements. Herein, while the joint between the manufactured parts may obviously be located in any place of the loudspeaker construction, the joint is typically made along the center plane of the piece.

The curved portion 1 can be made of a metal, plastic, cardboard or the like. Due to its curved shape even a very thin structure is stiff, and its resonant frequency is in the

order of several hundred Hz, which is fully satisfactory in the reproduction of bass range sounds. By laminating the curved portion 1 from several layers of which at least one layer is lossy, it is possible to obtain a construction with the added benefit of attenuation of resonance frequencies.

The loudspeaker construction shown in FIGS. 1-4 may be designed to be independent, to function as a so-called subwoofer optimized for the bass range only or, alternatively to serve as a component in a loudspeaker construction covering the sound frequency band.

Typically, the loudspeaker construction according to the invention can also incorporate an amplifier.

What is claimed is:

1. A bass-reflex loudspeaker construction comprising

- a loudspeaker chamber (7) delimited by a loudspeaker enclosure structure (1, 2, 8),
- a reflex duct (4) connected to the loudspeaker chamber (7) which connects the loudspeaker chamber to the space outside the loudspeaker enclosure, and
- at least one loudspeaker unit (3) mounted to the loudspeaker enclosure structure (1, 2, 8) which forms a portion of the structure delimiting the loudspeaker chamber (7),

characterized in that

- the loudspeaker enclosure structure (1, 2, 8) comprises a curved spiral structure (1) which is closed at both ends so as to form the loudspeaker chamber (7), and
- the reflex duct (4) is formed at least partially on the outer periphery of spiral structure (1).

2. The loudspeaker construction of claim 1, **characterized** in that the curved spiral structure (1) is delimited at its both ends by gable elements (2, 8).

3. The loudspeaker construction of claim 1, **characterized** in that the curved spiral structure (8) is formed into a portion of a cast structure.

4. The loudspeaker construction of claim 1, **characterized** in that the enclosure structure comprises a reflex duct (4) which is entirely on the outer periphery of the

spiral structure (1).

5. The loudspeaker construction of claim 1 or 2 or 3 or 4, **characterized** in that the reflex duct (4) has a width that is equal to the width of the spiral structure (1).

6. The loudspeaker construction of claim 1 or 2 or 3 or 4 or 5, **characterized** in that the gable elements (2, 8) are parallel.

7. The loudspeaker construction of claim 1 or 2 or 3 or 4 or 5 or 6, **characterized** in that the gable elements (2, 8) are perpendicular to the longitudinal axis of the spiral structure (1).

8. The loudspeaker construction of claim 1 or 2 or 3 or 4 or 5 or 6 or 7, **characterized** in that the spiral structure (1) is fabricated of a laminated structure wherein at least one is a lossy layer.

9. A method of constructing a bass-reflex loudspeaker construction comprising

- forming a loudspeaker chamber (7) using a loudspeaker enclosure structure (1, 2, 8),
- connecting to the loudspeaker chamber (7) a reflex duct (4) that connects the loudspeaker chamber (7) to the space outside the loudspeaker enclosure, and
- mounting on the loudspeaker enclosure structure (1, 2, 8) at least one loudspeaker unit (3) that forms a portion of the construction delimiting the loudspeaker chamber (7),

characterized in that

- the loudspeaker enclosure structure (1, 2, 8) is formed of a curved spiral

structure (1) closed at its ends so as to form the loudspeaker chamber (7),
and

- the reflex duct (4) is formed at least partially onto the outer periphery of the spiral structure (1).

10. The method of claim 9, **characterized** in that the curved spiral structure (1) is closed at its both ends by gable elements (2, 8).

11. The method of claim 9, **characterized** in that the curved spiral structure (8) is formed into a portion of a cast structure.

12. The method of claim 9 or 10 or 11, **characterized** in that the reflex duct (4) is formed entirely onto the outer periphery of the spiral structure (1).

13. The loudspeaker of claim 9 or 10 or 11 or 12, **characterized** in that the reflex duct (4) is arranged to have a width that is equal to the width of the spiral structure (1).

14. The method of claim 9 or 10 or 11 or 12 or 13, **characterized** in that the gable elements (2, 8) are placed in parallel.

15. The method of claim 9 or 10 or 11 or 12 or 13 or 14, **characterized** in that the gable elements (2, 8) are placed perpendicularly to the longitudinal axis of the spiral structure (1).

16. The method of any foregoing claim, **characterized** in that the spiral structure (1) is fabricated of a laminated structure wherein at least one layer is lossy.

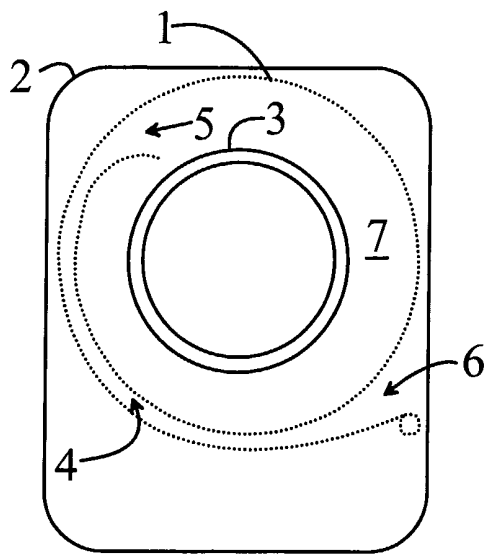


Fig. 1

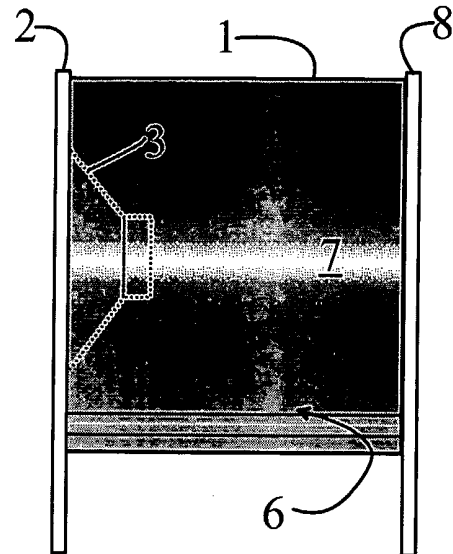


Fig. 2

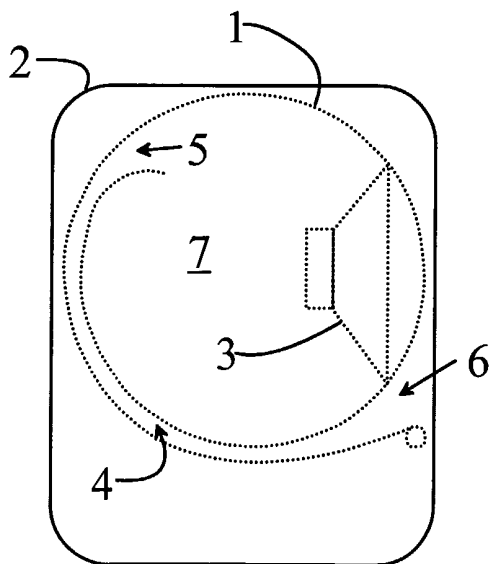


Fig. 3

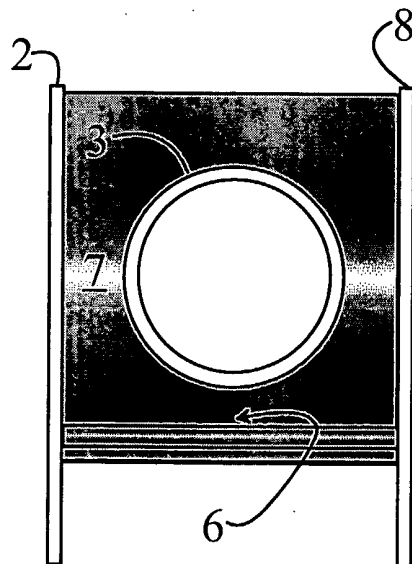


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 02/00104

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04R 1/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3730291 A (GOECKEL), 1 May 1973 (01.05.73), figure 4 --	1-16
X	US 3923124 A (HANCOCK), 2 December 1975 (02.12.75), figures 3-5 --	1-16
P,X	JP 2001-157286 A (UTOPIA KIKI KK), 8 June 2001 (08.06.01), figures 1-2 --	1-16
A	JP 2000-78681 A (SONY CORP), 14 March 2000 (14.03.00), figures 1-6 -- -----	1-16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 June 2002

Date of mailing of the international search report

13-06-2002

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Leif Vingård / JA A
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/05/02

International application No.

PCT/FI 02/00104

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	3730291	A	01/05/73	AT 305403 B BE 771389 A CH 539372 A DE 2041012 A,B FR 2102317 A,B GB 1349489 A LU 63280 A NL 7111302 A NO 133344 B,C SE 370306 B,C	15/01/73 31/12/71 15/07/73 24/02/72 07/04/72 03/04/74 09/09/71 22/02/72 05/01/76 07/10/74
US	3923124	A	02/12/75	NONE	
JP	2001-157286	A	08/06/01	NONE	
JP	2000-78681	A	14/03/00	NONE	