



(51) International Patent Classification:

H01L 43/08 (2006.01) *H01L 43/12* (2006.01)
H01L 43/10 (2006.01)

(21) International Application Number:

PCT/US2018/021007

(22) International Filing Date:

06 March 2018 (06.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/477,288 03 April 2017 (03.04.2017) US

(71) Applicant: **HEADWAY TECHNOLOGIES, INC**
[US/US]; 678 South Hillview Drive, Milpitas, CA 95035 (US).(72) Inventors: **LIU, Huanlong**; 649 Garland Avenue, Sunnyvale, CA 94086 (US). **LEE, Yuan-Jen**; 35558 Morley Place, Fremont, CA 94536 (US). **ZHU, Jian**; 3582 Tumble Way, San Jose, CA 95132 (US). **JAN, Guenole**; 448 Coe Avenue, San Jose, CA 95125 (US). **THOMAS, Luc**; 1369 Camino Robles Way, San Jose, CA 95120 (US). **WANG, Po-Kang**; 766 Vista Grande Avenue, Los Altos, CA 94024

(US). **TONG, Ru-Ying**; 1730 Las Joyas Court, Los Gatos, CA 95032 (US). **IWATA, Jodi, Mari**; 2845 Brittan Avenue, San Carlos, CA 94070 (US).

(74) Agent: **ACKERMAN, Stephen, B.**; Saile Ackerman LLC, 28 Davis Avenue, Poughkeepsie, NY 12603 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: MAINTAINING COERCIVE FIELD AFTER HIGH TEMPERATURE ANNEAL FOR MAGNETIC DEVICE APPLICATIONS WITH PERPENDICULAR MAGNETIC ANISOTROPY

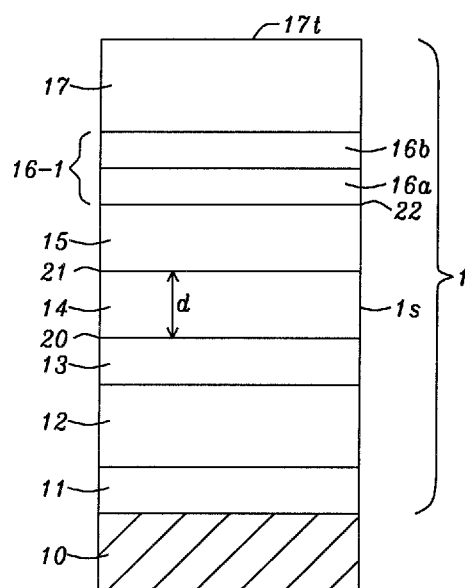


FIG. 1

(57) **Abstract:** A magnetic tunnel junction with perpendicular magnetic anisotropy (PMA MTJ) is disclosed wherein a free layer (14) has an interface (20) with a tunnel barrier (13) and a second interface (21) with an oxide layer (15). A lattice-matching layer (16-1) adjoins an opposite side of the oxide layer with respect to the free layer and is comprised of $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ or $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P, and M is one of Mo, Mg, Ta, Cr, W, or V, ($x + y + z + w + v = 100$ atomic%, $x + y > 0$, and each of v and w are > 0). The lattice-matching layer grows a BCC structure during annealing at about 400°C thereby promoting BCC structure growth in the oxide layer. As a result, free layer PMA is enhanced and maintained to yield improved thermal stability.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

MAINTAINING COERCIVE FIELD AFTER HIGH TEMPERATURE ANNEAL FOR MAGNETIC DEVICE APPLICATIONS WITH PERPENDICULAR MAGNETIC ANISOTROPY

RELATED PATENT APPLICATIONS

This application is related to U.S. Patent 9,147,833; and U.S. Patent 9,425,387; assigned to a common assignee and herein incorporated by reference in their entirety.

TECHNICAL FIELD

This disclosure relates to magnetic devices with magnetic tunnel junctions (MTJs) having perpendicular magnetic anisotropy (PMA), and in particular, to inserting a lattice-matching layer between a cap layer and top electrode to maintain coercivity (H_c) in the MTJ stack following annealing or during semiconductor processes with high temperatures of about 400°C.

BACKGROUND

Magnetoresistive Random Access Memory (MRAM) has a read function based on a tunneling magnetoresistive (TMR) effect in a MTJ stack wherein a tunnel barrier is formed between a free layer and a reference layer. The free layer serves as a sensing layer by switching the direction of its magnetic moment in response to external fields (media field) while the reference layer has a fixed magnetic moment.

MRAM devices comprised of MTJ elements wherein one or both of the free layer and reference layer have PMA are preferred over their counterparts that employ in-plane anisotropy because the former has an advantage in a lower writing current for the same thermal stability, and better scalability. In MTJs with PMA, the free layer, which stores information for the memory bit, has two preferred magnetization orientations that are perpendicular to the physical

plane of the layer. Without external influence, the magnetization direction of the free layer will align to one of the two preferred directions, either up or down, representing information “1” or “0” in the binary system. For memory applications, the free layer magnetization direction is expected to be maintained during a read operation and idle, but change to the opposite direction during a write operation if the new information to store differs from its current memory state. The ability to maintain free layer magnetization direction during an idle period is called data retention or thermal stability and has a different requirement for each memory application. A typical non-volatile memory device may require thermal stability at an elevated temperature of 125°C for approximately 10 years.

For conventional CoFeB based free layers, PMA originates from the interface between the CoFeB free layer and MgO tunnel barrier. However, the physical shape of the free layer, having a lateral dimension more than ten times the thickness, tends to induce in-plane anisotropy wherein the free layer (FL) magnetization direction will be in the plane of the FL. Moreover, as FL thickness (volume) increases, a greater portion of the free layer is away from the FL/tunnel barrier interface where PMA is generated. Accordingly, PMA is further reduced until at a sufficiently large FL thickness value, FL anisotropy is entirely “in-plane”. Thus, thermal stability for MRAM devices with PMA MTJs is limited since the physical law predicts thermal stability is proportional to the product of the coercive field (H_c) and the FL magnetic moment where H_c is the minimum magnetic field needed to reverse the FL magnetization direction. Also, H_c is directly related to PMA in that a larger PMA for the free layer translates to a higher H_c , and vice versa. Although greater free layer thickness provides a higher magnetic moment, the tradeoff is a reduction in PMA and coercivity. In general, there is an optimal free layer thickness for best thermal stability.

Thermal stability is a function of the perpendicular anisotropy field as shown in equation (1) where k_B is the Boltzmann constant, T is the temperature, M_s is the saturation magnetization, and $H_{k_{eff}, \perp}$ and V are the out-of-plane anisotropy field and volume, respectively, of the free layer:

$$(1) \quad \Delta = \frac{M_s V H_{k_{eff}, \perp}}{2 k_B T}$$

and the perpendicular anisotropy field of a magnetic layer is expressed in equation (2) as:

$$(2) \quad H_{k_{eff}, \perp} = -4\pi M_s + \frac{2K_U^{\perp, s}}{M_s d} + H_{k, \chi, \perp}$$

where d is the thickness of the free layer, $H_{k, \chi, \perp}$ is the crystalline anisotropy field in the perpendicular direction, and $K_U^{\perp, s}$ is the surface perpendicular anisotropy of the top and bottom surfaces of the free layer. The shape anisotropy field is represented by the term $(-4\pi M_s)$.

In order to improve thermal stability by increasing the value $K_U^{\perp, s}$, a second free layer/metal oxide interface is commonly introduced on an opposite side of the free layer with respect to the tunnel barrier. The metal oxide may be another MgO layer and is often called a cap layer or a Hk enhancing layer. Thus, a MgO/FL/MgO stack will substantially increase total PMA in the free layer thereby allowing a thicker free layer and higher thermal stability. The cap layer often contacts an uppermost MTJ layer called a hard mask, which in turn connects to a top electrode and through a top electrode array to complementary-metal-oxide-semiconductor (CMOS) units in a memory chip. Hard mask materials are typically metals or alloys such as Ta, Ru, Mo, MnPt, and their conductive oxides and nitrides as required for conventional techniques in manufacturing integrated circuits. The hard mask thickness is often greater than a total thickness of the other MTJ layers, which is generally around 100 Angstroms.

Since MTJ elements are implemented in CMOS devices, a PMA MTJ must be able to withstand annealing temperatures up to about 400°C for 30 minutes that are commonly applied to improve the quality of the CMOS units for semiconductor purposes. It is widely recognized that interfacial PMA between adjoining CoFeB and MgO layers is optimized when both have a matching body-centered cubic (BCC) structure. During annealing, the amorphous CoFeB and MgO layers usually are transformed from an amorphous state to a BCC structure. However, PMA is easily degraded by diffusion of metal from the hard mask into the cap layer thereby interrupting the BCC formation process in the cap layer. Therefore, an improved MTJ structure is needed that enables the cap layer to achieve a pure BCC structure which in turn leads to enhanced thermal

stability for the PMA MTJ at elevated temperatures up to 400°C that are typical of back end of line (BEOL) semiconductor processes.

SUMMARY

One objective of the present disclosure is to provide a MTJ stack in a magnetic device wherein the free layer has PMA and coercivity (H_c) that is maintained after high temperature processing including annealing at temperatures up to 400°C for a plurality of hours.

A second objective of the present disclosure is to provide a MTJ stack of layers according to the first objective such that other properties including the TMR ratio, and resistance x area (RA) value are maintained at an acceptable level.

According to one embodiment of the present disclosure, these objectives are achieved by configuring a magnetic tunnel junction with perpendicular magnetic anisotropy (PMA MTJ) with a reference layer (RL)/tunnel barrier/free layer (FL)/ oxide layer stack in a bottom spin valve structure to include a lattice-matching layer between the oxide layer (cap layer) and overlying hard mask. The lattice-matching layer enables the cap layer to transform from an amorphous state to a BCC structure in order to match the BCC structure that forms in the free layer thereby providing optimum interfacial magnetic anisotropy at the FL/oxide layer interface. In an alternative embodiment wherein the MTJ has an oxide layer/FL/tunnel barrier/RL stack in a top spin valve structure and the oxide layer serves as a H_k enhancing layer, a lattice-matching layer is inserted between the oxide layer and a bottom electrode. Thus, the free layer interfaces with an oxide layer along both of its top and bottom surfaces to induce or enhance PMA therein. Additional layers may be included such as a seed layer formed at the bottom of the MTJ stack, and a hard mask as the uppermost MTJ layer.

According to one embodiment, the lattice-matching layer is a bilayer wherein a first layer is made of a magnetic material such as $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P, and $(x + y + z + w) = 100$ atomic%, $x + y > 0$, and $w > 0$. The $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer contacts the top surface of the oxide layer in a bottom spin valve configuration, or the bottom

surface of the oxide layer in a top spin valve configuration. Moreover, there is a second layer that is a non-magnetic metal or alloy that adjoins an opposite side of the first layer with respect to the oxide layer. The second layer is preferably one of Mo, Ta, Mg, Cr, V, Ru, or W. The second layer serves to effectively eliminate a magnetic interaction between the first layer and the free layer, and preferably remains amorphous at temperatures proximate to 400°C, thereby blocking migration of non-magnetic metals from the hard mask, top electrode, or bottom electrode into the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer and preventing a disruption of BCC structure formation therein.

In another embodiment, the lattice-matching layer may be a single layer that is an alloy of the first and second layer materials. For example, during deposition of the metal or alloy M on a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer, the latter may be resputtered to form a layer represented by $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ where each of w and v is > 0. In this case, a lower concentration of M may be formed proximate to the cap layer than in an upper portion of the lattice-matching layer. In yet another embodiment, the deposition of the M material is controlled to an extent that only an upper portion of the first layer is resputtered. As a result, a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w/\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v/\text{M}$ trilayer stack may be formed on the cap layer in a bottom spin valve configuration.

The present disclosure also encompasses an embodiment where the lattice matching layer has a bilayer or trilayer configuration wherein a first layer that is an oxide or nitride of Ru, Ta, Ti, or Si has a first surface that adjoins the oxide layer, and a second surface opposite to the first surface that contacts a second layer comprised of one or more M elements that are Mo, Ta, Mg, Cr, V, Ru, and W, or contacts a stack with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w/\text{M}$ composition.

In a PMA MTJ with a top spin valve configuration, an optional seed layer is formed on a bottom electrode. When the seed layer is omitted, the second layer comprised of the metal or alloy M may serve as the seed layer on the bottom electrode. Moreover, a plurality of M materials may be deposited such that the second layer is a bilayer or trilayer, for example. Thereafter, the first layer made of $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ is deposited on the second layer to give a $\text{M}/\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ bilayer configuration for the lattice-matching layer. In some embodiments, a certain amount of the second layer is resputtered to yield a $\text{M}/\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}/\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ trilayer configuration for the lattice-matching layer, or the M layer

may be completely resputtered and then co-deposited with the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ alloy to yield a single lattice-matching layer with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ composition.

The free layer may be a single layer made of Co, Fe, or an alloy thereof with one or more elements including Ni and B. In an alternative embodiment, the free layer has two magnetic layers FL1 and FL2 separated by an antiferromagnetic coupling layer such as Ru, or separated by a non-magnetic insertion layer that is Ta or the like which serves as a moment diluting layer. A reference layer adjoins a surface of the tunnel barrier that is opposite the free layer. In a preferred embodiment, the reference layer has a synthetic antiparallel (SyAP) configuration wherein two magnetic layers called AP1 and AP2 are antiferromagnetically coupled through a Ru layer, for example.

After all of the layers in the MTJ are laid down, conventional processing is employed to convert the MTJ stack into a plurality of MTJ elements. In a subsequent step, an anneal process that comprises a temperature of about 400°C is performed to transform the amorphous character of the free layer, tunnel barrier, and oxide layer to a BCC crystal structure thereby enhancing free layer PMA.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view of a PMA MTJ with a bottom spin valve design wherein a lattice-matching layer having a bilayer structure is formed between a cap layer and top electrode according to a first embodiment of the present disclosure.

FIG. 2 is a cross-sectional view of a PMA MTJ with a bottom spin valve design wherein a lattice-matching single layer is formed between a cap layer and top electrode according to a second embodiment of the present disclosure.

FIG. 3 is a cross-sectional view of a PMA MTJ with a bottom spin valve design wherein a lattice-matching layer having a bilayer structure is formed between a cap layer and top electrode according to a third embodiment of the present disclosure.

FIGS. 4-5 are cross-sectional views of PMA MTJs with a bottom spin valve design wherein a lattice-matching layer with a trilayer stack is formed between a

cap layer and top electrode according to fourth and fifth embodiments of the present disclosure.

FIG. 6 is a cross-sectional view of a PMA MTJ with a top spin valve design wherein a lattice matching layer with a trilayer structure is formed between a Hk enhancing layer and bottom electrode (BE) according to a sixth embodiment of the present disclosure.

FIG. 7 is a cross-sectional view of a PMA MTJ with a top spin valve design wherein a lattice matching layer having a bilayer structure is formed between a Hk enhancing layer and a bottom electrode according to a seventh embodiment of the present disclosure.

FIG. 8 is a cross-sectional view of a PMA MTJ with a top spin valve design wherein a lattice matching single layer is formed between a Hk enhancing layer and bottom electrode according to an eighth embodiment of the present disclosure.

FIG. 9 is a cross-sectional view of a PMA MTJ (top spin valve design) wherein a lattice matching layer with a bilayer stack is formed between a Hk enhancing layer and BE according to a ninth embodiment of the present disclosure.

FIG. 10 is a cross-sectional view of a top spin valve PMA MTJ wherein a lattice matching layer with a trilayer structure is formed between a Hk enhancing layer and bottom electrode according to a tenth embodiment of the present disclosure.

FIGS. 11-14 are cross-sectional views depicting a sequence of steps during the fabrication of a PMA MTJ with a bottom spin valve design according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

The present disclosure is a PMA MTJ element wherein a free layer has thermal stability to at least 400°C because of perpendicular magnetic anisotropy (PMA) therein that is established by interfaces with a tunnel barrier and an oxide layer, and wherein a lattice-matching layer enables the oxide layer

to transform to a BCC structure in order to match the BCC structure formed in the free layer. The PMA MTJ element may be employed in magnetic memory devices such as MRAM and spin-torque MRAM, and in spintronic devices such as microwave assisted magnetic recording (MAMR), spin torque oscillator (STO), magnetic sensors, and biosensors. The PMA MTJ may have a bottom spin valve, top spin valve, or dual spin valve design as appreciated by those skilled in the art. Although a plurality of PMA MTJ elements is typically formed on a substrate during the fabrication of a memory device, only one PMA MTJ is depicted in the exemplary embodiments in order to simplify the drawings. The terms "Hk enhancing layer" and "cap layer" may be used interchangeably when referring to an oxide layer that induces PMA in an adjoining free layer. A cap layer as defined herein has a position above the free layer in a PMA MTJ stack, and a Hk enhancing layer may contact either a bottom surface of the free layer in a top spin valve, or the top surface of the free layer in a bottom spin valve design.

In related U.S. Patent 9,147,833, we disclosed the use of a laminated Hk enhancing layer to achieve high coercivity in PMA MTJ elements after 400°C annealing. In U.S. Patent 9,425,387, we disclosed a PMA MTJ in which a diffusion barrier is inserted between the Hk enhancing layer and overlying hard mask in order to prevent metals in the hard mask from migrating into the Hk enhancing layer and diluting the interfacial PMA established at the free layer/Hk enhancing layer interface. In other words, high oxygen content is maintained in the Hk enhancing layer by blocking metals from entering therein. Accordingly, better coercivity and higher thermal stability are realized.

Now we have found that coercivity (H_c) in a PMA MTJ with a tunnel barrier/free layer/metal oxide stack of layers is further improved with a layer hereafter called the lattice-matching layer that adjoins the oxide layer on a side facing away from the free barrier, and has a key feature of ensuring that the oxide layer will be completely transformed from an amorphous state to a body-centered cubic (BCC) structure. It should be understood that a tunnel barrier such as MgO is transformed into a BCC layer during annealing and thereby assists the adjoining free layer in achieving a BCC structure through a first interface. The growth of a BCC structure in both of the free layer and lattice-matching layer will influence a similar BCC growth in the oxide layer during high

temperature annealing or processing at about 400°C. As a result of BCC lattice matching between the tunnel barrier and free layer, and between the free layer and oxide layer, a greater level of PMA is achieved and maintained in the free layer. The oxide layer may be a cap layer formed between the free layer and overlying hard mask in embodiments depicted in FIGS. 1-4, or a Hk enhancing layer between the bottom electrode and free layer in another set of embodiments shown in FIGS. 5-8.

Referring to FIG. 1, a PMA MTJ **1** with sidewall **1s** is shown according to a first embodiment of the present disclosure in which an optional seed layer **11**, reference layer **12**, tunnel barrier **13**, free layer **14**, cap layer **15**, lattice-matching layer **16**, and hard mask **17** are sequentially formed on a bottom electrode **10** in a MRAM, STT-MRAM, or spintronic device. The bottom electrode may be formed on a substrate (not shown) that in some embodiments is a semiconductor structure that may include transistors and other associated control devices. In a STO device, the bottom electrode may be a main pole layer. All layers are typically sputter deposited in a sputter deposition mainframe that has at least one oxidation chamber and an etching chamber. In a preferred embodiment, the tunnel barrier is formed by a first step of depositing a first metal layer, a second step of performing a natural oxidation or radical oxidation to transform the first metal to a first metal oxide, and then depositing a second metal on the first metal oxide. The first and second steps may be repeated before depositing an uppermost metal layer. During a subsequent anneal process, the second or uppermost metal layer absorbs oxygen from the free layer and the underlying metal oxide layer to generate a substantially uniform metal oxide layer. It should be understood that in a STO device, the reference layer serves as a spin injection layer (SIL) and free layer functions as a field generation layer (FGL).

Preferably, seed layer **11** is employed to maintain or enhance PMA in reference layer **12** and facilitates smooth and uniform crystalline growth in the overlying PMA MTJ layers. The seed layer may be one or more of NiCr, NiFeCr, Pd, Pt, Ta, Ru, Mg, Ti, Mo, or other metals or alloys used in the art.

Reference layer **12** preferably is a SyAP stack of layers having an AP2/coupling layer/AP1 configuration wherein the AP1 layer has an interface with the tunnel barrier, and each of AP1 and AP2 are one or more of Co, Fe,

CoFe, or alloys thereof that may have an additional element including one or both of Ni and B. AP1 and AP2 layers have magnetic moments in opposite directions because of anti-ferromagnetic (AFM) coupling provided by a Ru, Rh, Ir or another AFM coupling layer. PMA is induced or enhanced in the reference layer **12** through an interface with tunnel barrier **13**. In another embodiment, one or both of the AP1 and AP2 layers are a laminated structure that is one of $(\text{Co/Ni})_n$, $(\text{Co/Pd})_n$, $(\text{Co/Pt})_n$, $(\text{CoFe/Ni})_n$, $(\text{Co/NiFe})_n$, $(\text{Co/NiCo})_n$, or other laminated stacks exhibiting intrinsic PMA where n is between 2 and 30. Preferably, each Co or Co alloy layer in the laminated structure has a thickness between 0.5 and 5 Angstroms while each Pd, Pt, Ni, or Ni alloy layer has a thickness from 2 to 10 Angstroms. The Co or Co alloy layer is generally thinner than the Ni, Ni alloy, Pt, or Pd layer.

When the AP1 layer comprises one of the aforementioned laminated structures, a transition layer that is Co, CoFe, or CoFeB may be inserted as the uppermost layer in the AP1 stack. In some embodiments, a CoFeB/Co transition layer may be formed in which the CoFeB portion is from 4 to 8 Angstroms thick while the Co layer portion has a thickness from 3 to 5 Angstroms. Co is often used as the uppermost layer in the reference layer stack to form an interface with the tunnel barrier layer since Co is more resistant to oxidation than a CoFeB (or CoFe) layer. In other words, oxygen is able to migrate out of a MgO tunnel barrier layer into a reference layer during annealing thereby causing partial oxidation of CoFeB, for example, which leads to a degradation in the TMR ratio.

The tunnel barrier layer **13** may be any metal oxide layer that induces a spin dependent tunneling effect between the reference layer and free layer. Although MgO is often preferred since it provides an optimum TMR ratio, other materials including MgN, MgON, and oxides, nitrides, or oxynitrides of Al, Ti, Zn, Hf, AlTi, MgZn, MgTa, or Ta may be employed as the tunnel barrier. Furthermore, laminations of one or more of the aforementioned materials may be selected as the tunnel barrier.

The free layer **14** adjoins a top surface of the tunnel barrier **13** in a bottom spin valve design, and according to one embodiment is a single layer that is one of Co, Fe, CoFe, or alloys thereof with an optional additional element including one or both of Ni and B. However, the free layer may have a bilayer or

trilayer configuration represented by FL1/FL2 or FL1/FL2/FL3 where each of FL1, FL2, and FL3 are magnetic layers made of Co, Fe, CoFe or alloys thereof wherein magnetic moments of all the two or three layers are aligned in the same direction through ferromagnetic coupling. The alloys may include one or both of Ni, B, and transition metal elements including Ta, Zr, Hf, Mg, Mo, and Nb. In other embodiments, the free layer has a FL1/Ru/FL2 configuration wherein FL1 and FL2 layers are antiferromagnetically coupled. In yet another embodiment, the free layer is one of the laminated structures described previously with respect to reference layer composition. A laminated structure that is $(\text{Co/Ni})_n$ or the like is considered to have intrinsic PMA.

In some embodiments, the free layer **14** has a FL1/A/FL2 stack in which A is layer with a thickness from 5 to 10 Angstroms and is made of a non-magnetic element such as Ta, Ti, W, Zr, Hf, Nb, Mo, V, Mg, or Cr that provides a moment dilution effect. The FL1 and FL2 layers are ferromagnetically coupled through the A layer. In other words, for a fixed free layer thickness **d**, a FL1/A/FL2 configuration will have a smaller in-plane magnetization component than a FL1/FL2 stack. It follows that interfacial perpendicular anisotropy at the interface **20** between the tunnel barrier and free layer, and at the interface **21** between the free layer and cap layer more easily overcomes the shape anisotropy field and generates substantial PMA in the free layer with a FL1/A/FL2 configuration.

PMA in the free layer is induced or enhanced by interfacial perpendicular anisotropy generated in a portion thereof adjacent to a first interface **20** with the tunnel barrier layer **13**, and in a portion adjacent to a second interface **21** with an Hk enhancing layer also known in bottom spin valve designs as cap layer **15**. Preferably, interfacial (surface) perpendicular anisotropy exceeds the shape anisotropy field for the free layer to provide PMA and a net magnetization direction that is perpendicular to the two interfaces. As a result, the free layer will have greater thermal stability, and higher Hc after high temperature processing up to about 400°C than a free layer with in-plane magnetization. Note that the thickness of free layer **14** is represented by “d” in equation (4) presented previously. Thus, as the value for “d” is reduced, the perpendicular anisotropy field increases. We have found that PMA is established in the free layer by maintaining thickness **d** in FIG. 1 in the 5 to 25 Angstrom range. In

many free layer configurations, if thickness **d** is greater than about 25 Angstroms, then the shape anisotropy field is too large to be overcome by an out-of plane component, and the net magnetization of the free layer remains in-plane.

Cap layer **15** is formed on the free layer **14** and is preferably comprised of an oxide that is one of MgTaOx, MgO, SiOx, SrTiOx, BaTiOx, CaTiOx, LaAlOx, MnOx, VOx, Al₂O₃, TiOx, BOx, and HfOx. In some embodiments, the cap layer is a lamination of one or more of the aforementioned oxides. Preferably, the cap layer is MgO having a non-stoichiometric oxidation state wherein a certain number of Mg atoms remain unoxidized in order to achieve a RA value therein that is less than about 1 ohm- μm^2 , which is substantially less than the RA value of the tunnel barrier. In some cases, the total RA for the PMA MTJ represented by the sum ($\text{RA}_{\text{tunnel barrier}} + \text{RA}_{\text{cap layer}}$) is $<5 \text{ ohm-}\mu\text{m}^2$ while in other embodiments, the total RA value is below 20 ohm- μm^2 . The cap layer may be formed by a process similar to the one used in tunnel barrier formation in which a metal or alloy layer is deposited and is then oxidized to a stoichiometric or non-stoichiometric oxidation state by a radical oxidation (ROX) or natural oxidation (NOX) process. Since the oxide cap layer contributes to resistance x area (RA) value for the PMA MTJ but does not increase the TMR ratio, the thickness of the cap layer is preferably minimized to a value of 2 to 20 Angstroms to avoid an unacceptably high total RA value.

A key feature of the present disclosure is a lattice-matching layer **16** formed between the cap layer and an overlying hard mask **17**. The lattice-matching layer serves to block the structural influence of the hard mask during subsequent high temperature processing including annealing at 400°C for a plurality of hours. As a result, the cap layer is transformed from an amorphous character to a BCC structure while the free layer grows a BCC structure during 400°C processing. Accordingly, higher PMA is achieved in the free layer due to lattice matching with the cap layer. In the prior art, the hard mask metal or alloy is in contact with the oxide cap layer and has a tendency to prevent some or the entire cap layer from forming a BCC structure, and thereby limiting PMA in the free layer.

In the first embodiment, the lattice-matching layer **16-1** has a bilayer structure with a lower layer **16a** made of a magnetic material and a thickness of 2 to 10 Angstroms, and an upper layer **16b** that is a single layer or multilayer stack comprised of one or more non-magnetic metals or alloys of M elements where M is one or more of Mo, Mg, Ta, Cr, W, Ru, or V. The upper layer serves to effectively eliminate a magnetic influence of the lower layer on the free layer so that the lower layer does not affect switching behavior in the free layer. The lower layer preferably has a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ composition wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P, and $(x + y + z + w) = 100$ atomic%, $x + y > 0$, and $w > 0$. Lower layer **16a** has a finite magnetic moment after the aforementioned 400°C annealing process. Moreover, “x” and “z” may be zero to yield a FeL lower layer, or “y” and “z” may be zero to give a CoL lower layer. The L content is relied on to provide an amorphous character in the deposited lower layer, and enables BCC growth in the lower layer during 400°C annealing.

Since the cap layer is thin as described earlier, the lower layer's magnetic moment is proximate to the free layer and would normally affect the PMA MTJ through either a magnetic dipole field or spin polarization under electric current. However, forming the M layer with a thickness of 2 to 10 Angstroms on a top surface of the lower layer removes any undesirable influence of the lower layer on the free layer. During annealing, the CoFeNiL layer grows a BCC structure and thereby induces a similar BCC growth in cap layer **15** through interface **22**. BCC crystal growth is usually complete after 30 minutes at a temperature proximate to 400°C . However, as the non-magnetic element L content increases, the time required for the transformation from amorphous to a BCC structure may increase.

Above the lattice-matching layer **16-1** is a hard mask **17** with a thickness in the range of about 50 to 300 Angstroms, and having a top surface **17t**. The hard mask acts as a protective layer to underlying PMA MTJ layers during subsequent processing including photoresist patterning and etching (FIG. 8), and offers resistance to chemicals and abrasives during a chemical mechanical polish (CMP) process shown in FIG. 11 where a top surface of the hard mask is planarized such that it is coplanar with an adjoining insulation layer. The hard mask also serves as an electrical connection from the PMA MTJ to top

electrode **40** (FIG. 12) and provides substantial resistance to oxidation. The hard mask is preferably made of one or more of Ta, Ru, Ti, Mo, or MnPt, or a conductive oxide, oxynitride, or nitride thereof.

According to a second embodiment shown in FIG. 2, PMA MTJ **2** having sidewall **2s** retains all the layers previously described in the first embodiment with the exception of the lattice-matching layer. The present disclosure anticipates that depositing the M layer on a lower layer **16a** may resputter essentially all of the lower layer such that the magnetic material and M element are co-deposited on the cap layer **15** to yield a single lattice-matching layer **16c** having a thickness of 2 to 10 Angstroms, and with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ composition wherein $(x + y + z + w + v) = 100$ atomic%, $x + y > 0$, and each of v and w are > 0 . Here, the M content may be responsible for generating a net non-magnetic character in the lattice-matching layer. In some embodiments, the M content may be uniformly distributed within the CoFeNiLM layer. In other embodiments, the M content in lattice-matching layer **16c** may be less in a lower portion thereof that is proximate to the cap layer than in an upper portion that is proximate to hard mask **17**. During annealing, the CoFeNiLM layer grows a BCC structure and thereby induces a similar BCC growth in cap layer **15** through interface **22**. It should be understood that as the non-magnetic content ($v + w$ atomic%) increases in layer **16c**, the time required to complete the BCC growth in the lattice-matching layer will also increase.

In a third embodiment shown in FIG. 3, the deposition of a M material on a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer may not only form a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer **16c** that has an interface **22** with the cap layer **15**, but may also yield a M layer **16b** on the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer to give a lattice-matching layer **16-2** with a bilayer stack having a **16c/16b** configuration. Each of layers **16b**, **16c** has a thickness from 2 to 10 Angstroms in PMA MTJ **3** with sidewall **3s**. As in the previous embodiment, the CoFeNiLM layer grows a BCC structure during high temperature annealing proximate to 400°C thereby promoting a BCC growth in the adjoining cap layer.

The present disclosure also encompasses a fourth embodiment depicted in FIG. 4 where PMA MTJ **4** with sidewall **4s** retains all layers in PMA MTJ **1** except the lattice-matching layer **16-3** has a trilayer configuration. In particular, the M deposition process may be controlled to an extent where only an upper

portion of lower layer **16a** is resputtered to form a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ alloy layer **16c** on layer **16a**. Furthermore, a M layer **16b** may be formed on a top surface of layer **16c** to give a **16a/16c/16b** stack represented by a $\text{CoFeNiL}/\text{CoFeNiLM}/\text{M}$ configuration for the lattice matching layer **16-3**. Alternatively, the M layer deposition may resputter an upper portion of the lower layer to yield a **16a/16c** bilayer with a $\text{CoFeNiL}/\text{CoFeNiLM}$ configuration for lattice matching layer **16-3**.

A fifth embodiment of the present disclosure is shown in FIG. 5 and is a modification of the first embodiment. In particular, a lattice matching layer **16d** that is an oxide or nitride of Ru, Ta, Ti, or Si may be inserted between lattice matching layer **16a** and oxide layer **15** to yield a PMA MTJ **5** with sidewall **5s**. Preferably, layer **16d** is amorphous as deposited and grows a BCC structure during high temperature annealing to promote BCC growth in the adjoining oxide layer. Moreover, lattice matching layer **16d** may be conductive to avoid an additional contribution to total RA value. When lattice matching layer **16d** is conductive, the thickness of layer **16d** may be up to 80 Angstroms such that a total thickness of stack **16-4** is from 2 to 100 Angstroms. Thus, the lattice matching layer stack **16-4** has a trilayer configuration represented by **16d/16a/16b** where layer **16b** contacts hard mask **17**. In an alternative embodiment, layer **16a** may be omitted to provide a **16d/16b** bilayer configuration such as TiN/Ru, for example.

FIG. 6 is a sixth embodiment of the present disclosure that comprises all of the MTJ layers in FIG. 5 except PMA MTJ **5'** has a top spin valve configuration wherein the optional seed layer **11**, layer **16b**, optional layer **16a**, and layer **16d**, Hk enhancing layer **15**, free layer **14**, tunnel barrier **13**, reference layer **12**, and hard mask **17** are sequentially formed on bottom electrode **10**. In some embodiments, the seed layer is omitted since the single layer or multilayer of M elements in layer **16b** may serve as an acceptable seed layer.

The present disclosure also anticipates a seventh embodiment with a top spin valve configuration as illustrated for PMA MTJ **1'** with sidewall **1s** in FIG. 7. All layers are retained from FIG. 1 except the order of formation is different. In particular, an optional seed layer **11**, lattice-matching layer **16-1**, Hk enhancing layer **15**, free layer **14**, tunnel barrier **13**, reference layer **12**, and hard mask **17** are sequentially formed on bottom electrode **10**. There is a first interface **21**

between a bottom surface of the free layer and a top surface of the Hk enhancing layer, and a second interface **20** between a top surface of the free layer and a bottom surface of the tunnel barrier that generate interfacial perpendicular anisotropy and PMA in the free layer. In some embodiments, seed layer **11** is omitted since the one or more M elements in layer **16b** effectively serves as a seed layer that promotes uniform growth in overlying layers. In this embodiment, $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer **16a** is formed on a top surface of the M layer **16b**, and interface **22** is at a lower surface of Hk enhancing layer **15**, and at an upper surface of layer **16a**. A similar advantage to that associated with bottom spin valve embodiments in FIGS. 1-5 is realized. Namely, greater PMA in free layer **14** is achieved as a result of BCC growth in layer **16a** during annealing that induces a similar BCC growth in the Hk enhancing layer. As a result of transforming essentially all of the amorphous character in the Hk enhancing layer to a BCC structure, there is a higher degree of interfacial perpendicular anisotropy at interface **21** and improved lattice matching with the free layer. Accordingly, thermal stability and coercivity in the free layer are maintained after high temperature processing around 400°C for a plurality of hours.

In another top spin valve embodiment depicted as PMA MTJ **2** with sidewall **2s** in FIG. 8, all layers are retained from FIG. 2 where lattice-matching layer **16c** is a single layer having a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ composition described previously. The present disclosure anticipates that the deposition of a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ magnetic material on a M layer may resputter all of the M material which is then co-deposited with the CoFeNiL material. The M material may be uniformly distributed in the CoFeNiLM layer. In other embodiments, there may be a greater M content in a lower portion of layer **16c** than in an upper portion that is proximate to Hk enhancing layer **15**. The CoFeNiLM layer grows a BCC structure during high temperature annealing proximate to 400°C and thereby promotes BCC structure growth in the adjoining Hk enhancing layer that enables lattice matching with the BCC growth in free layer **14**.

According to a ninth embodiment of the present disclosure illustrated in FIG. 9, PMA MTJ **3'** with sidewall **3s** is formed with a top spin valve structure in which all layers are retained from FIG. 7 except there is a lattice matching layer **16-2** having a **16b/16c** bilayer stack with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer **16c** formed on

a M layer **16b**. In other words, the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer deposition on the M layer described earlier may be controlled such that only an upper portion of the M layer is resputtered, and is then co-deposited with the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ material to yield the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ alloy layer **16c**. As in the previous embodiment, the CoFeNiLM layer is responsible for promoting BCC structure growth in the adjoining Hk enhancing layer **15**. In so doing, the Hk enhancing layer forms a crystal structure matching that of the free layer **14** and thereby maintains substantial PMA in the free layer during high temperature processing proximate to 400°C for a plurality of hours. Accordingly, greater Hc and improved thermal stability are realized over prior art PMA MTJ designs.

Referring to FIG. 10, the present disclosure encompasses a tenth embodiment depicted as PMA MTJ **4'** having sidewall **4s** where all layers are retained from the top spin valve structure in FIG. 4 except there is a lattice matching layer **16-3** having a trilayer configuration represented by **16b/16c/16a** with a M/CoFeNiLM/CoFeNiL stack of layers described previously. Here, the deposition of a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ material on a M layer **16b** may be controlled such that only an upper portion of the M layer is resputtered to yield a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer **16c** on lower layer **16b**. Then, the deposition of the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer is continued so that a CoFeNiL layer **16a** is formed on layer **16c**. Here, each of the layers **16a-16c** has a thickness from 2 to 10 Angstroms. Thus, a CoFeNiL layer contacts the Hk enhancing layer **15** at interface **22** and is responsible for ensuring a BCC structure is formed in the Hk enhancing layer during an annealing process that comprises a temperature proximate to 400°C as explained earlier.

The present disclosure also encompasses a method of forming a PMA MTJ element having a configuration disclosed in one of the embodiments shown in FIGS. 1-10. Referring to FIG. 11, a PMA MTJ stack of layers is formed on a substrate that comprises a bottom electrode layer **10**. According to the first bottom spin valve embodiment, the seed layer **11**, reference layer **12**, tunnel barrier **13**, free layer **14**, cap layer **15**, lattice-matching layer **16-1**, and hard mask **17** are sequentially formed on the substrate. It should be understood that lattice-matching layer **16c**, **16-2**, **16-3**, or **16-4** may be substituted for layer **16-1**. All layers may be laid down by a sputter deposition technique. In a preferred embodiment, the tunnel layer is formed by depositing a first metal (or alloy)

layer, oxidizing the first metal layer with a NOX or ROX method, and then depositing a second metal or alloy layer on the oxidized first metal layer. In some cases, the second metal layer may be oxidized and a third metal layer is deposited on the oxidized second metal layer. Typically, the third metal layer becomes oxidized during a subsequent annealing process by scavenging oxygen from adjoining layers.

Referring to FIG. 12, a photoresist layer is deposited on a top surface **17t** of the hard mask and is patternwise exposed and developed by a conventional method to form a photoresist mask **30** with a top-down view (not shown) in the desired shape of the MRAM, spin-torque MRAM, or spintronic device. Thereafter, an ion beam etch or reactive ion etch is used to transfer the photoresist mask pattern through the underlying layers to form sidewalls **1s** that stop on bottom electrode top surface **10t**. In the exemplary embodiment, sidewalls **1s** and **50s** are formed along a continuous surface that is essentially orthogonal to a top surface of bottom electrode **10**. In other embodiments, sidewall **1s** may be aligned with a slope such that the seed layer has a greater width in the x-axis direction than hard mask **17**. Here, the thickness of each PMA MTJ layer is related to a distance along the y-axis direction. Preferably, the free layer **14** and reference layer **12** have a magnetization either in the (+) y-axis or (-) y-axis direction.

Referring to FIG. 13, an insulation layer **25** such as alumina or SiO₂ is deposited on top surface **10t** and sidewall **1s** to a thickness at least equal to that of the PMA MTJ stack of layers. Then, a chemical mechanical polish (CMP) process is performed to remove the photoresist mask and form a top surface **25t** on the insulation layer that is coplanar with top surface **17t** of the hard mask layer in the PMA MTJ. The PMA MTJ is now considered to be a nanopillar because the structure resembles a pillar with lateral dimensions along the x-axis and z-axis, and a thickness in the y-axis direction. From a top-down view (not shown), the MTJ nanopillar may have a circular, elliptical, or polygonal shape.

Thereafter in FIG. 14, a top electrode layer is formed in a second insulation layer (not shown) by a well-known process to complete the MRAM, spin-torque MRAM, or STO fabrication sequence. Top electrode **20** contacts a top surface of hard mask **17** and is usually one in a plurality of parallel lines that are formed

in a MRAM array and typically comprises Cu or another efficient electrical conductor. In some embodiments, a cladding layer (not shown) is formed around the conductive layer. Only one top electrode is shown in order to simplify the drawing and focus on the PMA MTJ structure that is the key feature of the present disclosure. For STT-MRAM, a current is directed through the PMA MTJ between the top electrode and bottom electrode **10** for reading or writing purposes. In a MRAM write process, a current in the top electrode and bottom electrode generates a magnetic field on the PMA MTJ that is capable of switching the magnetization direction in the free layer. In STO devices, the bottom electrode may be a main pole while the top electrode is a trailing shield as appreciated by those skilled in the art.

Formation of a PMA MTJ with a top spin valve design such as one depicted in FIGS. 6-10 follows the same process flow represented in FIGS. 11-14 with the exception that the order of the PMA MTJ layers is changed. In particular, an optional seed layer **11**, lattice matching layer **16-1** (or **16c**, **16-2**, **16-3**, **16-4**), Hk enhancing layer **15**, free layer **14**, tunnel barrier **13**, reference layer **12**, and hard mask **17** are sequentially formed on a bottom electrode **10** before sidewall **1s** (or **2s**, **3s**, **4s**, or **5s**) is generated by employing a photoresist patterning and etch process previously described with respect to FIG. 10.

To demonstrate the benefits of a lattice-matching layer according to the present disclosure, patterned PMA MTJ nanopillars were fabricated as circular 90-100 nm MRAM devices and the H_c field for each was measured. Reference PMA MTJ A has a seed layer/reference layer/MgO tunnel barrier/free layer/MgO cap layer/Ru/Ta/TiN configuration wherein the reference layer and free layer are CoFeB based materials, the tunnel barrier and cap layer are MgO, and the hard mask is a Ru/Ta/TiN stack. PMA MTJ B is formed according to an embodiment of the present disclosure and differs from the reference only by including a lattice-matching layer having a CoFeB/Mo configuration between the cap layer and hard mask. All structures were deposited at room temperature and subjected to a first anneal at 330°C for 30 minutes. A baseline coercivity measurement indicated H_c = 3200 Oe for both samples. Then a second anneal was performed at 400°C for 151 minutes before a second coercivity measurement was taken. As shown in Table 1, H_c for MTJ A is undesirably reduced to 1600 Oe after the second anneal while PMA MTJ B has a H_c of

3200 Oe that is essentially unchanged compared with the first measurement. In some applications, a minimum H_c of ≥ 3200 Oe is required after high temperature anneal. In addition, it is important that H_c should be maintained for at least two hours during a 400°C anneal. Note that 400°C is an industry standard for semiconductor manufacturing to reduce the defect rate of the product and therefore becomes a requirement for embedded MRAM applications.

Table 1

Results for PMA MTJs with CoFeB/MgO/CoFeB/cap layer/LM/hard mask configurations

MTJ	Cap layer	Lattice-matching (LM) layer 1	Lattice-matching (LM) layer 2	Fail rate after 260°C , 90 sec.	H_c (Oe) after 400°C , 151 sec.
A	MgO	None	None	50%	1600
B	MgO	CoFeB (5 Angs.)	Mo (5 Angstroms)	1 ppm	3200

The benefits of the present disclosure are improved PMA (H_c and H_k) for a free layer in a magnetic device that will increase the retention time for a memory element such as a PMA MTJ following high temperature processing up to 400°C that is required for MRAM or STT-MRAM devices integrated in CMOS structures. Furthermore, the processes and materials described herein are compatible with the design and processing requirements of magnetic devices. The fabrication of a MTJ according to an embodiment of this disclosure is not expected to significantly impact the manufacturing cost.

While this disclosure has been particularly shown and described with reference to, the preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made without departing from the spirit and scope of this disclosure.

We claim:

1. A magnetic memory element formed between a first electrode and a second electrode, comprising:
 - (a) a tunnel barrier layer formed between a reference layer and a free layer;
 - (b) the free layer with a first surface that forms a first interface with the tunnel barrier layer thereby promoting perpendicular magnetic anisotropy (PMA) in the free layer;
 - (c) an oxide layer that forms a second interface with the free layer at a second surface thereof that is on an opposite side of the free layer with respect to the tunnel barrier layer, and wherein both of the oxide layer and free layer have a body-centered cubic (BCC) structure that enhances PMA in the free layer; and
 - (d) a first lattice-matching layer that adjoins an opposite side of the oxide layer with respect to the second interface, wherein the first lattice-matching layer is comprised of a magnetic material that is a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ alloy where L is a non-magnetic element, $(x + y + z + w) = 100$ atomic%, $x + y > 0$, and $w > 0$, and wherein the first lattice-matching layer has a BCC structure to assist a growth of the BCC structure in the oxide layer.
2. The magnetic memory element of claim 1 wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P.
3. The magnetic memory element of claim 1 further comprised of a second lattice-matching layer that is a single layer or multilayered structure that adjoins an opposite side of the first lattice-matching layer with respect to the oxide layer, and wherein the second lattice-matching layer is one or more of Mo, Mg, Ta, Cr, W, Ru, or V.
4. The magnetic memory element of claim 1 further comprised of a second lattice-matching layer that is a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer wherein L is a non-magnetic element, $(x + y + z + w + v) = 100$ atomic%, M is one of Mo, Mg, Ta, Cr, W, Ru, or V, $x + y > 0$, each of v and w are > 0 , and wherein the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer adjoins an opposite side of the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ alloy layer with respect to the oxide layer.

5. The magnetic memory element of claim 4 further comprised of a third lattice-matching layer that is a M layer which is formed on an opposite side of the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer with respect to the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ layer.

6. The magnetic memory element of claim 3 wherein each of the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ alloy layer and the M layer has a thickness from about 2 to 10 Angstroms.

7. The magnetic memory element of claim 3 further comprised of a seed layer, and a hard mask to give a seed layer/reference layer/tunnel barrier/free layer/ oxide layer/first lattice-matching layer/second lattice matching layer/hard mask stack in a bottom spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

8. The magnetic memory element of claim 5 further comprised of a seed layer, and a hard mask to give a seed layer/reference layer/tunnel barrier/free layer/ oxide layer/first lattice-matching layer/second lattice matching layer/third lattice matching layer/hard mask stack in a bottom spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

9. The magnetic memory element of claim 1 wherein the oxide layer is one of MgTaOx , MgO , SiOx , SrTiOx , BaTiOx , CaTiOx , LaAlOx , MnOx , VOx , Al_2O_3 , TiOx , BOx , and HfOx , or is a laminate of one or more of the aforementioned oxides.

10. The magnetic memory element of claim 3 further comprised of a seed layer, and a hard mask to give a seed layer/second lattice-matching layer/first lattice matching layer/oxide layer/free layer/tunnel barrier/reference layer/hard mask stack in a top spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

11. The magnetic memory element of claim 5 further comprised of a seed layer, and a hard mask to give a seed layer/third lattice matching layer/second lattice-matching layer/first lattice matching layer/oxide layer/free layer/tunnel barrier/ reference layer/hard mask stack in a top spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

12. The magnetic memory element of claim **1** wherein the oxide layer has a thickness from about 2 to 20 Angstroms.

13. The magnetic memory element of claim **1** wherein the first electrode is a bottom electrode in a Magnetoresistive Random Access Memory (MRAM) device or in a spin-torque MRAM, or the first electrode is a main pole layer in a spin torque oscillator (STO) device.

14. A magnetic memory element formed between a first electrode and a second electrode, comprising:

(a) a tunnel barrier layer formed between a reference layer and a free layer;

(b) the free layer with a first surface that forms a first interface with the tunnel barrier layer thereby promoting perpendicular magnetic anisotropy (PMA) in the free layer;

(c) an oxide layer that forms a second interface with the free layer at a second surface thereof that is on an opposite side of the free layer with respect to the tunnel barrier layer, and wherein both of the oxide layer and free layer have a body centered cubic (BCC) structure that enhances PMA in the free layer; and

(d) a first lattice-matching layer that adjoins an opposite side of the oxide layer with respect to the second interface, wherein the first lattice-matching layer is an oxide or nitride of Ru, Ta, Ti, or Si, or has a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ composition wherein L is non-magnetic metal, M is one of Mo, Mg, Ta, Cr, W, Ru, or V, $(x + y + z + w + v) = 100$ atomic%, $x + y > 0$, and each of v and w are > 0 , and wherein the first lattice-matching layer has a BCC structure to assist a growth of the BCC structure in the oxide layer.

15. The magnetic memory element of claim **14** wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P.

16. The magnetic memory element of claim **14** further comprised of a second lattice-matching layer that is a single layer or multilayer structure that adjoins an opposite side of the first lattice-matching layer with respect to the oxide layer, and wherein the second lattice matching layer is a single layer or multilayer structure comprised of one or more of Mo, Mg, Ta, Cr, W, Ru, and V.

17. The magnetic memory element of claim **14** wherein the oxide layer is one of MgTaOx, MgO, SiOx, SrTiOx, BaTiOx, CaTiOx, LaAlOx, MnOx, VOx, Al₂O₃, TiOx, BOx, and HfOx, or is a laminate of one or more of the aforementioned oxides.

18. The magnetic memory element of claim **16** wherein the first lattice-matching layer is the Co_xFe_yNi_zL_wM_v layer and each of the second lattice matching layer and Co_xFe_yNi_zL_wM_v layer has a thickness from about 2 to 10 Angstroms.

19. The magnetic memory element of claim **16** further comprised of a third lattice matching layer having an Co_xFe_yNi_zL_w composition where $w > 0$ and $x + y > 0$ that is formed between the first lattice matching layer and the second lattice matching layer, and wherein the first lattice matching layer is the oxide or nitride of Ru, Ta, Ti, or Si.

20. The magnetic memory element of claim **19** wherein the first lattice matching layer is conductive, and a total thickness of the first, second, and third lattice matching layers is from about 2 to 100 Angstroms.

21. The magnetic memory element of claim **14** further comprised of a seed layer, and a hard mask to give a seed layer/reference layer/tunnel barrier/free layer/oxide layer/first lattice-matching layer/hard mask stack in a bottom spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

22. The magnetic memory element of claim **16** further comprised of a seed layer, and a hard mask to give a seed layer/reference layer/tunnel barrier/free layer/oxide layer/first lattice-matching layer/second lattice matching layer/hard mask stack in a bottom spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

23. The magnetic memory element of claim **14** further comprised of a seed layer, and a hard mask to give a seed layer/first lattice-matching layer/oxide layer/free layer/tunnel barrier/reference layer/hard mask stack in a top spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

24. The magnetic memory element of claim **16** further comprised of a seed layer, and a hard mask to give a seed layer/second lattice-matching layer/first

lattice matching layer/oxide layer/free layer/tunnel barrier/reference layer/hard mask stack in a top spin valve configuration in which the seed layer contacts the first electrode and the hard mask contacts a bottom surface of the second electrode.

25. A method of forming a magnetic memory element with a stack of layers, comprising:

- (a) sequentially depositing a reference layer, a tunnel barrier, and a free layer on a substrate wherein the free layer forms a first interface with the tunnel barrier thereby inducing or enhancing perpendicular magnetic anisotropy (PMA) in the free layer;
- (b) forming an oxide layer on a top surface of the free layer to form a second interface that induces or enhances PMA in the free layer;
- (c) forming a first lattice-matching layer on the oxide layer, wherein the first lattice-matching layer is amorphous as deposited and is comprised of a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$ layer, an oxide or nitride of Ru, Ta, Ti, and Si, or a layer that is made of a magnetic material that is a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ alloy wherein L is a non-magnetic element, M is one of Mo, Mg, Ta, Cr, W, Ru, or V, $(x + y + z + w + v) = 100$ atomic%, $x + y > 0$, and each of v and w are > 0 ;
- (d) depositing a hard mask as an uppermost layer in the stack of layers; and
- (e) annealing the stack of layers at a temperature proximate to 400°C so that the first lattice-matching layer grows a BCC structure to promote a growth of a BCC structure in the oxide layer.

26. The method of claim **25** wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P.

27. The method of claim **25** further comprised of depositing a second lattice-matching layer that is a single layer or multilayer structure and comprises one or more M elements selected from Mo, Mg, Ta, Cr, W, Ru, and V on the first lattice-matching layer before the hard mask is formed.

28. The method of claim **25** wherein the oxide layer is one of MgTaO_x , MgO , SiO_x , SrTiO_x , BaTiO_x , CaTiO_x , LaAlO_x , MnO_x , VO_x , Al_2O_3 , TiO_x , BO_x , and HfO_x , or is a laminate of one or more of the aforementioned oxides.

29. The method of claim **27** wherein deposition of the second lattice-matching layer on the first lattice-matching layer forms a single layer of $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v$,

or forms bilayer stack with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w/\text{M}$ or a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v/\text{M}$ configuration wherein an M element layer contacts the hard mask.

30. The method of claim **27** wherein deposition of the second lattice-matching layer on the first lattice-matching layer made of $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ forms a trilayer stack with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w/\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w\text{M}_v/\text{M}$ configuration wherein an M element layer contacts the hard mask.

31. The method of claim **25** wherein the substrate is a seed layer or a first electrode, and the first electrode is a bottom electrode in a Magnetoresistive Random Access Memory (MRAM) device or in a spin-torque MRAM, or the first electrode is a main pole layer in a spin torque oscillator (STO) device.

32. The method of claim **25** wherein the first lattice matching layer is the oxide or nitride of Ru, Ta, Ti, or Si, and the method is further comprised of depositing a second lattice matching layer with the $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ alloy composition on the first lattice matching layer, and then depositing a third lattice matching layer that is one or more of the M elements on the second lattice matching layer before the hard mask is formed.

33. A method of forming a magnetic memory element with a stack of layers, comprising:

(a) depositing a first lattice-matching layer that is a single layer or a multilayer structure, and comprises one or more M elements selected from Mo, Mg, Ta, Cr, W, Ru, and V on a substrate;

(b) depositing a second lattice-matching layer on the first lattice matching layer, wherein the second lattice-matching layer is amorphous as deposited and is comprised of a magnetic material with a $\text{Co}_x\text{Fe}_y\text{Ni}_z\text{L}_w$ composition wherein L is a non-magnetic element, $(x + y + z + w) = 100$ atomic%, $x + y > 0$, and w is > 0 ;

(c) forming an oxide layer on the second lattice-matching layer;

(d) depositing a free layer that contacts a top surface of the oxide layer to form a first interface which induces or enhances perpendicular magnetic anisotropy (PMA) in the free layer;

(e) sequentially forming a tunnel barrier, reference layer, and a hard mask wherein the tunnel barrier contacts a top surface of the free layer to form a second interface that induces or enhances PMA in the free layer; and

(f) annealing the stack of layers at a temperature of about 400°C so that the second lattice-matching layer grows a BCC structure to match a growth of a BCC structure in the oxide layer.

34. The method of claim **33** wherein L is one of B, Zr, Nb, Hf, Mo, Cu, Cr, Mg, Ta, Ti, Au, Ag, or P.

35. The method of claim **33** wherein the oxide layer is one of MgTaOx, MgO, SiOx, SrTiOx, BaTiOx, CaTiOx, LaAlOx, MnOx, VOx, Al₂O₃, TiOx, BOx, and HfOx, or is a laminate of one or more of the aforementioned oxides.

36. The method of claim **33** wherein depositing the second lattice-matching layer on the first lattice-matching layer forms a single lattice-matching layer with a Co_xFe_yNi_zL_wM_v composition wherein $(x + y + z + w + v) = 100$ atomic%, $x + y > 0$, and each of v and w are > 0 , and wherein the single lattice matching layer adjoins the oxide layer, and grows a BCC structure during the annealing of the stack of layers thereby promoting a BCC structure growth in the oxide layer.

37. The method of claim **33** wherein deposition of the second lattice-matching layer on the first lattice-matching layer forms a bilayer stack with a M/Co_xFe_yNi_zL_w or a M/Co_xFe_yNi_zL_wM_v configuration wherein the Co_xFe_yNi_zL_wM_v or Co_xFe_yNi_zL_w layer contacts the oxide layer, and the Co_xFe_yNi_zL_wM_v or Co_xFe_yNi_zL_w layer grows a BCC structure during the annealing of the stack of layers to promote a BCC structure growth in the oxide layer.

38. The method of claim **33** wherein deposition of the second lattice-matching layer on the first lattice-matching layer forms a trilayer stack with a M/Co_xFe_yNi_zL_wM_v/Co_xFe_yNi_zL_w configuration in which the Co_xFe_yNi_zL_w layer contacts the oxide layer, and the Co_xFe_yNi_zL_w layer grows a BCC structure during the annealing of the stack of layers to promote a BCC structure growth in the oxide layer.

39. The method of claim **33** wherein the substrate is a seed layer or a first electrode, and the first electrode is a bottom electrode in a Magnetoresistive Random Access Memory (MRAM) device or in a spin-torque MRAM, or the first electrode is a main pole layer in a spin torque oscillator (STO) device.

40. The method of claim **33** further comprised of depositing a third lattice matching layer on the second lattice matching layer before the oxide layer is

deposited, wherein the third lattice matching layer is an oxide or nitride of Ru, Ta, Ti, or Si.

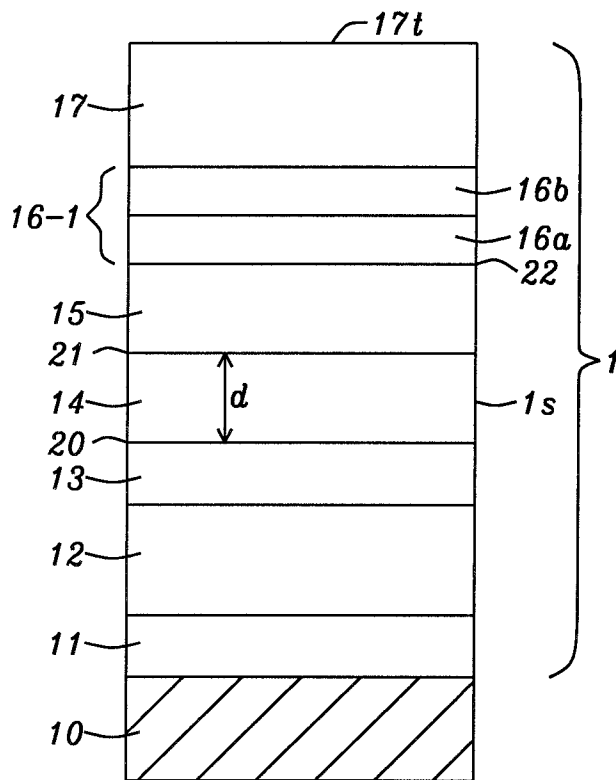


FIG. 1

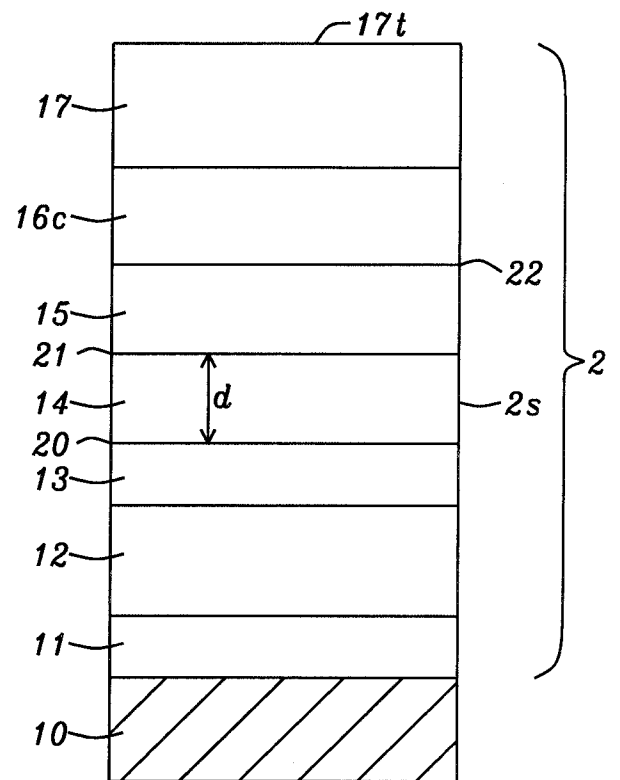


FIG. 2

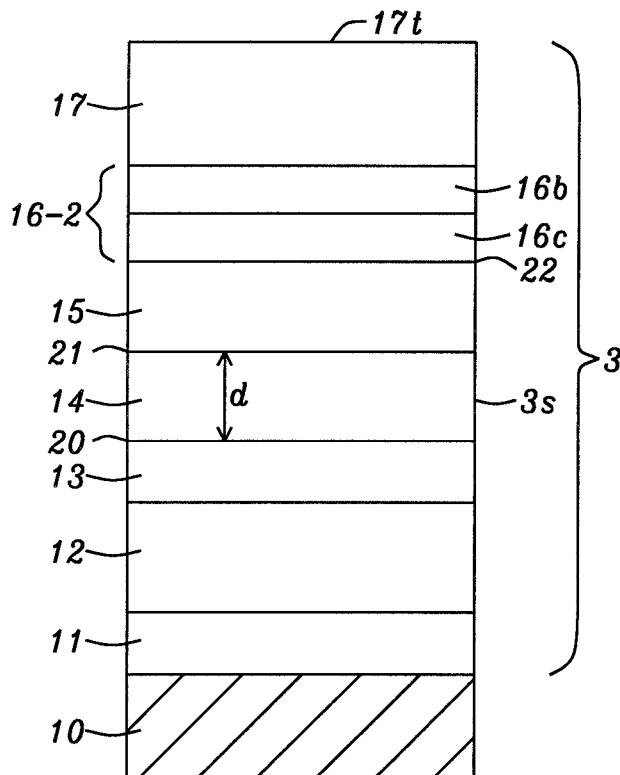


FIG. 3

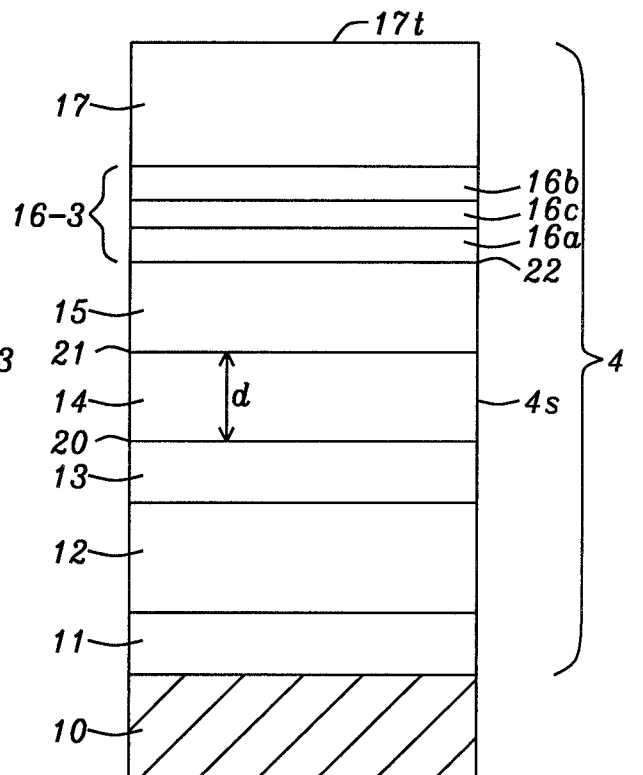


FIG. 4

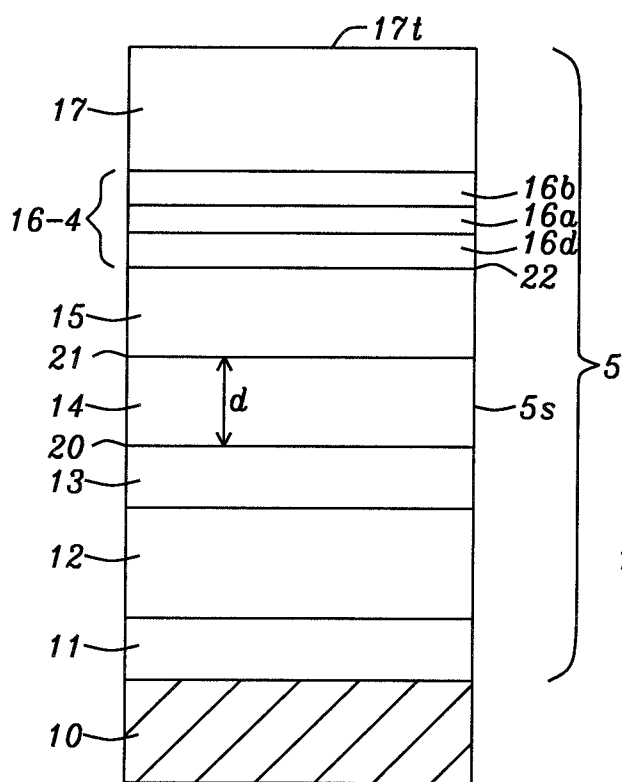


FIG. 5

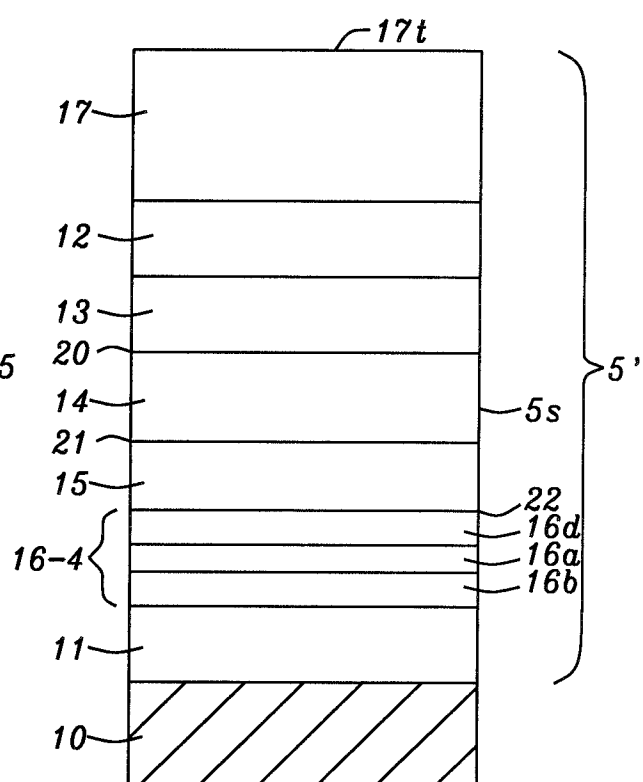


FIG. 6

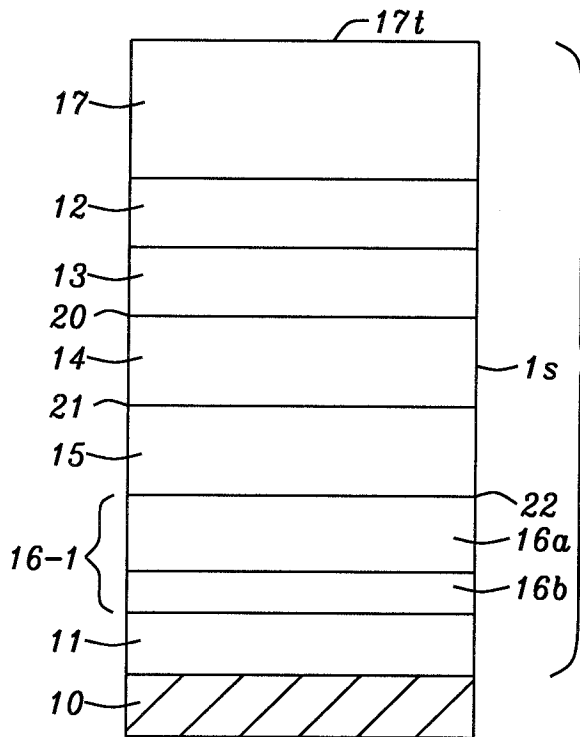


FIG. 7

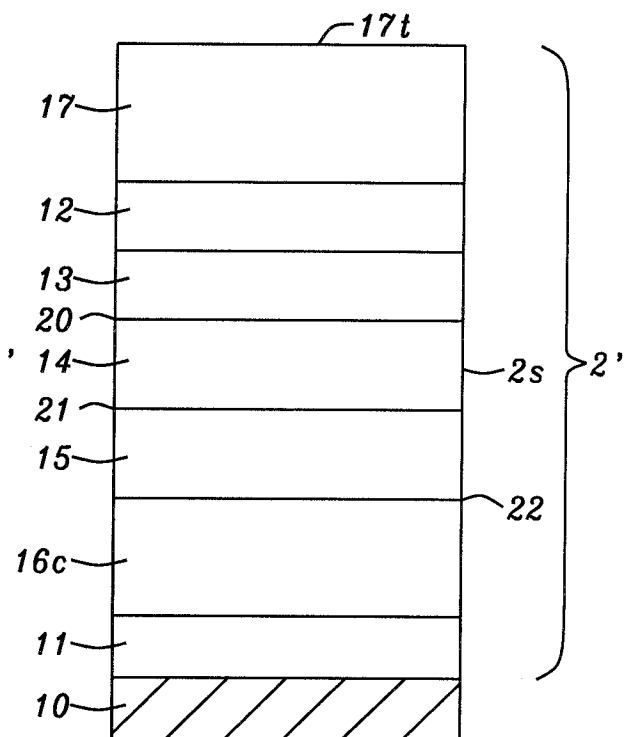


FIG. 8

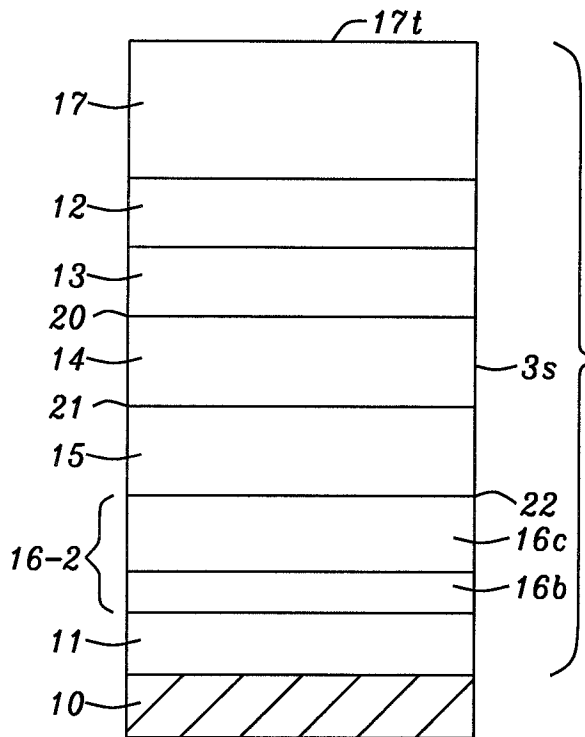


FIG. 9

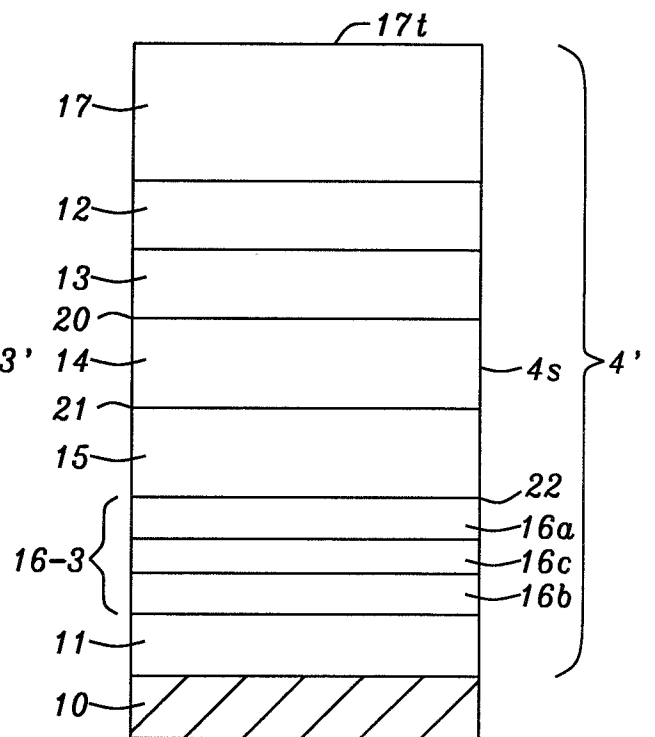


FIG. 10

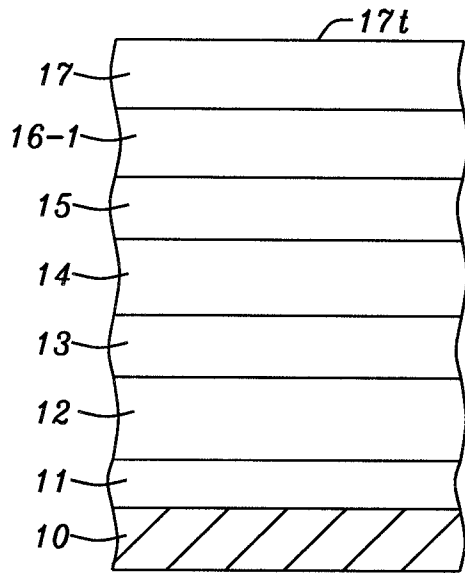


FIG. 11

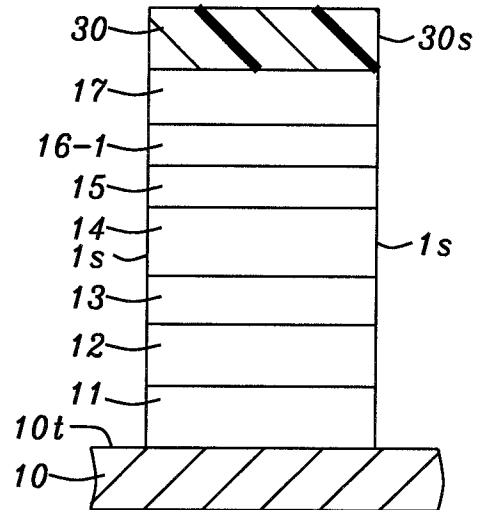


FIG. 12

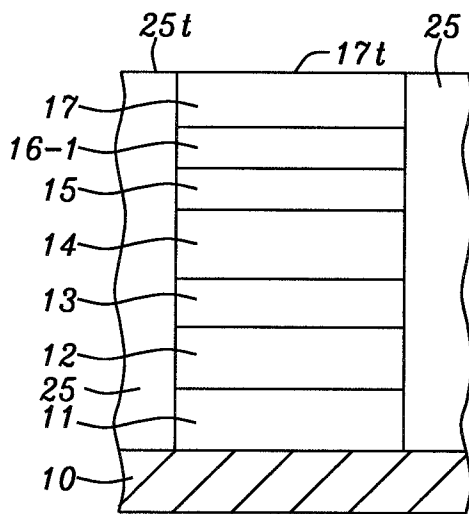


FIG. 13

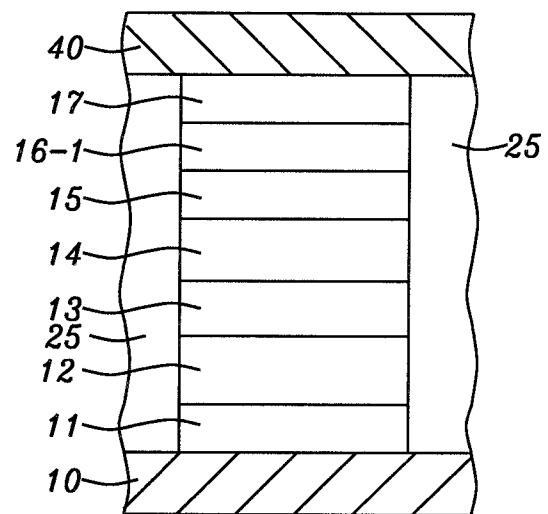


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/021007

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01L43/08 H01L43/10 H01L43/12
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015/028439 A1 (KULA WITOLD [US] ET AL) 29 January 2015 (2015-01-29)	1-3, 6-13, 33-40
Y	paragraph [0050] - paragraph [0088]; figures 1A-2C	4,5,25, 31
X	US 2012/018825 A1 (LIM WOO CHANG [KR] ET AL) 26 January 2012 (2012-01-26)	14,15, 17,23,24
Y	paragraph [0081] - paragraph [0146]; figures 1-7	25,31
Y	WO 2016/178758 A1 (MICRON TECHNOLOGY INC [US]) 10 November 2016 (2016-11-10) paragraph [0001] - paragraph [0005] paragraph [0012] - paragraph [0024] paragraph [0039] figures 1-3	14-22, 25-32
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 June 2018

Date of mailing of the international search report

22/06/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gröger, Andreas

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/021007

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2010/034014 A1 (OHNO HIDEO [JP] ET AL) 11 February 2010 (2010-02-11) paragraph [0072] - paragraph [0073] -----	4,5, 14-22, 25-32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/021007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015028439 A1	29-01-2015	US 2015028439 A1	29-01-2015
		US 2017033155 A1	02-02-2017
		US 2018145112 A1	24-05-2018
US 2012018825 A1	26-01-2012	KR 20120009714 A	02-02-2012
		TW 201214813 A	01-04-2012
		US 2012018825 A1	26-01-2012
WO 2016178758 A1	10-11-2016	CN 107534084 A	02-01-2018
		EP 3292570 A1	14-03-2018
		KR 20180002798 A	08-01-2018
		TW 201707247 A	16-02-2017
		US 2016329486 A1	10-11-2016
		WO 2016178758 A1	10-11-2016
US 2010034014 A1	11-02-2010	NONE	